


# Transceiver and Direct Attach Cable

LINE EXPANSION

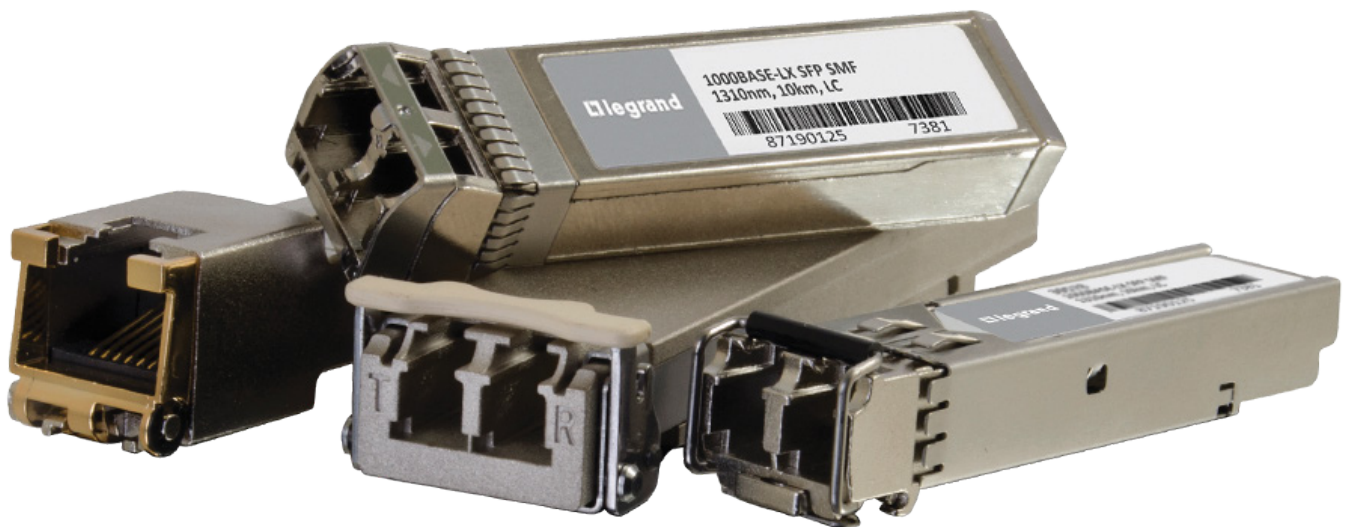

# LINE EXPANSION

## INTRODUCTION

We are broadening our product offering yet again by adding almost 300 new transceivers and direct attach cables to our stock product offering. This expansion provides our customers with easy access to a range of products that are compatible with a wider range of manufacturers and equipment models, making it easier to find the right transceiver or direct attached cable for any data center. Each transceiver and direct attach cable is designed with the same hardware and interface specifications and support all of the features of their OEM counterpart- including enhanced features that go beyond MSA specification. All protocol support, modulation techniques, electrical pinouts and power requirements for each transceiver or direct attach cable must pass the same quality standards of Arista, Brocade, Cisco, Finsar, HP, Juniper, and all other OEMs. Each transceiver and direct attach cable offered by Legrand is TAA compliant and provides features like DOM, or rugged construction, all of which can be implanted in servers, switches, and other data center equipment in a wide variety of applications- from a small IT install to a colocation data center. These new transceivers and direct attach cables—along with our extensive line of copper and fiber optic cables, and racks and cabinets, allow Legrand to be the single partner for complete networking solutions.

### Compatibility

All transceivers from Legrand are 100% OEM compatible.

### Multi-Source Agreement

Transceivers from Legrand conform to all MSA guidelines.

### Code

Legrand transceivers are coded with the same information as their OEM counterparts. Much like OEM transceivers, Legrand transceivers are coded and tested to work flawlessly with the OEM network equipment.

### Testing

No batch testing- each transceiver is application tested with OEM equipment.

### Legrand Lifetime Warranty

The Legrand lifetime warranty offers lightning fast sales support via chat, phone, or email and next day replacement, all of which exceed any standard OEM warranty.

### Evaluation Unit

Evaluation units are available for on-site testing.

### Lead Times

Stocked transceivers can be delivered in as little as one day. While non-stocked transceivers will ship within 1 to 3 business days.

Note: To make part searching easier the transceivers and direct attach cables in the following pages are listed in alphabetical order by manufacturer part number.

## Alcatel-Lucent®

PART NUMBER	TRANSCEIVERS
3HE00028CA-LEG	Alcatel-Lucent[R] 3HE00028CA Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
SFP-GIG-LX-LEG	Alcatel-Lucent[R] SFP-GIG-LX Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC)
SFP-GIG-T-LEG	Alcatel-Lucent[R] SFP-GIG-T Compatible TAA Compliant 1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)

## Arista®

PART NUMBER	DIRECT ATTACH CABLES
CAB-SFP-SFP-0.5M-LEG	Arista Networks[R] CAB-SFP-SFP-0.5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 0.5m)
CAB-SFP-SFP-1M-LEG	Arista Networks[R] CAB-SFP-SFP-1M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 1m)
CAB-SFP-SFP-2M-LEG	Arista Networks[R] CAB-SFP-SFP-2M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 2m)
CAB-SFP-SFP-3M-LEG	Arista Networks[R] CAB-SFP-SFP-3M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 3m)
CAB-SFP-SFP-5M-LEG	Arista Networks[R] CAB-SFP-SFP-5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 5m)

PART NUMBER	TRANSCEIVERS
QSFP100GLR4ARLEG	Arista Networks[R] QSFP-100G-LR4 Compatible 100GBase-LR4 QSFP28 Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
QSFP-100G-SR4-AR-LEG	Arista Networks[R] QSFP-100G-SR4 Compatible 100GBase-SR QSFP28 Transceiver (MMF, 850nm, 100m, MPO, DOM)
QSFP-40G-LR4-AR-LEG	Arista Networks[R] QSFP-40G-LR4 Compatible TAA Compliant 40GBase-LR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
QSFP-40G-LRL4-AR-LEG	Arista Networks[R] QSFP-40G-LRL4 Compatible TAA Compliant 40GBase-LR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 1km, LC, DOM)
QSFP-40G-PLR4-AR-LEG	Arista Networks[R] QSFP-40G-PLR4 Compatible TAA Compliant 40GBase-PLR4 QSFP+ Transceiver (SMF, 1310nm, 10km, MPO, DOM)
QSFP-40G-PLRL4-AR-LEG	Arista Networks[R] QSFP-40G-PLRL4 Compatible TAA Compliant 40GBase-PLR4 QSFP+ Transceiver (SMF, 1310nm, 10km, MPO, DOM)
QSFP-40G-SR4-AR-LEG	Arista Networks[R] QSFP-40G-SR4 Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 150m, MPO, DOM)
QSFP-40G-UNIV-AR-LEG	Arista Networks[R] QSFP-40G-UNIV Compatible TAA Compliant 40GBase-LX4 QSFP+ Transceiver (SMF/MMF, 1310nm, 500m/150m, LC, DOM)
QSFP-40G-XSR4-AR-LEG	Arista Networks[R] QSFP-40G-XSR4 Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 400m, MPO, DOM)
QSFP-LR4-LEG	Arista Networks[R] QSFP-LR4 Compatible TAA Compliant 40GBase-LR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
QSFP-SR4-LEG	Arista Networks[R] QSFP-SR4 Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 150m, MPO, DOM)

## Avaya/Nortel®

PART NUMBER	TRANSCEIVERS
AA1419043-E6-LEG	Avaya/Nortel[R] AA1419043-E6 Compatible TAA Compliant 10/100/1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)
AA1419049-E6-LEG	Avaya/Nortel[R] AA1419049-E6 Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC, DOM)

## Brocade®

PART NUMBER	DIRECT ATTACH CABLES
100G-CFP2-LR4-10KM-LEG	Brocade[R] 100G-CFP2-LR4-10KM Compatible TAA Compliant 100GBase-LR4 CFP2 Transceiver (SMF, 1310nm, 10km, LC, DOM)
100G-CFP-LR4-10KM-LC-LEG	Brocade[R] 100G-CFP-LR4-10KM Compatible TAA Compliant 100GBase-LR4 CFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
100G-CFP-SR10-LEG	Brocade[R] 100G-CFP-SR10 Compatible TAA Compliant 100GBase-SR10 CFP Transceiver (MMF, 850nm, 150m, MPO, DOM)
10G-SFPP-LR-LEG	Brocade[R] 10G-SFPP-LR Compatible TAA Compliant 10GBase-LR SFP+ Transceiver (SMF, 1310nm, 10km, LC, DOM)
40G-QSFP-ER4-LEG	Brocade[R] 40G-QSFP-ER4 Compatible TAA Compliant 40GBase-ER4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 40km, LC, DOM)
40G-QSFP-LM4-LEG	Brocade[R] 40G-QSFP-LM4 Compatible TAA compliant 40GBase-IR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 2km, LC, DOM)
40G-QSFP-LR4-LEG	Brocade[R] 40G-QSFP-LR4 Compatible TAA Compliant 40GBase-LR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
40G-QSFP-SR4-LEG	Brocade[R] 40G-QSFP-SR4 Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 150m, MPO, DOM)
XBR-000147-LEG	Brocade[R] XBR-000147 Compatible TAA Compliant 8Gbs Fiber Channel SW SFP+ Transceiver (MMF, 850nm, 300m, LC)

## Cisco®

PART NUMBER	TRANSCEIVERS
CFP-100G-LR4-LC-LEG	Cisco[R] CFP-100G-LR4 Compatible TAA Compliant 100GBase-LR4 CFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
CFP-100G-SR10-LEG	Cisco[R] CFP-100G-SR10 Compatible TAA Compliant 100GBase-SR10 CFP Transceiver (MMF, 850nm, 150m, MPO, DOM)
CFP2-100G-LR4-LEG	Cisco[R] CFP2-100G-LR4 Compatible TAA Compliant 100GBase-LR4 CFP2 Transceiver (SMF, 1310nm, 10km, LC, DOM)
CFP-40G-LR4-LEG	Cisco[R] CFP-40G-LR4 Compatible TAA Compliant 40GBase-LR4 CFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
QSFP-40G-SR4-LC-LEG	Cisco[R] Compatible TAA Compliant 40GBase-LX4 QSFP+ Transceiver (SMF/MMF, 1310nm, 500m/150m, LC, DOM)
DS-SFP-FC4G-SW-LEG	Cisco[R] DS-SFP-FC4G-SW Compatible TAA Compliant 1/2/4Gbs Fiber Channel SW SFP Transceiver (MMF, 850nm, 150m, LC)
DS-SFP-FC8G-LW-LEG	Cisco[R] DS-SFP-FC8G-LW Compatible TAA Compliant 2/4/8Gbs Fiber Channel LW SFP+ Transceiver (SMF, 1310nm, 10km, LC)

## Cisco®

PART NUMBER	TRANSCEIVERS (CONTINUED)
FET-40G-LEG	Cisco[R] FET-40G Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 100m, MPO, DOM)
GLC-BX-D-40-LEG	Cisco[R] GLC-BX-D-40 Compatible TAA Compliant 1000Base-BX SFP Transceiver (SMF, 1550nmTx/1310nmRx, 40km, LC, DOM)
GLC-BX-U-40-LEG	Cisco[R] GLC-BX-U-40 Compatible TAA Compliant 1000Base-BX SFP Transceiver (SMF, 1310nmTx/1550nmRx, 40km, LC, DOM)
GLC-FE-100BX-U-LEG	Cisco[R] GLC-FE-100BX-U Compatible TAA Compliant 100Base-BX SFP Transceiver (SMF, 1310nmTx/1550nmRx, 10km, LC)
GLC-FE-100LX-RGD-LEG	Cisco[R] GLC-FE-100LX-RGD Compatible TAA Compliant 100Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC, Rugged)
GLC-ZX-SMD-LEG	Cisco[R] GLC-ZX-SMD Compatible TAA Compliant 1000Base-ZX SFP Transceiver (SMF, 1550nm, 80km, LC, DOM)
GLC-ZX-SM-RGD-LEG	Cisco[R] GLC-ZX-SM-RGD Compatible TAA Compliant 1000Base-ZX SFP Transceiver (SMF, 1550nm, 70km, LC, DOM, Rugged)
ONS-SE-G2F-SX-LEG	Cisco[R] ONS-SE-G2F-SX Compatible TAA Compliant 1/2Gbs Fiber Channel SW SFP Transceiver (MMF, 850nm, 550m, LC)
QSFP-100G-LR4-S-LEG	Cisco[R] QSFP-100G-LR4-S Compatible 100GBase-LR4 QSFP28 Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
QSFP-100G-SR4-S-LEG	Cisco[R] QSFP-100G-SR4-S Compatible 100GBase-SR QSFP28 Transceiver (MMF, 850nm, 100m, MPO, DOM)
QSFP-40G-CSR4-LEG	Cisco[R] QSFP-40G-CSR4 Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 400m, MPO, DOM)
QSFP-40GE-LR4-LEG	Cisco[R] QSFP-40GE-LR4 Compatible TAA Compliant 40GBase-LR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
QSFP-40G-ER4-LEG	Cisco[R] QSFP-40G-ER4 Compatible TAA Compliant 40GBase-ER4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 40km, LC, DOM)
QSFP-40G-LR4-LEG	Cisco[R] QSFP-40G-LR4 Compatible TAA Compliant 40GBase-LR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
QSFP-40G-LR4-S-LEG	Cisco[R] QSFP-40G-LR4-S Compatible TAA Compliant 40GBase-LR4 QSFP+ Transceiver (SMF, 1310nm, 10km, LC, DOM)
QSFP-40G-SR4-LEG	Cisco[R] QSFP-40G-SR4 Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 150m, MPO, DOM)
QSFP-40G-SR4-S-LEG	Cisco[R] QSFP-40G-SR4-S Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 100m, MPO, DOM)
QSFP-40G-SR-BD-LEG	Cisco[R] QSFP-40G-SR-BD Compatible TAA Compliant 40GBase-SR QSFP+ Transceiver (MMF, 832nm-918nm, 150m, LC, DOM)
QSFP-4X10G-LR-S-LEG	Cisco[R] QSFP-4X10G-LR-S Compatible TAA Compliant 40GBase-PLR4 QSFP+ Transceiver (SMF, 1310nm, 10km, MPO, DOM)
SFP-10G-LR-S-LEG	Cisco[R] SFP-10G-LR-S Compatible TAA Compliant 10GBase-LR SFP+ Transceiver (SMF, 1310nm, 10km, LC, DOM)
SFP-10G-SR-S-LEG	Cisco[R] SFP-10G-SR-S Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
SFP-10G-SR-X-LEG	Cisco[R] SFP-10G-SR-X Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM, Rugged)

Cisco®

PART NUMBER	TRANSCEIVERS (CONTINUED)
SFP-10G-ZR-LEG	Cisco[R] SFP-10G-ZR Compatible TAA Compliant 10GBase-ZR SFP+ Transceiver (SMF, 1550nm, 80km, LC, DOM)
SFP-GE-Z-LEG	Cisco[R] SFP-GE-Z Compatible TAA Compliant 1000Base-ZX SFP Transceiver (SMF, 1550nm, 80km, LC, DOM)
SFP-OC3-SR-LEG	Cisco[R] SFP-OC3-SR Compatible TAA Compliant OC-3-SR SFP Transceiver (MMF, 1310nm, 2km, LC)
WS-G5487-LEG	Cisco[R] WS-G5487 Compatible TAA Compliant 1000Base-ZX GBIC Transceiver (SMF, 1550nm, 80km, SC)
WSP-Q40GLR4L-LEG	Cisco[R] WSP-Q40GLR4L Compatible TAA Compliant 40GBase-IR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 2km, LC, DOM)
X2-10GB-LRM-LEG	Cisco[R] X2-10GB-LRM Compatible TAA Compliant 10GBase-LRM X2 Transceiver (MMF, 1310nm, 220m, SC, DOM)
XFP-10GLR-OC192SR-LEG	Cisco[R] XFP-10GLR-OC192SR Compatible TAA Compliant 10GBase-LR XFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
PART NUMBER	DIRECT ATTACH CABLES
QSFP-H40G-ACU10M-LEG	Cisco[R] QSFP-H40G-ACU10M Compatible TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Active Twinax, 10m)
QSFP-H40G-ACU7M-LEG	Cisco[R] QSFP-H40G-ACU7M Compatible TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Active Twinax, 7m)
QSFP-H40G-AOC3M-LEG	Cisco[R] QSFP-H40G-AOC3M Compatible TAA Compliant 40GBase-AOC QSFP+ to QSFP+ Direct Attach Cable (850nm, MMF, 3m)
QSFP-H40G-AOC7M-LEG	Cisco[R] QSFP-H40G-AOC7M Compatible TAA Compliant 40GBase-AOC QSFP+ to QSFP+ Direct Attach Cable (850nm, MMF, 7m)
QSFP-H40G-CU1M-LEG	Cisco[R] QSFP-H40G-CU1M Compatible TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 1m)
QSFP-H40G-CU3M-LEG	Cisco[R] QSFP-H40G-CU3M Compatible TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 3m)
SFP-10G-AOC10M-LEG	Cisco[R] SFP-10G-AOC10M Compatible TAA Compliant 10GBase-AOC SFP+ to SFP+ Direct Attach Cable (850nm, MMF, 10m)
SFP-10G-AOC1M-LEG	Cisco[R] SFP-10G-AOC1M Compatible TAA Compliant 10GBase-AOC SFP+ to SFP+ Direct Attach Cable (850nm, MMF, 1m)
SFP-10G-AOC3M-LEG	Cisco[R] SFP-10G-AOC3M Compatible TAA Compliant 10GBase-AOC SFP+ to SFP+ Direct Attach Cable (850nm, MMF, 3m)
SFP-10G-AOC5M-LEG	Cisco[R] SFP-10G-AOC5M Compatible TAA Compliant 10GBase-AOC SFP+ to SFP+ Direct Attach Cable (850nm, MMF, 5m)
SFP-10G-AOC7M-LEG	Cisco[R] SFP-10G-AOC7M Compatible TAA Compliant 10GBase-AOC SFP+ to SFP+ Direct Attach Cable (850nm, MMF, 7m)
SFP-H10GB-ACU10M-LEG	Cisco[R] SFP-H10GB-ACU10M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 10m)
SFP-H10GB-ACU5M-LEG	Cisco[R] SFP-H10GB-ACU5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 5m)
SFP-H10GB-ACU7M-LEG	Cisco[R] SFP-H10GB-ACU7M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 7m)

Cisco®

PART NUMBER	DIRECT ATTACH CABLES (CONTINUED)
SFP-H10GB-CU.5M-LEG	Cisco[R] SFP-H10GB-CU.5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 0.5m)
SFP-H10GB-CU0-5M-LEG	Cisco[R] SFP-H10GB-CU0-5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 0.5m)
SFP-H10GB-CU1-5M-LEG	Cisco[R] SFP-H10GB-CU1-5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 1.5m)
SFP-H10GB-CU1M-LEG	Cisco[R] SFP-H10GB-CU1M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 1m)
SFP-H10GB-CU2-5M-LEG	Cisco[R] SFP-H10GB-CU2-5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 2.5m)
SFP-H10GB-CU2M-LEG	Cisco[R] SFP-H10GB-CU2M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 2m)
SFP-H10GB-CU3M-LEG	Cisco[R] SFP-H10GB-CU3M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 3m)
SFP-H10GB-CU5M-LEG	Cisco[R] SFP-H10GB-CU5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 5m)
SFP-H10GB-CU7M-LEG	Cisco[R] SFP-H10GB-CU7M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 7m)

Dell®

PART NUMBER	TRANSCEIVERS
310-7225-LEG	Dell[R] 310-7225 Compatible TAA Compliant 1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)
320-2879-LEG	Dell[R] 320-2879 Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC)
320-2881-LEG	Dell[R] 320-2881 Compatible TAA Compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC)
330-2403-LEG	Dell[R] 330-2403 Compatible TAA Compliant 10GBase-LRM SFP+ Transceiver (MMF, 1310nm, 220m, LC, DOM)
330-2404-LEG	Dell[R] 330-2404 Compatible TAA Compliant 10GBase-LR SFP+ Transceiver (SMF, 1310nm, 10km, LC, DOM)
330-2405-LEG	Dell[R] 330-2405 Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
330-2409-LEG	Dell[R] 330-2409 Compatible TAA Compliant 10GBase-LR SFP+ Transceiver (SMF, 1310nm, 10km, LC, DOM)
330-2410-LEG	Dell[R] 330-2410 Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
330-5819-LEG	Dell[R] 330-5819 Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
330-8721-LEG	Dell[R] 330-8721 Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
331-5308-LEG	Dell[R] 331-5308 Compatible TAA Compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC, DOM)



## Dell®

PART NUMBER	TRANSCEIVERS (CONTINUED)
331-5309-LEG	Dell[R] 331-5309 Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
331-5310-LEG	Dell[R] 331-5310 Compatible TAA Compliant 10GBase-LR SFP+ Transceiver (SMF, 1310nm, 10km, LC, DOM)
331-5311-LEG	Dell[R] 331-5311 Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
407-10439-LEG	Dell[R] 407-10439 Compatible TAA compliant 10/100/1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)
407-10933-LEG	Dell[R] 407-10933 Compatible TAA compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC)
407-BBGN-LEG	Dell[R] 407-BBGN Compatible TAA Compliant 40GBase-LR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
407-BBOI-LEG	Dell[R] 407-BBOI Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 150m, MPO, DOM)
407-BBOJ-LEG	Dell[R] 407-BBOJ Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
407-BBOK-LEG	Dell[R] 407-BBOK Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
407-BBON-LEG	Dell[R] 407-BBON Compatible TAA Compliant 10GBase-LRM SFP+ Transceiver (MMF, 1310nm, 220m, LC, DOM)
407-BB00-LEG	Dell[R] 407-BB00 Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
407-BBOP-LEG	Dell[R] 407-BBOP Compatible TAA Compliant 10GBase-LR SFP+ Transceiver (SMF, 1310nm, 10km, LC, DOM)
407-BBOR-LEG	Dell[R] 407-BBOR Compatible TAA compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC)
407-BBOU-LEG	Dell[R] 407-BBOU Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
407-BBQV-LEG	Dell[R] 407-BBQV Compatible TAA Compliant 40GBase-PSM4 QSFP+ Transceiver (SMF, 1310nm, 10km, MPO, DOM)
407-BBRC-LEG	Dell[R] 407-BBRC Compatible TAA Compliant 40GBase-LM4 QSFP+ Transceiver (MMF, 1270nm to 1330nm, 150m, LC, DOM)
409-10007-LEG	Dell[R] 409-10007 Compatible TAA compliant 10GBase-LR XFP Transceiver (SMF, 1310nm, 10km, LC)
430-4585-CW55-LEG	Dell[R] 430-4585 Compatible TAA Compliant 10GBase-CWDM SFP+ Transceiver (SMF, 1550nm, 40km, LC, DOM)
430-4586-LEG	Dell[R] 430-4586 Compatible TAA Compliant 1000Base-ZX SFP Transceiver (SMF, 1550nm, 80km, LC)
430-4909-LEG	Dell[R] 430-4909 Compatible TAA Compliant 10GBase-LRM SFP+ Transceiver (MMF, 1310nm, 220m, LC, DOM)
462-3619-LEG	Dell[R] 462-3619 Compatible TAA Compliant 1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)
462-3620-LEG	Dell[R] 462-3620 Compatible TAA Compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC, DOM)



## Dell®

PART NUMBER	TRANSCEIVERS (CONTINUED)
462-3621-LEG	Dell[R] 462-3621 Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
462-3623-LEG	Dell[R] 462-3623 Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
QSFP28-100G-SR4-DE-LEG	Dell[R] QSFP28-100G-SR4 Compatible 100GBase-SR QSFP28 Transceiver (MMF, 850nm, 100m, MPO, DOM)

## Dell Force 10®

PART NUMBER	TRANSCEIVERS
GP-10GSFP-1E-LEG	Dell Force10[R] GP-10GSFP-1E Compatible TAA Compliant 10GBase-ER SFP+ Transceiver (SMF, 1550nm, 40km, LC, DOM)
GP-10GSFP-1L-LEG	Dell Force10[R] GP-10GSFP-1L Compatible TAA Compliant 10GBase-LR SFP+ Transceiver (SMF, 1310nm, 10km, LC, DOM)
GP-10GSFP-1S-LEG	Dell Force10[R] GP-10GSFP-1S Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
GP-QSFP-40GE-1ER-LEG	Dell Force10[R] GP-QSFP-40GE-1ER Compatible TAA Compliant 40GBase-ER4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 40km, LC, DOM)
GP-QSFP-40GE-ESR4-LEG	Dell Force10[R] GP-QSFP-40GE-ESR4 Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 300m, MPO, DOM)
GP-SFP2-1F-LEG	Dell Force10[R] GP-SFP2-1F Compatible TAA Compliant 100Base-FX SFP Transceiver (MMF, 1310nm, 2km, LC)
GP-SFP2-1S-LEG	Dell Force10[R] GP-SFP2-1S Compatible TAA Compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC)
GP-SFP2-1T-LEG	Dell Force10[R] GP-SFP2-1T Compatible TAA Compliant 1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)
GP-SFP2-1Y-LEG	Dell Force10[R] GP-SFP2-1Y Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC)
GP-SFP2-1Z-LEG	Dell Force10[R] GP-SFP2-1Z Compatible TAA Compliant 1000Base-ZX SFP Transceiver (SMF, 1550nm, 70km, LC)
GP-XFP-1L-LEG	Dell Force10[R] GP-XFP-1L Compatible TAA Compliant 10GBase-LR XFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
PART NUMBER	DIRECT ATTACH CABLES
CBL-10GSFP-DAC-0.5M-LEG	Dell Force10[R] CBL-10GSFP-DAC-0.5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 0.5m)
CBL-10GSFP-DAC-10M-LEG	Dell Force10[R] CBL-10GSFP-DAC-10M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 10m)
CBL-10GSFP-DAC-1M-LEG	Dell Force10[R] CBL-10GSFP-DAC-1M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 1m)
CBL-10GSFP-DAC-3M-LEG	Dell Force10[R] CBL-10GSFP-DAC-3M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 3m)
CBL-10GSFP-DAC-5M-LEG	Dell Force10[R] CBL-10GSFP-DAC-5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 5m)

**D-Link®**

PART NUMBER	TRANSCEIVERS
DEM-311GT-LEG	D-Link[R] DEM-311GT Compatible TAA Compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC)

**Enterasys®**

PART NUMBER	TRANSCEIVERS
MGBIC-LC01-LEG	Enterasys[R] MGBIC-LC01 Compatible TAA Compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC)

**Finisar®**

PART NUMBER	TRANSCEIVERS
FTL410QE2C-LEG	Finisar[R] FTL410QE2C Compatible TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 150m, MPO, DOM)
FTL4C1QE1C-LEG	Finisar[R] FTL4C1QE1C Compatible TAA compliant 40GBase-LR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
FTLC1121RDNL-LEG	Finisar[R] FTLC1121RDNL Compatible TAA Compliant 100GBase-LR4 CFP2 Transceiver (SMF, 1310nm, 10km, LC, DOM)
FTLC1183RDNL-LEG	Finisar[R] FTLC1183RDNL Compatible TAA Compliant 100GBase-LR4 CFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
FTLF8519P3BNL-LEG	Finisar[R] FTLF8519P3BNL Compatible TAA Compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC, DOM)
FTLF8528P3BCV-LEG	Finisar[R] FTLF8528P3BCV Compatible TAA Compliant 2/4/8Gbs Fiber Channel SW SFP+ Transceiver (MMF, 850nm, 300m, LC)
FTLX8573D3BTL-LEG	Finisar[R] FTLX8573D3BTL Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)

**Gigamon Systems®**

PART NUMBER	TRANSCEIVERS
SFP-532-LEG	Gigamon Systems[R] SFP-532 Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)

**HP®**

PART NUMBER	DIRECT ATTACH CABLES
J9281B-LEG	HP[R] J9281B Compatible 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 1m)
J9283B-LEG	HP[R] J9283B Compatible 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 3m)
JD095C-LEG	HP[R] JD095C Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 0.5m)
JD096C-LEG	HP[R] JD096C Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 1m)
JD097C-LEG	HP[R] JD097C Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 3m)

## IBM®

PART NUMBER	TRANSCEIVERS
46C3447-LEG	IBM[R] 46C3447 Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)

## Juniper Networks®

PART NUMBER	TRANSCEIVERS
EX-XFP-10GE-SR-LEG	Juniper Networks[R] EX-XFP-10GE-SR Compatible TAA Compliant 10GBase-SR XFP Transceiver (MMF, 850nm, 300m, LC, DOM)
QFX-SFP-10GE-SR-LEG	Juniper Networks[R] QFX-SFP-10GE-SR Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
QFX-SFP-1GE-T-LEG	Juniper Networks[R] QFX-SFP-1GE-T Compatible TAA Compliant 1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)
SFPP-10GE-LR-LEG	Juniper Networks[R] SFPP-10GE-LR Compatible TAA Compliant 10GBase-LR SFP+ Transceiver (SMF, 1310nm, 10km, LC, DOM)

PART NUMBER	DIRECT ATTACH CABLES
EX-QSFP-40GE-DAC-50CM-LEG	Juniper Networks[R] EX-QSFP-40GE-DAC-50CM Compatible TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 0.5m)
EX-SFP-10GE-DAC-1M-LEG	Juniper Networks[R] EX-SFP-10GE-DAC-1M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 1m)
EX-SFP-10GE-DAC-3M-LEG	Juniper Networks[R] EX-SFP-10GE-DAC-3M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 3m)
EX-SFP-10GE-DAC-5M-LEG	Juniper Networks[R] EX-SFP-10GE-DAC-5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 5m)
QFX-QSFP-DAC-1M-LEG	Juniper Networks[R] QFX-QSFP-DAC-1M Compatible TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 1m)
QFX-QSFP-DAC-3M-LEG	Juniper Networks[R] QFX-QSFP-DAC-3M Compatible TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 3m)
QFX-QSFP-DAC-5M-LEG	Juniper Networks[R] QFX-QSFP-DAC-5M Compatible TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 5m)
QFX-QSFP-DACB0-5M-LEG	Juniper Networks[R] QFX-QSFP-DACB0-5M Compatible TAA Compliant 40GBase-CU QSFP+ to 4xSFP+ Direct Attach Cable (Passive Twinax, 5m)
QFX-SFP-DAC-3M-LEG	Juniper Networks[R] QFX-SFP-DAC-3M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 3m)
QFX-SFP-DAC-5M-LEG	Juniper Networks[R] QFX-SFP-DAC-5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 5m)
SFP-10GE-DAC-1M-LEG	Juniper Networks[R] SFP-10GE-DAC-1M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 1m)
SFP-10GE-DAC-3M-LEG	Juniper Networks[R] SFP-10GE-DAC-3M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 3m)
SFP-10GE-DAC-5M-LEG	Juniper Networks[R] SFP-10GE-DAC-5M Compatible TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 5m)

## Linksys®

PART NUMBER	TRANSCEIVERS
MFEFX1-LEG	Linksys[R] MFEFX1 Compatible TAA Compliant 100Base-FX SFP Transceiver (MMF, 1310nm, 2km, LC)
MGBBX1-LEG	Linksys[R] MGBBX1 Compatible TAA Compliant 1000Base-BX SFP Transceiver (SMF, 1310nmTx/1490nmRx, 20km, LC, DOM)
MGBLH1-LEG	Linksys[R] MGBLH1 Compatible TAA Compliant 1000Base-LH SFP Transceiver (SMF, 1310nm, 40km, LC)
MGBLX1-LEG	Linksys[R] MGBLX1 Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC)
MGBSX1-LEG	Linksys[R] MGBSX1 Compatible TAA Compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC)
MGBT1-LEG	Linksys[R] MGBT1 Compatible TAA Compliant 1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)

## Meraki®

PART NUMBER	TRANSCEIVERS
MA-SFP-1GB-LX10-LEG	Meraki Cisco[R] MA-SFP-1GB-LX10 Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
MA-SFP-1GB-SX-LEG	Meraki Cisco[R] MA-SFP-1GB-SX Compatible TAA Compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC, DOM)
MA-SFP-1GB-TX-LEG	Meraki Cisco[R] MA-SFP-1GB-TX Compatible TAA Compliant 1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)

## MSA Compliant (Unbranded)

PART NUMBER	TRANSCEIVERS
SFP-1000BASE-LX-LEG	MSA and TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC)
SFP-1000BASE-T-LEG	MSA and TAA Compliant 1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)
CFP-100GB-LR4-LEG	MSA and TAA Compliant 100GBase-LR4 CFP Transceiver (SMF, 1310nm, 10km, LC, DOM)
CFP2-100GB-LR4-LEG	MSA and TAA Compliant 100GBase-LR4 CFP2 Transceiver (SMF, 1310nm, 10km, LC, DOM)
QSFP28-100GB-LR4-LEG	MSA and TAA Compliant 100GBase-LR4 QSFP28 Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
QSFP28-100GB-SR-LEG	MSA and TAA Compliant 100GBase-SR QSFP28 Transceiver (MMF, 850nm, 100m, MPO, DOM)
CFP-100GB-SR10-LEG	MSA and TAA Compliant 100GBase-SR10 CFP Transceiver (MMF, 850nm, 150m, MPO, DOM)
SFP-10GBASE-SR-LEG	MSA and TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC)
QSFP-40GBASE-IR4-LEG	MSA and TAA Compliant 40GBase-IR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 2km, LC, DOM)
QSFP-40GBASE-LR4-LEG	MSA and TAA Compliant 40GBase-LR4 QSFP+ Transceiver (SMF, 1270nm to 1330nm, 10km, LC, DOM)
QSFP-40GBASE-PLR-LEG	MSA and TAA Compliant 40GBase-PLR4 QSFP+ Transceiver (SMF, 1310nm, 10km, MPO, DOM)
QSFP-40GBASE-SR4-LEG	MSA and TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 150m, MPO, DOM)
QSFP-40GBASE-ESR4-LEG	MSA and TAA Compliant 40GBase-SR4 QSFP+ Transceiver (MMF, 850nm, 300m, MPO, DOM)
QSFP-40GBASE-4LC-2M-LEG	MSA and TAA Compliant 40GBase-SR4 QSFP+ Transceiver to 4LC Duplex (MMF, 850nm, 2m, DOM)

## MSA Compliant (Unbranded)

PART NUMBER	DIRECT ATTACH CABLES - PASSIVE
CX4-10G-PDAC50CM-LEG	MSA and TAA Compliant 10GBase-CU CX4 to CX4 Direct Attach Cable (Passive Twinax, 0.5m)
CX4-10G-PDAC3M-LEG	MSA and TAA Compliant 10GBase-CU CX4 to CX4 Direct Attach Cable (Passive Twinax, 3m)
CX4-10G-PDAC7M-LEG	MSA and TAA Compliant 10GBase-CU CX4 to CX4 Direct Attach Cable (Passive Twinax, 5m)
CX4-10G-PDAC5M-LEG	MSA and TAA Compliant 10GBase-CU CX4 to CX4 Direct Attach Cable (Passive Twinax, 7m)
SFP-10G-PDAC50CM-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 0.5m)
SFP-10G-PDAC10M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 10m)
SFP-10G-PDAC15M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 15m)
SFP-10G-PDAC1M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 1m)
SFP-10G-PDAC2M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 2m)
SFP-10G-PDAC3M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 3m)
SFP-10G-PDAC4M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 4m)
SFP-10G-PDAC5M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 5m)
SFP-10G-PDAC7M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Passive Twinax, 7m)
QSFP-CX4-50CM-LEG	MSA and TAA Compliant 10GBase-CX CX4 to CX4 Direct Attach Cable (Passive Twinax, 0.5m)
CX4-10G-PDAC10M-LEG	MSA and TAA Compliant 10GBase-CX CX4 to CX4 Direct Attach Cable (Passive Twinax, 10m)
CX4-10G-PDAC1M-LEG	MSA and TAA Compliant 10GBase-CX CX4 to CX4 Direct Attach Cable (Passive Twinax, 1m)
QSFP-CX4-1M-LEG	MSA and TAA Compliant 10GBase-CX CX4 to CX4 Direct Attach Cable (Passive Twinax, 1m)
QSFP-CX4-3M-LEG	MSA and TAA Compliant 10GBase-CX CX4 to CX4 Direct Attach Cable (Passive Twinax, 3m)
QSFP-CX4-5M-LEG	MSA and TAA Compliant 10GBase-CX CX4 to CX4 Direct Attach Cable (Passive Twinax, 5m)
QSFP-CX4-7M-LEG	MSA and TAA Compliant 10GBase-CX CX4 to CX4 Direct Attach Cable (Passive Twinax, 7m)
QSFP-40G-PDAC50CM-LEG	MSA and TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 0.5m)
QSFP-40G-PDAC1M-LEG	MSA and TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 1m)
QSFP-40G-PDAC2M-LEG	MSA and TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 2m)
QSFP-40G-PDAC3M-LEG	MSA and TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 3m)
QSFP-40G-PDAC4M-LEG	MSA and TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 4m)
QSFP-40G-PDAC5M-LEG	MSA and TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 5m)
QSFP-40G-PDAC7M-LEG	MSA and TAA Compliant 40GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 7m)
QSFP-56G-PDAC1M-LEG	MSA and TAA Compliant 56GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 1m)
QSFP-56G-PDAC2M-LEG	MSA and TAA Compliant 56GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 2m)
QSFP-56G-PDAC3M-LEG	MSA and TAA Compliant 56GBase-CU QSFP+ to QSFP+ Direct Attach Cable (Passive Twinax, 3m)
PART NUMBER	DIRECT ATTACH CABLES - ACTIVE
SFP-10G-ADAC50CM-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 0.5m)
SFP-10G-ADAC10M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 10m)
SFP-10G-ADAC15M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 15m)
SFP-10G-ADAC1M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 1m)
SFP-10G-ADAC2M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 2m)

**MSA Compliant (Unbranded)**

PART NUMBER	DIRECT ATTACH CABLES - ACTIVE (CONTINUED)
SFP-10G-ADAC3M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 3m)
SFP-10G-ADAC4M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 4m)
SFP-10G-ADAC5M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 5m)
SFP-10G-ADAC7M-LEG	MSA and TAA Compliant 10GBase-CU SFP+ to SFP+ Direct Attach Cable (Active Twinax, 7m)

**Netgear®**

PART NUMBER	DIRECT ATTACH CABLES
AFM735-10000S-LEG	Netgear[R] AFM735-10000S Compatible TAA Compliant 100Base-FX SFP Transceiver (MMF, 1310nm, 2km, LC)
AGM732F-LEG	Netgear[R] AGM732F Compatible TAA Compliant 1000Base-LX SFP Transceiver (SMF, 1310nm, 10km, LC)
AGM734-LEG	Netgear[R] AGM734 Compatible TAA Compliant 1000Base-TX SFP Transceiver (Copper, 100m, RJ-45)
AXM761-LEG	Netgear[R] AXM761 Compatible TAA Compliant 10GBase-SR SFP+ Transceiver (MMF, 850nm, 300m, LC, DOM)
AXM762-LEG	Netgear[R] AXM762 Compatible TAA Compliant 10GBase-LR SFP+ Transceiver (SMF, 1310nm, 10km, LC, DOM)

**QLogic®**

PART NUMBER	DIRECT ATTACH CABLES
SFP8-SW-1PK-LEG	QLogic[R] SFP8-SW-1PK Compatible TAA Compliant 8Gbs Fiber Channel SW SFP+ Transceiver (MMF, 850nm, 150m, LC)

**Sonicwall®**










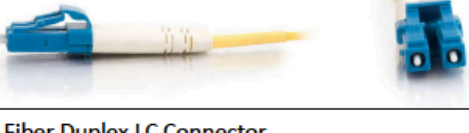






PART NUMBER	DIRECT ATTACH CABLES
01-SSC-9789-LEG	Sonicwall[R] 01-SSC-9789 Compatible TAA Compliant 1000Base-SX SFP Transceiver (MMF, 850nm, 550m, LC)

Support Materials

WHEN USING THIS TRANSCEIVER	RECOMMENDED FIBER TO USE
<p>CFP2 100GBase SMF LC Connection</p> 	<p>OS2 Single-Mode Fiber Duplex LC Connector</p> 
<p>CFP 100GBase MMF MPO Connection</p> 	<p>OM4 Multimode Fiber MPO Connector Make sure to determine Method A or Method B</p> 
<p>CFP 40GBase SMF LC Connection</p> 	<p>OS2 Single-Mode Fiber Duplex LC Connector</p> 
<p>QSFP28 100GBase SMF LC Connection</p> 	<p>OS2 Single-Mode Fiber Duplex LC Connector</p> 
<p>QSFP28 100GBase MMF MPO Connection</p> 	<p>OM4 Multimode Fiber MPO Connector Make sure to determine Method A or Method B</p> 
<p>QSFP+ 40GBase SMF MPO Connection</p> 	<p>OS2 Single-Mode Fiber MPO Connector Make sure to determine Method A or Method B</p> 
<p>QSFP+ 40GBase MMF MPO Connection</p> 	<p>OM4 Multimode Fiber MPO Connector Make sure to determine Method A or Method B</p> 
<p>QSFP+ 40GBase SMF LC Connection</p> 	<p>OS2 Single-Mode Fiber Duplex LC Connector</p> 
<p>QSFP+ 40GBase MMF LC Connection</p> 	<p>OM4 Multimode Fiber Duplex LC Connector</p> 



Support Materials

WHEN USING THIS TRANSCEIVER	RECOMMENDED FIBER TO USE
<p>SFP+ 10GBase SMF LC Connection</p> 	<p>OS2 Single-Mode Fiber Duplex LC Connector</p> 
<p>SFP+ 10GBase MMF LC Connection</p> 	<p>OM3 or OM4 Multimode Fiber Duplex LC Connector</p> 
<p>X2 10GBase SMF SC Connection</p> 	<p>OS2 Single-Mode Fiber Duplex LC Connector</p> 
<p>X2 10GBase MMF SC Connection</p> 	<p>OM3 or OM4 Multimode Fiber Duplex SC Connector</p> 
<p>XENPAK 10GBase MMF SC Connection</p> 	<p>OM3 or OM4 Multimode Fiber Duplex SC Connector</p> 
<p>SFP 1000Base SMF LC Connection</p> 	<p>OS2 Single-Mode Fiber Duplex LC Connector</p> 
<p>SFP 1000Base MMF LC Connection</p> 	<p>OM2 Multimode Fiber Duplex LC Connector</p> 
<p>SFP BX 1000Base SMF LC Connection</p> 	<p>OS2 Single-Mode Fiber Simplex LC Connector</p> 
<p>SFP 1000Base RJ45 Connection</p> 	<p>CAT6 Ethernet Patch Cord</p> 

Support Materials

Fiber Optics Type (Speed / Range) Chart

	OM1	OM2	OM3	OM4	OS2
	62.5/125 MMF	50/125 MMF	50/125 LOMMF	50/125 LOMMF	9/125 SMF
Wavelength range (nm)	850/1300	850/1300	850/1300	850/1300	1310/1383/1550
Serial 1 gigabit Ethernet Bandwidth	300m @ 850nm 550m @ 1300nm	600m @ 850nm 750m @ 1300nm	600m @ 850nm 1000m @ 1300nm	600 @ 850nm 1100 @ 1300nm	5000 @ 1310nm
Serial 10 gigabit Ethernet Bandwidth	33m @ 850nm	150m @ 850nm	300m @ 850nm	550m @ 850nm	10000m @ 1310nm 40000m @ 1550nm
Maximum Attenuation (dB/km)	3.4/1.0	3.0/1.0 2.8/1.0	3.0/1.0 2.8/1.0	3.0/1.0 2.8/1.0	0.4/0.4/0.3
Minimum Over Field Launch Bandwidth (MHz*km)	200/500	700/500	1500/500	3500/500	-/-/-
Minimum Effective Modal Bandwidth (MHz * km)	220/-	950/-	2000/-	4700/-	-/-/-



designed to be better.™



©2017 Legrand All Rights Reserved rev01117 Transceiver Expansion

