

NASA CR  
147757

28234-6029-RU-00

N76-25632

{NASA-CR-147757} LACIE PERFORMANCE  
PREDICTOR FINAL OPERATIONAL CAPABILITY  
PROGRAM DESCRIPTION, VOLUME 3 (TRW SYSTEMS  
GROUP) 611.P HC ~~16.25~~ 16.25

CSCL 02C

UNCLAS  
42118

G3/43

# LACIE PERFORMANCE PREDICTOR FINAL OPERATIONAL CAPABILITY PROGRAM DESCRIPTION


## VOLUME III

MAY 1976



Prepared for

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION  
Lyndon B. Johnson Space Center  
Houston, Texas



Contract Number NAS-9-14547



ONE SPACE PARK • REDONDO BEACH • CALIFORNIA 90278

# LACIE PERFORMANCE PREDICTOR FINAL OPERATIONAL CAPABILITY PROGRAM DESCRIPTION

## VOLUME III

MAY 1976



Prepared for

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION  
Lyndon B. Johnson Space Center  
Houston, Texas

Contract Number NAS-9-14547

**TRW**  
SYSTEMS GROUP

ONE SPACE PARK • REDONDO BEACH • CALIFORNIA 90278

This document, in three volumes,  
describes the FOC version of the  
LACIE Performance Predictor pro-  
duced under Contract NAS9-14547.  
NASA/JSC Contract Technical  
Monitor is I. D. Browne, Earth  
Observations Division.

## Table of Contents

		Page
Volume I		
Book I	EPHEMS . . . . .	1
Book II	GRID . . . . .	111
Book III	LUMP . . . . .	137
Book IV	SEE . . . . .	254
Volume II		
Book V	SAGE . . . . .	1
Book VI	SACS . . . . .	107
Book VII	POUT. . . . .	202
Volume III		
Book VIII	LEM . . . . .	1

LEM BOOK VIII

Table of Contents

	Page
Part I Problem Description . . . . .	1
Part II Common Block Definitions . . . . .	155
Part III List of Subroutines and Subroutine Call Structure . . . . .	226
Part IV Subroutine Descriptions and Flowcharts . . . . .	231
Part V Subroutine Listings . . . . .	360

PART I

PROBLEM DESCRIPTION FOR THE  
LEM PROGRAM  
INCLUDING  
LEM, CAMS, CAS AND YES SUBPROGRAMS

PART I

PROBLEM DESCRIPTION FOR THE  
LEM SUBPROGRAM

Table of Contents

	Part I Page
1.0 Scope . . . . .	1
1.1 Program Capabilities . . . . .	1
1.2 Program Development and Organization . . . . .	2
1.3 Operational Assumptions . . . . .	3
2.0 Input . . . . .	4
2.1 Card Input . . . . .	4
2.2 Input Files . . . . .	9
2.3 Restrictions . . . . .	10
3.0 Processing . . . . .	13
3.1 Overview . . . . .	13
3.2 Program Flow . . . . .	13
3.3 Procedures and Equations . . . . .	17
4.0 Output . . . . .	19
4.1 Printed Data . . . . .	19
4.2 Files . . . . .	21
5.0 Error Processing . . . . .	22
5.1 General . . . . .	22
5.2 Input Errors . . . . .	22
5.3 Processing Errors . . . . .	32



## Problem Description for the LEM Program

### 1.0 SCOPE

This document describes the requirements and processing logic for the LACIE Error Model program (LEM). This program is an integral part of the Large Area Crop Inventory Experiment (LACIE) system.

### 1.1 PROGRAM CAPABILITIES

LEM is that portion of the LPP (LACIE Performance Predictor) which simulates the sample segment classification, strata yield estimation, and production aggregation. LEM controls repetitive Monte Carlo trials based on input error distributions to obtain statistical estimates of the wheat area, yield, and production at different levels of aggregation. LEM interfaces with the rest of the LPP through a set of data files. The input files for LEM consist of the following:

- Segment ID file
- Crop Calendar file
- Substrata Historical file
- CAMS Error Model file
- YES Error Model file
- Signature Extension file
- Data Acquisition file

The program generates two output files for use by the output processor.

In addition, three intermediate files (Segment Truth file, CAMS Output file, and YES Output file) are generated by various modules within LEM and may be saved for subsequent runs on the LEM program permitting the bypassing of specified modules on those runs.

## 1.2 PROGRAM DEVELOPMENT AND ORGANIZATION

The program will be initially developed on the CDC 6600 Timesharing system and later converted to the UNIVAC 1108 under Exec II and Exec VIII. In order to make program development, modification, check out, and conversion easier, the following guidelines will be observed:

- a. Modular programming techniques will be used. In particular, the LEM program will contain the following subprograms:
  - Segment Truth Generator
  - CAMS Simulator
  - YES Simulator
  - CAS Simulation
- b. All error processing will be through a standard error routine ERRMES.
- c. The program will be coded in ANSI Standard FORTRAN. To provide for compatibility between the CDC 6600 and the UNIVAC 1108, the "Rules for Program Development" written by G. Hull for the LACIE Project will be faithfully observed.
- d. In order to clarify the coding, comments will be used extensively throughout the program. In particular:
  - Each local quantity will be described within the sub-routine using it.
  - Comments will be used to relate the coding to the Problem Definition and Flow Charts.

### 1.3 OPERATIONAL ASSUMPTIONS

- Only 1 case may be run at a time.
- Only 1 country may be considered in a case.
- A maximum of 999 Monte Carlo trials may be run in a case and a maximum of 100 trials may be executed on any given run.
- A maximum of 4 crop calendar windows and 14 additional prediction points can be processed.
- A maximum of 10 regions per country can be processed.
- A maximum of 50 zones per country can be processed.
- A maximum of 20 strata per zone can be processed.
- A maximum of 325 strata per country can be processed.
- A maximum of 60 substrata per strata can be processed.
- A maximum of 3200 substrata per country can be processed.
- A maximum of 300 substrata per zone can be processed.
- A maximum of 4000 segments per country can be processed.
- A maximum of 300 acquired segments per zone can be processed.
- A maximum of 4000 segments per country can be processed.
- All control card input data will be echo printed. —
- All control card input data will be checked for errors before any error will cause the processing of a case to terminate.
- In a repetitive Monte Carlo trial case, normally the individual subprogram reports will be allowed to print during the first and last trial only. An option will exist to eliminate all reports or allow printing of all reports for each trial or for just the last trial.
- All input data files will be checked for correct case numbers.
- The program will require less than 20,000 words of storage in the CPU of the UNIVAC 1108.
- The program will have a restart capability which will allow the program to continue with additional Monte Carlo iterations starting from the last iteration of the previous run.
- All files will be in country, region, zone, stratum, substratum and segment order (to whatever level that is appropriate).
- A maximum of 10 classes will exist in a zone.

## 2.0 INPUT

There are one control card set and up to seven files required for input to the LEM program. The control card set specifies the problem title, the initial random number seeds, and various program control flags. The following files may be generated by other programs within the LACIE system and input to LEM:

- Segment ID file
- Crop Calendar file
- Substrata Historical file
- CAMS Error Model file
- YES Error Model file
- Signature Extension file
- Data Acquisition file

In addition, the following files may be generated by LEM on one run and then saved and input back into LEM on a subsequent run:

- Segment Truth file
- CAS Cumulative Output File
- CAMS Output file
- CAS Distribution Output File
- YES Output file

## 2.1 CARD INPUT

### 2.1.1 List of Data Quantities

See Input Data Description sheet on the following pages.

### 2.1.2 Card Formats


The LEM program requires four control cards. Each card has a fixed field format as shown in Figure 2-1.

"LEM" is punched in columns 75-77 of each control card and a sequence number is punched in columns 79-80.


Card 1

Header card: Alphanumeric problem header entered in Columns 1-60, LEM is entered in Columns 75-77 and 01 in Columns 79-80.

Card 2

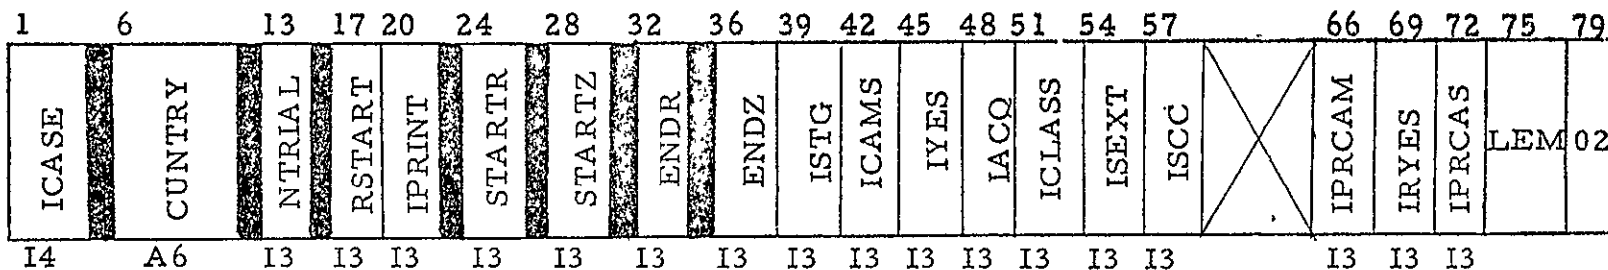

Card 3

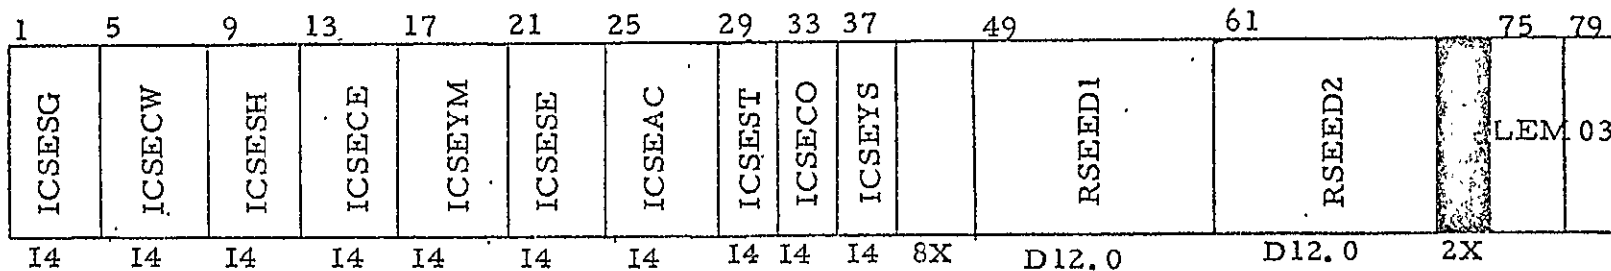

Card 4

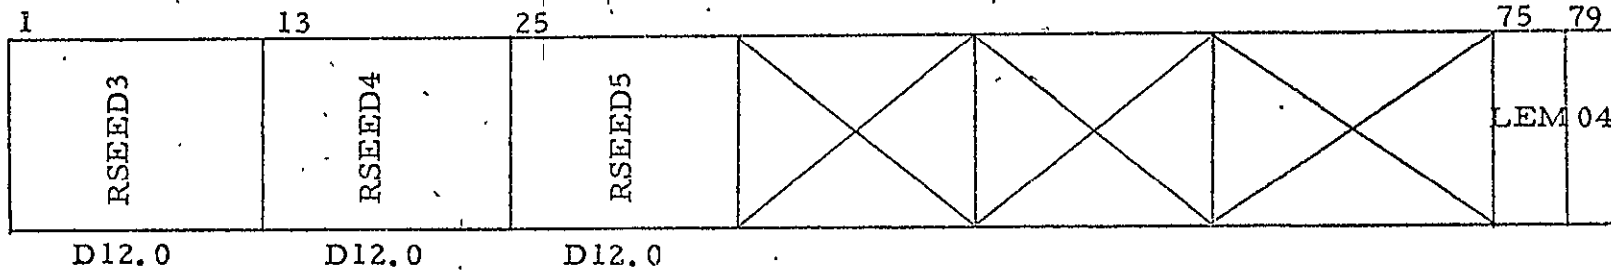


Figure 2-1. Data Card Formats

Input Data Description

Card Col.	Name	Dimension	Nominal Value	Range	Description
1-60	TITLE	10	blanks	---	Problem header to be printed at the top of each output page. (format 10A6)
1-4	ICASE	1	0	0-9999	Case number
6-11	CUNTRY	1	--	---	Country (must agree with all input files).
13-15	NTRIAL	1	1	1-999 (NTRIAL- RSTART ≤ 100)	Total number of Monte Carlo iterations at the end of the current run (including previous runs if this is a restart). NTRIAL must be ≤100 if CAS distribution file is to be generated (i.e., if DISTFF ≠ 0 in CAS input)
17-19	RSTART	1	0	0-999	Restart Flag: = n ≠ 0 to restart after n Monte Carlo iterations, 0 if this is not a restart.
20-22	IPRINT	1	0	0-3	Iteration Print Flag (for Segment Truth Generator) 0 to print first and last iterations; 1 to print each iteration; 2 to print last iteration only; 3 to suppress printing.
24-26	STARTR	1	0	0-999	Starting region number. } Starting zone number. } Both zero or both non-zero
28-30	STARTZ	1	0	0-999	
32-34	ENDR	1	0	0-999	Ending region number. } Ending zone number. } Both zero or both non-zero
36-38	ENDZ	1	0	0-999	
39-41	ISTG	1	0	0-3	Segment Truth Flag: 0 to vary error statistically, 1 to hold error constant using results from the first iteration only, 2 to hold error constant using a previously generated Segment Truth file, 3 to eliminate the Segment Truth error (error is zero).
42-44	ICAMS	1	0	0-3	CAMS Error Flag: Usage is similar to the usage of the Segment Truth flag described above except that for the case in which ICAMS = 2, the CAMS Output file is used.

Input Data Description

Card Col.	Name	Dimension	Nominal Value	Range	Description
45-47	IYES	1	0	0-3	YES Error Flag: Usage is similar to the usage of the Segment Truth flag described above except that for the case in which IYES = 2, the YES Output file is used.
48-50	IACQ	1	0	0-1	Segment Acquisition Flag: 0 to include segment acquisition conditions, 1 to eliminate segment acquisition conditions.
51-53	ICLASS	1	0	0-2	Classification Error Flag: 0 to vary classification error in CAMS, 1 to hold the classification error constant, 2 to eliminate the classification error (set it to zero).
54-56	ISEXT	1	0	0-2	Signature Extension Error Flag: 0 to vary Signature Extension Error, 1 to hold Signature Extension Error constant, 2 to eliminate the Signature Extension Error (error is zero).
57-59	ISCC	1	0	0-2	Segment Crop Calendar Error: 0 to vary the error, 1 to hold the error constant, 2 to eliminate the error (error is zero).
66-68	IPRCAM	1	0	0-3	Iteration print flag for CAMS: Usage is similar to that of IPRINT.
69-71	IPRYES	1	0	0-3	Iteration print flag for YES: Usage is similar to that of IPRINT.
72-74	IPRCAS	1	0	0-3	Iteration print flag for CAS: Usage is similar to that of IPRINT.

Input Data Description

REPRODUCIBILITY OF THIS ORIGINAL PAGE IS POOR

Card Col.	Name	Dimension	Nominal Value	Range	Description
1-4	ICSESG	1	0	0-9999	Case number for Segment ID file.
5-8	ICSECW	1	0	0-9999	Case number for Crop Calendar file.
9-12	ICSESH	1	0	0-9999	Case number for Substrata Historical file.
13-16	ICSECE	1	0	0-9999	Case number for CAMS Error Model file.
17-20	ICSEYM	1	0	0-9999	Case number for YES Error Model file.
21-24	ICSESE	1	0	0-9999	Case number for Signature Extension file.
25-28	ICSEAC	1	0	0-9999	Case number for Data Acquisition file.
29-32	ICSEST	1	0	0-9999	Case number for Segment Truth file.
33-36	ICSECO	1	0	0-9999	Case number for CAMS Output file.
37-40	ICSEYS	1	0	0-9999	Case number for YES Output file.
49-60	RSEED1	1	1	1-999999999999	Initial random number seed for Segment Truth Error (odd positive integer in F-format).
61-72	RSEED2	1	1	1-999999999999	Initial random number seed for Classification Error.
1-12	RSEED3	1	1	1-999999999999	Initial random number seed for Signature Extension Error.
13-24	RSEED4	1	1	1-999999999999	Initial random number seed for Segment Crop Calendar Error.
25-36	RSEED5	1	1	1-999999999999	Initial random number seed for Yield Error.



### 2.1.3 Deck Set Up

Each of the four LEM control cards is required and they must be in card number order. In addition, control cards are always required for the CAMS module even if this module is not used. If CAMS is skipped (e.g., ICAMS = 2), then the corresponding control cards must still be included. Finally, the control cards for CAS must always be specified. The contents and format of the CAMS and CAS control cards are specified in the Problem Descriptions for CAMS and CAS.

### 2.1.4 Rules for Entering Data on Cards

1. Integers must be right justified.
2. Alphanumeric fields should be left justified.
3. Real (i.e., floating point) fields must have the decimal point present.

## 2.2 INPUT FILES

The following files may be input to the LEM program:

	Source	Destination
Segment ID File	LUMP	STG
Crop Window (Calendar) File	LUMP	CAMS
Substrata Historical File	LUMP	STG, CAS
CAMS Error Model File	SEE	CAMS
YES Error Model File	SEE	YES
Signature Extension File	SEE	CAMS
Data Acquisition File	SACS	CAMS
Segment Truth File	STG	CAMS
CAMS Output File	CAMS	CAS
YES Output File	YES	CAS
CAS Cumulative File	CAS	CAS
CAS Distribution File	CAS	CAS

Note that the last five files listed above are generated by modules within LEM. They may be saved and input to LEM on subsequent runs.

## 2.3 RESTRICTIONS

1. In general, the various error sources may be independently varied, held constant, or eliminated by specifying appropriate values for the input parameters ISTG, ICAMS, IYES, ICLASS, ISEXT, ISCC, ICAS2, and ICAS3. However, the user may not specify ISTG = 0 unless ICAMS is also zero. The reason for this restriction is that if ICAMS = 1 or 3 for example, the CAMS Output file will be generated on the first iteration and then used on all subsequent iterations. If ISTG were zero indicating that the Segment Truth error was to be varied, the program would be in trouble because to vary the Segment Truth error means that the results on the CAMS Output file must also be variable even if the CAMS errors are constant or zero. The way around this restriction is to specify both ICAMS = 0 and ISTG = 0 and then to specify non-zero values for ICLASS, ISEXT, and ISCC. In this manner the CAMS Output file will be written on each iteration even though the CAMS errors are really constant.
2. The variable possible combinations of the input parameters ICAMS, ISTG, IYES, ICLASS, ISEXT, and ISCC as well as other options (CAMS classification model, multi-temporal sampling, and acquisition effects) are presented in the chart on the following page.
3. On a restart run the input case number ICASE must agree with the case number on both of the following files which may be input to LEM:
  - CAS Cumulative Output file
  - CAS Distribution Output file

ICAMS

	ISEXT	ISCC	ICLASS	Model	Multi-Temp Sampling	ISTG	IYES	IACQ
0	0, 1, 2	0, 1, 2	0, 1, 2	1, 2	0, 1	0, 1, 2, 3	0, 1, 2, 3	0, 1
1	1, 2	1, 2	1, 2	1, 2	0, 1	1, 2, 3		0, 1
2	X	X	X	X	X	X		X
3	X	X	X	1, 2	X	3	↓	0, 1

For ICAMS, ISTG, IYES

- 0 ⇒ vary error,
- 1 ⇒ hold error constant; use first iteration results,
- 2 ⇒ hold error constant; use previously generated file,
- 3 ⇒ eliminate error.

For ISEXT, ISCC, ICLASS

- 0 ⇒ vary error,
- 1 ⇒ hold error constant,
- 2 ⇒ eliminate error.

For Multi-Temporal Sampling

- 0 ⇒ include multi-temporal sampling effects,
- 1 ⇒ exclude effects.

For Acquisition Effects

- 0 ⇒ include segment acquisition effects,
- 1 ⇒ eliminate segment acquisition effects.

Model = 1 or 2 for classification model 1 or 2 respectively in CAMS

4. On a restart run the CAS Cumulative Output file and the CAS Distribution Output file must always be specified. In addition, the Segment Truth file, the CAMS Output file and/or the YES Output file should be specified if the input flags ISTG, ICAMS, and/or IYES are set to 1, 2, or 3. Note, however, that if the CAMS Output file is specified, then it is not necessary to specify the Segment Truth file.

### 3.0 PROCESSING

#### 3.1 OVERVIEW

The LEM program consists of control logic to execute one or more application subprograms as selected by the user through the control card parameters. The effect of various input error distributions is taken into account by use of a Monte Carlo technique employing a random number generator. The application subprograms are as follows:

##### Segment Truth Generator

This subprogram generates true proportion of wheat and the true proportion of mixed pixels for each sample segment.

##### CAMS Simulator

This subprogram models the LACIE segment classification process and associated errors to provide an estimate of the proportion of wheat in each satellite acquired sample segment and a measure of the classification error.

##### YES Simulator

This subprogram models the yield estimation process and associated errors in order to provide an estimate of the wheat yield for each strata and a measure of the yield error.


##### CAS Simulator


This subprogram models the LACIE aggregation technique including the aggregation of wheat area and production to the country level and the estimation of the accuracy of the aggregation. CAS also compares the estimates to the truth baseline to compute actual errors.


#### 3.2 PROGRAM FLOW

An overall flow diagram of the LEM program is presented on Pages 14-16.

REPRODUCIBILITY OF THE  
ORIGINAL PAGE IS POOR

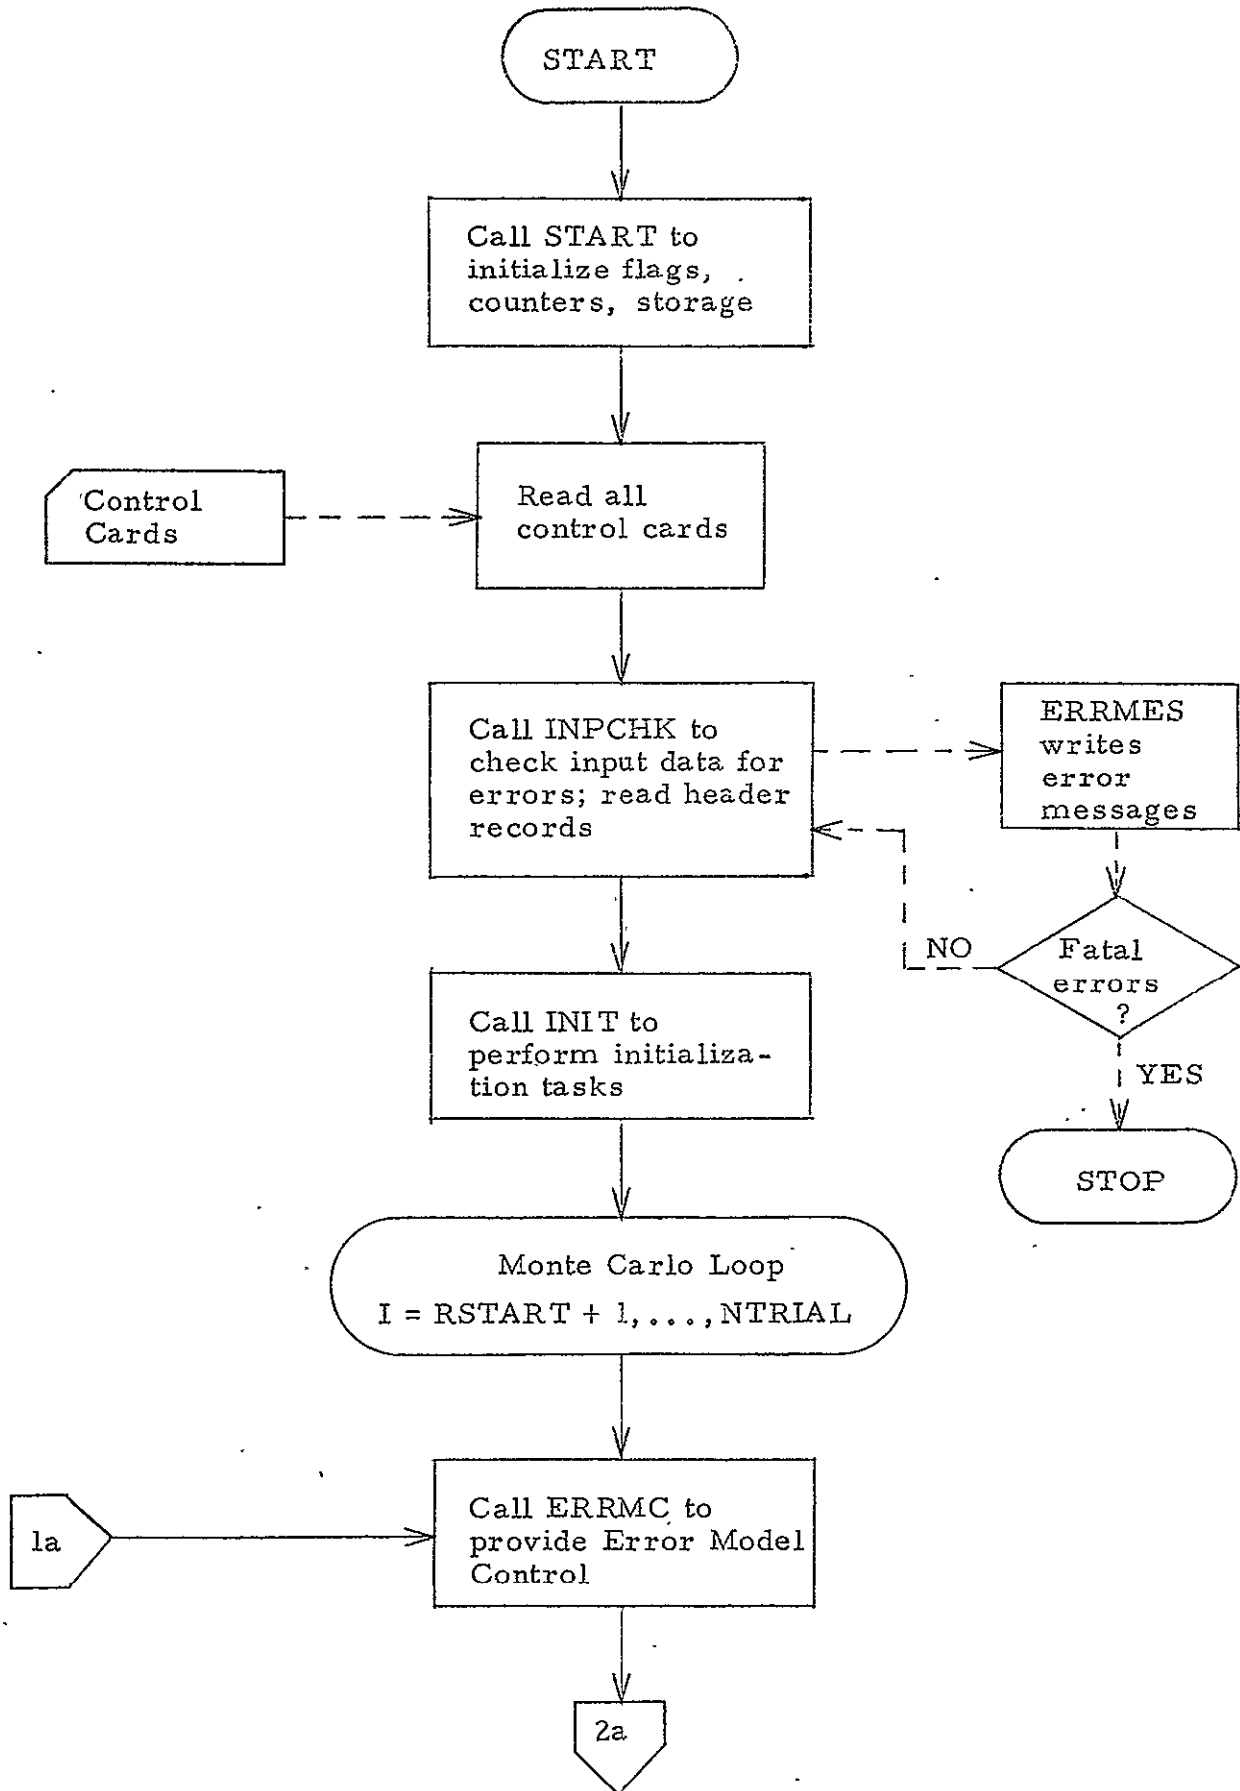

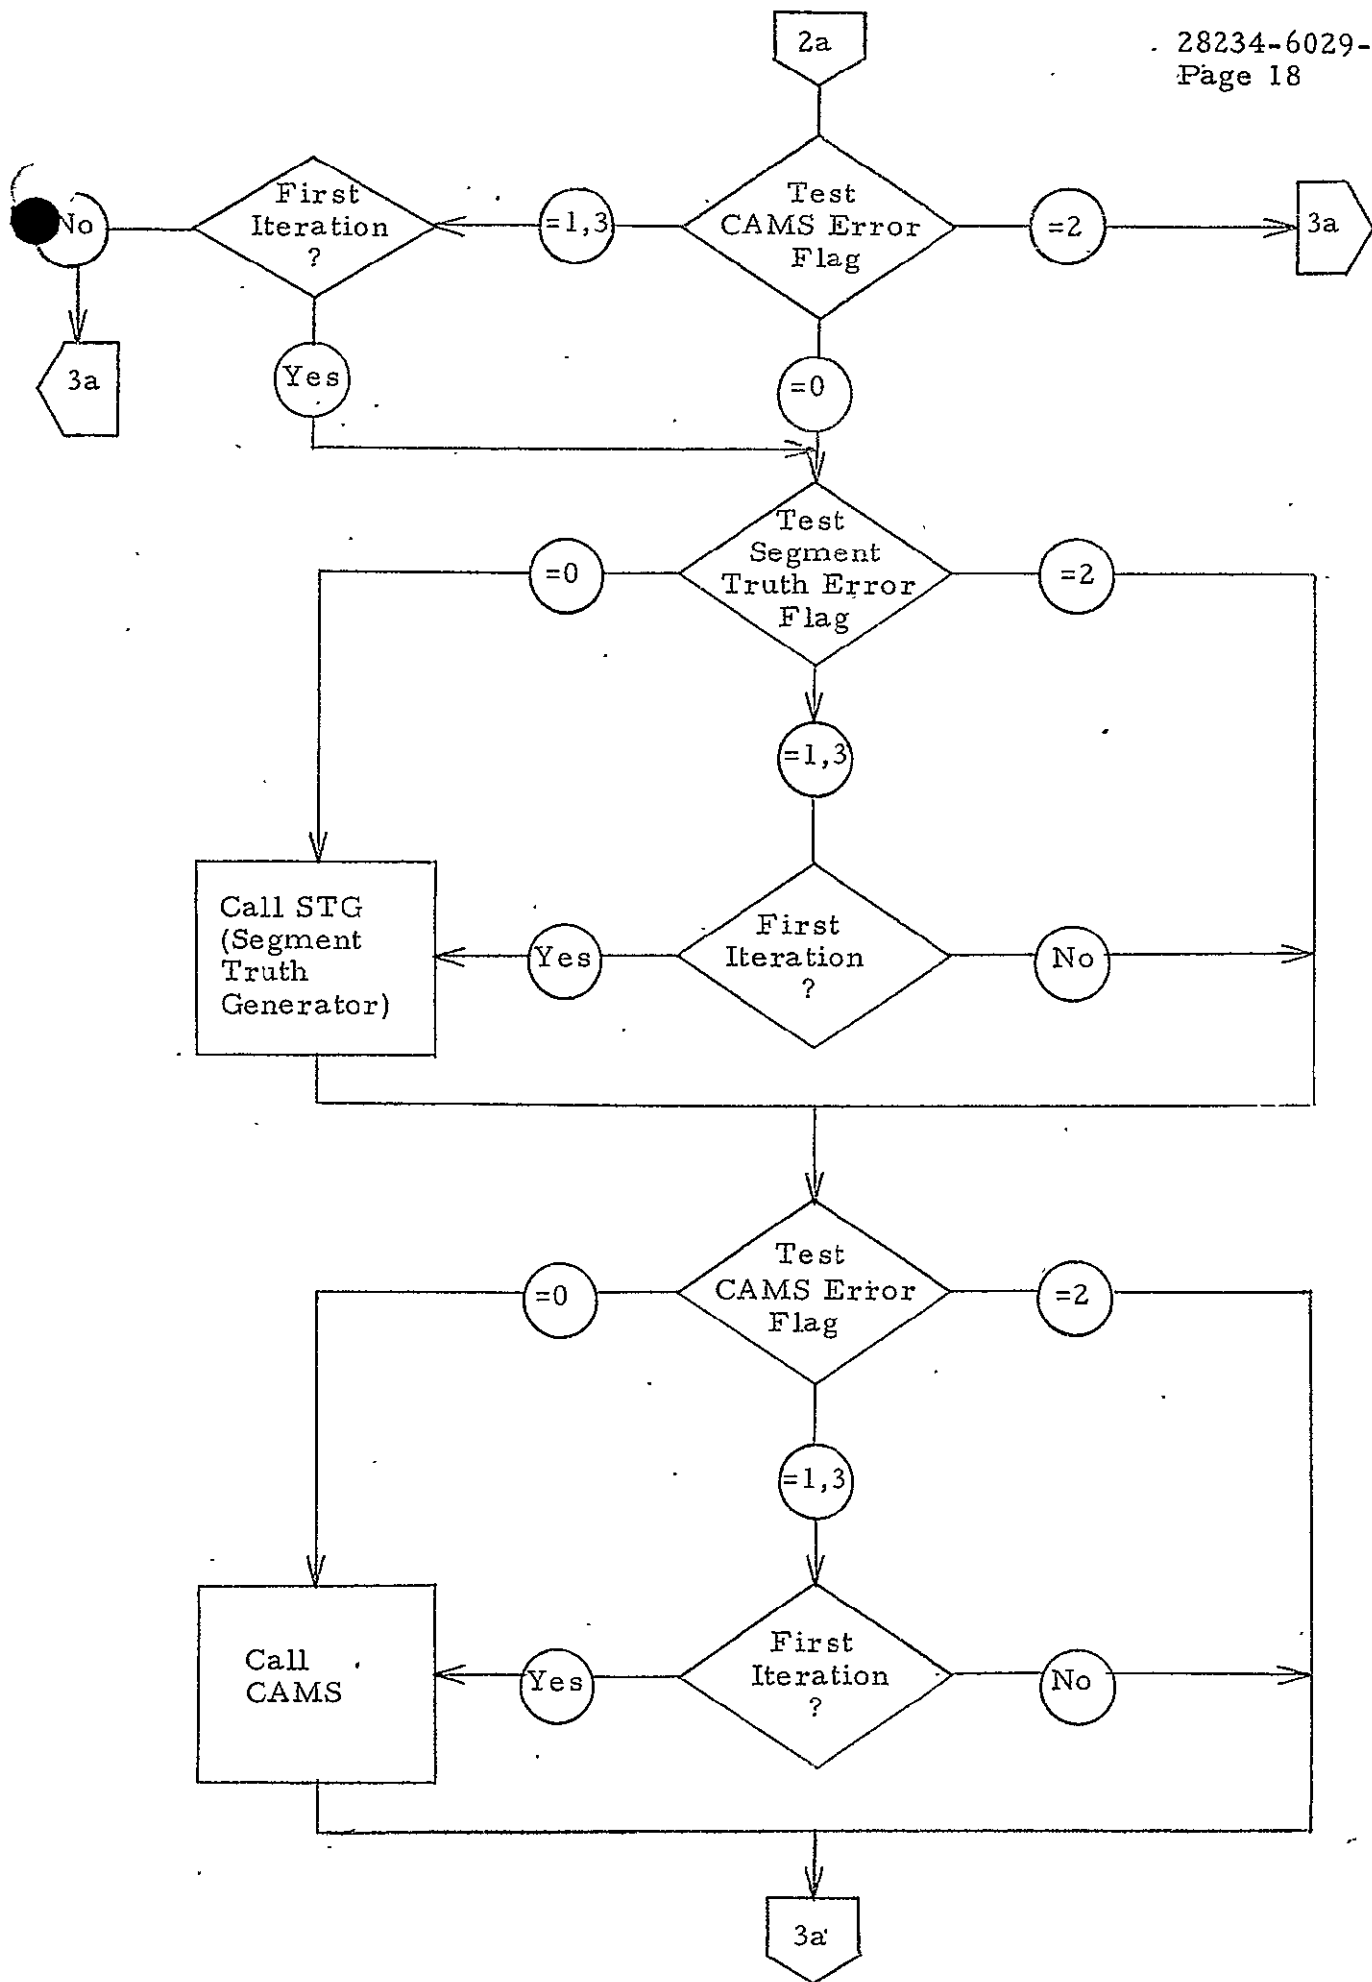

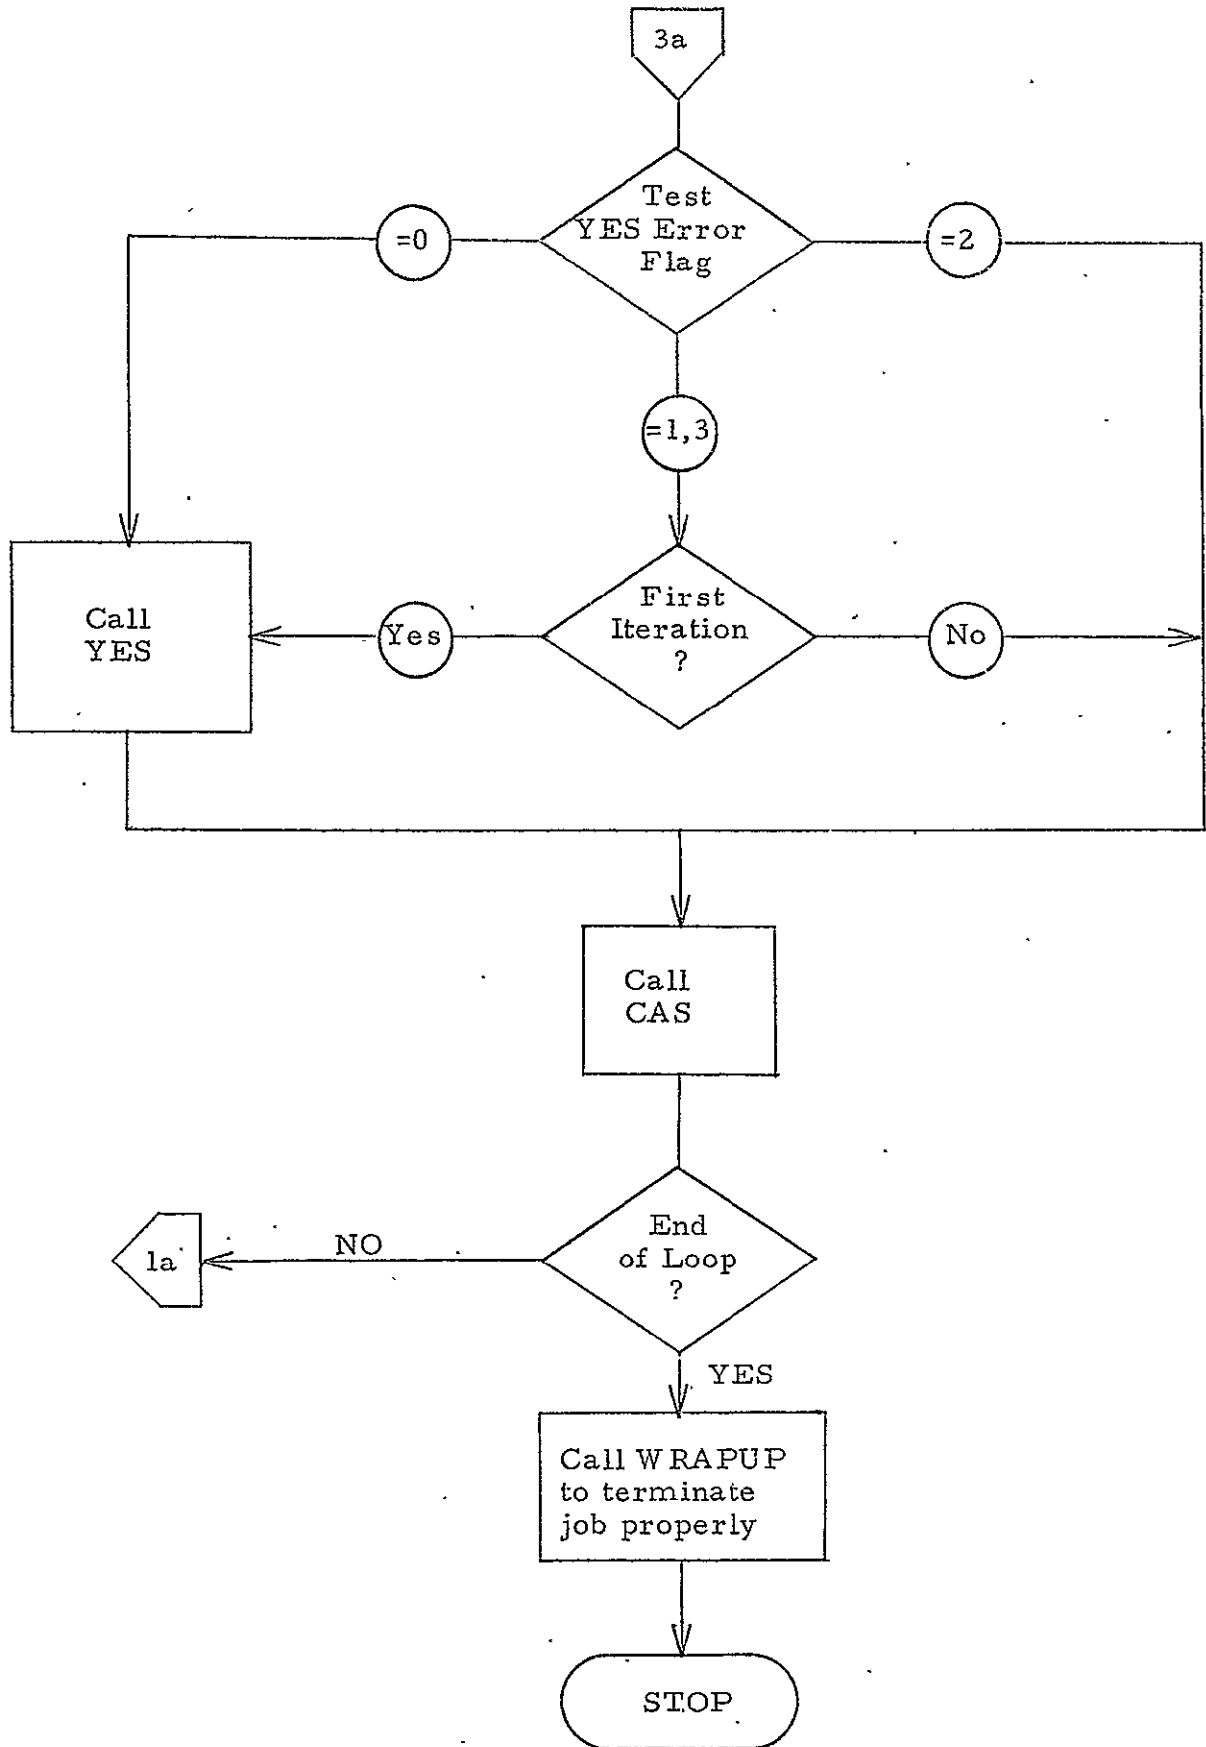



### 3.3 PROCEDURES AND EQUATIONS

#### 3.3.1 Job Initialization

Initialize storage, flags, and counters.

#### 3.3.2 Read All Control Cards

(LEM, CAMS, and CAS)

#### 3.3.3 Input Check

- Check all parameters from control cards for errors.
- Read header records of all input files and compare country and case number from each file to input values.

#### 3.3.4 Monte Carlo Loop

Perform steps for each Monte Carlo trial.

1. CALL ERRMC to properly initialize the random number seeds for the various error sources as specified by input flags.
2. Obtain the Segment Truth data by calling STG or by having CAMS read from the Segment Truth file as specified by the Segment Truth error flag.

The procedures to be used in the Segment Truth Generator are as follows:

- Calculate  $PM_{K_i}$  by calling BETAD with

mean =  $PW_K$  and

standard deviation =  $PW_K * CV_2$

- Calculate  $PM_{K_i}$  by calling BETAD with

mean =  $PW_{K_i} * (\delta PM)$  and

standard deviation =  $PW_{K_i} * (\delta PM) * CV_3$

$\delta PM_{wheat}$  = ratio of mixed pixels to true proportion  
wheat

3. Obtain the CAMS error data by calling CAMS or by having CAS read from the CAMS Output file as specified by the CAMS error flag.
4. Obtain the YES error data by calling YES or by having CAS read from the YES Output file as specified by the YES error flag.
5. Call CAS

### 3.3.5 Program Termination

After the final Monte Carlo iteration, call WRAPUP to terminate the job properly.

#### 4.0 OUTPUT

The LEM program produces printed reports in the Segment Truth Generator, CAMS, YES, and CAS modules and generates two output files for further processing by the LEM Post Processor. In addition, three intermediate files are generated by the Segment Truth Generator, CAMS, and YES modules. Finally, program status information about each subprogram and LEM itself after each Monte Carlo trial and at the end of the program execution are printed out.

#### 4.1 PRINTED DATA

##### 4.1.1 Printed Reports

Printed reports are generated by the Segment Truth Generator, CAMS, YES, and CAS modules. The Segment Truth Report consists of the substrata true PW, each segment true PW, and each segment true PM plus the average segment true PW for each substratum. The CAMS module generates two reports -- a CAMS estimated proportion wheat summary and an error source report. YES generates a report specifying the true yield of each stratum, and for each prediction point of each stratum, the estimated yield, estimated date, standard error, and percent error. CAS generates a summary report for the LEM simulation. The content and format of the CAMS, YES, and CAS modules will be described in the Problem Definitions for each of those subprograms. The format of the Segment Truth report is as follows:

#### Segment Truth Report

True Substrata PW	True Segment PW	Ave. PW	Error PW	True Segment PM
XXX	XXX XXX XXX	XXX	XXX	XXX XXX XXX
	⋮			⋮
XXX	XXX XXX	XXX	XXX	XXX XXX
	⋮			⋮

#### 4.1.2 Intermediate Debug

At the present there is no Intermediate Debugging printout specified. However, it is anticipated that during checkout the contents of various files will be printed out as the data records are written.

#### 4.1.3 Status Information

At the conclusion of the run the following status information is printed out:

- Number of data records read from each input file
- Number of non-fatal errors detected in the input data
- Number of non-fatal errors detected during execution
- Number of Monte Carlo trials completed
- Final random number seeds (to be input on restart run)
- Number of data records written on each output file

#### 4.1.4 Echo Print Input Card Images

The data specified on the input control cards is always printed out in a format that is similar to the format on the input card images. Due to differences in the FORTRAN read and write formats, the printout may be slightly different from the input card images. For example, a blank field will be printed out as -0 rather than being left blank.

## 4.2 FILES

There are two output files generated by LEM -- the CAS Cumulative Output File and the CAS Distribution Data File. In addition, intermediate files are generated by the Segment Truth Generator, CAMS, and YES. These intermediate files may be saved and input on subsequent runs allowing specified subprograms to be bypassed provided the corresponding error contributions are constant.

### 4.2.1 CAS Cumulative Output File

This file contains the cumulative information being generated from Monte Carlo analysis.

### 4.2.2 CAS Distribution Data

This file provides distribution data to be analyzed by the post processor.

### 4.2.3 Segment Truth File

This file contains all of the essential Segment Truth data. It may be saved and input to LEM on a subsequent run allowing the Segment Truth Generator to be bypassed. However, on that subsequent run the Segment Truth data will be constant.

### 4.2.4 CAMS Output File

This file contains all of the essential CAMS output data. It may be saved and input to LEM on a subsequent run allowing CAMS to be bypassed. However, on that subsequent run the CAMS data will be constant.

### 4.2.5 YES Output File

This file contains all of the essential YES output data. It may be saved and input to LEM on a subsequent run allowing YES to be bypassed. However, on that subsequent run the YES data will be constant.

## 5.0 ERROR PROCESSING

### 5.1 GENERAL

The program will attempt to find as many errors as possible during the processing of the input control cards. The program will continue checking for additional input errors if any input error is detected. There are two levels of error. These are:

Level 1 - non-fatal, continue processing.

Level 2 - job fatal. Terminate job after processing all input control cards.

When a level 1 error is detected, the program will print an informative message and continue processing. When a level 2 error is detected, the program will print an informative message, set a fatal error flag, and continue processing. When all control cards have been processed the program will continue executing if no fatal errors were found or will return control back to the operating system if at least one fatal error is detected.

The errors which may be detected by the LEM control program itself are described below. Any error conditions which are detected by CAMS, YES, or CAS will be described separately in the Problem Definitions for CAMS, YES, or CAS.

### 5.2 INPUT ERRORS DETECTED BY LEM

1. Message:

TOO MANY MONTE CARLO TRIALS REQUESTED. NTRIAL = n,  
RSTART = r. MAX. NO. OF TRIALS PER RUN IS m.

Meaning:

On the LEM control cards the user has specified n - r Monte Carlo trials for the current run but the program permits a maximum of m trials for any single run.

Remedy:

Fatal error -- the user should check NTRIAL and RSTART and be sure NTRIAL-RSTART does not exceed the maximum allowable value.

2. Message:

RSTART = r MUST BE LESS THAN NTRIAL = n.

Meaning:

RSTART, the final iteration number from the previous run from which the user is trying to restart, must be less than NTRIAL, the total number of iterations desired at the end of the current run.

Remedy:

Fatal error -- RSTART is fixed. Hence, NTRIAL must be increased on the LEM control cards.

3. Message:

STARTR =  $n_1$  MUST BE BETWEEN 0 AND ENDR =  $n_2$ . ENDR MUST BE .LE. m.

Meaning:

The starting region  $n_1$  and the ending region  $n_2$  must satisfy the inequalities

$$0 \leq n_1 \leq n_2 \leq m$$

where m is the maximum region number.

Remedy:

Fatal error -- the user should check STARTR and ENDR on the LEM control cards to be sure they satisfy the above inequalities.

4. Message:

STARTZ =  $n_1$  MUST BE BETWEEN 0 AND ENDZ =  $n_2$ . ENDZ MUST BE .LE. m.

Meaning:

The starting zone  $n_1$  and the ending zone  $n_2$  must satisfy the inequalities

$$0 \leq n_1 \leq n_2 \leq m$$

where m is the maximum zone number.

Remedy:

Fatal error -- the user should check STARTZ and ENDZ on the LEM control cards to be sure they satisfy the above inequalities.

5. Message:

ISTG =  $n_1$ , ICAMS =  $n_2$ , AND IYES =  $n_3$  MUST ALL BE 0, 1, 2, OR 3.

Meaning:

One or more of the parameters ISTG, ICAMS, and IYES have an illegal value specified. The only allowable values are 0, 1, 2, or 3.

Remedy:

Fatal error -- specify the proper value(s) for the offending parameter(s) on the LEM control cards.

6. Message:

IF ICAMS IS NONZERO, THEN ISTG MUST BE NONZERO.  
I. E. IF THE CAMS ERRORS ARE HELD CONSTANT, THEN SO MUST THE SEGMENT TRUTH ERROR.

Meaning:

Self-explanatory. The user cannot vary the Segment Truth error while holding the CAMS errors constant by setting ICAMS  $\neq$  0. However, it is possible to hold the Segment Truth error constant while varying the CAMS errors.

Remedy:

Fatal error -- change either ICAMS or ISTG on the LEM control cards.



7. Message:

CASE NUMBER =  $n_1$  OR COUNTRY  $C_1$  FROM SEGMENT ID  
FILE DOES NOT AGREE WITH INPUTS ICSESG =  $n_2$  AND  
CUNTRY =  $C_2$ .

Meaning:

Possibly the wrong Segment ID file has been specified, or the  
wrong values have been specified for the parameters ICSESG  
and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper Segment ID file or specify the  
correct values for ICSESG and CUNTRY on the LEM control  
cards. It might be necessary to dump the header record of the  
Segment ID file.

8. Message:

CASE NUMBER =  $n_1$  OR COUNTRY  $C_1$  FROM CROP WINDOW  
FILE DOES NOT AGREE WITH INPUTS ICSECW =  $n_2$  AND  
CUNTRY =  $C_2$ .

Meaning:

Possibly the wrong Crop Window file has been specified, or the  
wrong values have been specified for the parameters ICSECW  
and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper Crop Window file or specify the  
correct values for ICSECW and CUNTRY on the LEM control cards.  
It might be necessary to dump the header record of the Crop  
Window file.

9. Message:

CASE NUMBER =  $n_1$  OR COUNTRY  $C_1$  FROM CAMS ERROR  
FILE DOES NOT AGREE WITH INPUTS ICSECE =  $n_2$  AND  
CUNTRY =  $C_2$ .

Meaning:

Possibly the wrong CAMS error file has been specified, or the  
wrong values have been specified for the parameters ICSECE  
and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper CAMS error file or specify  
the correct values for ICSECE and CUNTRY on the LEM control  
cards. It might be necessary to dump the header record of the  
CAMS error file.

10. Message:

CASE NUMBER =  $n_1$  OR COUNTRY  $C_1$  FROM THE SIGNATURE  
EXTENSION FILE DOES NOT AGREE WITH INPUTS ICSESE =  $n_2$   
AND CUNTRY =  $C_2$ .

Meaning:

Possibly the wrong signature extension file has been specified,  
or the wrong values have been specified for the parameters  
ICSESE and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper signature extension file or  
specify the correct values for ICSESE and CUNTRY. It might  
be necessary to dump the header record of the signature  
extension file.

11. Message:

CASE NUMBER =  $n_1$  OR COUNTRY  $C_1$  FROM THE DATA ACQUISITION FILE DOES NOT AGREE WITH INPUTS ICSEAC =  $n_2$  AND CUNTRY =  $C_2$ .

Meaning:

Possibly the wrong Data Acquisition file has been specified, or the wrong values have been specified for the parameters ICSEAC and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper Data Acquisition file or specify the correct values of ICSEAC and CUNTRY. It might be necessary to dump the header record of the Data Acquisition file.

12. Message:

CASE NUMBER =  $n_1$  OR COUNTRY  $C_1$  FROM THE YES ERROR MODEL FILE DOES NOT AGREE WITH INPUTS ICSEYM =  $n_2$  AND CUNTRY =  $C_2$ .

Meaning:

Possibly the wrong YES Error Model file has been specified or the wrong values have been specified for the parameters ICSEYM and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper YES Error Model file or specify the correct values for ICSEYM and CUNTRY. It might be necessary to dump the header record of the YES Error Model file.

13. Message:

CASE NUMBER =  $n_1$  OR COUNTRY  $C_1$  FROM THE SUBSTRATA HISTORICAL FILE DOES NOT AGREE WITH INPUTS ICSESH =  $n_2$  AND CUNTRY =  $C_2$ .

Meaning:

Possibly the wrong Substrata Historical file has been specified or the wrong values have been specified for the parameters ICSESH and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper Substrata Historical file or specify the correct values for ICSESH and CUNTRY. It might be necessary to dump the header record of the Substrata Historical file.

14. Message:

CASE NUMBER =  $n_1$  OR COUNTRY =  $C_1$  FROM THE SEGMENT TRUTH FILE DOES NOT AGREE WITH INPUTS ICSEST =  $n_2$  AND CUNTRY =  $C_2$ .

Meaning:

Possibly the wrong file has been specified as the Segment Truth file, or the wrong values have been specified for ICSEST and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper Segment Truth file or specify the correct values for ICSEST and CUNTRY. It might be necessary to dump the header record of the Segment Truth file.

15. Message:

CASE NUMBER =  $n_1$  OR COUNTRY =  $C_1$  FROM THE CAMS OUTPUT FILE DOES NOT AGREE WITH INPUTS ICSECO =  $n_2$  AND CUNTRY =  $C_2$ .

Meaning:

Possibly the wrong file has been specified as the CAMS Output file, or the wrong values have been specified for ICSECO and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper CAMS Output file or specify the correct values for ICSECO and CUNTRY. It might be necessary to dump the header record of the CAMS Output file.

16. Message:

CASE NUMBER =  $n_1$  OR COUNTRY =  $C_1$  FROM THE YES OUTPUT FILE DOES NOT AGREE WITH INPUTS ICSEYS =  $n_2$  AND CUNTRY =  $C_2$ .

Meaning:

Possibly the wrong file has been specified as the YES Output file, or the wrong values have been specified for ICSEYS and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper YES Output file or specify the correct values for ICSEYS and CUNTRY. It might be necessary to dump the header record of the YES Output file.

17. Message:

CASE NUMBER =  $n_1$  OR COUNTRY =  $C_1$  FROM THE CAS CUM OUTPUT FILE DOES NOT AGREE WITH INPUTS ICASE =  $n_2$  AND CUNTRY =  $C_2$ .

Meaning:

On a restart run the case number and country of the CAS Cum Output file must agree with the parameters ICASE and CUNTRY on the LEM control cards. Possibly the wrong file has been mounted, or the wrong values have been specified for ICASE and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper CAMS Cum file or specify the proper values for ICASE and CUNTRY. It might be necessary to dump the header record of the CAMS Cum file.

18. Message:

CASE NUMBER =  $n_1$  OR COUNTRY =  $C_1$  FROM THE CAS  
DIST OUTPUT FILE DOES NOT AGREE WITH INPUTS

ICASE =  $n_2$  AND CUNTRY =  $C_2$ .

Meaning:

On a restart run the case number and country of the CAS  
Distribution Output file must agree with the parameters ICASE  
and CUNTRY on the LEM control cards. Possibly the wrong  
file has been mounted, or the wrong values have been specified  
for ICASE and CUNTRY on the LEM control cards.

Remedy:

Fatal error -- mount the proper CAS Distribution file or specify  
the proper values for ICASE and CUNTRY. It might be necessary  
to dump the header record of the CAS Distribution file.

19. Message:

IMPROPER HEADER LABEL ON FILE filename.

LABEL = label.

Meaning:

The file label specified in the first two words of the header  
record of the file "filename" does not correspond to the expected  
label. Possibly the wrong file has been mounted.

Remedy:

Mount the proper file. It might be necessary to dump the header  
record of the designated file.

20. Message:

IMPROPER LABEL AND SEQUENCE NUMBER ON A LEM  
CONTROL CARD. LABEL AND SEQ. NO. = \_\_\_\_\_.

Meaning:

The four LEM control cards are supposed to have LEM (1) 0i  
entered in Columns 75-80 (where  $i = 1, 2, 3, \text{ or } 4$ ). Possibly  
the control cards are out of order.

Remedy:

Be sure the LEM control cards are in the proper order and that the label and sequence numbers are entered properly.

21. Message:

ITERATION NUMBER NT FROM filename FILE = n DOES NOT AGREE WITH RSTART = r FROM LEM CONTROL CARD, where filename = CASCUM or CASDIS

Meaning:

The iteration number NT from both the CAS Cumulative file (CASCUM) and the CAS Distribution file (CASDIS) must be consistent with the value of RSTART specified on the LEM control cards. Possibly the wrong file has been specified or else RSTART is specified incorrectly.

Remedy:

Fatal error -- mount the proper file or specify the correct value for RSTART.

### 5.3 PROCESSING ERRORS

Each of the modules STG, CAMS, YES, and CAS performs its own error checking during execution. The error messages for CAMS and CAS are described separately in the problem descriptions for those modules. The error messages for the Segment Truth Generator and the YES module are described below.

#### 5.3.1 Processing Errors Detected by the Segment Truth Generator

##### 1. Message:

THE SEGMENT ID FILE AND THE SUBSTRATA HISTORICAL FILE  
ARE INCONSISTENT.

	SEGID	SUBHST
REGION	r1	r2
ZONE	z1	z2
STRATA	s1	s2
SUBSTRATA	k1	k2

##### Meaning:

The region, zone, strata, and/or substrata ID's do not agree between the SEGID file and the SUBHST file. Perhaps the wrong file has been specified for one or both files. This error message was intended primarily for checkout purposes. The error should not occur during production usage.

##### Remedy:

Non-fatal error -- the segment from the SEGID file will be dropped and execution will continue. However, the user should check both files to be sure the proper files have been specified. It may be necessary to dump part or all of one or both files.

##### 2. Message:

SEGMENT  $\sigma$  IS NOT IN IDSEG FROM SUBHST FOR REGION r, ZONE z,  
STRATA s, SUBSTRATA k  
SEGMENT WILL BE DROPPED.



Meaning:

The indicated segment ID  $\sigma$  from the Segment ID file was not found in the array IDSEG read from the SUBHST file. Apparently the SEGID file and the SUBHST file are inconsistent.

Remedy:

Non-fatal error -- the indicated segment will be ignored and execution will proceed. However, the user should check both files to be sure the proper files have been specified.

3. Message:

ERROR RETURN FROM BETAD ROUTINE.

IER = f . PWK =  $PW_k$  SIGMA =  $\sigma$  PWKI =  $PW_i$

Meaning:

An error return from the Beta Distribution routine has occurred in STG. (See the writeup of BETAD for details.) The error flag f indicates the nature of the error.

f = 1     XBAR = PWK ( $\bar{X} = PW_k$ ) is not in the range  $0 \leq \bar{X} \leq 1$ .  
          $\bar{X}$  was reset within BETAD.

f = 2      $\sigma$  not in the range  $0 \leq \sigma \leq \bar{X} \sqrt{\frac{1 - \bar{X}}{\bar{X} + \epsilon}}$

         where  $\epsilon = 10^{-4}$

$\sigma$  was reset within BETAD.

f = 3     Fatal error  
          $PW_{xi}$  could not be found within 35 iterations.

Remedy:

If IER = 1 or 2, the error is non-fatal and the program continues execution.

If IER = 3, then the user better check the values  $PW_k$  or  $CV_2$  from the SUBHST file.

4. Message:

ERROR RETURN FROM BETAD ROUTINE.

IER = f . PMMEAN =  $PM_k$  SIGMA =  $\sigma$

Meaning:

Similar to error message 3 described above except that here

XBAR = PMMEAN

( $\bar{X} = PM_k$ )

Remedy:

If IER = 1 or 2, the error is non-fatal and the program continues execution.

If IER = 3, then the user should check the values  $PW_k$ , DELTPM, and  $CV_3$  from the SUBHST file.

5. Message:

WARNING... NSEGS = n .NE. NSEG

(FROM SUBHST) = m

SEGMENT IDS MAY BE INCORRECT.

Meaning:

The number of segments read from the SEGID file does not agree with NSEG, the number of segments on the SUBHST file. Possibly the two files are inconsistent. The error is considered to be non-fatal by the program, but the error may be quite serious and the results should be regarded with suspicion.

Remedy:

Check to be sure the SEGID and SUBHST files are consistent. It might be necessary to dump all or part of both files.

6. Message:

WARNING... NO SEGMENTS PROCESSED BY SEGMENT TRUTH GENERATOR.

Meaning:

For some reason the Segment Truth Generator failed to process any segments. This is a very degenerate situation and should not normally be encountered in production runs. The most likely explanation is that all of the substrata processed by STG had zero segments.

Remedy:

Non-fatal error -- however, this condition will probably cause an abort in CAMS. Check the SUBHS file. Also check STARTR, STARTZ, ENDR, ENDZ.

PART I

PROBLEM DESCRIPTION  
FOR THE CAMS SUBPROGRAM

## Table of Contents

	Page
1.0 Scope . . . . .	1
1.1 Program Capabilities . . . . .	1
1.2 Program Development and Organization . . . . .	2
1.3 Operational Assumptions . . . . .	2
2.0 Input . . . . .	3
2.1 Card Input . . . . .	3
2.2 Input Files . . . . .	6
3.0 Processing . . . . .	11
3.1 Overview . . . . .	11
3.2 Program Flow . . . . .	11
3.3 Procedures and Equations . . . . .	11
4.0 Output . . . . .	19
4.1 Printed Data . . . . .	19
4.2 Files . . . . .	23
5.0 Error Processing . . . . .	24
5.1 General . . . . .	24
5.2 Input Errors . . . . .	24
5.3 Processing Errors . . . . .	27

## Problem Description - CAMS

### 1.0 SCOPE

#### 1.1 PROBLEM CAPABILITIES

The CAMS model provides an estimate of the proportion wheat in each segment selected by the acquisition program. Up to four estimates per segment are given, one for an acquisition date in each of four crop windows. It gives a Monte Carlo simulation of three types of errors:

1. Crop calendar errors
2. Signature extension errors (ordinary segments)
3. Classification errors - an error category including crop calendar, multi-temporal sampling effects, and input classification errors (training segments)

A fourth type of error modeled is multi-temporal sampling effects, which remains constant during a run. A fifth type of error is allowed by the choice between two classification models. The more complex model 1 allows for mixed crops, and includes the effect of omission and commission errors - the confusion created by other crops growing in the area. Options allow the omission of the effects of each type of error.

Since the signature extension error is not well understood, CAMS allows for the choice of either an additive or multiplicative factor. Signature extension requires acquisition of a training segment within a fixed period preceding the ordinary segment acquisition. If this condition is not met, then the ordinary segment is either classified as a training segment or not classified at all. The option desired is controlled by user input.

CAMS requires five input files and some card input. It produces an output file for CAS to use for aggregation of the wheat area estimates. On option, it also produces a report of the wheat estimates, and on option also, a breakdown of the error factors.

## 1.2 PROGRAM DEVELOPMENT AND ORGANIZATION

CAMS will be developed in FORTRAN as an overlay of the LEM program. See the LEM problem description, Section 1.2.

## 1.3 OPERATIONAL ASSUMPTIONS

See the LEM problem description, Section 1.3.

## 2.0 INPUT

CAMS requires five input files and some card data.

### 2.1 CARDS

Some data needed by CAMS is included on the LEM control card. See LEM problem description, Section 2.1. CAMS also requires:

1. A control card, specifying options
2. A multi-temporal matrix
3. Crop calendar error coefficients

Besides the LEM card, CAMS requires a total of 13 cards, which must be in order. See Figure 4 for the deck setup.

#### 2.1.1 List of Data Quantities and Formats

- a. LEM control card, see LEM Section 2.1. Data relevant to CAMS includes:

ISEXT	Signature extension error option, = 0, 1 simulate error = 2 bypass error
ISCC	Crop calendar error option, = 0, 1 simulate = 2 bypass
ICLASS	Classification error option, = 0, 1 simulate = 2 bypass
IACQ	Acquisition file option, = 0 include file = 1 no acquisition file
ICAMS	CAMS error option, = 0, 1 simulate = 3 bypass all errors
SEED2	Random no. seed for classification error
SEED3	Random no. seed for signature extension error
SEED4	Random no. seed for crop calendar error
IPRCAM	Print flag for CAMS - this controls if a report is printed - the flag, IREP, on the CAMS control card, controls what is printed.



- b. CAMS control card, see Figure 1 for the format and list of quantities. See Figure 4 for the total deck setup.
- c. Multi-temporal sampling matrix. The multi-temporal sampling model describes the effect of the acquisition of a sample segment in more than one bio-window. There are 15 possible non-zero acquisition states for a sample segment. These states are shown below.

Windows included	1	2	3	4	1, 2	1, 3	1, 4	2, 3	2, 4	3, 4	1, 2, 3	1, 2, 4	1, 3, 4	2, 3, 4	1, 2, 3, 4
Group #	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15

The effect of acquisition conditions corresponding to any particular state is modeled by a weighting factor, M. For ease of handling, three values of M are chosen as program inputs associated with groupings of the 15 acquisition states. These values indicate no improvement ( $M_1 = 1$ ), small improvement ( $M_2 < 1$ ), and large improvement ( $M_3 < M_2$ ) in the accuracy of classification of the segment with a given acquisition state over classification in the present window (last window in the state definition) alone.

The values needed are which M ( $M_1$ ,  $M_2$ , or  $M_3$ ) to use for each of the 15 groupings, and the values of  $M_2$  and  $M_3$  ( $M_1 \equiv 1$ ). Note that by definition, for group no. 1, 2, 3, and 4,  $M_1 = 1$ , and  $M_1 = 1 > M_2 > M_3$ . See Figure 2 for the description.

A total of eight cards are needed for the matrix, each with the above information, since the acquisition conditions depend on a. wheat type - winter or spring, b. the model - 1 or 2 (model 1 requires three cards, one for wheat, mixed, and other components; model 2 requires only one card). See Figure 4 for the order and setup.

If model 1 is being used, the cards for model 2 must be present but may have blank fields except for the id (CAMS) and sequence number, and vice versa if model 2 is being used, since the

values are not used. If data for both winter and spring is not available, the data may be left blank (except id and sequence number), but the cards must be present, and if CAMS tries to use the missing data, an error will be reported. If the multi-temporal error bypass is specified (IMULTI=1), then all the cards must be present but all the data but the id and sequence number may be left blank.

- d. Crop calendar coefficients. The effect of crop calendar errors on segment classification, particularly in an analytic sense, is not well established at this time. For this reason, a simple generic model was chosen to represent this effect. This model generates a bias (B) and standard deviation ( $\sigma$ ) from a quadratic function with user input coefficients.

$$B = G_1 (\Delta t) + G_2 (\Delta t)^2$$

$$\sigma = H_1 (\Delta t) + H_2 (\Delta t)^2$$

The value of the coefficients are to be determined from off-line analysis, curve fitting, etc., to represent the observed effects.

The values for G1, G2, H1, and H2 are needed. See Figure 3 for a description of the quantities and format. Model 1 requires these four values for the three components, wheat, mixed, and other, a total of 12 values. Model 2 requires only the four values, since the mixed crop effect is not present. Since these values may be different for winter and spring wheat, two sets must be inputted. Thus, four cards are always needed:

1. Spring wheat - model 1 - 3x4 values
2. Spring wheat - model 2 - 4 values
3. Winter wheat - model 1 - 3x4 values
4. Winter wheat - model 2 - 4 values

If model 1 is used, the cards for model 2 must be present but may have blank fields except for the id, CAMS, and sequence number, and vice versa for model 2. If data for both winter and spring is not available, the data may be left blank except for id and sequence number, but the cards must be present, and if CAMS needs the missing data, an error will be reported. If the crop calendar error bypass is specified (ISCC=2), then all the cards must still be present, but all the id and sequence number fields may be left blank. See Figure 4 for the full CAMS deck setup.

### 2. 1. 2 Deck Setup

See Figure 4. CAMS requires 13 card inputs.

### 2. 1. 4 Rules for Entering Data

See LEM problem description, Section 2.1.4, for general rules for entering data.

## 2. 2 FILES

CAMS requires five input files:

1. CAMS error file (CAMERR) from SEE program
2. Segment truth file (SEGTRU) intermediate LEM file
3. Data acquisition file (ACQUIS) from SACS program
4. Crop calendar file (CROPW) from LUMP program
5. Signature extension file (SIGEXT) from SEE program

See the file description, Section 2.4 of the Users Manual, for the formats and contents. If certain error simulation types are bypassed, the associated input file need not be loaded. See Section 3.3 for a description of all the CAMS error control flags and error bypasses. If the IACQ flag is 1 on the LEM control card, all CAMS error simulation is bypassed, and only the SEGTRU and CROPW files need be loaded. If the crop calendar error is bypassed (ISCC=2), the CROPW flag file need not be loaded. If the signature extension error is bypassed (ISEXT=2), the SIGEXT file need not be loaded. The ICAMS and ICLASS flags can cause more than one type error to be bypassed and the appropriate associated input files need not be loaded.

Name	Dimension	Nominal Value	Range	Units	Description
IMODEL			1-2		Flag = 1 use model 1, complex model = 2 use model 2, simple model
IMULTI		0	0-1		Flag = 0 include multi-temporal sampling error ≠ 0 bypass multi-temporal sampling error
ISIGEX		0	0-1		Flag ≠ 0 use multiplicative model of signature extension = 0 use additive model of signature extension
ISKIP		0	0-1		Flag = 0 skip if cannot correlate ordinary ≠ 0 classify as training with training segment
ITMAX			0-99	Days	Maximum no. of days between training and ordinary segment acquisition dates for successful correlation.
IREP		0	0-1		Flag = 0 include error breakdown factors in estimate report ≠ 0 print estimate report only
IWIND		4	1-4		From which window to take the probability of classifying as wheat given mixed to calculate the proportion of <u>pure</u> wheat pixels; if blank, defaults to window 4. This quantity is P(W/M) on the CAMERR input file; see file descriptions, Section

7

Input Data - CAMS Control Card Format

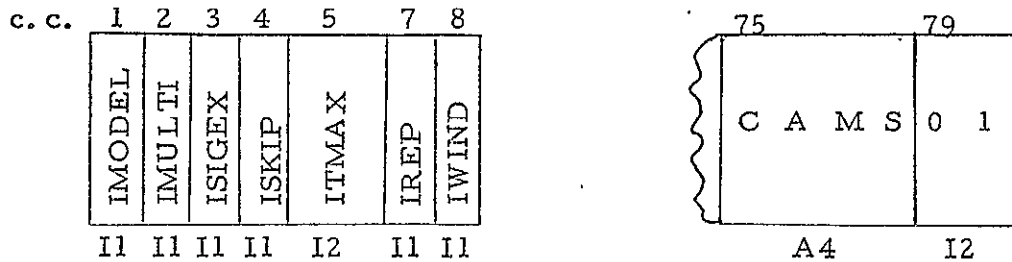


Figure 1. Input Data - CAMS Control Card Quantities

Name	Dimension	Nominal Value	Range	Units	Description
IGROUP	.15		1-3		Which value of M to use for each acquisition state, see 2.1.1, c., for which windows are in each state = 1 use M1 (= 1), no improvement = 2 use M2, small improvement = 3 use M3, large improvement Restriction: IGROUP(1), IGROUP(2), IGROUP(3) and IGROUP(4) are always = 1, by definition, and so need not be inputted.
M2			0.0 < M2 < 1.0		Value of M2, small improvement
M3			0.0 < M3 < 1.0		Value of M3, large improvement Restriction: M3 < M2 < 1, by definition.
ISEQ			2-9		Sequence no. - the matrix requires eight cards, each with the same format. See Deck-Setup, Figure 4, for the order and description.

∞ Input Data - Multi-Temporal Matrix Format


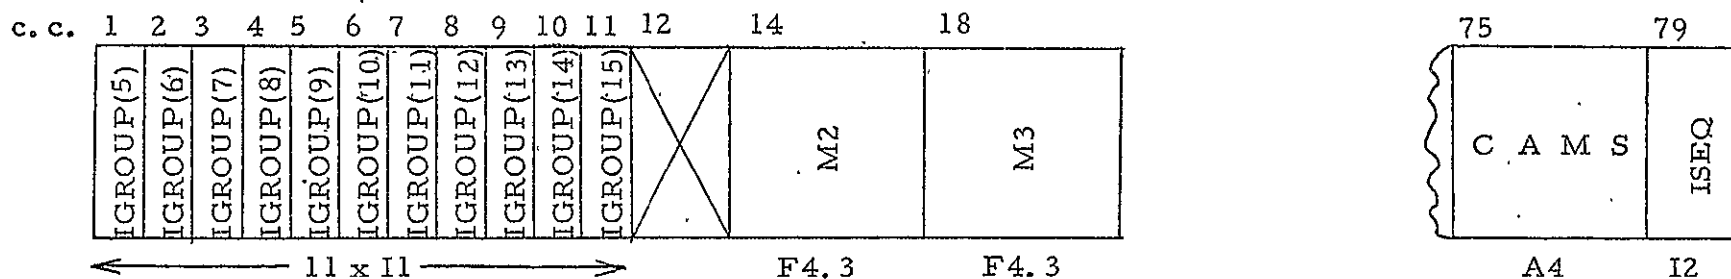


Figure 2. Input Data - Multi-Temporal Matrix Quantities

Name	Dimension	Nominal Value	Range	Units	Description
G1			+9.999		Crop calendar error coefficient
G2			+99.99		Crop calendar error coefficient
H1			+9.999		Crop calendar error coefficient
H2			+99.99		Crop calendar error coefficient
ISEQ			10-13		Sequence number - the calendar requires four cards. See Deck Setup, Figure 4.

Input Data - Crop Calendar Format

Model 1:

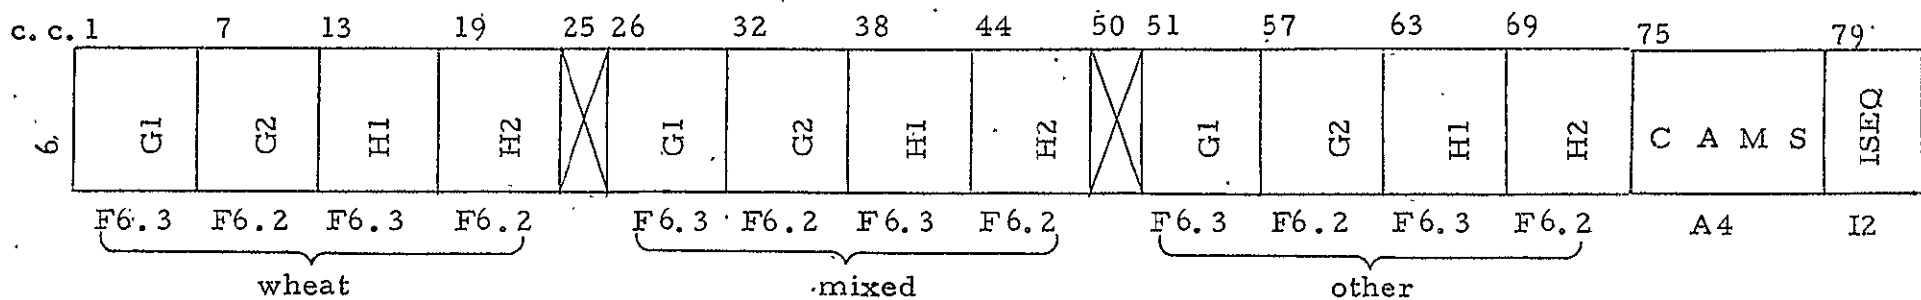

Model 2:

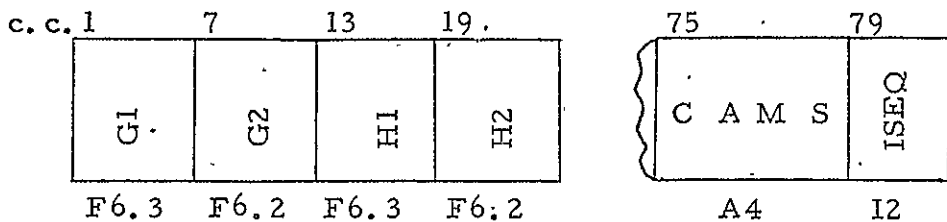


Figure 3. Input Data - Crop Calendar Coefficients Quantities

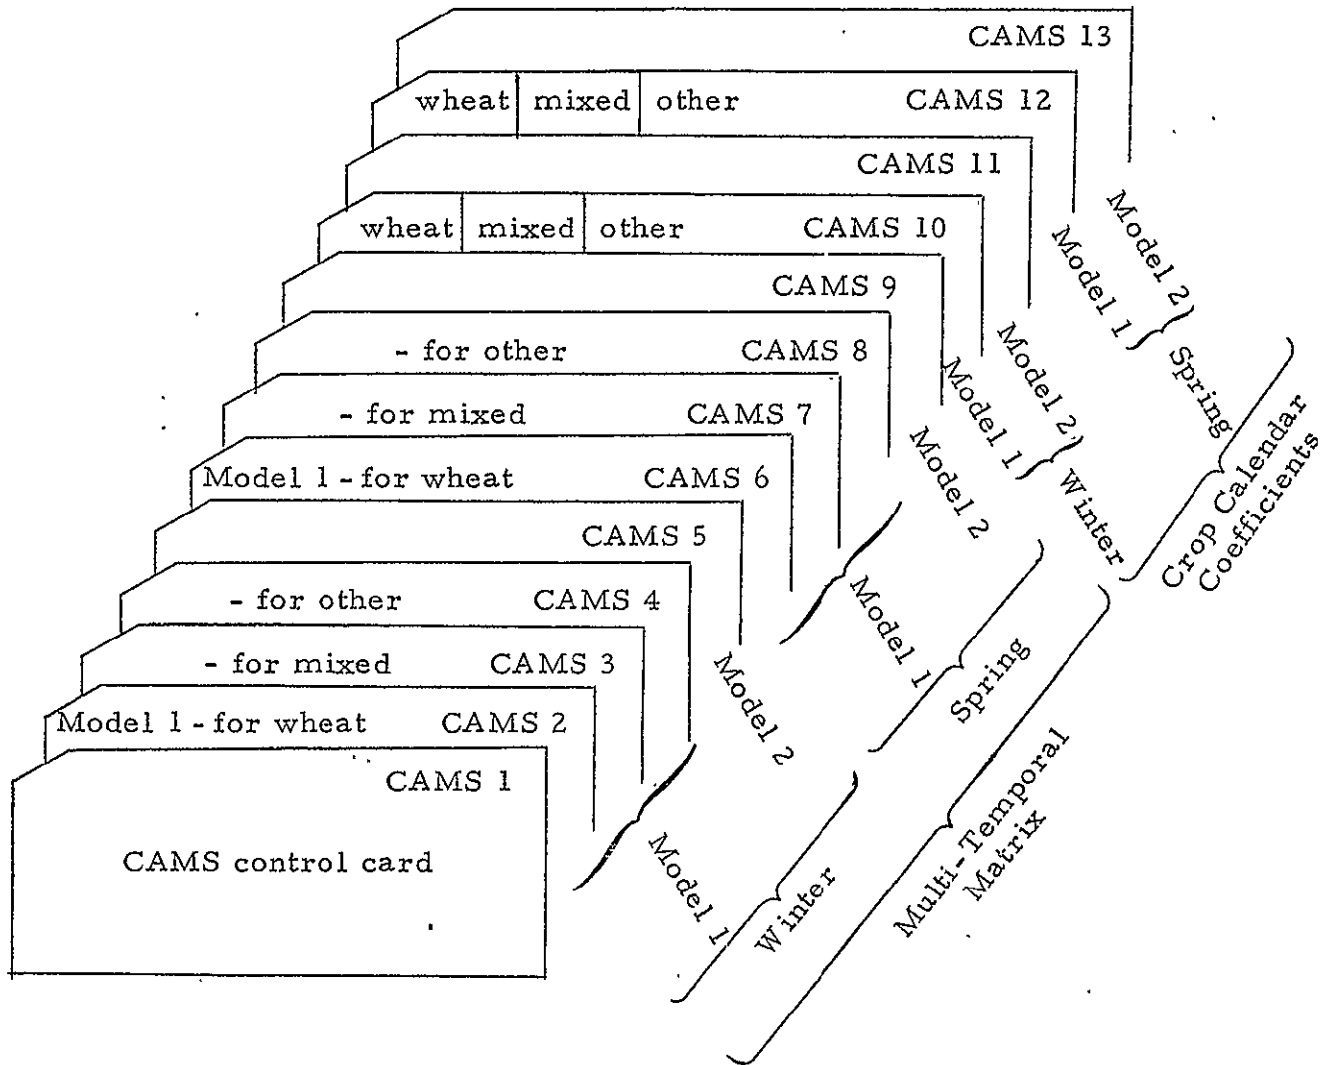


Figure.4. CAMS Deck Setup

### 3.0 PROCESSING

#### 3.1 OVERVIEW

See Figure 5 for an overview of the program flow in CAMS. CAMS operates on two passes through the acquisition data. The training segments are classified on the first pass and the ordinary segments on the second pass. The flow for models 1 and 2 are essentially the same, but for the more complex model 1 the error factors must be computed for each of the three divisions, wheat, mixed, and other, whereas for model 2 this breakdown does not take place. A random access scratch file with all the training segments is needed to figure out correlation of ordinary with training segments.

#### 3.2 PROGRAM FLOW

See Figure 6 for a block diagram of CAMS, at a more detailed level than Figure 5. It shows the possible options allowed by CAMS through its control card. The subroutine CAMSIN, shown in Figure 5, is called by LEM to read in the CAMS control card, multi-temporal matrix, and crop calendar coefficients, which are passed to the actual CAMS subprogram by LEM after error checking.

#### 3.3 PROCEDURES AND EQUATIONS

This corresponds to the Figure 6 flowchart. It specifies all the necessary equations.

CAMS flow can be broken down into:

- A. Initialization
- B. Pass 1 - training segments
  - 1. Compute multi-temporal effects
  - 2. Compute crop calendar errors
  - 3. Compute input classification and total classification error (includes 1 and 2)
  - 4. Compute PEST, estimated proportion wheat
  - 5. Write report



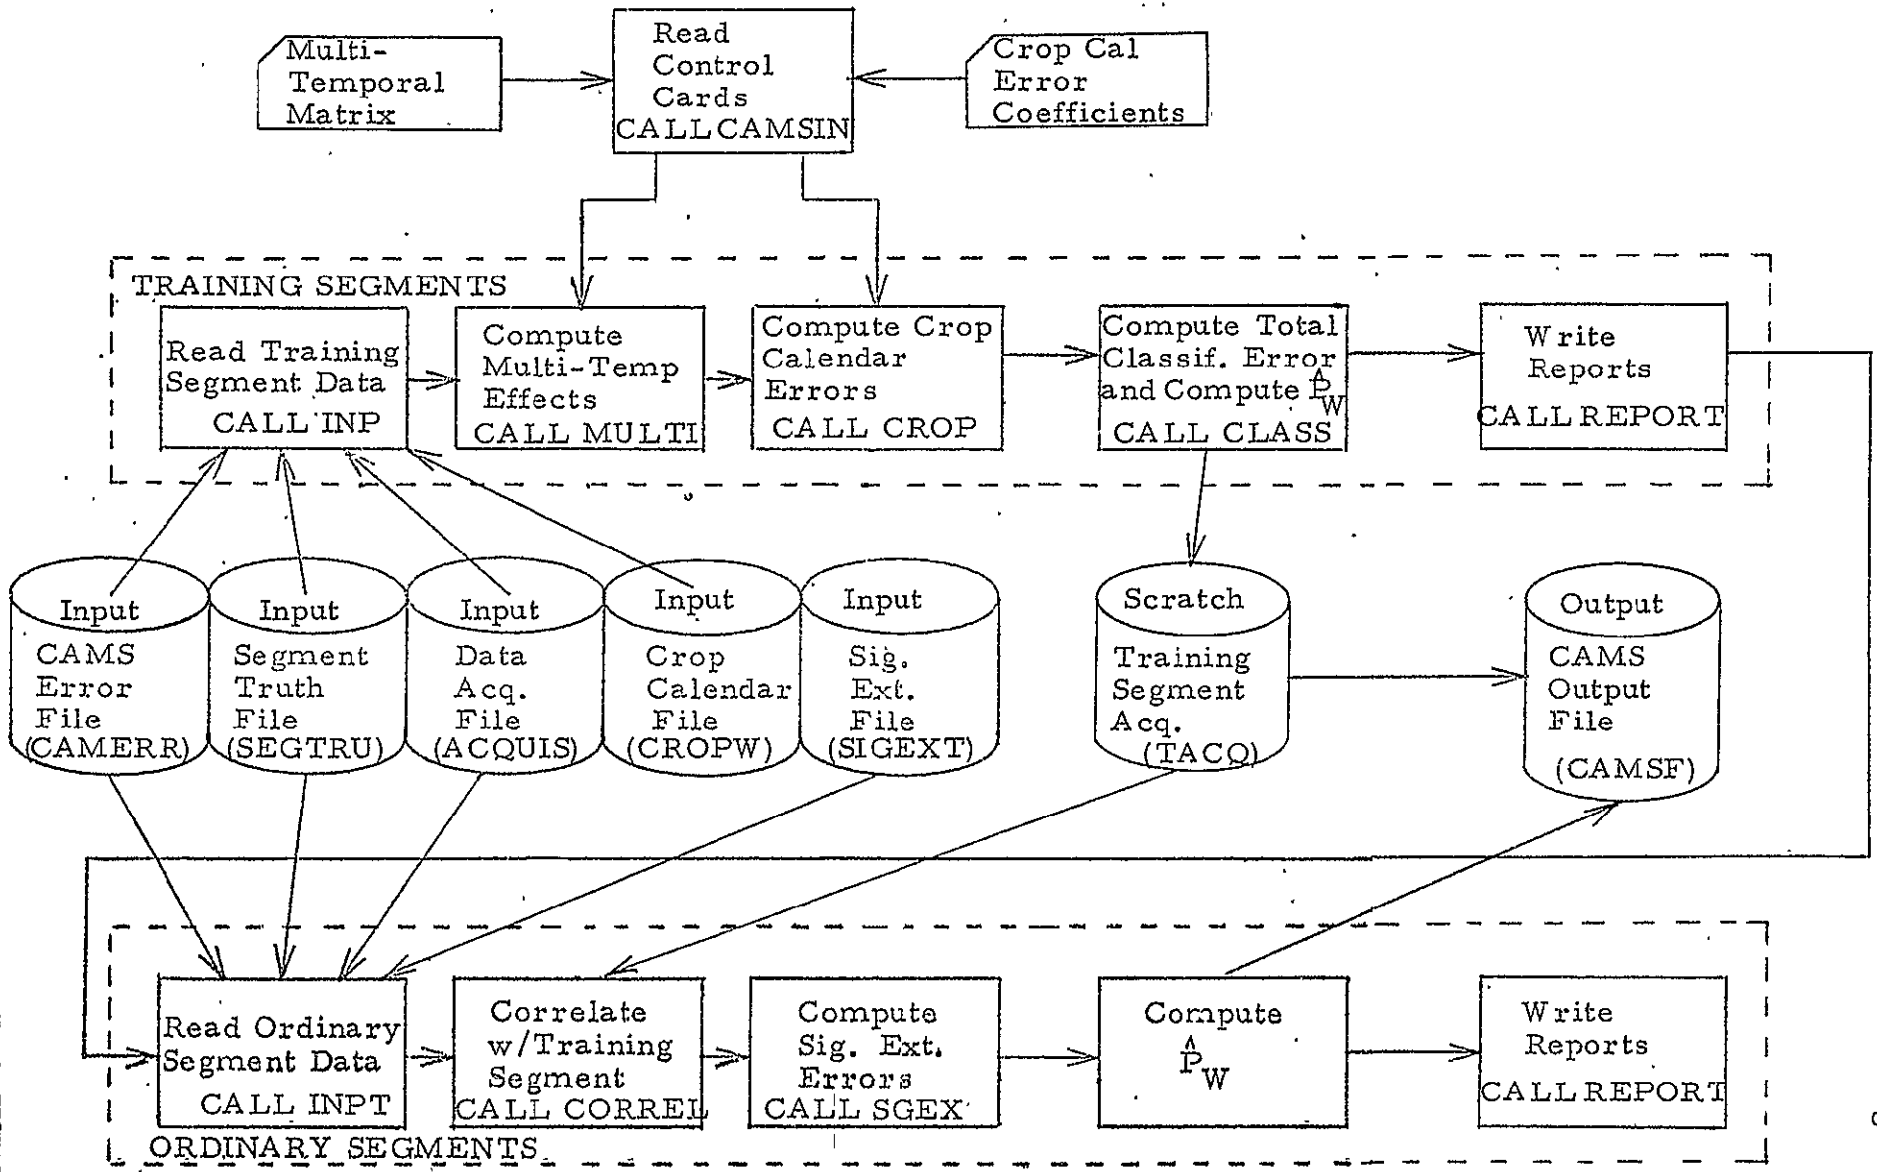


Figure 5. FOC CAMS Error Model


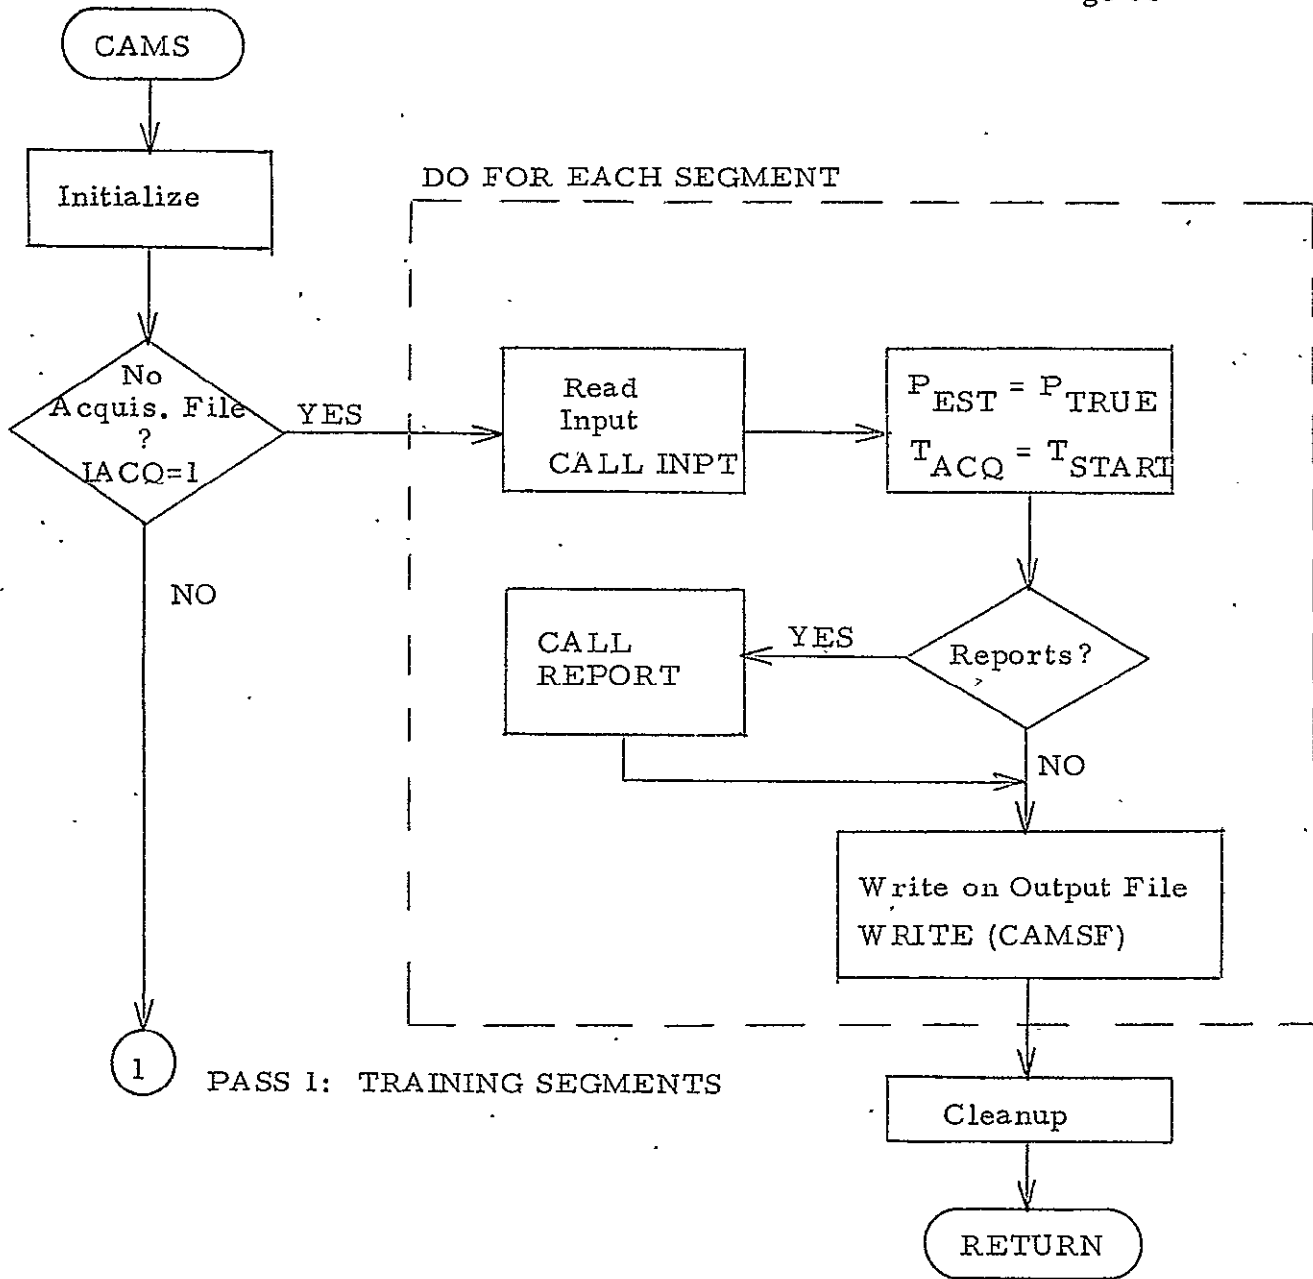


Figure 6. CAMS Logic Flow (Sheet 1 of 4)

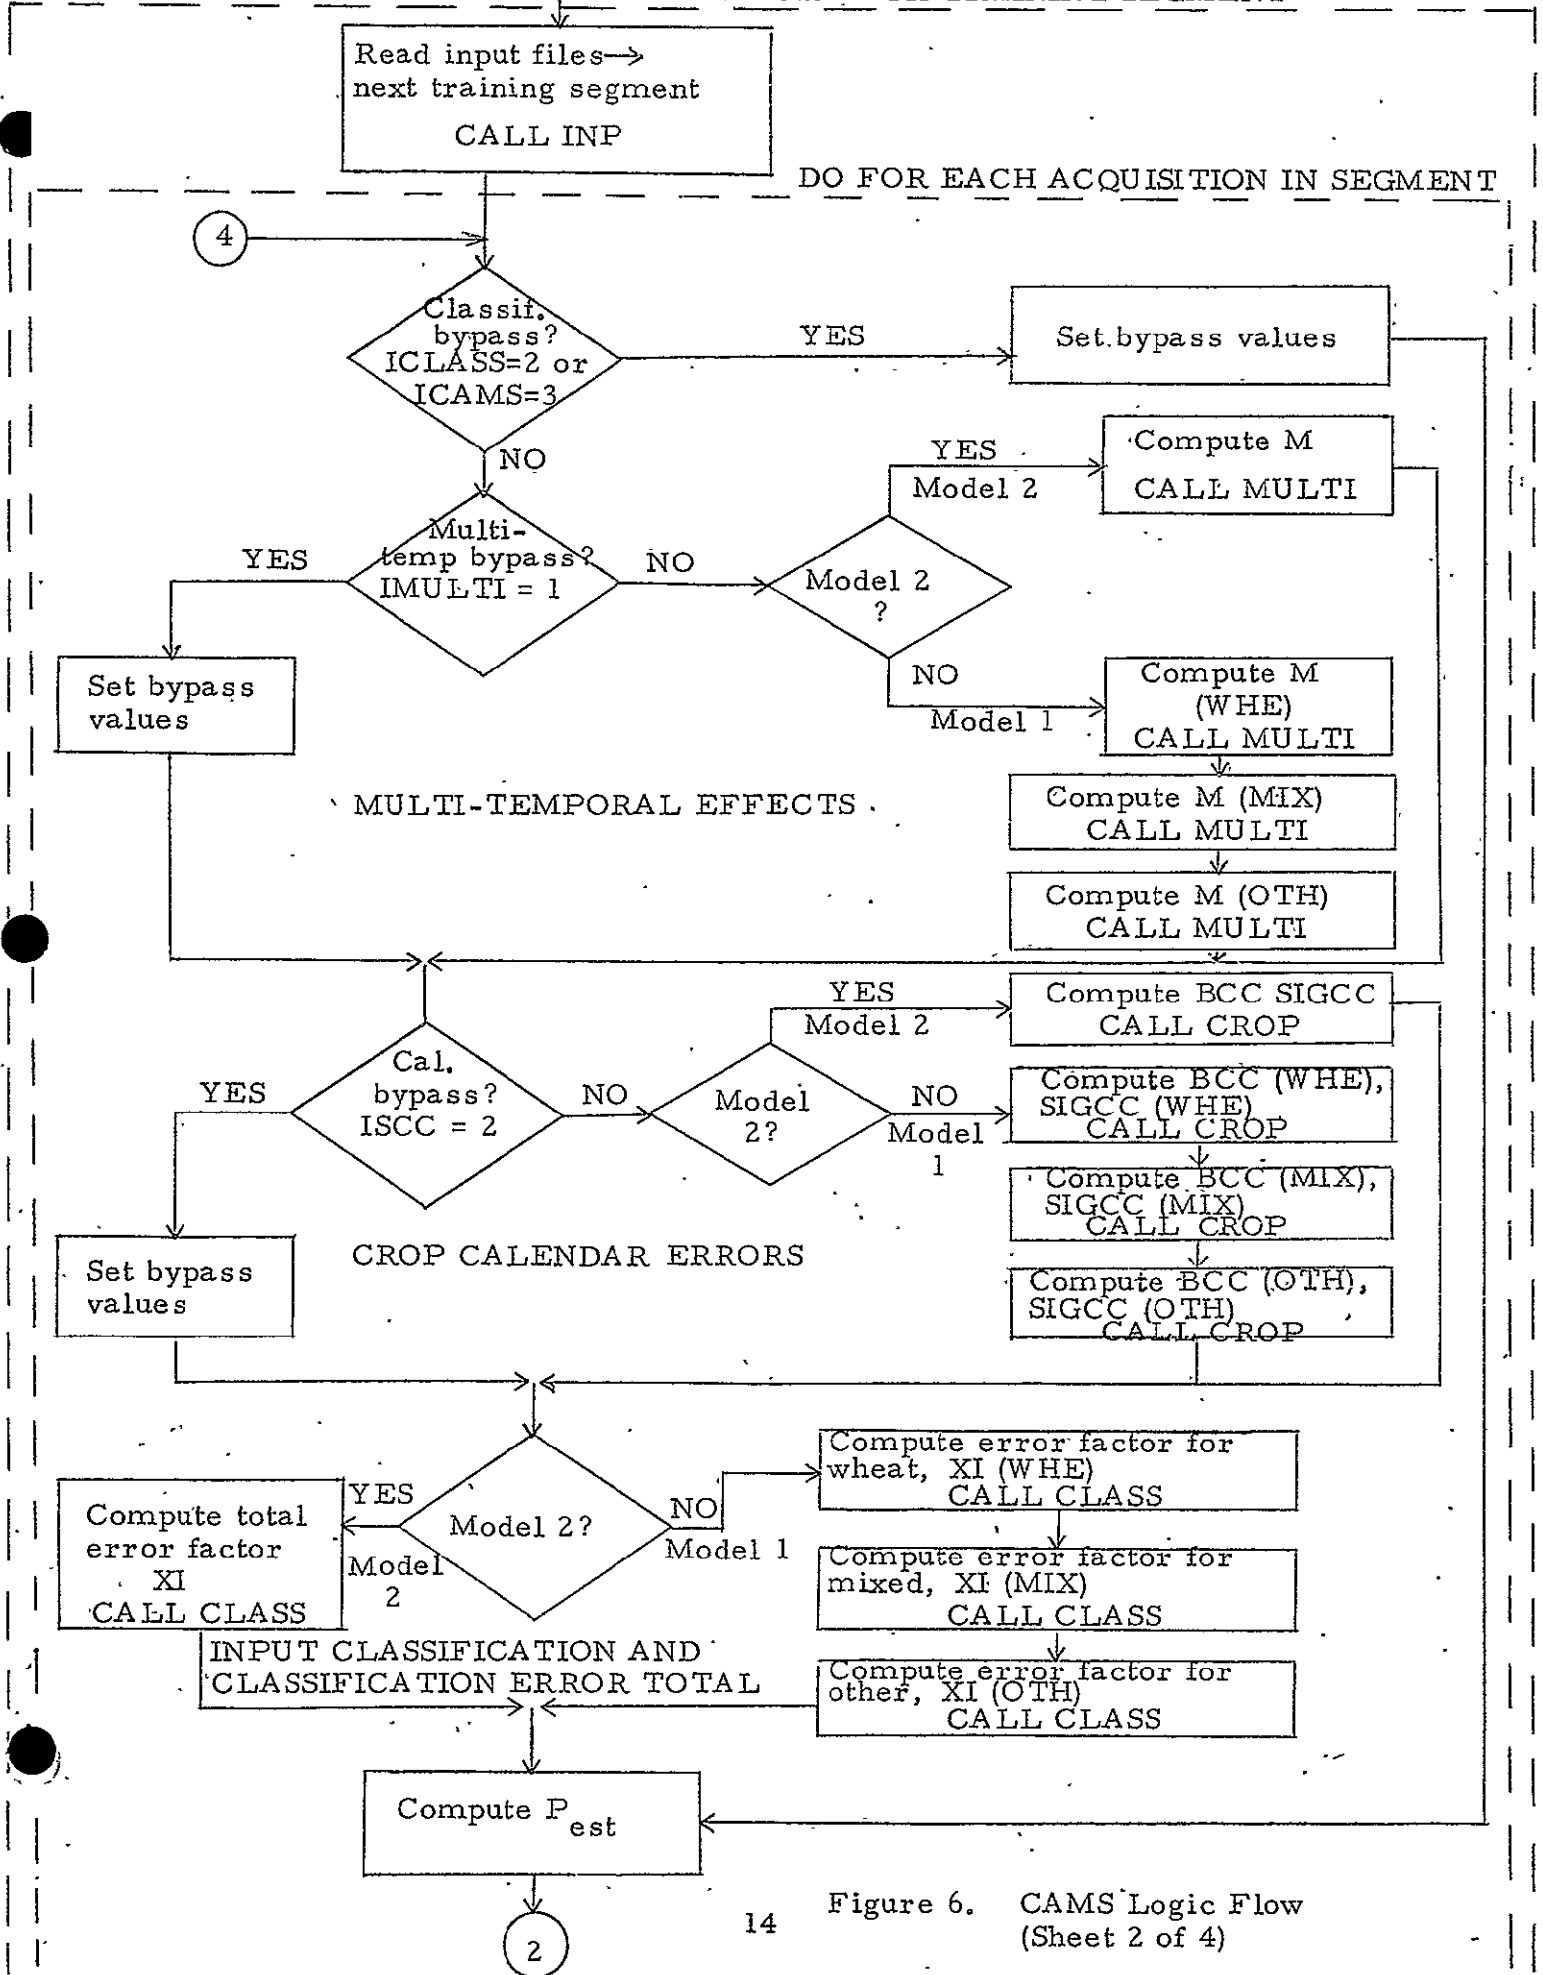

14 Figure 6. CAMS Logic Flow (Sheet 2 of 4)

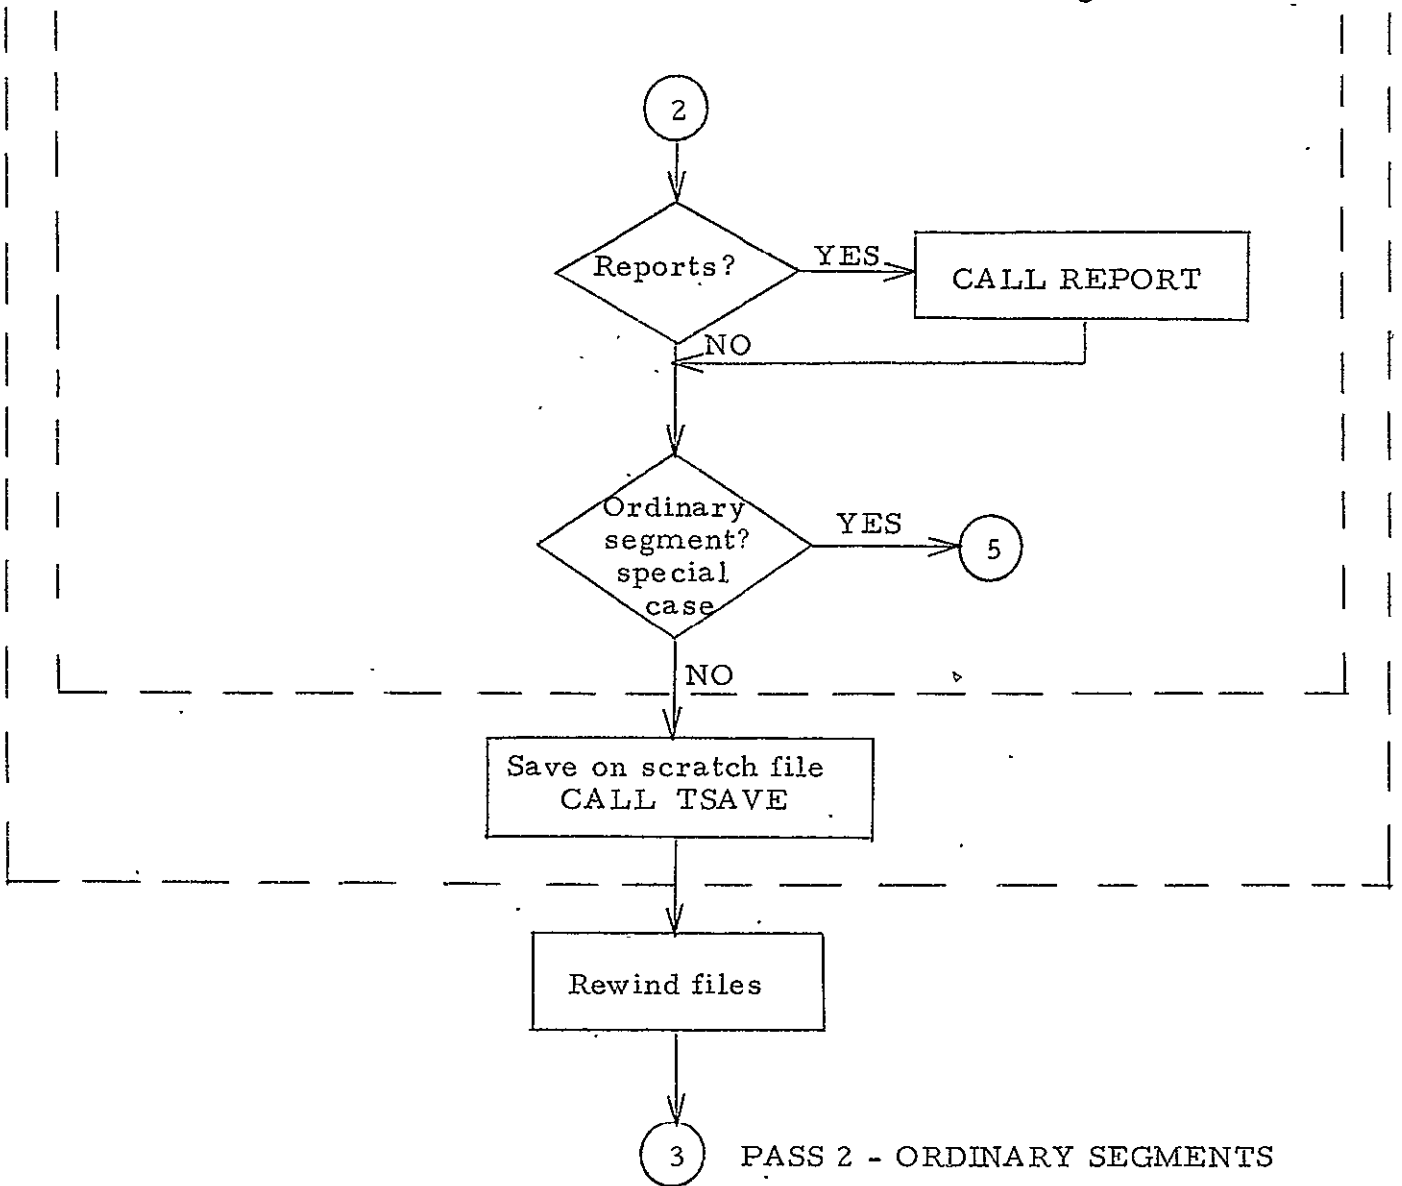


Figure 6. CAMS Logic Flow (Sheet 3 of 4)

3 PASS 2 - ORDINARY SEGMENTS

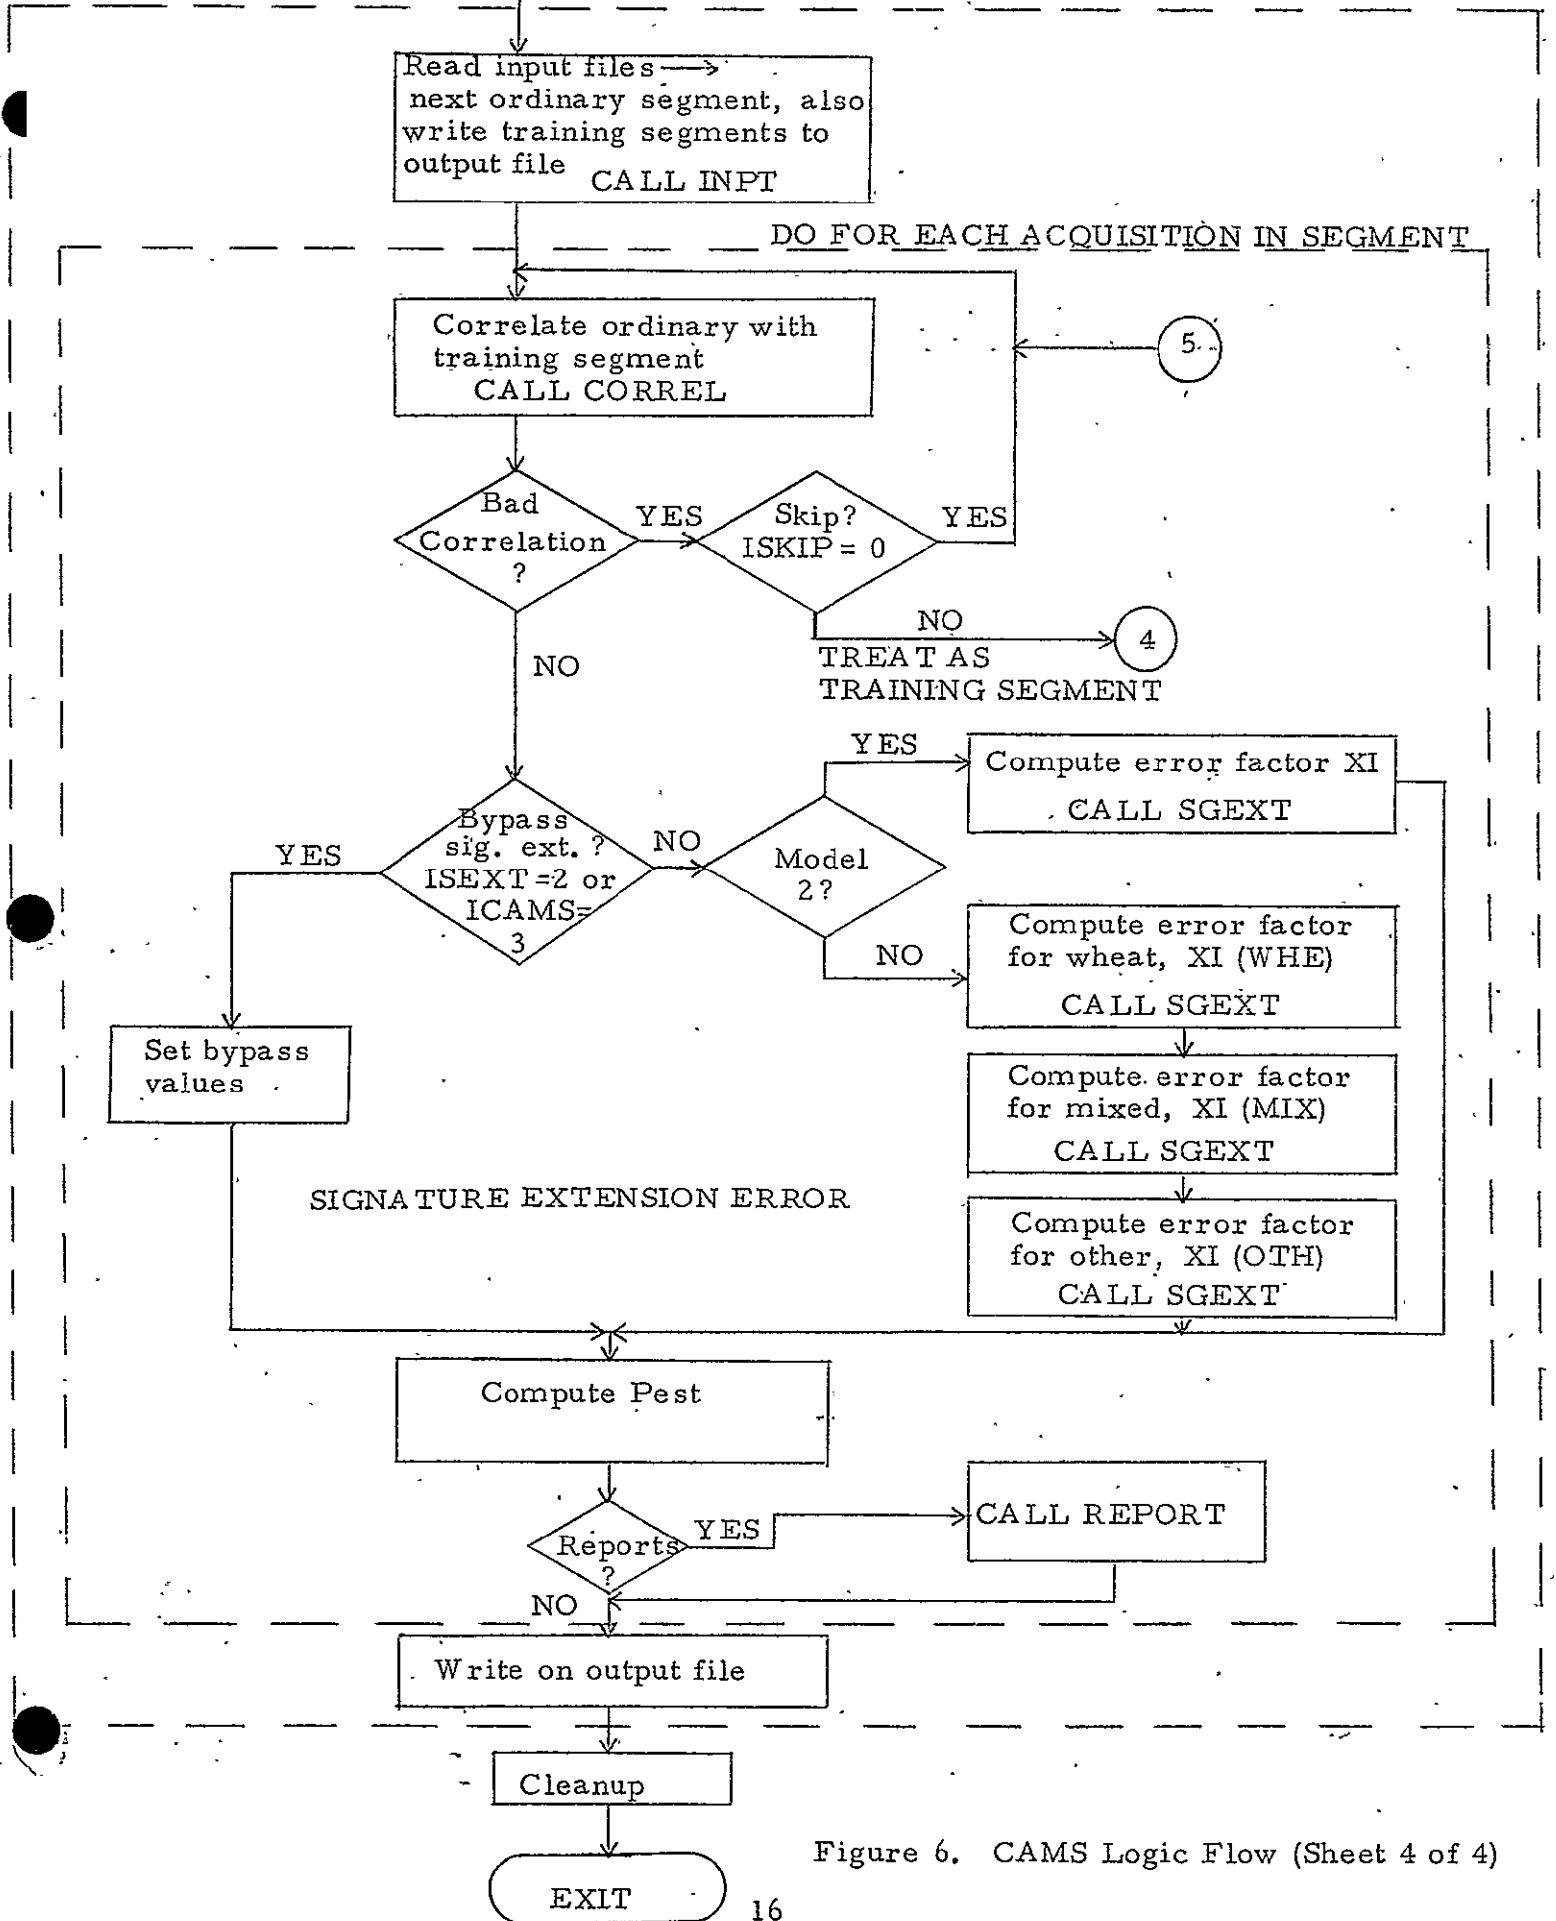


Figure 6. CAMS Logic Flow (Sheet 4 of 4)

C. Pass 2 - ordinary segments

1. Correlate with training segment
2. Compute signature extension error (includes B.3. for associated training segment)
3. Compute PEST, estimated proportion wheat
4. Write report

This is the flow of Figure 5. Figure 6 includes the complications introduced by options to bypass error effects, summarized below:

Error Type:	Flag:	IMULTI	ISCC	ICLASS	ISEXT	ICAMS	IMODEL	IACQ
1. Multi-temporal		X		X		X		X
2. Crop calendar			X	X		X		X
3. Input classification				X		X		X
4. Signature extension					X	X		X
5. Mixed crops							X	X

where X means error effect is bypassed.

If a more general flag is on, it will overrule the more specific flags.

All flags are on either the LEM or CAMS control cards. The IMODEL variable is not a flag, but specifies the model 1 or 2, but specifying model 2 has the effect of bypassing the mixed crop effects. What these mean, applied to the equations, will be spelled out later. In the equations, the W, M, and O stand for terms associated with wheat, mixed, and other. For model 2, M and O terms are zero. Note that the equations are presented from final to start.

B. Pass 1 - training segment acquisitions

B1. Compute PEST

The heart of this pass is the calculation of PEST, the estimated proportion of wheat:

$$1a. \text{PEST} = P(W) * XI(W) + P(M) * XI(M) + P(O) * XI(O)$$

where P(W), P(M), and P(O) true proportion of pure wheat, mixed, and pure other pixels

The total error would then be:

1b.  $PERR = PEST - PT(W)$

1c.  $P(W) = PT(W) - PT(M) * PW(M, IWIND)$

PT(W), PT(M) from SEGTRU file

Note: If out of range, PT(M) recomputed as:

If  $PT(M) * PW(M, IWIND) < PT(M) + PT(W) - 100$   
then  $PT(M) = (100 - PT(W)) / (100 - PW(M, IWIND))$

If  $PT(M) * PW(M, IWIND) > PT(W)$   
then  $PT(M) = PT(W) / PW(M, IWIND)$

PW(M, IWIND) from CAMERR file

IWIND from CAMS control card

1d.  $P(M) = PT(M)$

1e.  $P(O) = 100 - P(M) - P(W)$

and where XI(W), XI(M), and XI(O) are the probability of classifying as wheat, given wheat, mixed, or other, and includes all the error factors

B2. Compute XI (type) - classification error

The XIs are computed by first computing XBARS and SIGMAS and then getting a random number from a Beta distribution.

2a. CALL BETAD (SEED(2), XBAR (TYPE), SIGMA (TYPE), XI (TYPE), 0)

where SEED(2) is the random no. seed from card input for classification error

TYPE = W, M, O - call Betad three times

2b.  $SIGMA (TYPE) = PW (TYPE, WINDOW) * M (TYPE) * SIG (TYPE)$

where PW from CAMERR file

M multi-temporal error factor

SIG crop calendar/input classification error factor sigma

WINDOW which window current acquisition date in = 1, 2, 3, or 4

2c.  $XBAR (TYPE) = PW (TYPE, WINDOW) * (1. + M (TYPE) * B (TYPE))$

where PW same as above

M same as above

B crop calendar/input classification error factor bias

Add input classification errors

$$3a. B(\text{TYPE}) = \text{BERR}(\text{TYPE}, \text{WINDOW}) + \text{BCC}(\text{TYPE})$$

where BERR input classification error bias  
from CAMERR file

BCC crop calendar error bias

$$3b. \text{SIG}(\text{TYPE}) =$$

$$\text{SQRT}(\text{SIGERR}(\text{TYPE}, \text{WINDOW}) * \text{SIGERR}(\text{TYPE}, \text{WINDOW}) + \text{SIGCC}(\text{TYPE}) * \text{SIGCC}(\text{TYPE}))$$

where SIGERR input classification error sigma  
from CAMERR

SIGCC crop calendar error sigma

B3. Compute BCC (TYPE), SIGCC (TYPE) - crop calendar error.

Compute the crop calendar error, BCC and SIGCC:

$$4a. \text{BCC} = G(\text{TYPE}, \text{SEASON}, 1) * \text{DELTA} + G(\text{TYPE}, \text{SEASON}, 2) * \text{DELTA} * \text{DELTA}$$

where G from card input

SEASON winter or spring, from SEGTRU

DELTA difference between true and observed windows

$$4b. \text{SIGCC} = \text{ABS}(H(\text{TYPE}, \text{SEASON}, 1) * \text{DELTA} + H(\text{TYPE}, \text{SEASON}, 2) * \text{DELTA} * \text{DELTA})$$

where H from card input

SEASON same as above

DELTA same as above

$$4c. \text{DELTA} = (\text{TSEG} - \text{TSTART}) / (\text{ENDSEG} - \text{BGNSEG} + 1)$$

$$4d. \text{TSTART} = \text{ERR}(\text{SEASON}, \text{WINDOW})$$

ERR from CROPW file

$$4e. \text{ENDSEG} = \text{END}(\text{SEASON}, \text{WINDOW}) + \text{TSEG}$$

$$\text{BGNSEG} = \text{START}(\text{SEASON}, \text{WINDOW}) + \text{TSEG}$$

END, START from CROPW file

Compute TSEG only for first acquisition in each window; for rest, use same value.

$$5a. \text{ITSEG} = \text{RN} * \text{SD}(\text{SEASON})$$

SD from CROPW file



5b. CALL BETAD (SEED(4), 0, 0, RN, 1, IER)  
       SEED(4)   crop calendar seed, from card input returns  
       RN        random no. from normal distribution

B4. Compute M (TYPE). - multi-temporal matrix error factor.  
 This is just a table lookup.

6a.  $M (TYPE) = MS (TYPE, SEASON, IWHA TM)$   
       MS    from card input

6b.  $IWHA TM = IGROUP (TYPE, SEASON, ISTATE)$   
       IGROUP   from card input

6c.  $ISTATE = INDEX (IWIN(1), IWIN(2), IWIN(3), IWIN(4))$   
       INDEX   local array set up to yield correct value  
       IWIN    local array calculated in CAMS specifying which  
               windows have had acquisitions processed,  
               = 1 no, = 2 yes

These are all the equations necessary to compute PEST. If model 2 is specified, TYPE=WHEAT only for all steps is computed,  $PW (W, WINDOW) = PT(W)/100$ , and also 1a. becomes  $P(W) = 100$ . If the ICLASS or ICAMS bypasses are specified,

$$XI (TYPE) = PW (TYPE, WINDOW)$$

where PW from CAMERR file

and only step B1. needs to be done. If IMULTI bypass is specified, step B4. is skipped and  $M (TYPE) = 1$ . If ISCC bypass is specified, step B3. is skipped and  $BCC (TYPE) =$  ,  $SIGCC (TYPE) = 0$ .

The acquisition date for each window on the output file is set to the first acquisition date in each window from the ACQUIS file.

Error factors must be calculated and saved for each error type for the error report, if necessary. These equations are:

For total error:

$$1c. TOT = PERR$$

$$1d. V (TYPE) = (XI (TYPE) - XBAR (TYPE)) / (PW (TYPE, WINDOW) * M (TYPE))$$

1e.  $ERTOT (TYPE) = M (TYPE) * (B (TYPE) + V (TYPE))$

1f.  $ERBIAS (TYPE) = M (TYPE) * B (TYPE)$

1g.  $ERRAND (TYPE) = M (TYPE) * V (TYPE)$

For classification error:

2d.  $CLTOT (TYPE) = B (TYPE) + V (TYPE)$

2e.  $CLBIAS (TYPE) = B (TYPE)$

2f.  $CLRAND (TYPE) = V (TYPE)$

For crop calendar:

5f. DELTA

5g.  $CROPD = TSEG - TSTART$

For multi-temporal:

6d.  $MULT (TYPE) = M (TYPE)$

C. Pass 2 - ordinary segments

C1. Compute PEST

The heart of this pass is the calculation of PEST, the estimated proportion of wheat. The equations are the same as for B. Pass 1, 1a-1d. However, the error factors XI are computed differently.

C2. Compute XI (TYPE) - signature extension error

The XI's are again computed from XBARs and SIGMAS, and picking a random no. from a Beta distribution.

2a.  $CALL\ BETAD (SEED(3), XBAR (TYPE), SIGMA (TYPE), XI (TYPE), 0)$

where SEED(3) is the random no. seed from card input for signature extension error

2b.  $XBAR (TYPE) = PW (TYPE, WINDOW) * (1. + TERTOT (TYPE) * ZB (TYPE, 1) + ZB (TYPE, 2))$

where PW from CAMERR file

TERTOT from training segment value for ERTOT

ZBs from SIGEXT file

ZB (TYPE, 1) = ZB (TYPE, 1) + 1  
- multiplicative factor is increased by 1 from value on SIGEXT file

$$2c. \text{ SIGMA (TYPE) = PW (TYPE, WINDOW) * } \\ \text{ABS (TERTOT (TYPE) * ISIGEX * ZSIG (TYPE, 1, IUSE) } \\ \text{+ (1 - ISIGEX) * ZSIG (TYPE, 2, IUSE))}$$

where PW from CAMERR file  
TERTOT same as above  
ZSIG from SIGEXT file  
ISIGEX from card input  
IUSE calculated during correlation

C3. Compute IUSE - correlation of training with ordinary segment

$$3a. \text{ IUSE = I of IPRIOR(I), I = 1, 6 for training segment } \\ \text{which was ok; if none, I = 7}$$

where IPRIOR from SEGTRU file

For each training segment until good one:

3b. Find closest training acquisition date previous to acquisition date of ordinary segment

3c. Subtract the two and check against

ITMAX = max. no. of days from card input

These are all the equations needed to compute PEST. The output acquisition dates are from the ACQUIS file. If model 2 is specified, TYPE = WHEAT only for all steps,  $PW(W, WINDOW) = PT(W)/100$ , and also 1a becomes  $P(W) = 100$ . If the ISEXT or ICAMS bypasses are specified, instead of B2 step, do:

$$XI (TYPE) = PW (TYPE, WINDOW) * (1 + TERTOT (TYPE))$$

where PW from CAMERR file  
TERTOT from training segment value for ERTOT

If there was no correlation, the segment is either skipped or treated just like a training segment for that acquisition. If the IACQ bypass is specified,  $PEST = PT(W)$  and no error calculations for either training or ordinary segments are done. The acquisition date on the output file is set to START (WINDOW) from the CROPW file.

Error factors must be calculated and saved for each error type for the error report, if necessary. These equations are:

For total error:

1c.  $TOT = PERR$

where  $PT(W)$  from SEGTRU file

1d.  $SE = PEST$

1d.  $ALOCAL = P(W) * (1 + TERTOT(W)) * PW(W, WINDOW) +$   
 $P(M) * (1 + TERTOT(M)) * PW(M, WINDOW) +$   
 $P(O) * (1 + TERTOT(O)) * PW(O, WINDOW)$

1e.  $ERTOT(TYPE) = TERTOT(TYPE) * Z(TYPE, 1) + Z(TYPE, 2)$

1f. $V(TYPE, 1) = (XI(TYPE) - XBAR(TYPE)) /$ $(PW(TYPE, WINDOW) * TERTOT(TYPE))$	}	ISIGEXT = 1
$V(TYPE, 2) = 0$		
$V(TYPE, 1) = 0$	}	ISIGEXT = 0
$V(TYPE, 2) = (XI(TYPE) - XBAR(TYPE)) /$ $PW(TYPE, WINDOW)$		

Note: If SIGMA=0, then  $V(TYPE, 2)=0$ ,  $V(TYPE, 1)=0$ , and no calculation done.

1g.  $ERBIAS(TYPE) = TM(TYPE) * TB(TYPE) * ZB(TYPE, 1)$   
 $+ ZB(TYPE, 2)$

where TM and TB are M and B of assoc. training segment

1h.  $ERRAND(TYPE) = TM(TYPE) *$   
 $(TV(TYPE) * ZB(TYPE, 1) + TB(TYPE) * V(TYPE, 1)$   
 $+ TV(TYPE) * V(TYPE, 1)) + V(TYPE, 2)$

where TV is V from assoc. training segment

For classification error:

2d.  $CLTOT(TYPE) = (TB(TYPE) + TV(TYPE))$   
 $* Z(TYPE, 1) + Z(TYPE, 2)$

2e.  $CLBIAS(TYPE) = TB(TYPE) * ZB(TYPE, 1) + ZB(TYPE, 2)$

2f.  $CLRAND(TYPE) = TV(TYPE) * ZB(TYPE, 1)$   
 $+ TB(TYPE) * V(TYPE, 1) + TV(TYPE) * V(TYPE, 1)$   
 $+ V(TYPE, 2)$

For signature extension:

$$2g. \quad \dot{Z}(\text{TYPE}, 1) = ZB(\text{TYPE}, 1) + V(\text{TYPE}, 1)$$

$$2h. \quad Z(\text{TYPE}, 2) = ZB(\text{TYPE}, 2) + V(\text{TYPE}, 2)$$

For training segment:

$$2i. \quad PID = IPRIOR(IUSE)$$

$$2j. \quad TRAINA = (PEST/ALOCAL) * 100$$

$$2k. \quad TRAIND = (PEST - ALOCAL)/ALOCAL * 100$$

Note: If  $ALOCAL = 0$ ,  $TRAINA = \infty$

If  $ALOCAL = 0$  and  $PEST = 0$ ,  
 $TRAINA = 100$ ,  $TRAIND = 0$ .

Again, for model 2,  $TYPE = WHEAT$  only.

## 4.0 OUTPUT

### 4.1 PRINT DATA

#### 4.1.1 Reports

On option, CAMS produces a yield estimate report which, on option, also includes a breakdown of the error factors. These options are controlled by the IPRCAM flag on the LEM control card and the IREP flag on the CAMS control card.

Figure 7 gives the layout of the report. The report is divided into two parts, for training and ordinary segments. Section 3 gives the equations needed for each category.

#### 4.1.2 Echo Print Input Card Images

The 13 CAMS input cards are always echo printed. Defaulted or missing data will appear as zeros.

### 4.2 FILES

CAMS outputs one output file, the CAMS output file (CAMSF), to be used by CAS. See the file description, Section 2.4 of the Users Manual for the format and contents.

COUNTRY XXXX, REGION XX, ZONE XXX, STRATA XXX, SUBSTRATA XXXX, TRAINING SEGMENT XXXX  
 TRUE PROPORTION WHEAT = XXX.XX

CROP WINDOW	ACQ DATE MO/DY/YR	ESTIM. PROP.	TOTAL ERROR	ERROR			CLASSIF. ERROR			CROP CAL	MULTI- TEMP	
				WHEAT	MIXED	OTHER	WHEAT	MIXED	OTHER			
XXXXXXXXXXXXXXXXXX	XX/XX/XX	(PES)	(TOT)	TOT	(ERTOT)	(ERTOT)	(ERTOT)	(CLTOT)	(CLTOT)	(CLTOT)	(DELTA)	W (MULT)
				BIAS	(ERBIAS)	(ERBIAS)	(ERBIAS)	(CLBIAS)	(CLBIAS)	(CLBIAS)	(CROPD)	M (MULT)
				RAND	(ERRAND)	(ERRAND)	(ERRAND)	(CLRAND)	(CLRAND)	(CLRAND)		O (MULT)
	XX/XX/XX	XXX.XX	XX.XXX		X.XXXX	X.XXXX	X.XXXX	X.XXXX	X.XXXX	X.XXXX	.XX	.XX

\* \* \* \* \*

\* \* \* \* \*

If only estimate report wanted, from ① to the right omitted.

26

COUNTRY XXXX, REGION XX, ZONE XXX, STRATA XXX, SUBSTRATA XXXX, ORDINARY SEGMENT XXXX  
 TRUE PROPORTION WHEAT = XXX.XX

CROP WINDOW	ACQ DATE MO/DY/YR	ESTIM. PROP.	TOTAL ERROR	ERROR			SIG. EXT.			Z1	Z2	TRAIN SEG.
				WHEAT	MIXED	OTHER	WHEAT	MIXED	OTHER			
XXXXXXXXXXXXXXXXXX	XX/XX/XX	(PES)	(TOT)	TOT	(ERTOT)	(ERTOT)	(ERTOT)	(CLTOT)	(CLTOT)	(CLTOT)	W (Z)	(Z) (TID)
				BIAS	(ERBIAS)	(ERBIAS)	(ERBIAS)	(CLBIAS)	(CLBIAS)	(CLBIAS)	M (Z)	(Z) (TRAINA)
				(ALOCAL) RAND	(ERRAND)	(ERRAND)	(ERRAND)	(CLRAND)	(CLRAND)	(CLRAND)	O (Z)	(Z) (TRAIND)

Note: If model 2, MIXED and OTHER quantities will appear as zeros.

If unable to correlate ordinary segment acquisition with training segment and so treated as training segment, TRAIN SEG. column will appear as out of range (all \*'s) and SIG. EXT. Z1 will have the CROP CAL data, and SIG. EXT. Z2 the MULTI-TEMP data.

Figure 7. CAMS Estimate and Error Reports

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR

## 5.0 ERROR PROCESSING

### 5.1 GENERAL

See the LEM problem description, Section 5.1, for a summary of overall error handling.

### 5.2 INPUT DATA ERRORS

1. CAMS XX MODEL NOT 1 OR 2 - X  
Fatal error - model number on CAMS control card, CAMS 01, is not 1 or 2. See Figure 1.
2. CAMS XX ITMAX NOT BETWEEN 0 AND 99 - XX  
Fatal error - ITMAX value on CAMS control card bad. See Figure 1.
3. CAMS XX IWIND NOT BETWEEN 0 AND 4 - X  
Fatal error - IWIND value bad (note that 1-4 good values, 0 = default value, set to 4) on CAMS control card. See Figure 1.
4. BAD CAMS ID OR SEQUENCE NO. - XXX XX  
Fatal error - CAMS control cards bad, perhaps out of order, or missing one. See Figure 4.
5. CAMS XX CROP CALENDAR COEF. OUT OF RANGE - XXXXX  
Fatal error - crop calendar coefficient should be between  $\pm 9.999$  or  $\pm 99.99$ . See Figure 3.
6. CAMS XX BAD MULTI-TEMPORAL MATRIX VALUE M(X) - XXXX  
Fatal error - M2 not in range  $M3 \leq M2 < 1.0$  or M3 not in range  $0 \leq M3 \leq M2$ . See Figure 2.
7. CAMS XX BAD MULTI-TEMPORAL MATRIX VALUE IGROUP (XX) - X  
Fatal error - IGROUP value not 1, 2, or 3. See Figure 2.



## 5.3 PROCESSING ERRORS

1. CAMS INPUT TAPE SEGTRU - BEGINNING REGION AND ZONE NOT FOUND

Fatal error - start region and zone specified on LEM control card, LEM 02, is not present in file.

2. CAMS INPUT TAPE SEGTRU - ENDING REGION AND ZONE NOT FOUND

Warning - end region and zone were not found, so CAMS processed all records until EOF (end-of-file).

3. CAMS INPUT TAPE XXXX - MISSING RECORD

Fatal error - input tape does not correlate correctly with key tape SEGTRU - perhaps wrong file mounted for SEGID or this input tape.

4. BETA DISTRIBUTION ERROR - FLAG = X

Warning - Beta distribution subroutine, BETAD, returns error for mean production error:

- a. FLAG = 1    mean not in range  $0 \leq \text{mean} \leq 1$  so if  $\text{mean} > 1$ , mean set to 1;  $\text{mean} < 0$ , mean set to 0. (mean = XBAR of Equations B2-2c., C2-2b. in Section 3.3)
- b. FLAG = 2    sigma not in range  $0 \leq \text{sigma} \leq \text{XBAR} \sqrt{\frac{1 - \text{XBAR}}{\text{XBAR} + 10^{-4}}}$  so was reset within BETAD.
- c. FLAG = 3    the random number could not be found within 35 iterations via the inverse incomplete Beta function method, so XI set to XBAR. (See Section 3.3, B2 and C2.)

PART I  
PROBLEM DESCRIPTION FOR THE  
CAS MODULE OF THE  
LEM PROGRAM

Table of Contents

	Page
1.0 Scope . . . . .	1
1.1 Program Capabilities . . . . .	1
1.2 Program Development and Organization . . . . .	3
1.3 Operational Assumptions . . . . .	3
2.0 Input . . . . .	4
2.1 Card Input . . . . .	4
2.2 Input Files . . . . .	7
3.0 Processing. . . . .	8
3.1 Overview. . . . .	8
3.2 Program Flow . . . . .	8
3.3 Procedures and Equations . . . . .	8
4.0 Output. . . . .	19
4.1 Printed Data . . . . .	19
4.2 Files. . . . .	23
5.0 Error Processing . . . . .	24
5.1 General . . . . .	24
5.2 Input Errors . . . . .	24
5.3 Processing Errors . . . . .	28
Appendix A - Nomenclature . . . . .	A-1
Appendix B - Data Set Definitions . . . . .	B-1
Appendix C - Implementation Equations . . . . .	C-1

## Problem Description for the CAS Program

### 1.0 SCOPE

This document describes the requirements and processing logic for the CAS Simulator Module of the LACIE Error Model Program (LEM), which is an integral part of the Large Area Crop Inventory Experiment (LACIE) system.

### 1.1 PROGRAM CAPABILITIES

The purpose of the CAS Simulator is to model the LACIE aggregation technique including the aggregation of wheat area and production at the stratum, zone, region, and country levels and the estimation of the accuracy of the technique.

The CAS simulator provides the following functions:

- (1) Calculate area and production estimates and standard statistics at the stratum, zone, region, and country level.
- (2) Calculate the estimated confidence level associated with the 90% accuracy criterion at the country level.
- (3) Compute the mean values of the estimates, errors, and variances of area, yield, and production for repetitive Monte Carlo trials.
- (4) Calculate the true simulation confidence level associated with the 90% accuracy criterion at the country level based on the statistics of repetitive Monte Carlo trials.
- (5) Output the CAS summary reports and CAS Output Files.

The CAS aggregation is performed at various prediction intervals during the growing season. The CAS simulator determines the present interval and obtains the appropriate information from the YES and CAMS output files and the Substrata Historical File.

CAS processes the area data on the substrata level. The substrata Group No. is determined in order to determine the proper aggregation scheme. Group I substrata parameters are computed if any segments have been acquired for the substratum, otherwise it is reassigned to Group III. Group II parameters are computed if any segment has been acquired in the collection of Group II substrata in the stratum, otherwise these substrata are reassigned to Group III. Appropriate historical data is obtained for the Group III substrata.

Once the appropriate parameters have been computed, the Group I, II, and III substrata estimates are made and aggregated to the stratum level. Here they are combined to give the total stratum estimate.

The variances are computed for each group and aggregated to the stratum level and combined. Group I and Group II variances use a least squares fit of the historical vs. estimate data for the stratum as part of the variance computation. In order to compute the within-county variance estimates, all of the substrata (counties) within a zone are grouped into homogeneous classes and the within-class variance estimates are obtained by the least squares fit and then used for the within-county variance estimate.

The strata yield data from the YES Output File is combined with the area data to determine production. Area and production are then aggregated to the zone, region, and country levels. Production variance is also computed and aggregated along with the area variance. The estimated confidence level is computed from this variance data and the mean value at the country level for area and production.

The simulation also keeps track of the error between the LACIE estimate and the true value. These errors are computed for area, yield, and production at various levels of aggregation. During successive Monte Carlo trials, these values and other appropriate parameters are accumulated to enable computation of the simulation mean and variance of each parameter and error at various levels of aggregation. The Monte Carlo statistics are used to compute the simulation confidence level about the true mean.

The results of the simulation are output in the CAS summary output reports. The data is also maintained on the CAMS Cumulative and Distribution Output Files for further processing by the POUT Output Processor if required.

## 1.2 PROGRAM DEVELOPMENT AND ORGANIZATION

See Section 1.2 of the Problem Description for the LEM program.

## 1.3 OPERATIONAL ASSUMPTIONS

See Section 1.3 of the Problem Description for the LEM program.

## 2.0 INPUT

One control card set and three input files are required as inputs to the CAS simulator. The control card set specifies parameters and flags which control the execution of the CAS simulator.

Data files are used to input data to CAS from the YES and CAMS modules within LEM and from the LUMP program.

### 2.1 CARD INPUT

Three control cards are required by the CAS simulator. The first contains various flags and parameters. The second and third control cards specify the prediction dates for which the CAS computations are to be performed.

#### 2.1.1 List of Data Quantities

See the Input Data Description sheet on Page 5.

#### 2.1.2 Card Formats

Each CAS control card has a fixed field format as shown in Figure 2.1.

"CAS" is entered in Columns 75-77 of each control card, and a sequence number is entered in Columns 79-80.

#### 2.1.3 Deck Setup

Each of the three CAS control cards is required (even if only seven or less prediction points are specified), and they must be in the proper order. Furthermore, the CAS control cards must follow the LEM control cards and the CAMS control cards as specified in Section 2.1.3 of the Problem Description for the LEM program.

#### 2.1.4 Rules for Entering Data on Cards

1. Integers must be right justified.
2. The prediction dates must be entered in the format  
7 (3I2, 1X)  
with a maximum of seven dates per card.

INPUT DATA DESCRIPTION

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR

Card bl.	Name	Dimension	Nominal Value	Range	Description
1-3	NHISTY	1	-	1-20	M = Number of historical years for Group III ratio calculations. (No longer used; Set = 1)
4-6	H	1	-	3-99	H = Minimum number of segments required for applying S <sup>2</sup> regression equation.
7-9	TOPT	1	0	0, 1	T - option flag: = 0 to set T = 0, = 1 to calculate T where T is the second term of the variance equation for $\sqrt{V_{2S}}$
10-12	AUNITS	1	0	0, 1	Units Option: = 1 to print area in hectares and production in metric tons, = 0 to print area in acres and production in bushels
13-15	DISTFF	1	0	0, 1	CAS distribution file flag: = 0 to generate CAS distribution file, = 1 otherwise
16-27	IWIND	4	0	0, 1	Prediction bio-window flags: IWIND(n) = 1 to process bio-window n, = 0 otherwise
28-39	WPRIOR	4	0	0-4	Bio-window priorities: List of bio-windows in decreasing order of priority. e.g., 4, 1, 3, 2 or 3, 1, 0, 0
40-42	APREP	1	0	0, 1	Print option for area and production summary report: = 1 to print report, = 0 otherwise
1-48	IPRD	3, 14	0	>64 year 01-12 month 1-31 day	Prediction dates (up to 14 dates): IPRD (1, n) = year - 1900 IPRD (2, n) = month IPRD (3, n) = day The prediction dates must be in ascending order. The first zero date terminates the list.



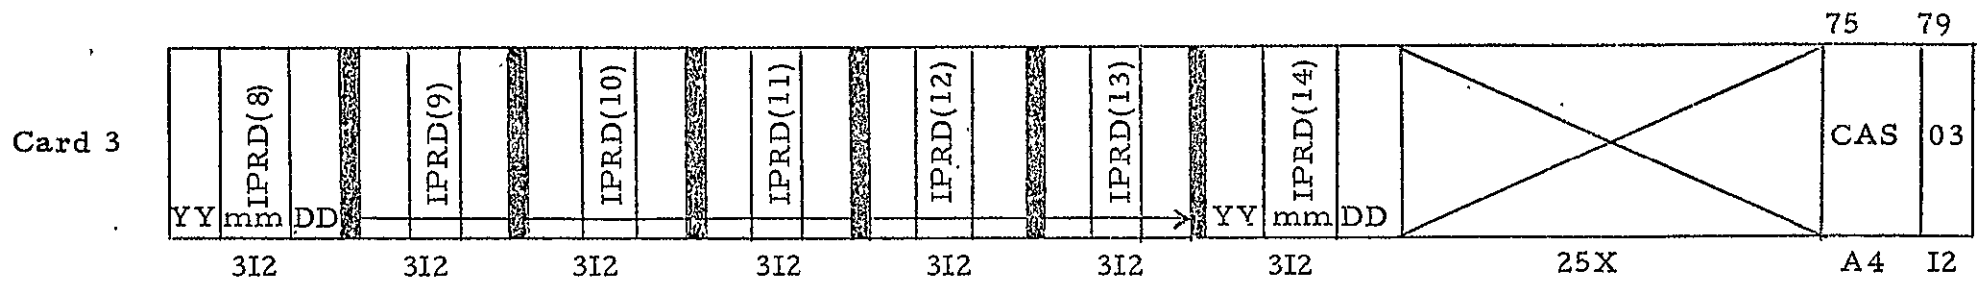
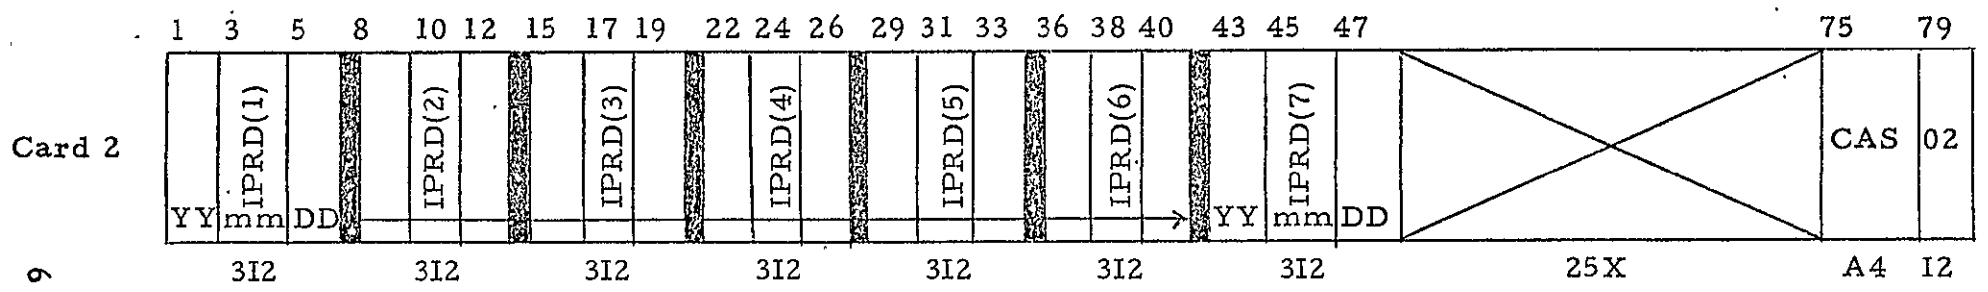
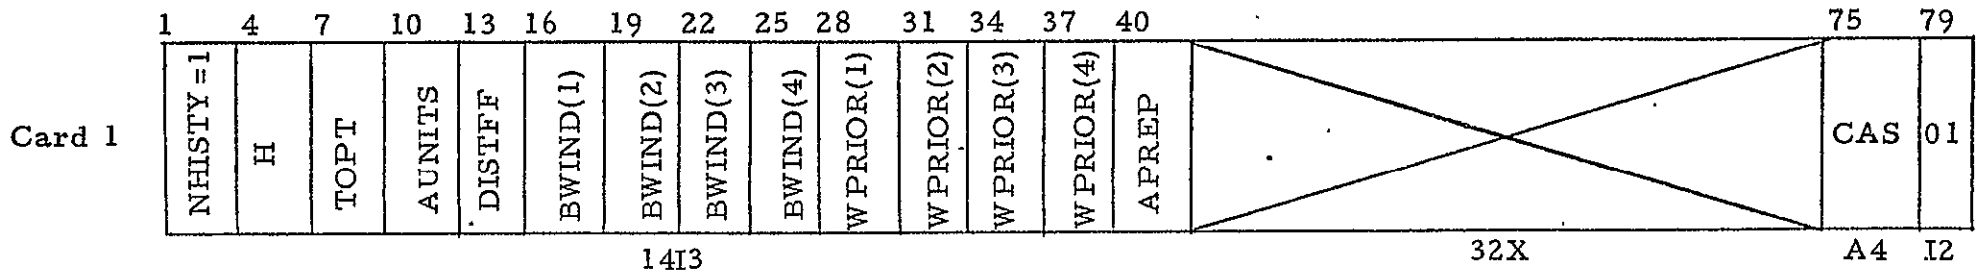


Figure 2-1. Data Card Formats

## 2.2 INPUT FILES

The following files are required as inputs to CAS.

- |                           |   |
|---------------------------|---|
| YES Output File           | - Strata yield data from the YES module     |
| Substrata Historical File | - Substrata information generated by LUMP   |
| CAMS Output Data          | - Segment data generated by the CAMS module |

In addition, on a restart run the CAS Cumulative File and on option, the CAS Distribution run must be input since the data on those files is accumulated over all Monte Carlo iterations.

## 3.0 PROCESSING

### 3.1 OVERVIEW

The CAS simulator module is divided into two major subdivisions. The first subdivision consists of two subroutines, CASIN and CASER1, which process the CAS control cards and write input error messages, respectively. The remaining portion of CAS executes as an overlay subprogram under the control of the LEM driver.

### 3.2 PROGRAM FLOW

Flow diagrams for the CAS simulator are presented in Figures 3-1 through 3-5. Figure 3-1 is an overall flow chart with very little detail. It represents the CAS driver. Figure 3-2 shows the detail of the substrata classification logic. Figure 3-3 shows the detail of the first pass CAS logic, which generates data sets 1-9 for a given bio-window or prediction date. Figure 3-4 shows the detail of the second pass logic, which computes the area variances for all strata with acquired segments. Figure 3-5 shows the detail of the third pass CAS logic, which generates data sets 10-17, and 19 for the same bio-window or prediction date.

### 3.3 PROCEDURES AND EQUATIONS

The symbols used in this section are defined in Appendix A. The data set descriptions are given in Appendix B. The equations are given in Appendix C.

As seen in the flow diagrams, the CAS logic consists of the following tasks:

- Initialization
- Determination of substrata classes
- First pass calculations
- Second pass calculations
- Third pass calculations
- Report generation

#### 3.3.1 Initialization

The general initialization tasks are performed by subroutine CASINT.

1. Rewinding all input files
2. Initializing flags and counters

3. Determining number of records to skip on files YESOUT, CAMSF, and SUBHST in order to position them at the proper starting region and zone (STARTR and STARTZ).

### 3.3.2 Determination of Substrata Classes

The determination of the substrata classes is performed in subroutine CLASSN, which is called by subroutine CASPP on the first Monte Carlo iteration of each computer run for each bio-window or prediction date.

1. Substrata historical data is read from either the SUBHST file or the ISUBH2 file. If the first bio-window or prediction point is being processed, then the substrata historical file SUBHST is used. Otherwise, the intermediate substrata historical file ISUBH2 is used.
2. Each zone in the country is processed one at a time. Within each zone the collection of substrata is partitioned into one or more homogeneous classes of substrata. By this partitioning process a class number is assigned to each substrata in the zone.
3. After each zone is partitioned and a class number is assigned to each substrata within that zone, the substrata data along with the assigned class number is written back onto the ISUBH2 file.
4. The details of the partitioning process are given in the writeup of subroutine CLASSN.

### 3.3.3 First Pass Calculations

The first pass calculations are performed in subroutine CASPP, which is called for each bio-window or prediction date.

1. Correctly position the files YESOUT, CAMSF, and SUBHST at the proper starting region and zone.
2. Read the strata yield data from the YESOUT file.
3. Read the substrata historical data from the SUBHST file.
4. The substrata group number is examined and if it is 1 or 2, the segment data is read from the CAMSF file.

5. Depending upon the substrata group number, the segment data is aggregated into data set 1 or 2, or data set 3 is generated.
6. Again depending upon the substrata group number, the substrata data (data set 1, 2, or 3) is aggregated into data set 4, 5, or 6.
7. If no Group II segments are acquired in the strata, then data set 5 is added to data set 6 and data set 5 is cleared to zero.
8. The strata data in data sets 4, 5, and 6 is aggregated into data set 7 at the zone level.
9. The zone data in data set 7 is then aggregated into data set 8 at the region level.
10. The region data in data set 8 is aggregated into data set 9 at the country level.

#### 3.3.4 Second Pass Calculations

The second pass calculations are performed in subroutine CAS2, which is called by CASPP.

1. If no segments were obtained for the entire country, the message NO ACQUISITIONS IN COUNTRY is printed out and the rest of the logic is skipped.
2. The region, zone, strata, and substrata pointers for the direct access files CASDSF and ISUBH2 are initialized.
3. The next record (data set 8) from file CASDSF is read into memory.
4. The next zone record (data set 7) from file CASDSF is read into memory.
5. The next strata record (data sets 4, 5, 6) from file CASDSF is read into memory.
6. The next substrata record from file ISUBH2 is read into memory.

7. If the substrata class number is zero, if there are less than two acquired segments in the zone, or if there are no acquired segments in the strata, then the rest of the substrata computations are skipped (steps 8-10).
8. Next the group number is tested. If it is 3, then the rest of the substrata computations are skipped.
9. If the group number is 2, then  $M_{2j}$ , the number of acquired Group II segments in the strata is tested. If it is zero, then the rest of the substrata computations are skipped. If  $M_{2j} > 0$ , then the computation of the substrata variance multiplier is completed by multiplying VMULTK by  $WA_{2S}/M_{2j}$ .
10. If the group number is 1 or 2, then VMULTK is multiplied by  $S^2$  for the proper substrata class and the result is added to the quantity  $VIV2S = V_{1S} + V_{2S}$ .
11. Steps 6-10 are performed for each substrata in the stratum.
12. After all of the substrata in the strata are processed, M1K2KZ, the number of acquired segments in the zone is examined. If it is less than 2, then steps 13-17 are skipped. If  $M1K2KZ \geq 2$ , then the number of acquired segments in the stratum is examined. If there are no acquired segments in the stratum, then steps 13-17 are skipped.
13. The term T is added to  $VIV2S = V_{1S} + V_{2S}$  and to the group 2 analytic area variance ANVS2.
14. The quantity
 
$$\tau_S^2 = \left[ 1 + \frac{\tilde{W}A_{3S}}{\tilde{W}A_{1S} + \tilde{W}A_{2S}} \right]^2$$
 is computed.
15. Finally, the area variance  $V_S = \tau_S^2 (V_{1S} + V_{2S})$  and the analytic area variance  $ANVAR_S = \tau_S^2 (ANVS1 + ANVS2)$  are computed for the current stratum, which has at least one acquired segment.

16. The strata record (data sets 4, 5, 6) is then written back onto the CASDSF file.
17. Also, the terms  $V_{1S} + V_{2S}$  are added to the sum

$$ESTVZ = \sum_{\text{zone}} (V_{1S} + V_{2S})$$

and the terms  $ANVS1 + ANVS2$  are added to the sum

$$ANALVZ = \sum_{\text{zone}} (ANVS1 + ANVS2)$$

18. If there were no acquired segments in the stratum or if there were less than two acquired segments in the zone, then the historical wheat area for the stratum is added to HWAZ3.
19. Steps 5-18 are performed for each stratum in the zone. When the last stratum of the zone has been processed, the zone data record (data set 7) is written back onto file CASDSF.
20. Then if there were at least two acquired segments in the zone, ESTVZ is added to ESTVR and ANALVZ is added to ANALVR.
21. Steps 4-20 are performed for each zone in the region.
22. If there were any zones in the region with at least two acquired segments, then the region data record (data set 8) is written back onto the CASDSF file.
23. Also, ESTVR is added to ESTVC and ANALVR is added to ANALVC.
24. Steps 3-23 are performed for each region in the country.
25. When all regions have been processed, control is returned back to subroutine CASPP, which called CAS2.

### 3.3.5 Third Pass Calculations

The third pass calculations are performed in subroutine CAS3, which is called by CASPP.

1. If no segments were acquired for the entire country, then a return to CASPP is performed.
2. Data from the zone, region, and country levels (data sets 7, 8, and 9) is combined with the strata data in data sets 4, 5 and 6 to generate data set 10 at the strata level.
3. The strata data in data set 10 is aggregated up to the zone level (data set 11). It is also accumulated in data set 14 of the CAS Cum file over all Monte Carlo iterations.
4. If the print flag is set (as directed by the LEM input parameter (IPRCAS), the strata portion of the Area and Production Summary report is printed out.
5. Next the zone data in data set 11 is aggregated up to the region level (data set 12). It is also accumulated in data set 15 of the CAS Cum file and is entered into the CAS Distribution file (data set 19).
6. If the print flag is set, the zone portion of the Area and Production Summary report is printed out.
7. Then the region data in data set 12 is aggregated up to the country level (data set 13). It is also accumulated in data set 16 of the CAS Cum file and is entered into the CAS Distribution file (data set 19).
8. If the print flag is set, the region portion of the Area and Production Summary report is printed out.
9. Finally the country data in data set 13 is accumulated in data set 17 of the CAS Cum file and is entered into the CAS Distribution file (data set 19).



10. If the print flag is set, then the country data for this bio-window or prediction date is saved for the Country Summary report to be printed after all bio-windows and prediction dates have been processed.
11. Also if the print flag is set, the country portion of the Area and Production Summary report is printed out.

### 3.3.6 Report Generation

The Area and Production Summary report is printed out during the second pass as each strata, zone, region, and country is processed.

The Country Summary report is printed out after all bio-windows and prediction dates have been processed.

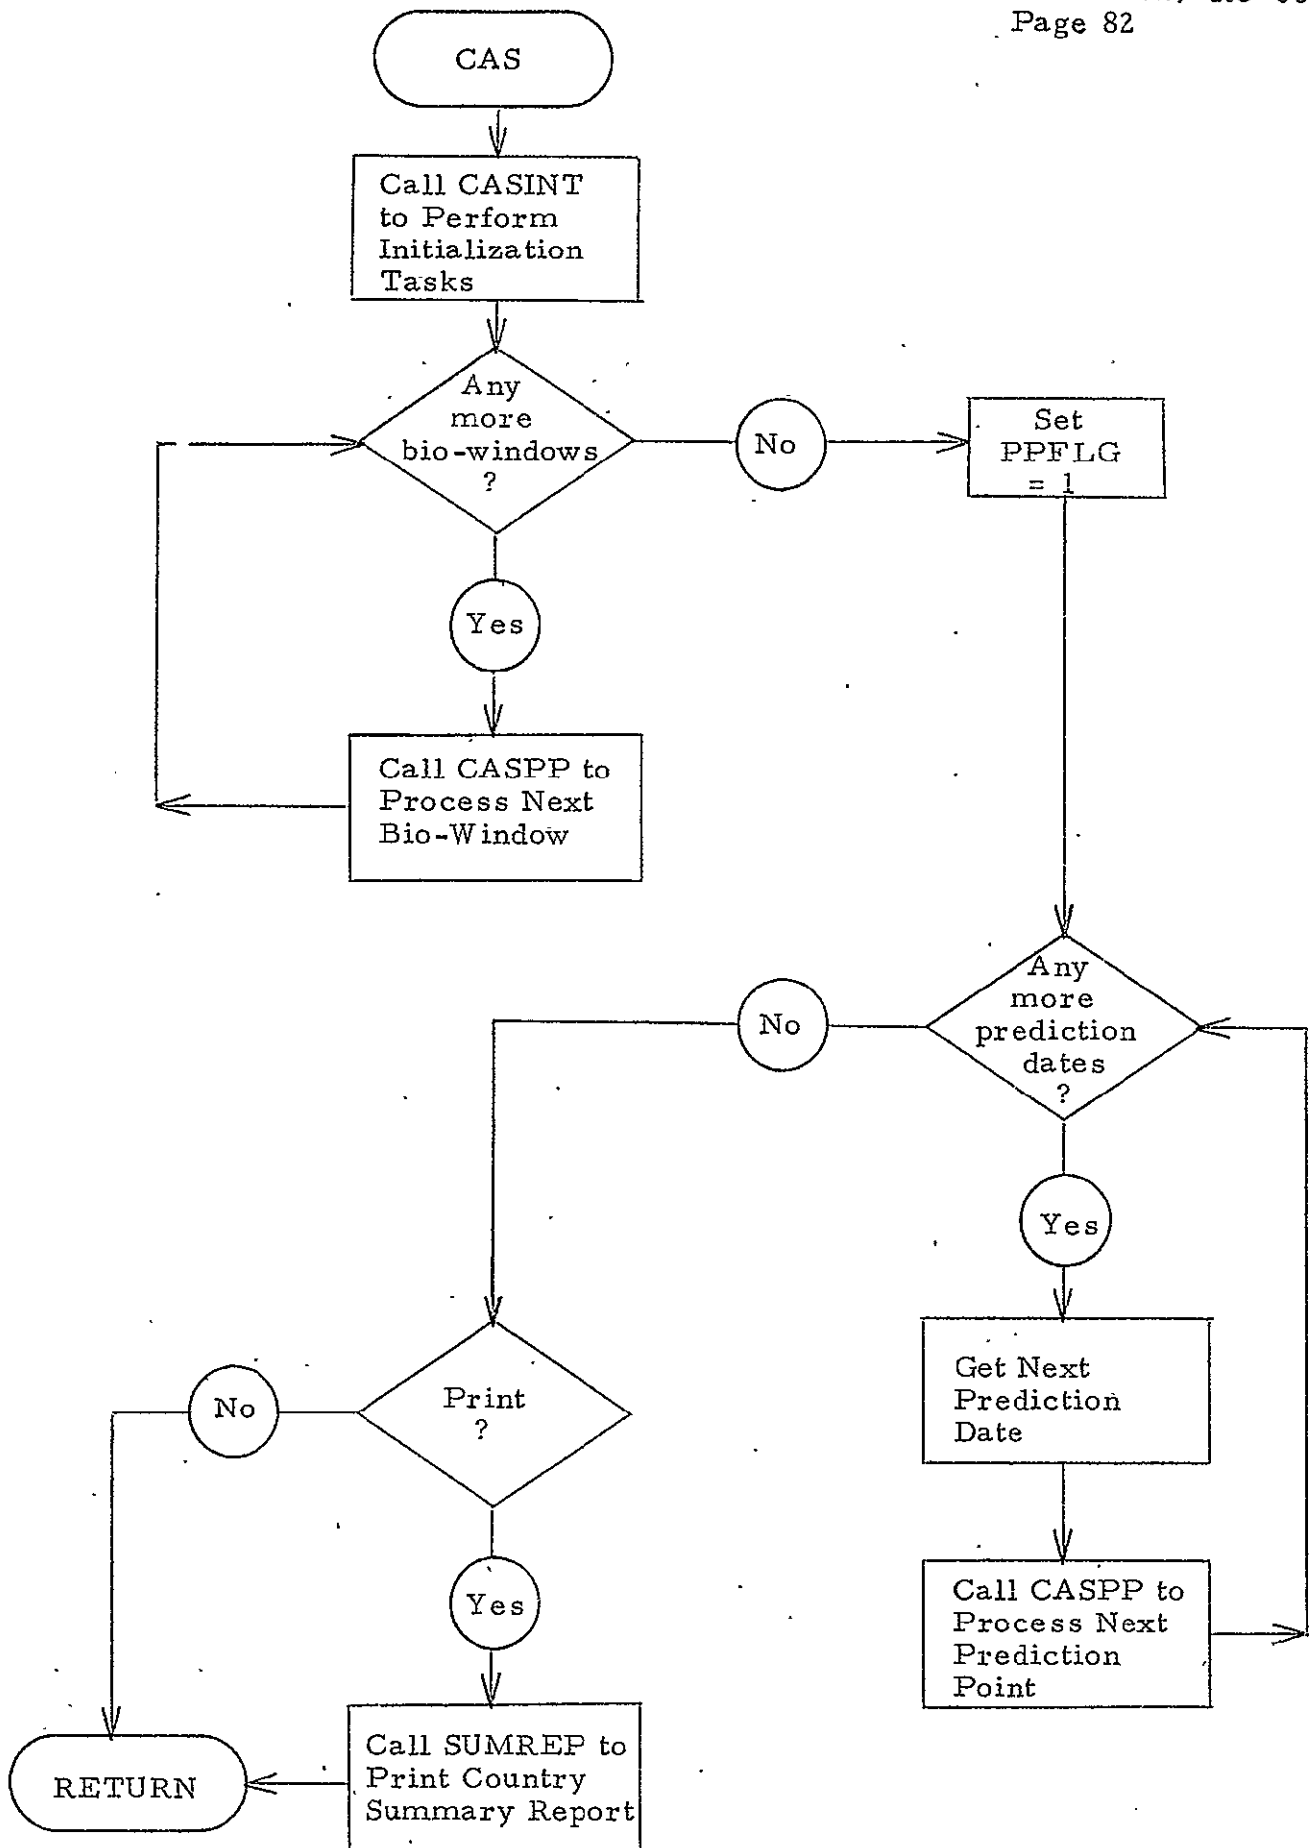


Figure 3-1. CAS Flow Diagram

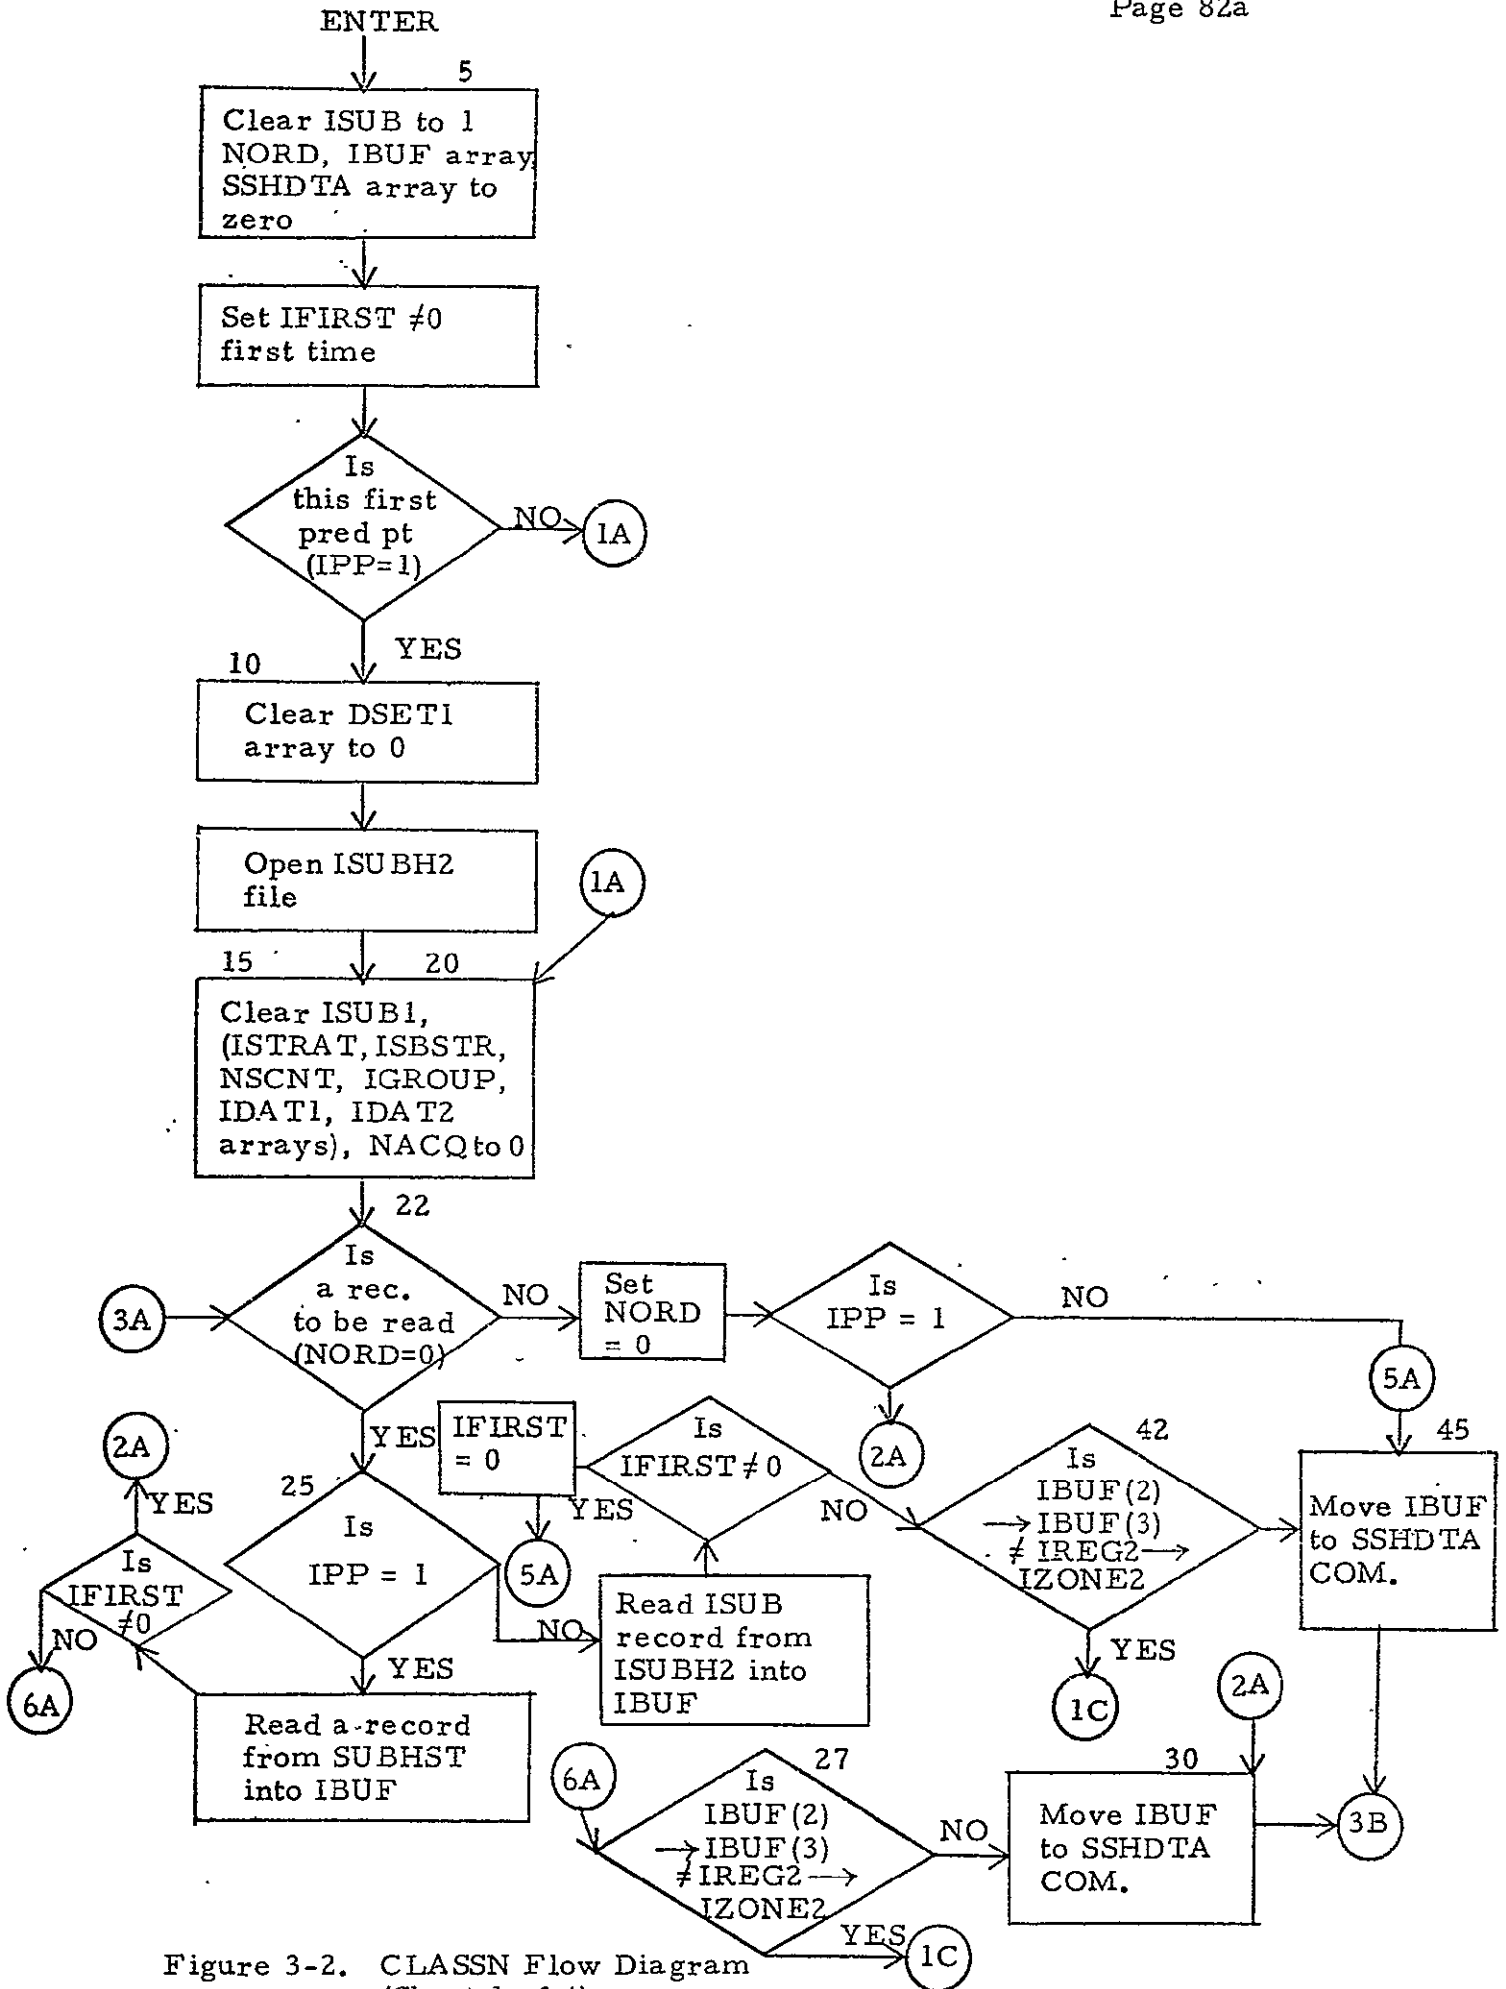


Figure 3-2. CLASSN Flow Diagram  
(Sheet 1 of 4)

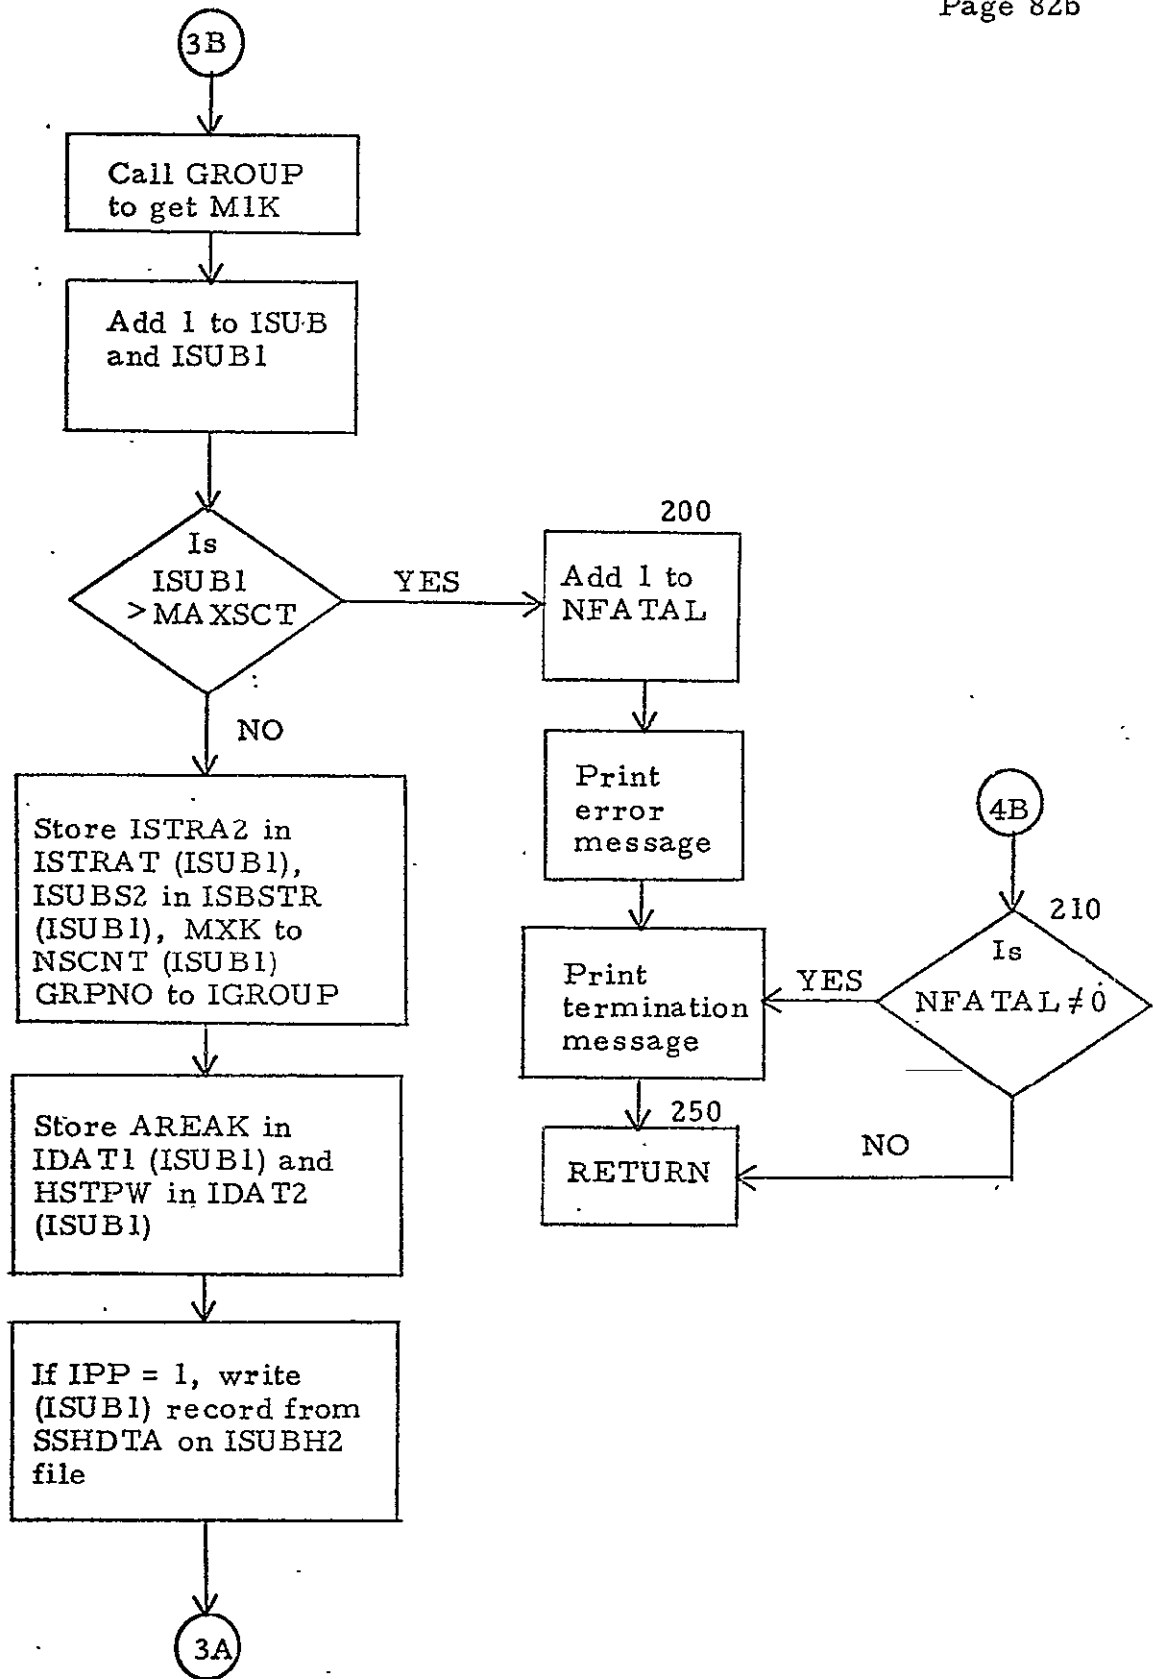


Figure 3-2. CLASSN Flow Diagram (Sheet 2 of 4)

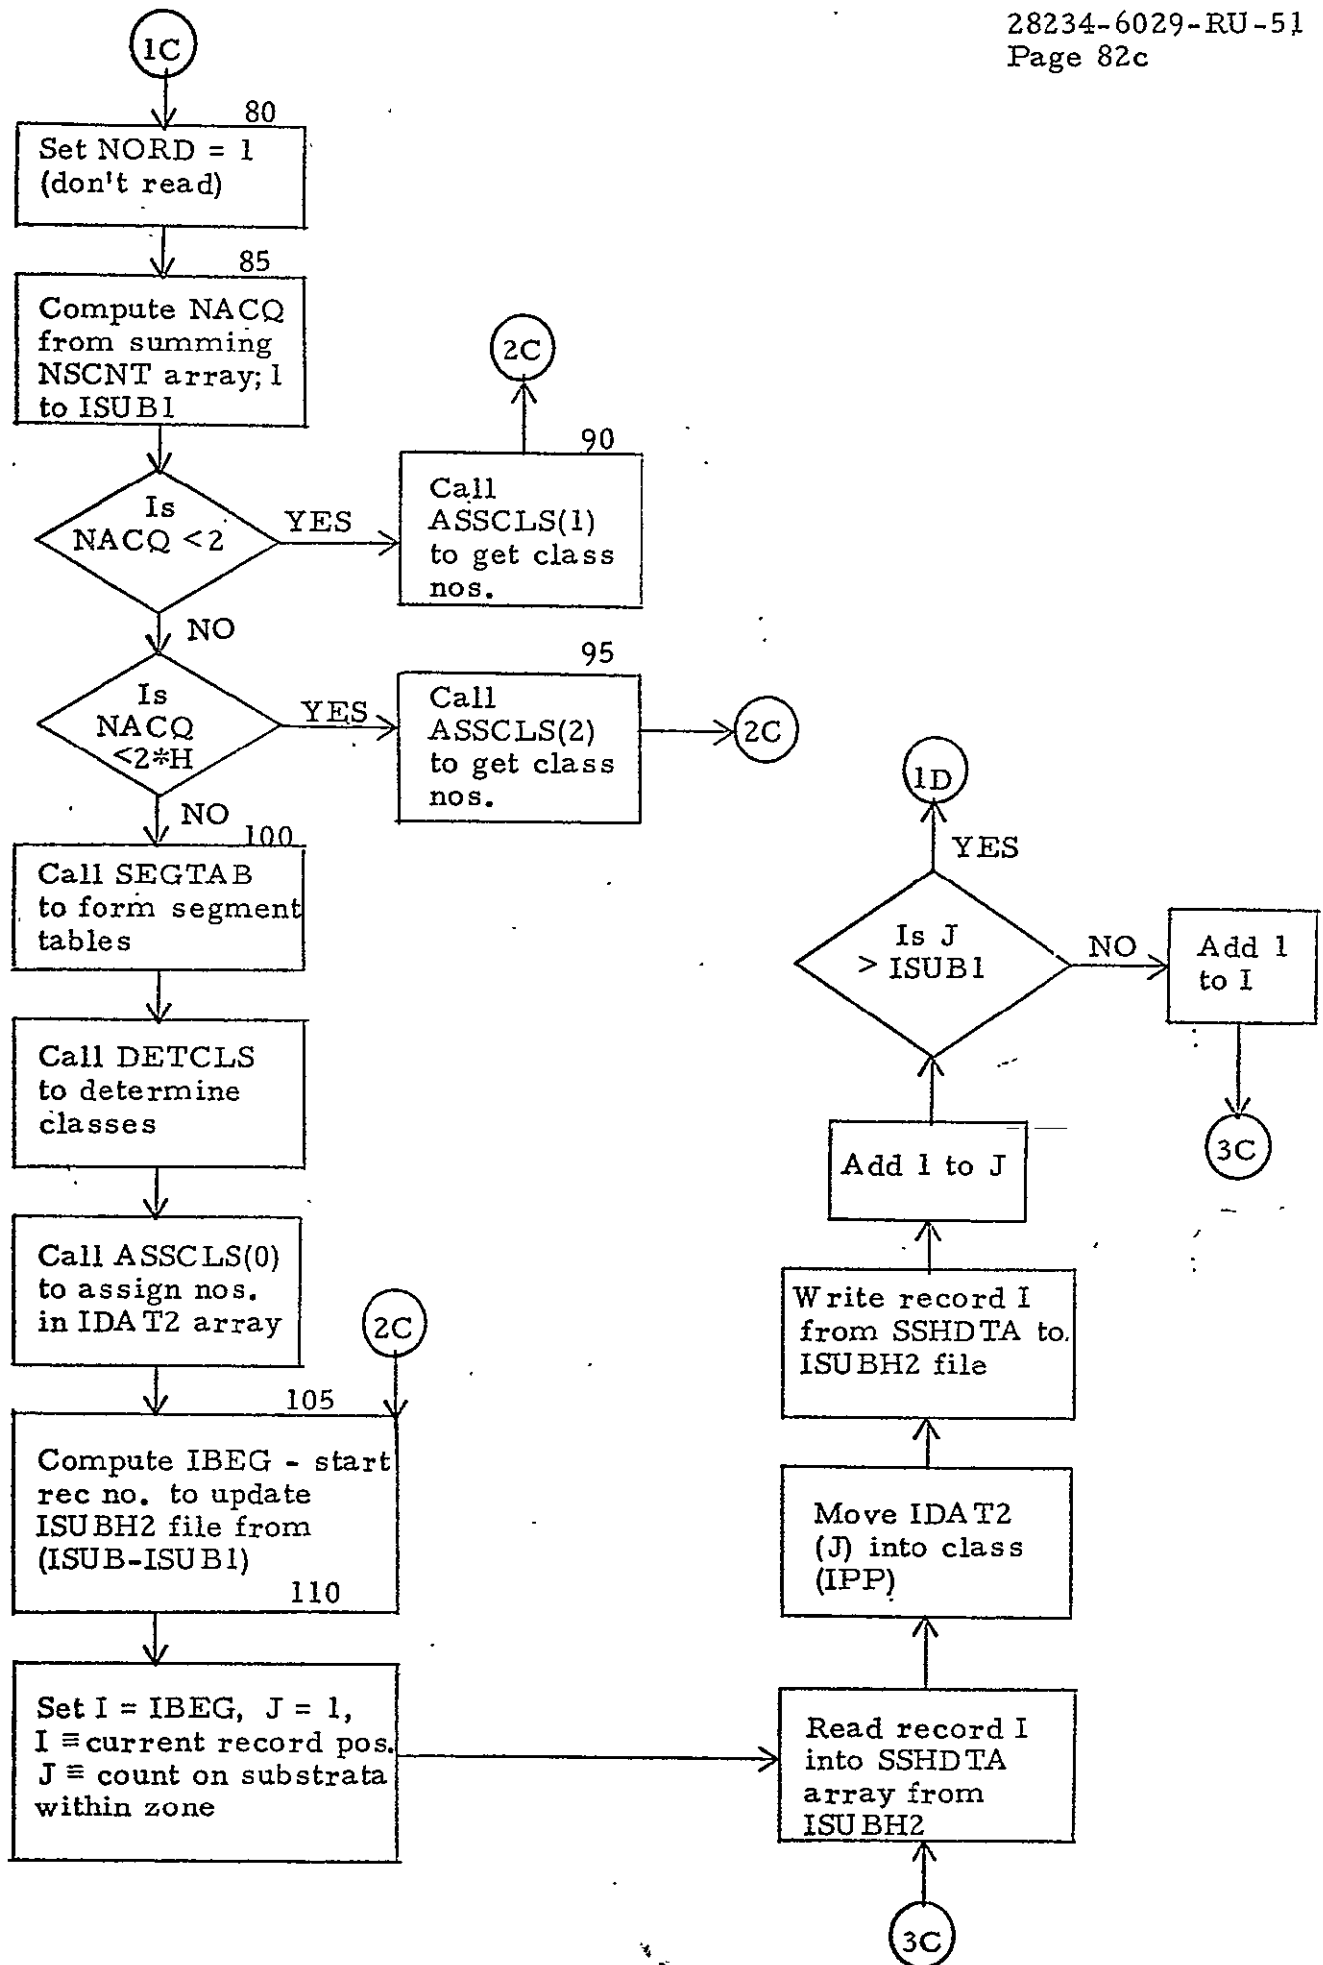


Figure 3-2. CLASSN Flow Diagram (Sheet 3 of 4)

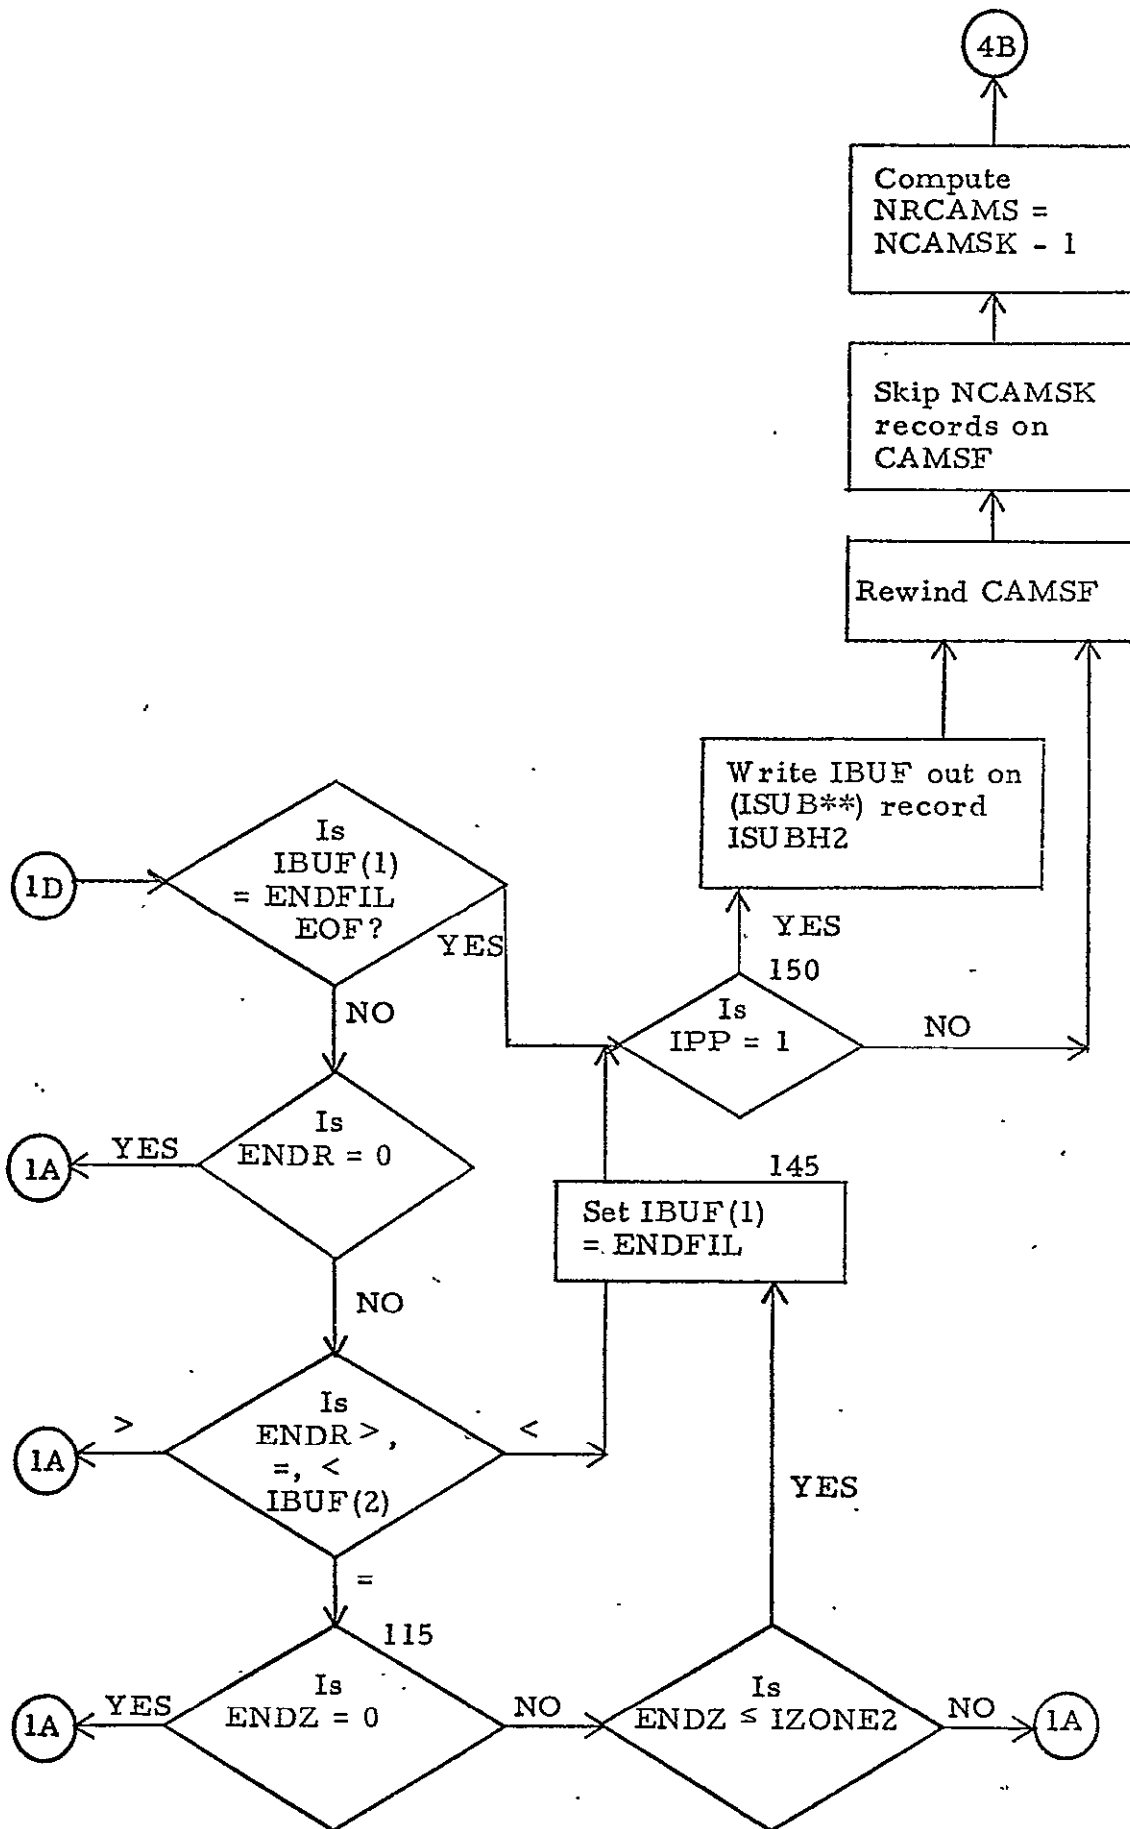


Figure 3-2. CLASSN Flow Diagram (Sheet 4 of 4)

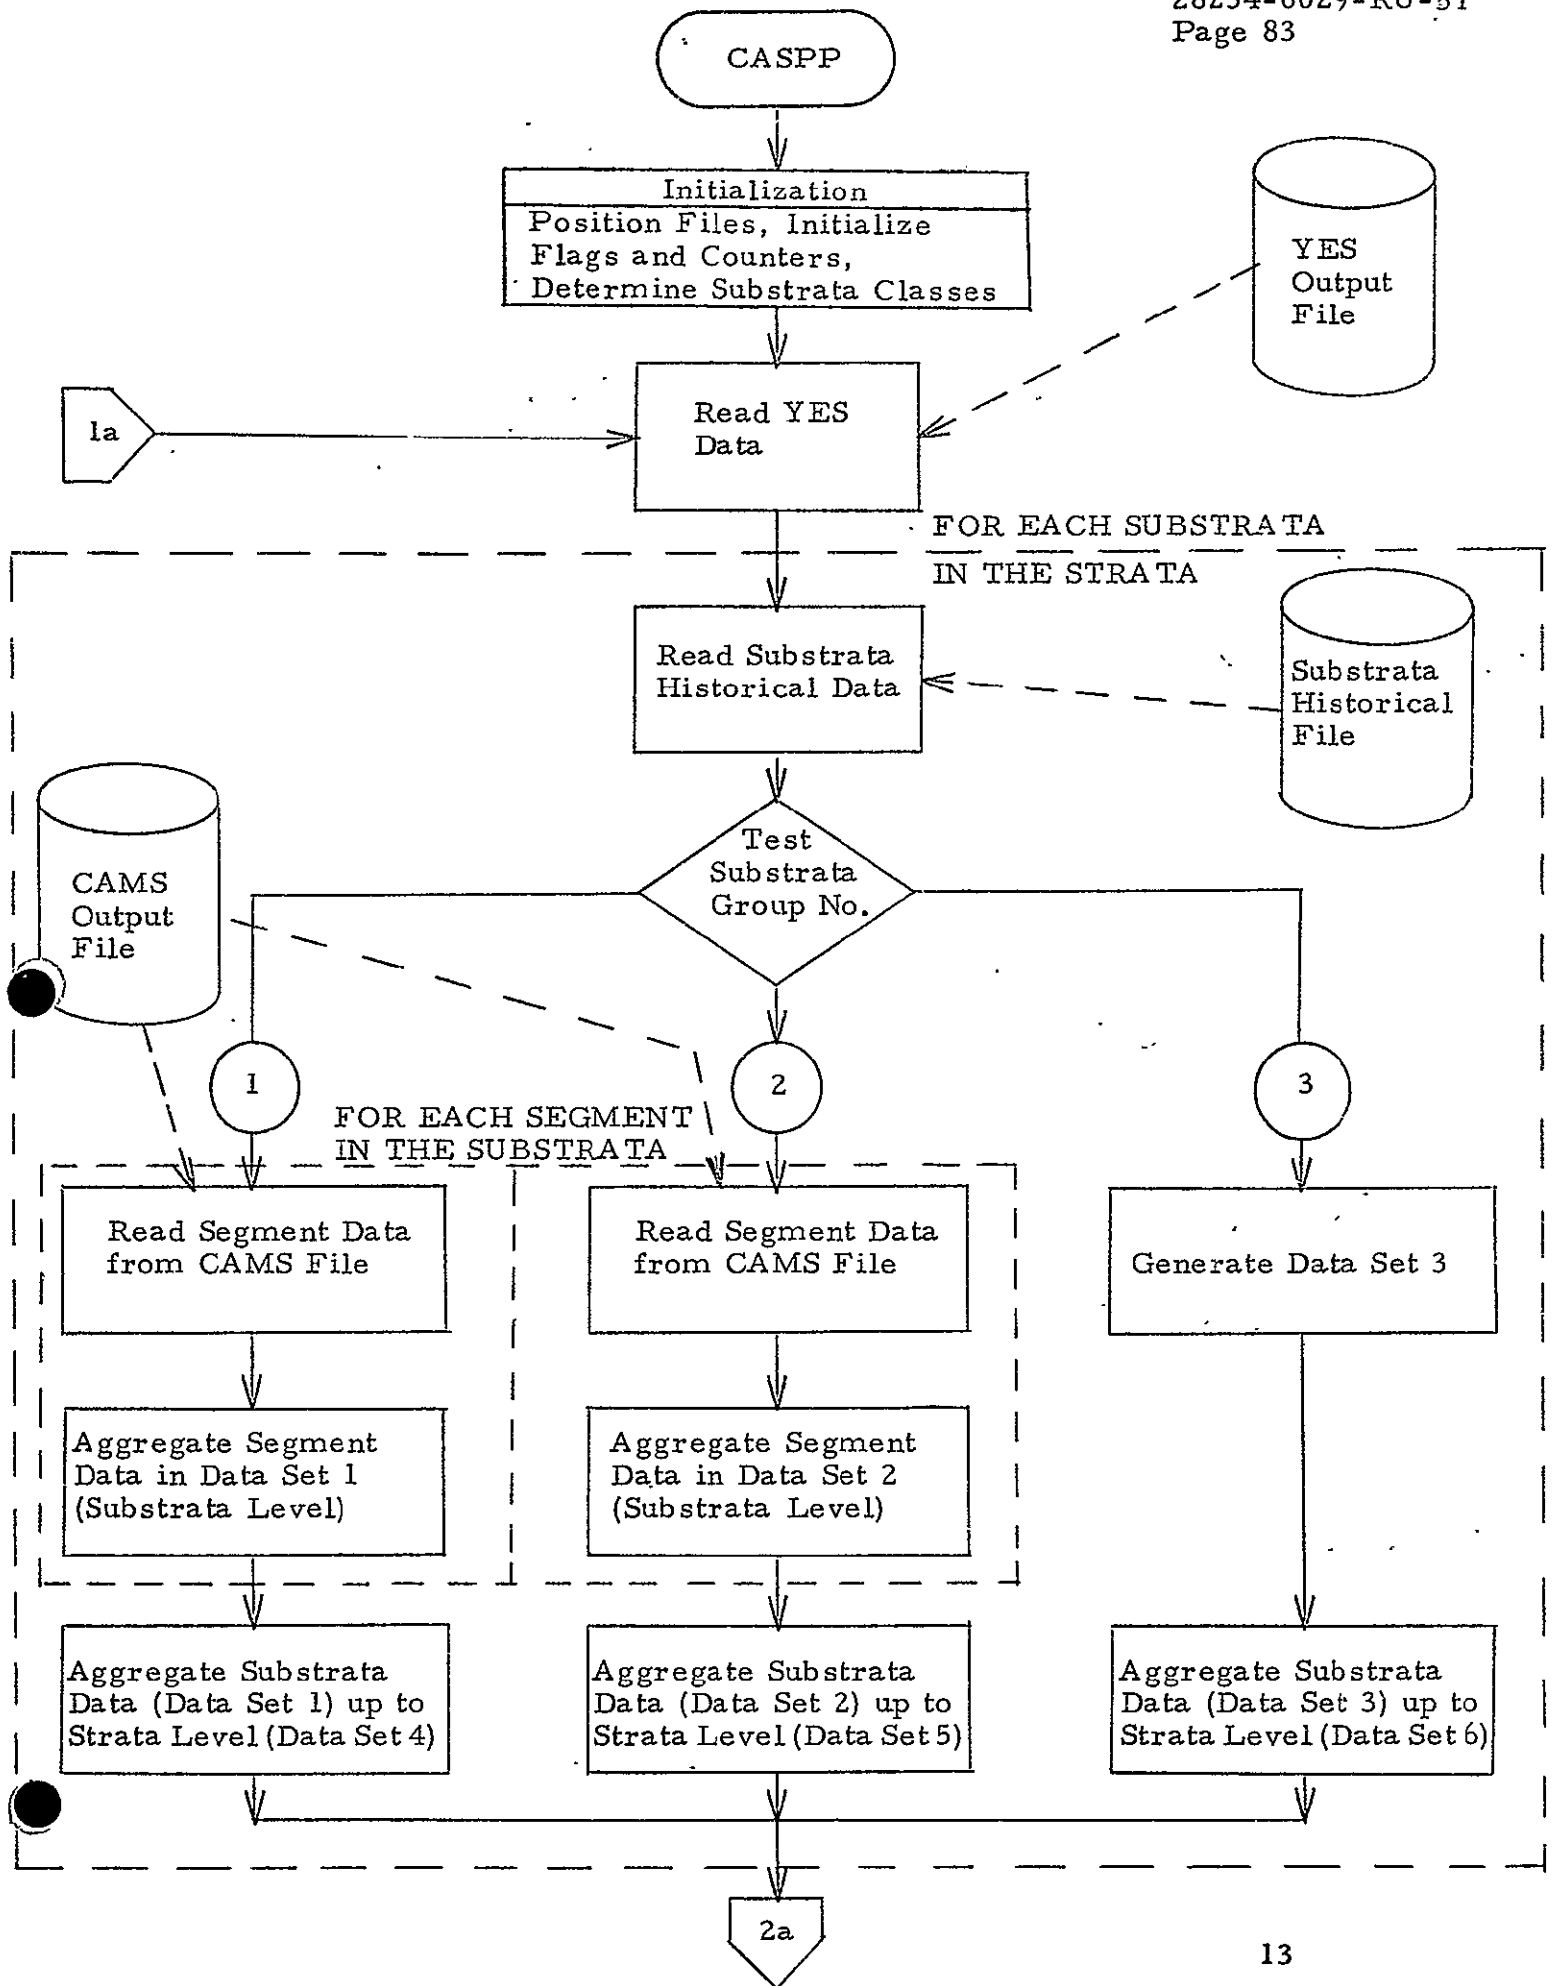


Figure 3-3. CASPP Flow Diagram (Sheet 1 of 2)

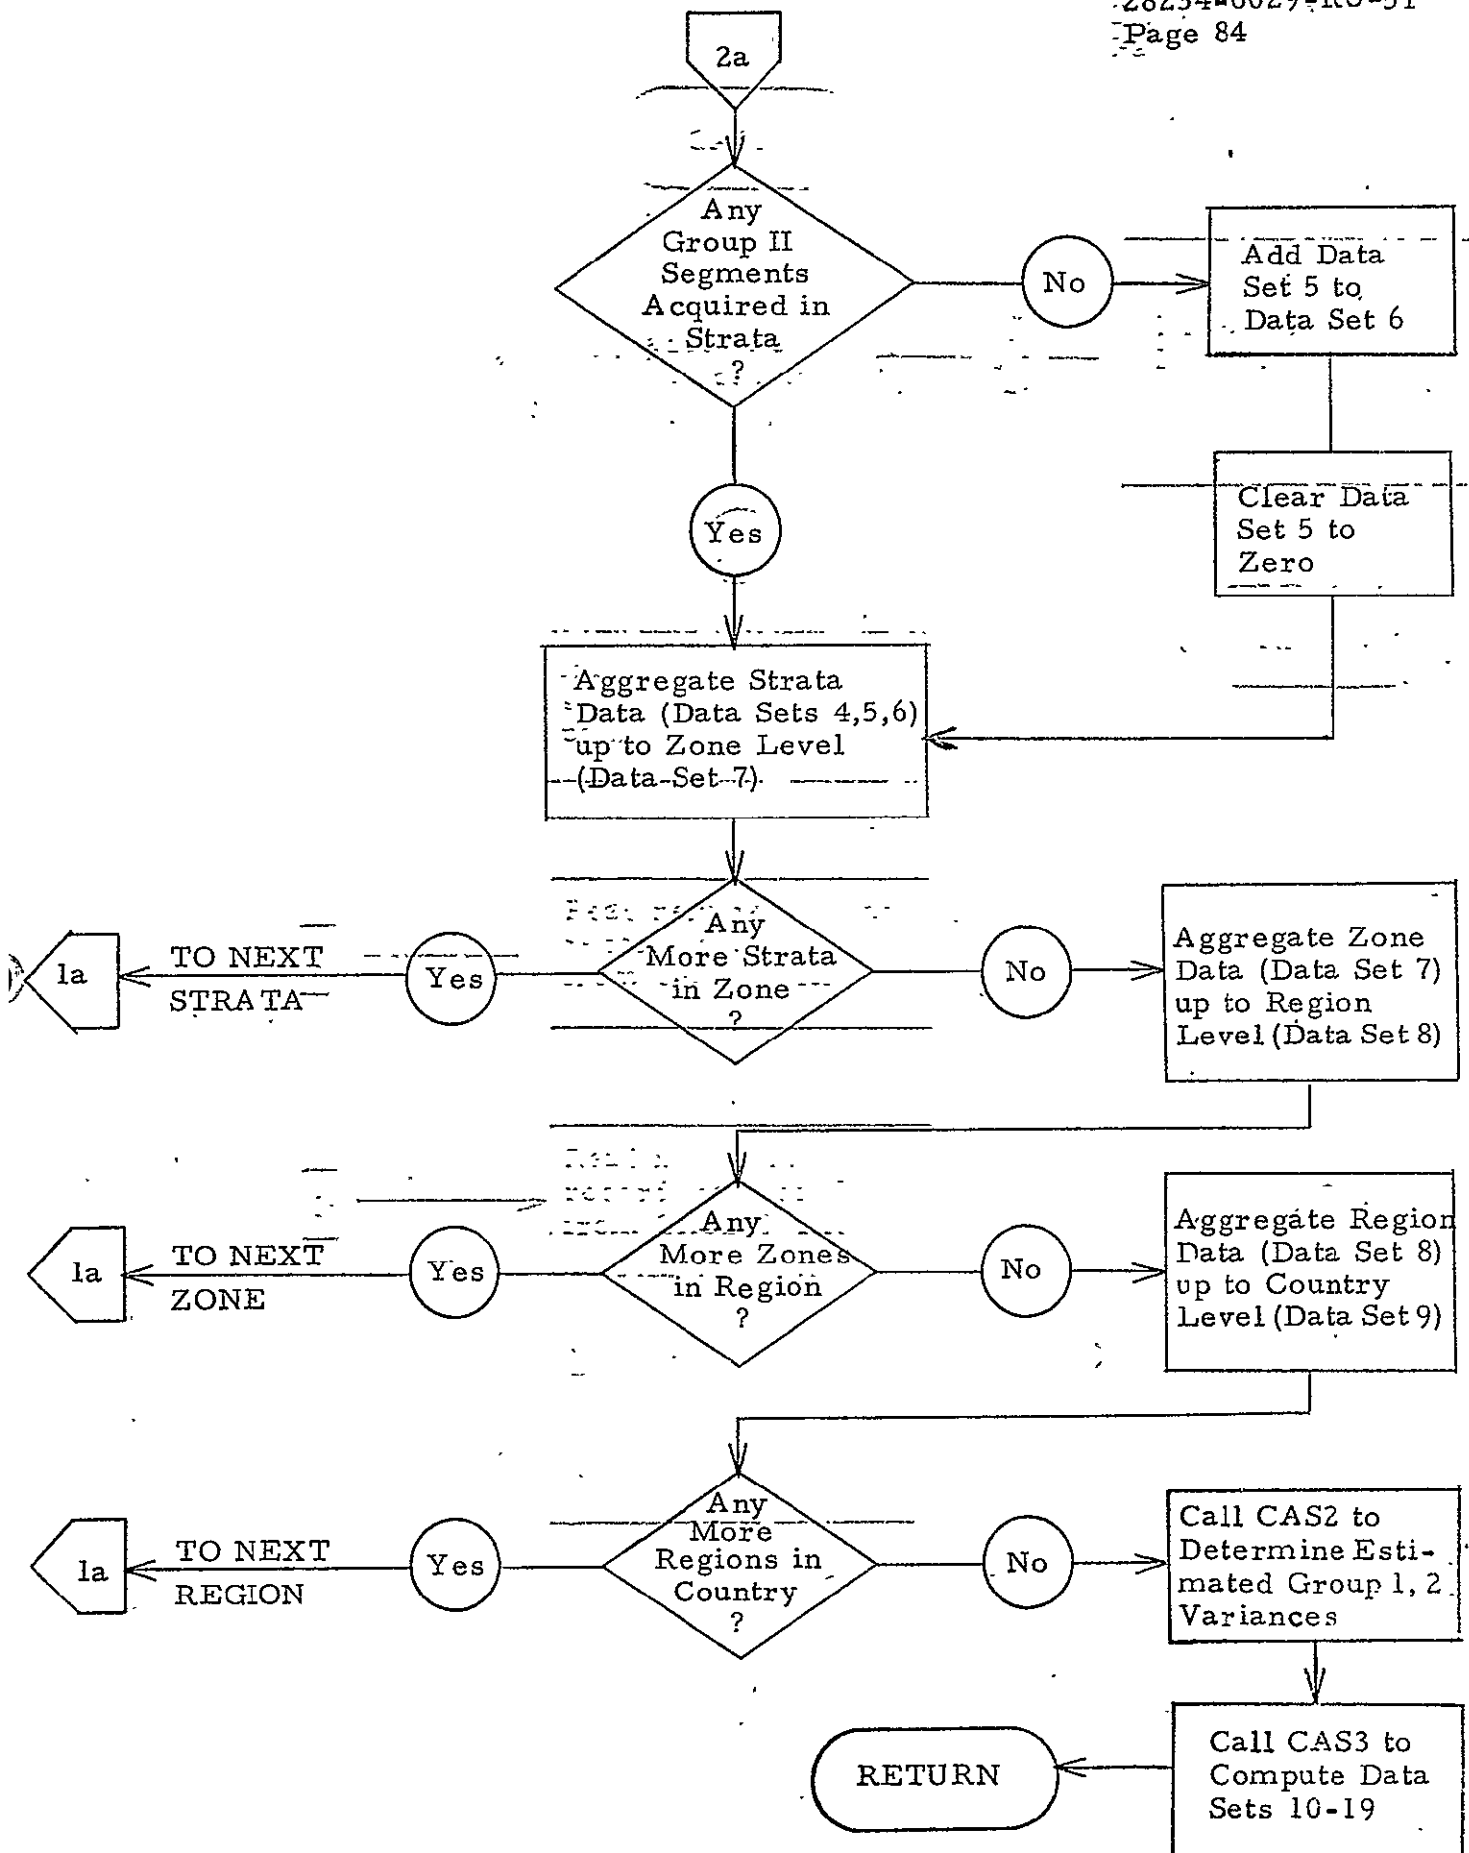


Figure 3-3. CASPP Flow Diagram (Sheet 2 of 2)



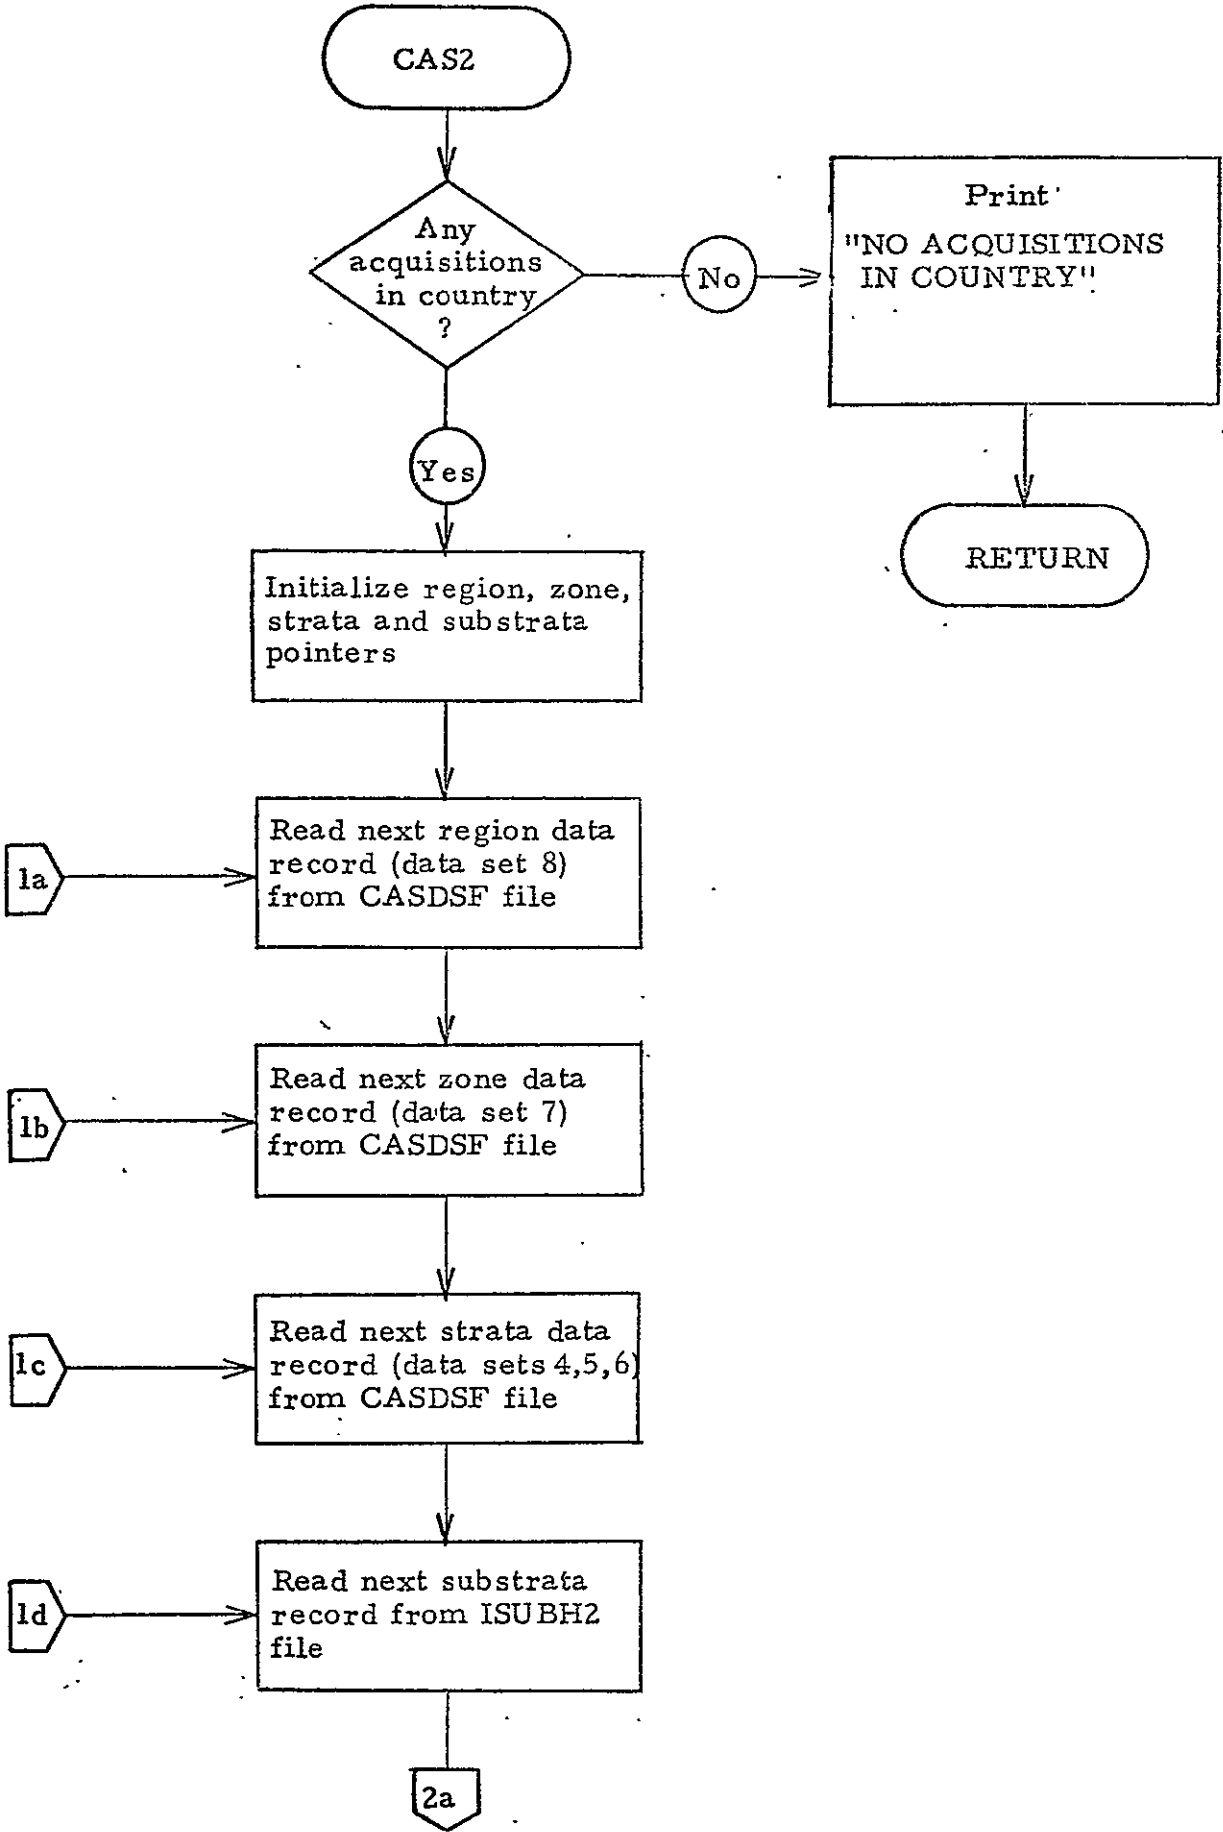


Figure 3-4. CAS2 Flow Diagram (Sheet 1 of 5)


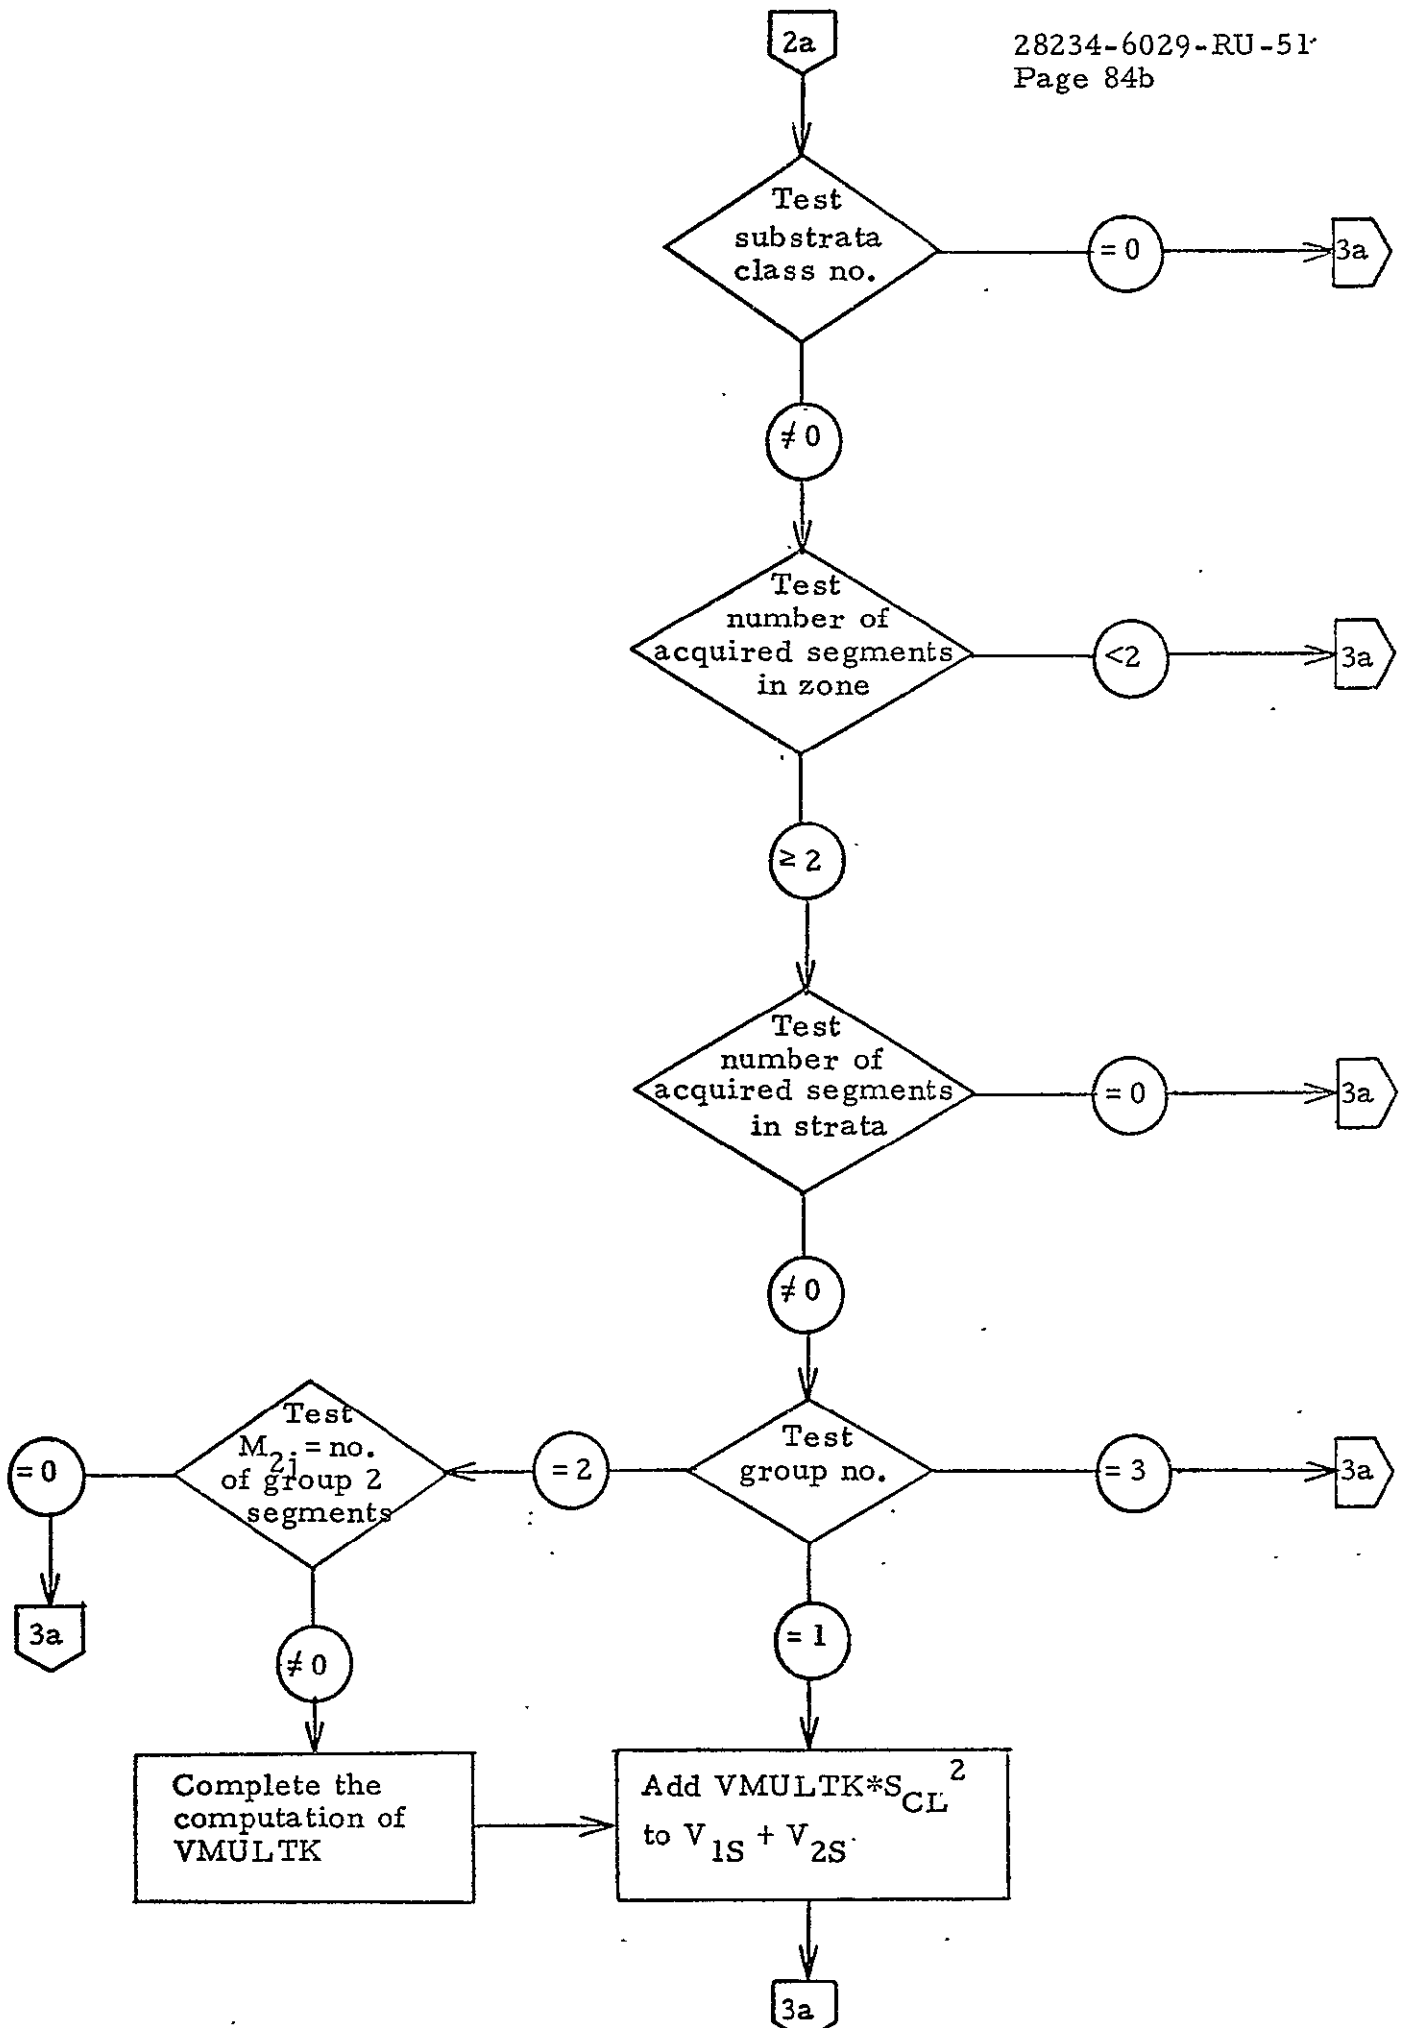


Figure 3-4. CAS2 Flow Diagram (Sheet 2 of 5)

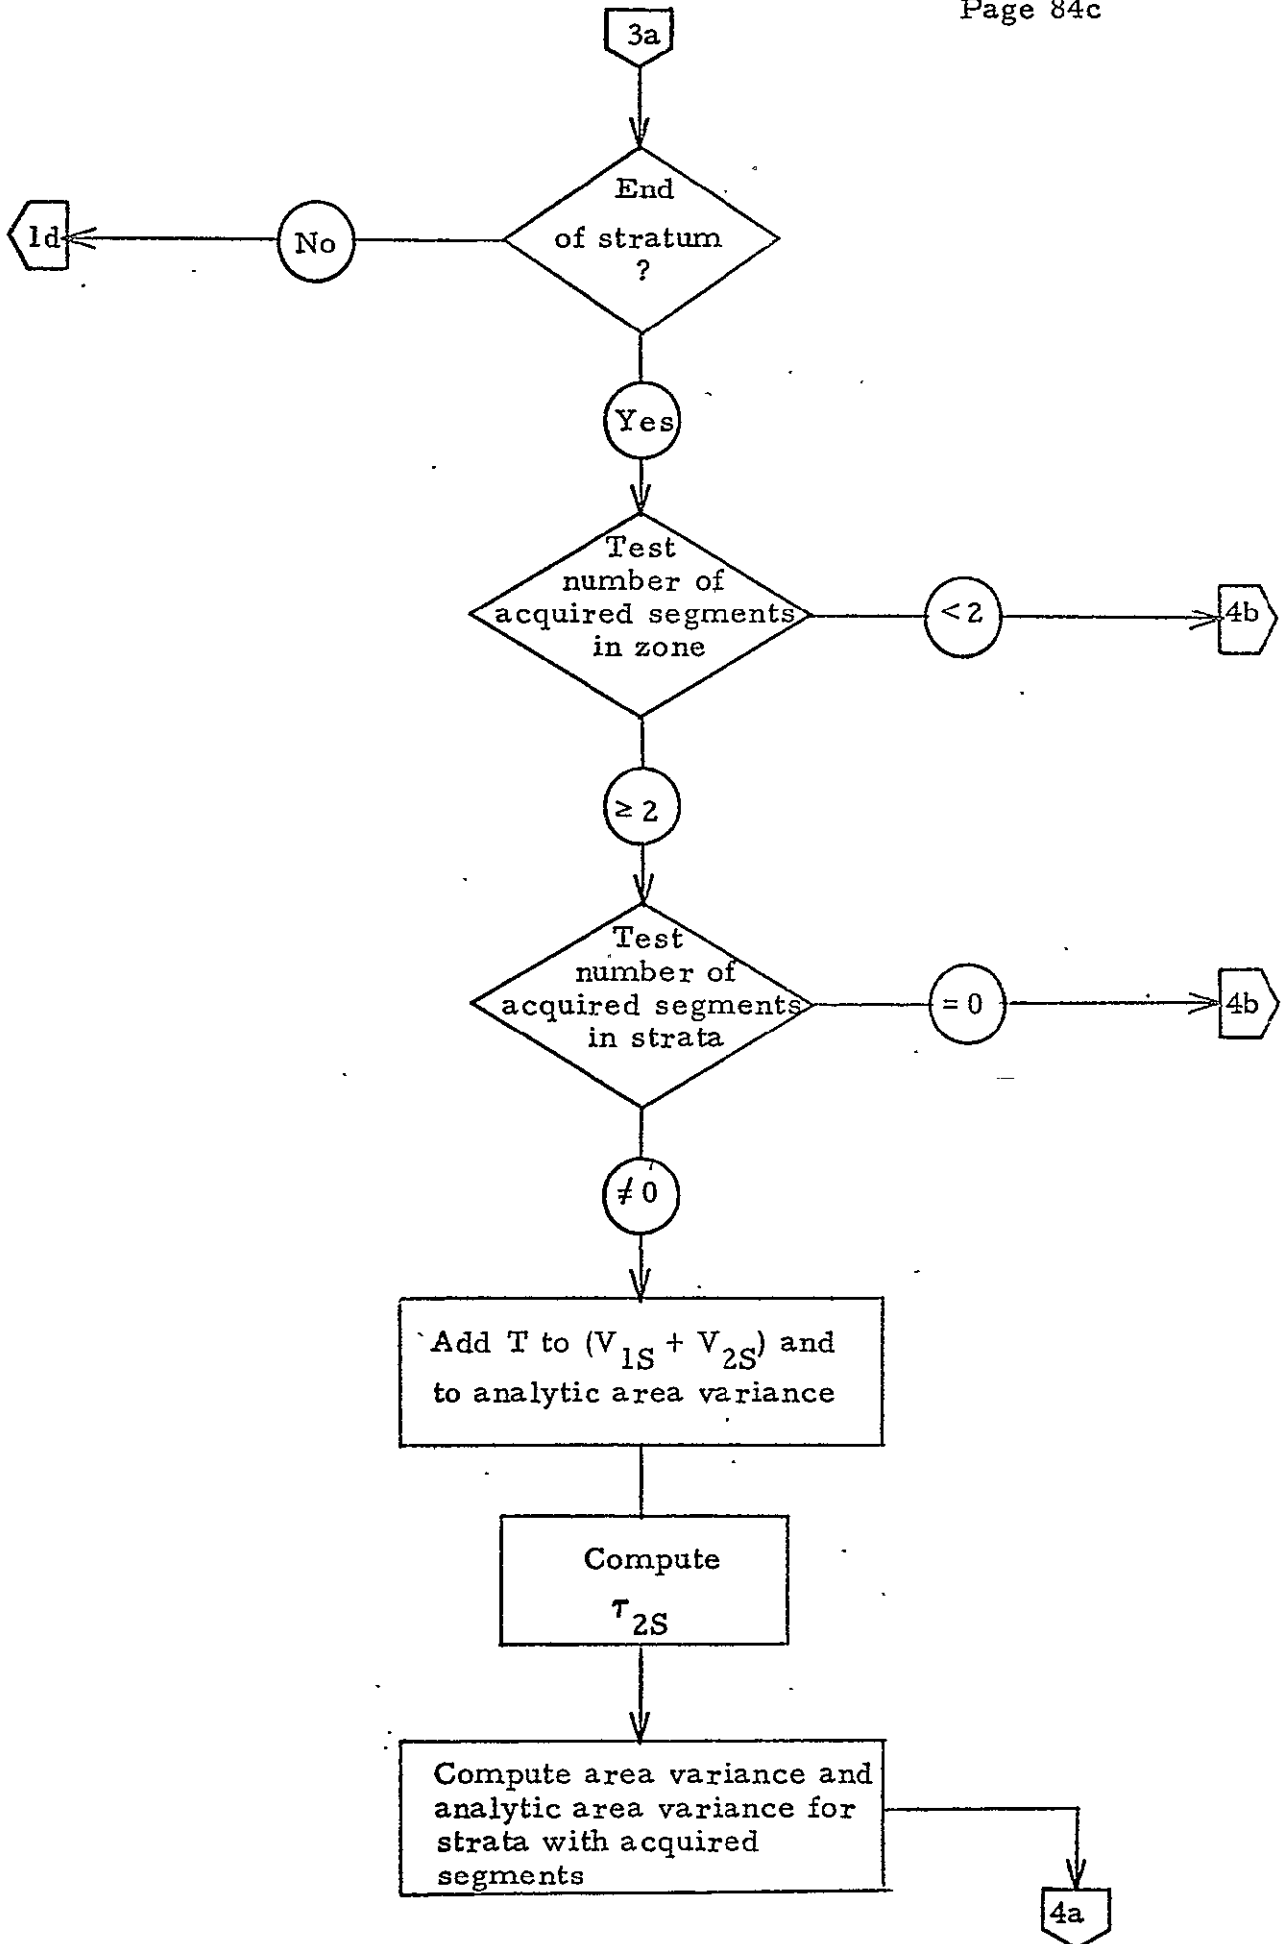

C-2

Figure 3-4. CAS2 Flow Diagram (Sheet 3 of 5)

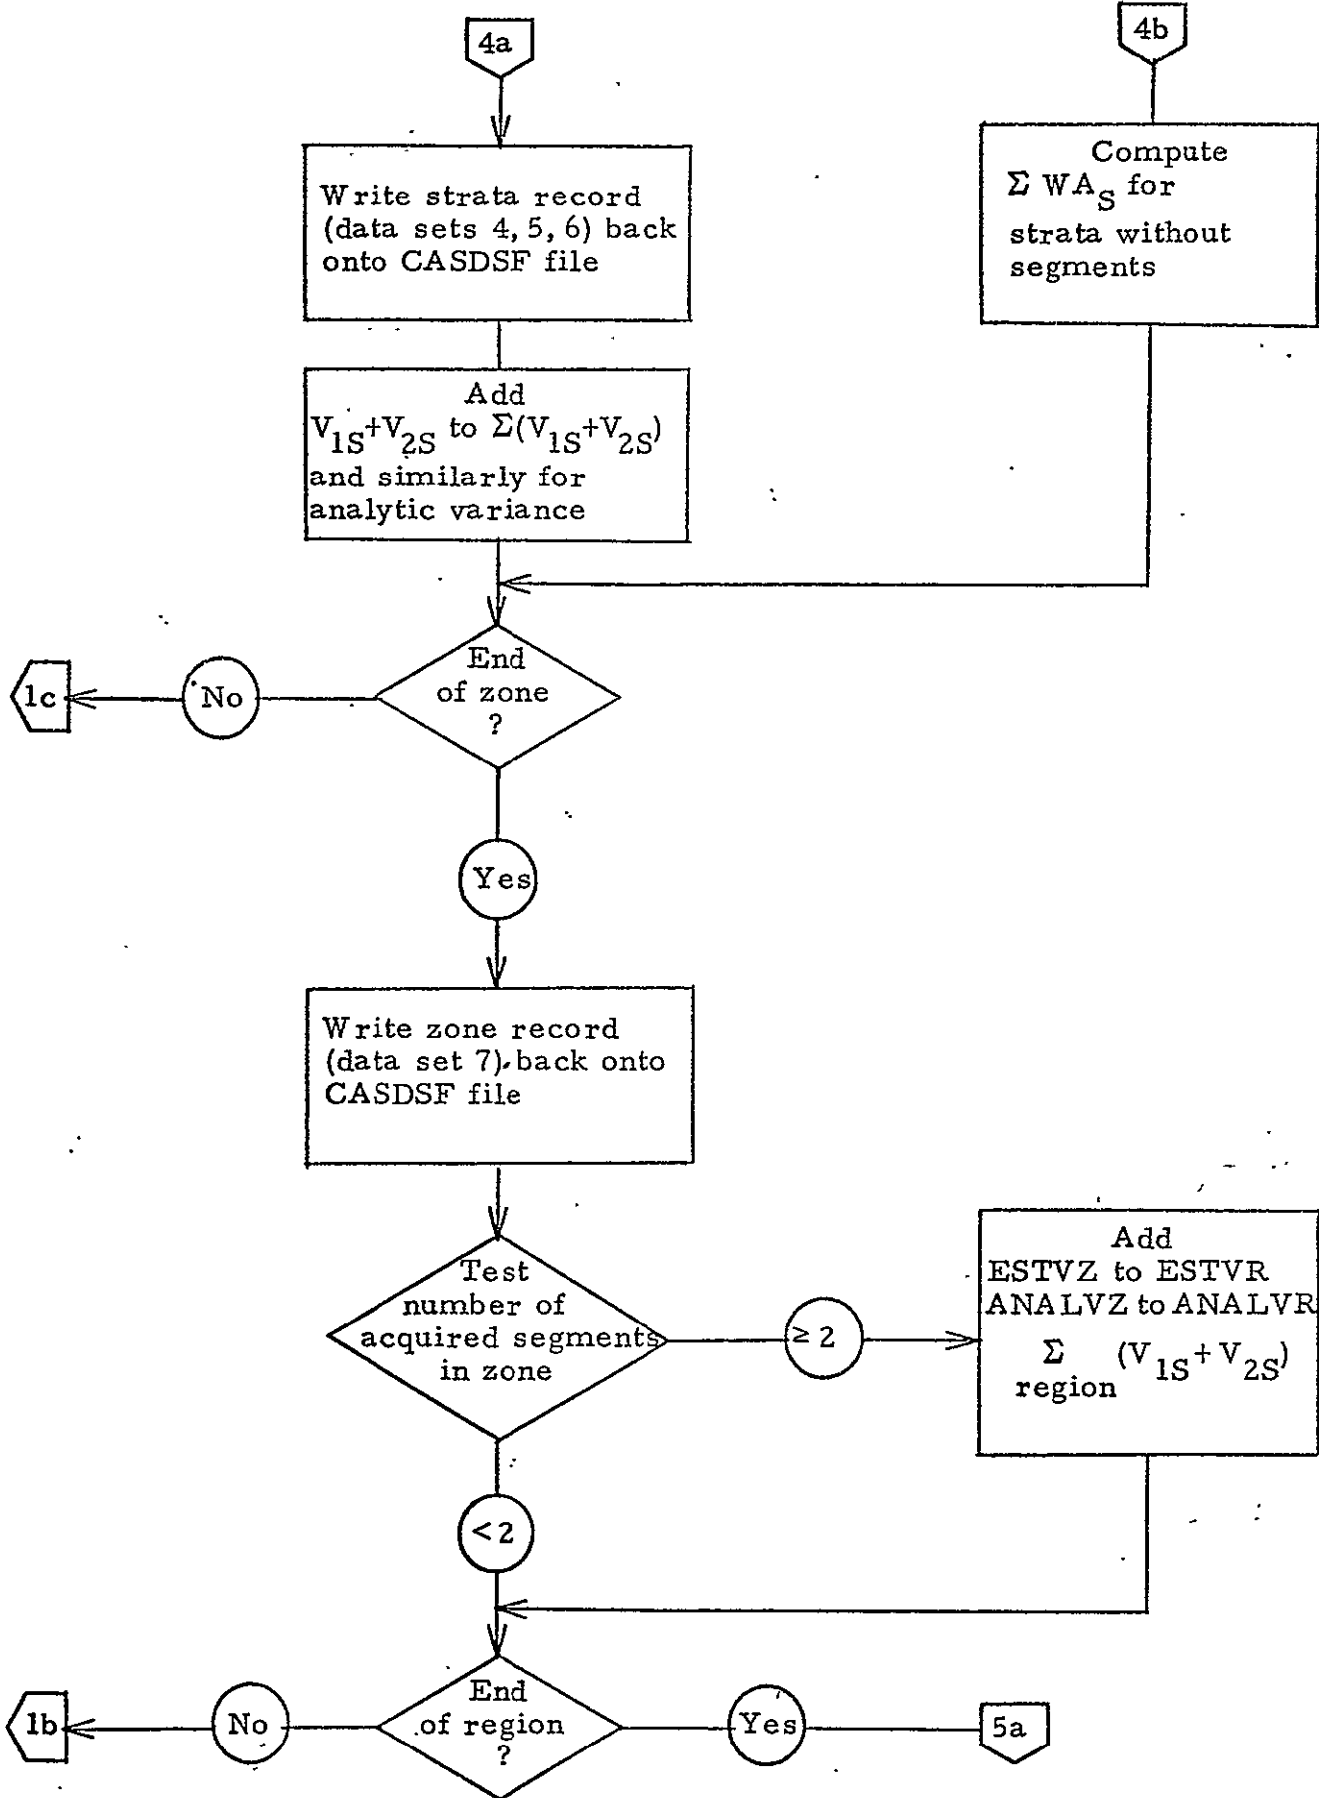


Figure 3-4. CAS2 Flow Diagram (Sheet 4 of 5)

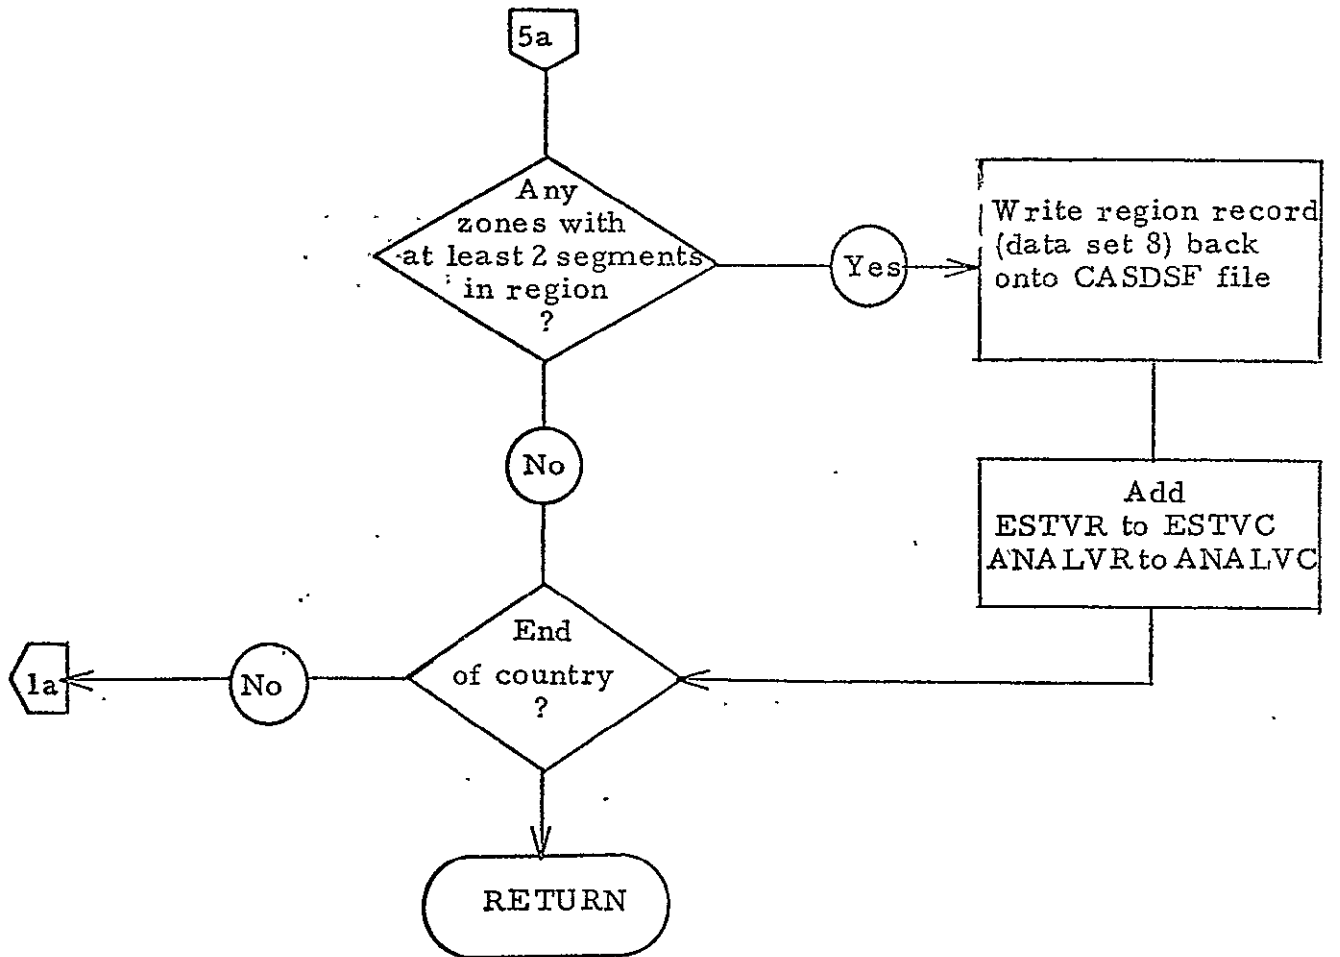


Figure 3-4. CAS2 Flow Diagram (Sheet 5 of 5)

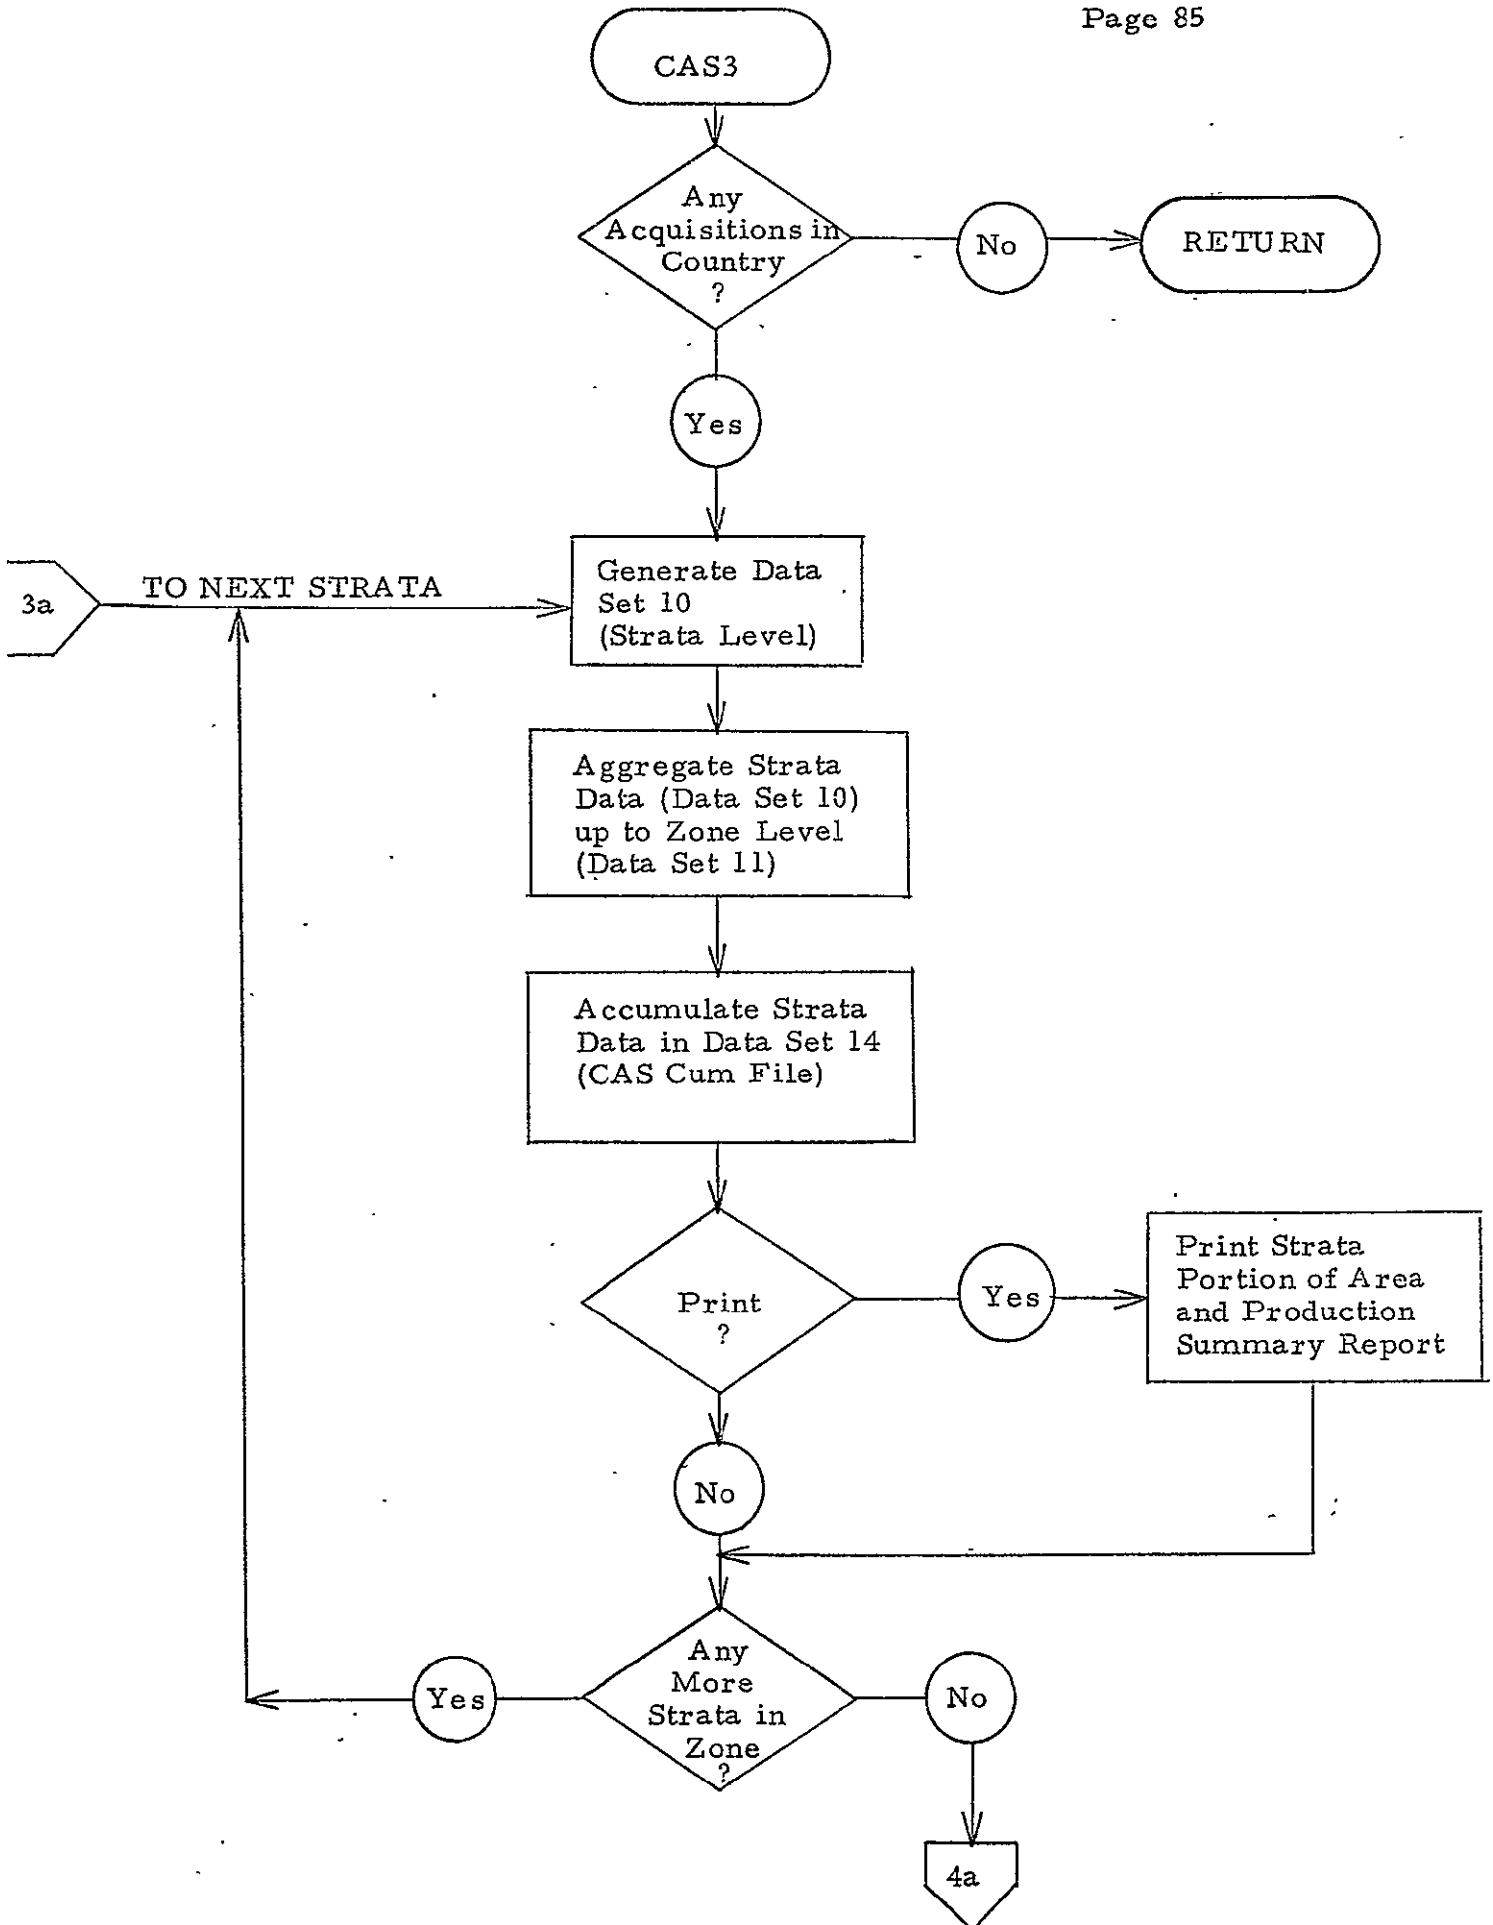


Figure 3-5. CAS3 Flow Diagram (Sheet 1 of 4)

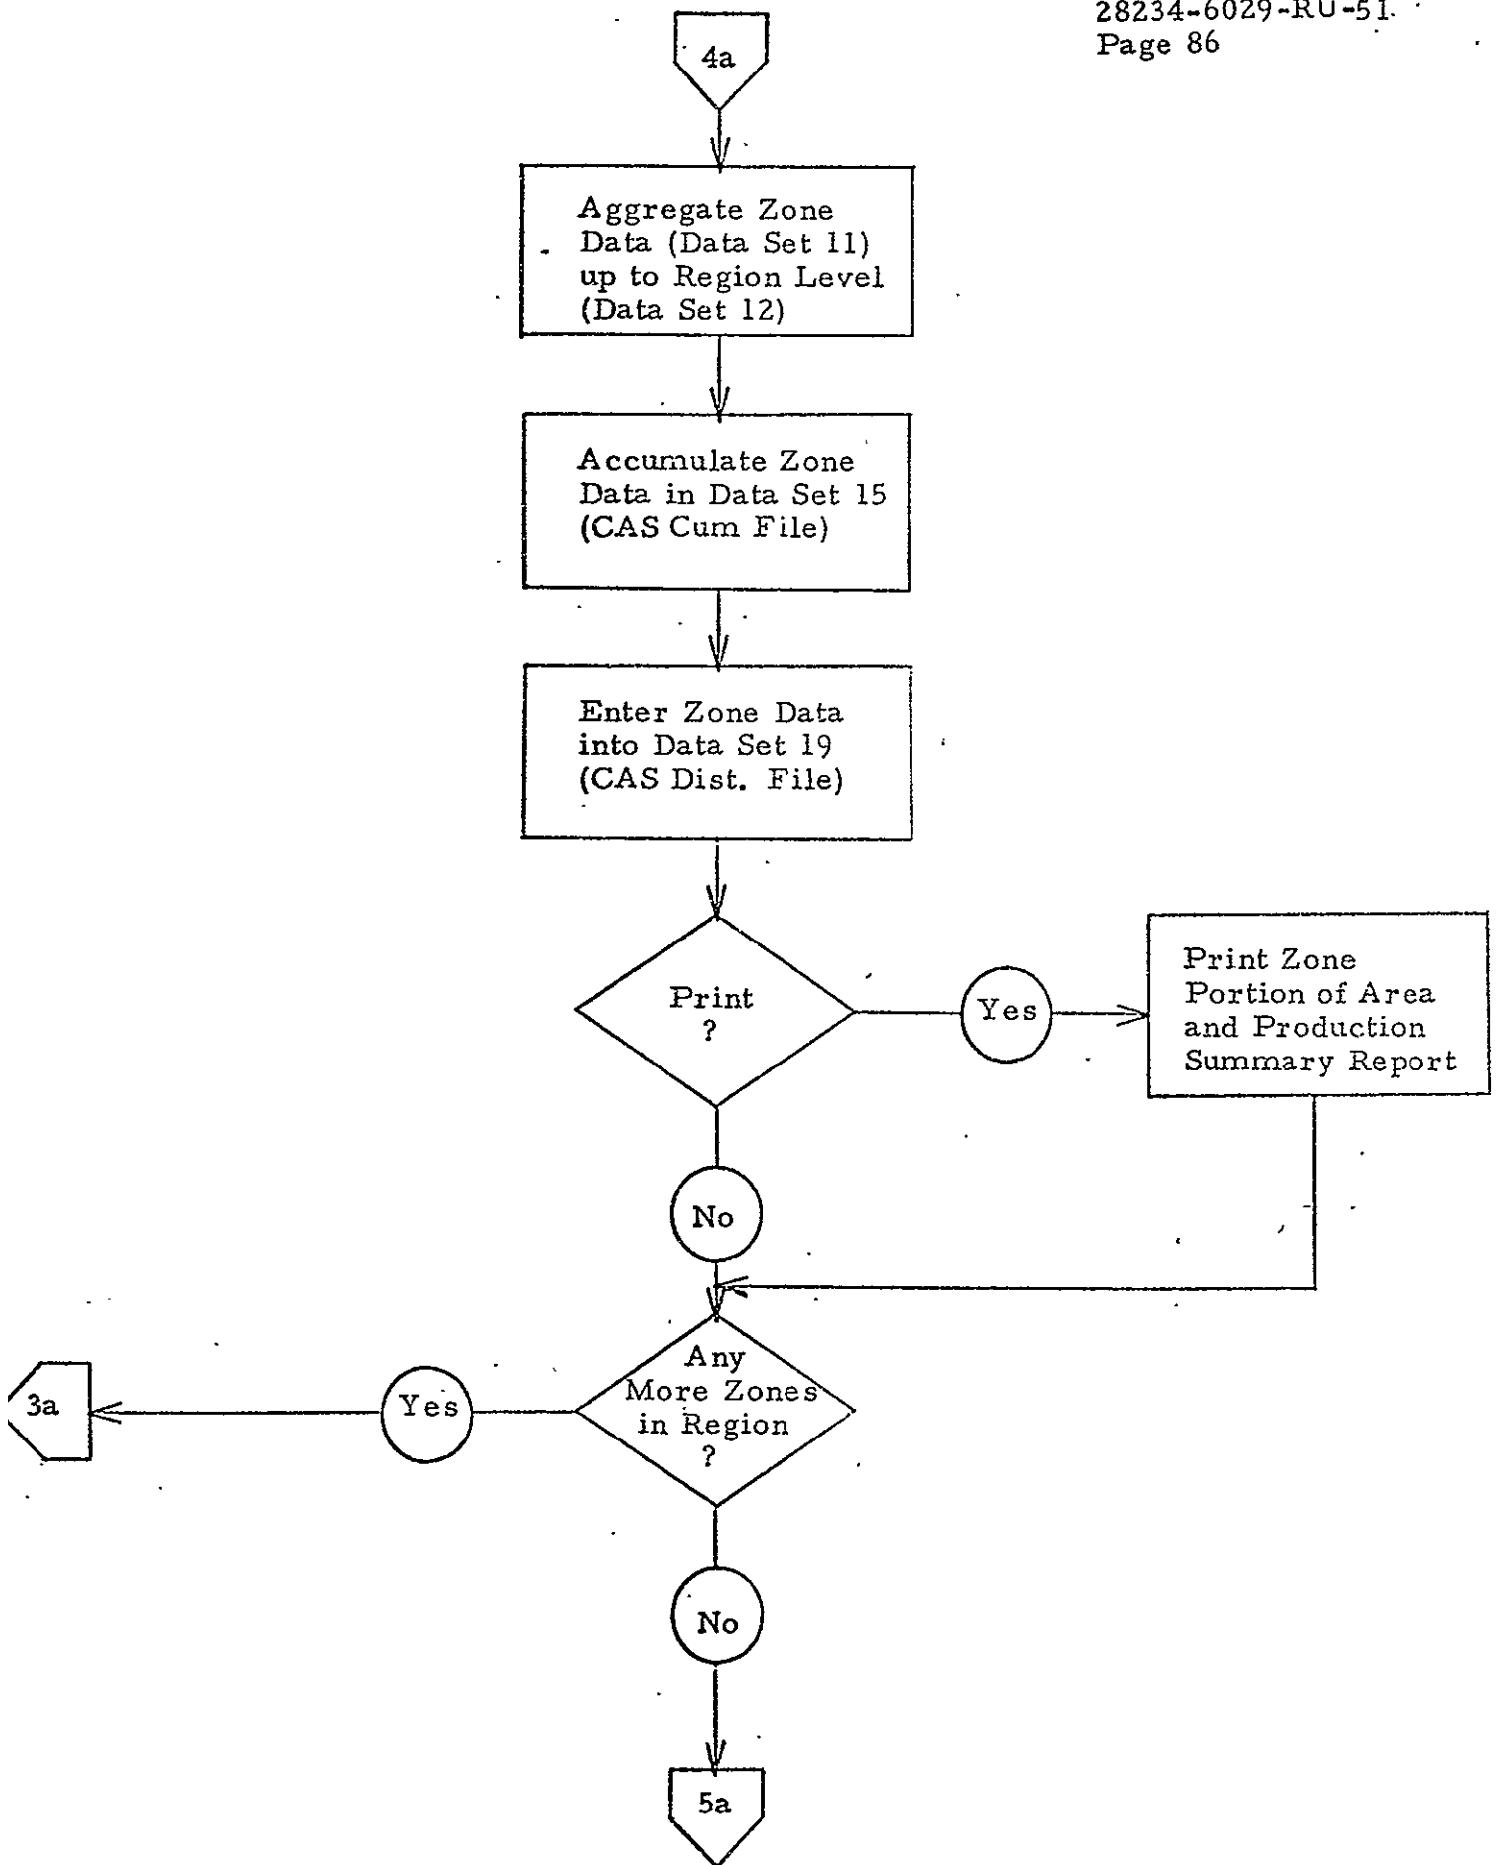


Figure 3-5. CAS3 Flow Diagram (Sheet 2 of 4)

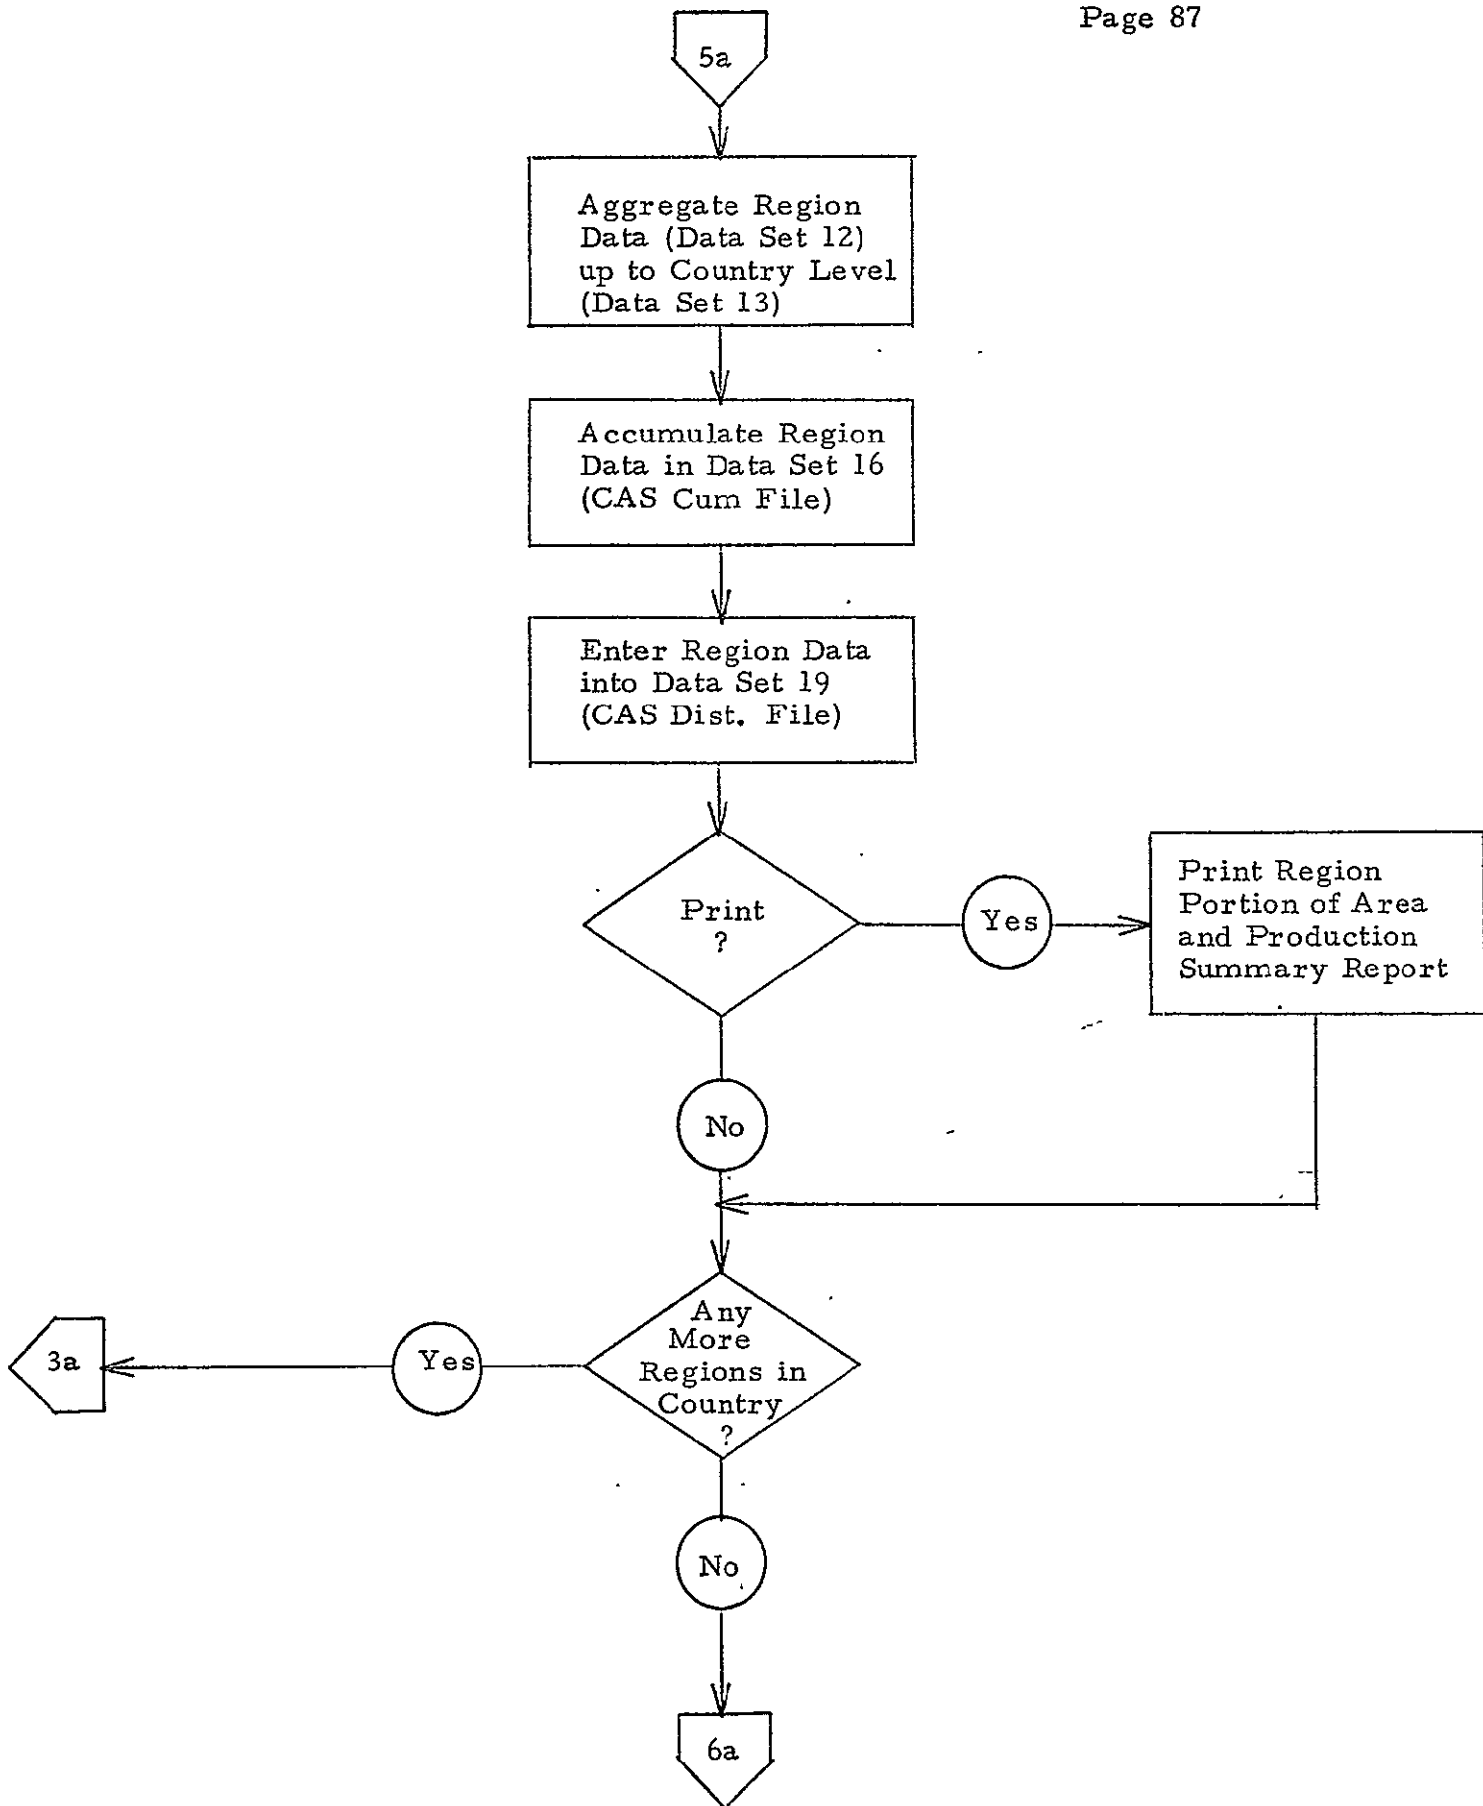


Figure 3-5. CAS3 Flow Diagram (Sheet 3 of 4)



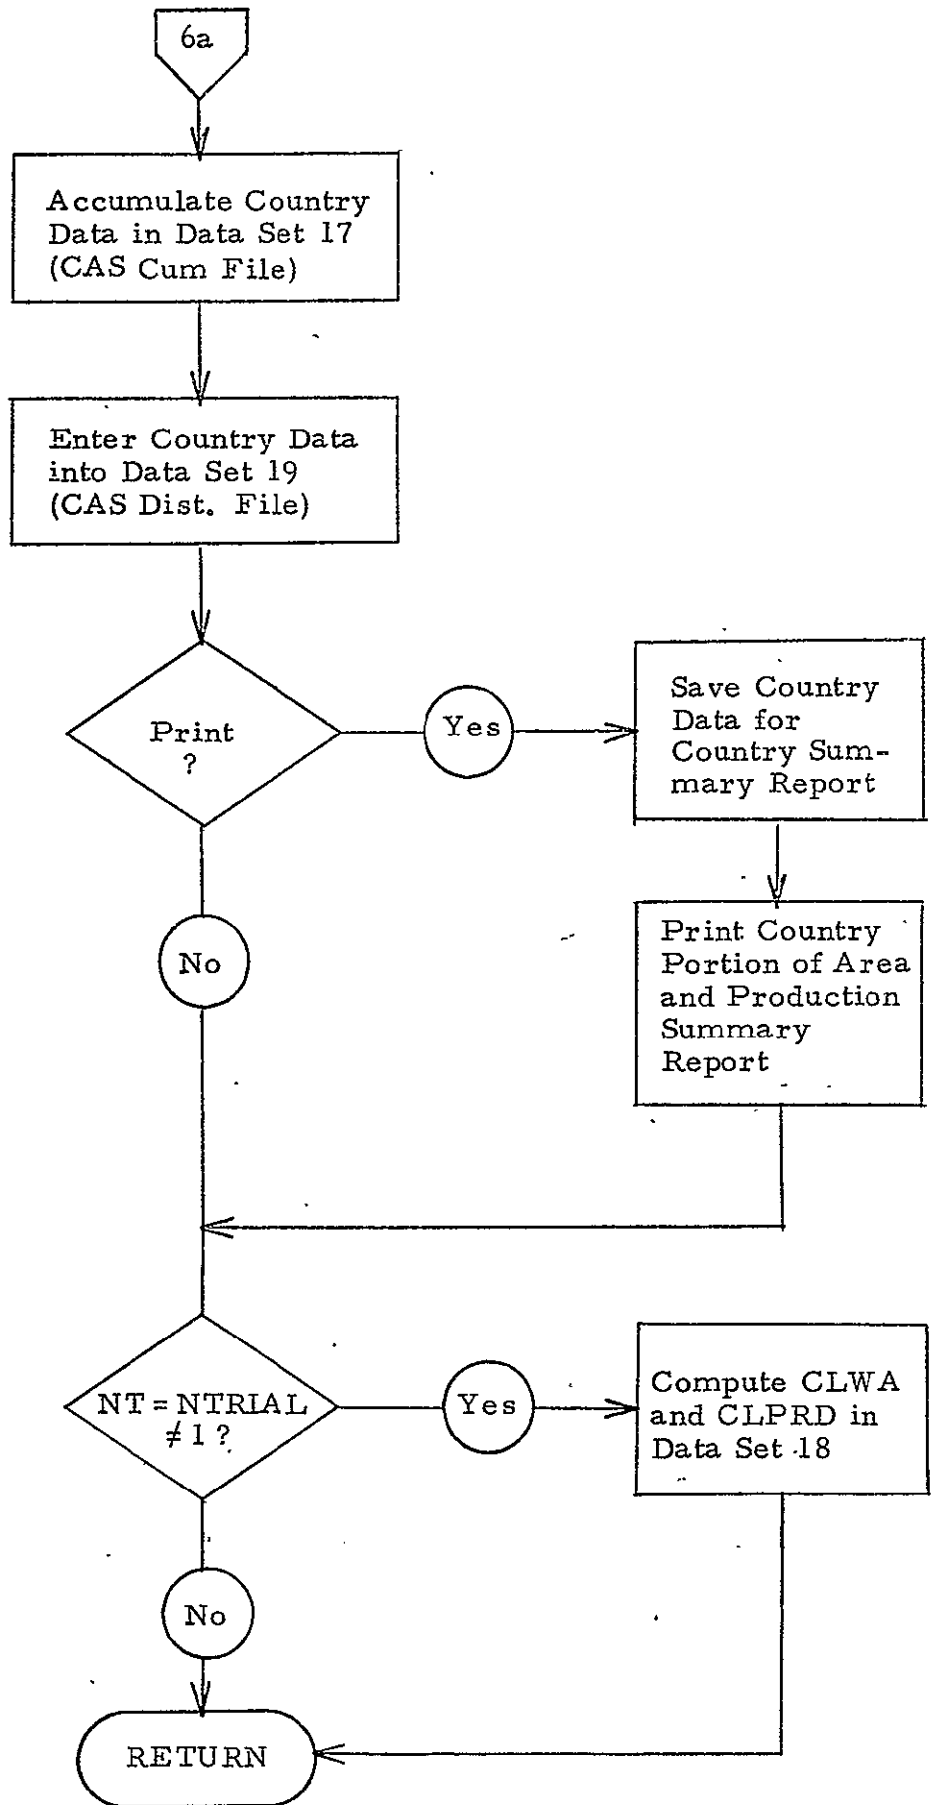


Figure 3-5. CAS3 Flow Diagram (Sheet 4 of 4)

## 4.0 OUTPUT

### 4.1 PRINTED DATA

#### 4.1.1 Printed Reports

Two reports, the Area and Production Summary Report and the Country Summary Report, may be generated by the CAS Simulator under the control of the IPRCAS parameter on the LEM control cards and the APREP parameter on the CAS control cards. If APREP = 1, then the Area and Production Summary Report will be produced on each iteration that the Country Summary Report is produced. If APREP = 0, then the Area and Production Report will not be generated at all. The Country Summary Report may be produced on each Monte Carlo iteration, on the first and last iterations only, on the last iteration only, or not at all, depending upon the setting of the IPRCAS parameter (see Section 2.1 of the Problem Description for the LEM Program).

The format of the Area and Production Summary Report is shown in Figure 4-1, and the format of the Country Summary Report is shown in Figures 4-2 and 4-3.

#### 4.1.2 Intermediate Debug

At the present there is no Intermediate Debugging printout specified. However, during checkout the contents of the various data sets will be printed out as they are generated.

#### 4.1.3 Status Information

During the execution of the CAS Simulator, miscellaneous status information will be collected and passed on to LEM for printing out at the end of the run. In particular, the number of records read from the Input Files and the number of records written onto the CAS Cumulative Output File and the CAS Distribution Output File will be saved for printing.

#### 4.1.4 Echo Print Input Card Images

The data specified on the CAS control cards is always printed out in a format that is almost identical to the format on the input card images. Due to differences in the FORTRAN read and write formats,

ROL  
CHAN.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
1	Input Problem Description																				LPP SIMULATION					CASE 1		PAGE 10P																	
2	AREA AND PRODUCT IAN SUMMARY REPORT																																												
3	AREA AND PRODUCT IAN SUMMARY REPORT																																												
4	AREA AND PRODUCT IAN SUMMARY REPORT																																												
5	AREA AND PRODUCT IAN SUMMARY REPORT																																												
6	AREA AND PRODUCT IAN SUMMARY REPORT																																												
7	COUNTRY ciomaly PREDICTION DATE mo/dd/yy																									ITERATION																			
8	(OR BLOW) PW																																												
9	AREA AND PRODUCT IAN SUMMARY REPORT																																												
10	AREA AND PRODUCT IAN SUMMARY REPORT																																												
11	AREA AND PRODUCT IAN SUMMARY REPORT																																												
12	AREA AND PRODUCT IAN SUMMARY REPORT																																												
13	AREA AND PRODUCT IAN SUMMARY REPORT																																												
14	AREA AND PRODUCT IAN SUMMARY REPORT																																												
15	AREA AND PRODUCT IAN SUMMARY REPORT																																												
16	AREA AND PRODUCT IAN SUMMARY REPORT																																												
17	AREA AND PRODUCT IAN SUMMARY REPORT																																												
18	AREA AND PRODUCT IAN SUMMARY REPORT																																												
19	AREA AND PRODUCT IAN SUMMARY REPORT																																												
20	AREA AND PRODUCT IAN SUMMARY REPORT																																												
21	AREA AND PRODUCT IAN SUMMARY REPORT																																												
22	AREA AND PRODUCT IAN SUMMARY REPORT																																												
23	AREA AND PRODUCT IAN SUMMARY REPORT																																												
24	AREA AND PRODUCT IAN SUMMARY REPORT																																												
25	AREA AND PRODUCT IAN SUMMARY REPORT																																												
26	AREA AND PRODUCT IAN SUMMARY REPORT																																												
27	AREA AND PRODUCT IAN SUMMARY REPORT																																												
28	AREA AND PRODUCT IAN SUMMARY REPORT																																												
29	AREA AND PRODUCT IAN SUMMARY REPORT																																												
30	AREA AND PRODUCT IAN SUMMARY REPORT																																												
31	AREA AND PRODUCT IAN SUMMARY REPORT																																												
32	AREA AND PRODUCT IAN SUMMARY REPORT																																												
33	AREA AND PRODUCT IAN SUMMARY REPORT																																												
34	AREA AND PRODUCT IAN SUMMARY REPORT																																												
35	AREA AND PRODUCT IAN SUMMARY REPORT																																												
36	AREA AND PRODUCT IAN SUMMARY REPORT																																												
37	AREA AND PRODUCT IAN SUMMARY REPORT																																												
38	AREA AND PRODUCT IAN SUMMARY REPORT																																												
39	AREA AND PRODUCT IAN SUMMARY REPORT																																												
40	AREA AND PRODUCT IAN SUMMARY REPORT																																												
41	AREA AND PRODUCT IAN SUMMARY REPORT																																												
42	AREA AND PRODUCT IAN SUMMARY REPORT																																												
43	AREA AND PRODUCT IAN SUMMARY REPORT																																												
44	AREA AND PRODUCT IAN SUMMARY REPORT																																												
45	AREA AND PRODUCT IAN SUMMARY REPORT																																												

Figure 4-1

ORIGINAL PAGE IS  
OF POOR QUALITY

# Country Summary Report (Page 1)

PP SIMULATION CASE 1 PAGE 1

COUNTRY	country	INTERI...	AREA	YIELD	PRD	CV	CV	CV	CV
PREDICTION	EST	AREA	EST	YIELD	PRD	CV	CV	CV	CV
1	XXXXXX.X	XXX.XX	XXX.XX	XXX.XX	XXX.XX	XXX.XX	XXX.XX	XXX.XX	XXX.XX
2									
3									
4									
5									
6									
7									
8									
9									
10									
11									
12									
13									
14									
15									
16									
17									
18									
19									
20									
21									
22									
23									
24									
25									
26									
27									
28									
29									
30									
31									
32									
33									
34									
35									
36									
37									
38									
39									
40									
41									
42									
43									
44									
45									

Figure 4-2

ORIGINAL PAGE IS OF POOR QUALITY

CHART TITLE: Country Summary Report (Page 2)

TROL CHAN.

COUNTRY	country	ITERATION	n	AREA CONFIDENCE LEVELS				PRODUCTION CONFIDENCE LEVELS			
PREDICTIVE/	POINT	TRUE/ERR	EST/EST	TRUE/EST	TRUE/NC	TRUE/ERR	EST/EST	TRUE/EST	TRUE/NC		
no/nd/yr		CLWA	mean CLEWA	mean CLTEC	mean CLATWC	CLPRD	mean CLEPRD	mean CLPTWC	mean CLATWC		
Product Problem Description						LPP SIMULATION	CASE	n	PAGE	p	
COUNTRY SUMMARY REPORT											
1											
2											
3											
4											
5											
6											
7											
8											
9											
10											
11											
12											
13											
14	1	xxx,xxx	xxx,xxx	xxx,xxx	xxx,xxx	xxx,xxx	xxx,xxx	xxx,xxx	xxx,xxx	xxx,xxx	
15	2										
16	3										
17	4										
18											
19											
20											
21											
22											
23											
24											
25											
26											
27											
28											
29											
30											
31											
32											
33		x				x					
34											
35											
36											
37											
38											
39											
40											
41											
42											
43											
44											
45											

True Confidence Using M/C Error Warned  
 Will Be Output Only on the Final  
 Iteration

Figure 4-3

ORIGINAL PAGE IS OF POOR QUALITY

the printout may be slightly different from the input card images. For example, a blank field will be printed out as -0 rather than being left blank.

#### 4.2 FILES

There are two files output by the CAS Simulator -- the CAS Cumulative Output File, which consists of Data Sets 14, 15, 16, and 17, and the CAS Distribution Output File, which consists of Data Set 19. Both of these files are random access files. The formats and contents of these two files are given in the LACIE File Definition Supplement.

## 5.0 ERROR PROCESSING

### 5.1 GENERAL

The program will attempt to find as many errors as possible during the processing of the input control cards. The program will continue checking for additional input errors if any input error is detected. There are two levels of error. These are:

Level 1 - non-fatal, continue processing.

Level 2 - job fatal. Terminate job after processing all input control cards.

When a level 1 error is detected, the program will print an informative message and continue processing. When a level 2 error is detected, the program will print an informative message, set a fatal error flag, and continue processing. When all control cards have been processed, the program will continue executing if no fatal errors were found or will return control back to the operating system if at least one fatal error is detected.

The errors which may be detected by the CAS Simulator are described below.

### 5.2 INPUT ERRORS DETECTED BY CAS

#### 1. Message:

IMPROPER LABEL AND SEQUENCE NUMBER ON A CAS CONTROL CARD. LABEL AND SEQ. NO. = \_\_\_\_\_

#### Meaning:

Fatal error -- the three CAS control cards are supposed to have CAS 0i entered in Columns 75-80 (where i = 1, 2, or 3). Possibly the control cards are out of order. The CAS control cards must always be preceded by the LEM control cards and the CAMS control cards.

Remedy:

Be sure that the LEM, CAMS, and CAS control cards are all present, and are in the proper order. Check the label and sequence numbers to be sure they are entered properly.

2. Message:

NHIST = m IS OUT OF RANGE.  
( 1 .LE. NHIST .LE. 20 )

Meaning:

Fatal error -- NHIST must satisfy  $1 \leq \text{NHIST} \leq 20$ .

Remedy:

Change the input value of NHIST or change the limits of NHIST within the CAS Simulator (subroutine CASIN). (No longer relevant.)

3. Message:

HH = h IS OUT OF RANGE  
( 3 .LE. HH .LE. 99 )

Meaning:

Non-fatal error -- HH must be within range  
 $3 \leq \text{HH} \leq 99$

in order to apply the regression relation for  $S^2$ .

Remedy:

Change the input value of HH or change the limits for HH within the CAS Simulator (subroutine CASIN). The program will set  $\text{HH} = 99999$  so that the first formula for  $S_o^2$  will always be used.

4. Message:

ILLEGAL WINDOW SPECIFIED IN WPRIOR =  $W_1, W_2, W_3, W_4$   
(EACH WINDOW MUST BE 1-4 OR 0)



Meaning:

Fatal error -- an improper value has been specified for one or more of the windows in the array WPRIOR. The only allowable values are 0, 1, 2, 3, or 4.

Remedy:

Correct the offending values.

5. Message:

ALL ENTRIES IN WPRIOR ARE ZERO

Meaning:

Fatal error -- each entry in the array WPRIOR is zero, but at least one window 1-4 must be specified.

Remedy:

Specify at least one non-zero window number in the array WPRIOR.

6. Message:

ILLEGAL PREDICTION DATE yy/mm/dd SPECIFIED. YEAR = yy MUST BE .GE. 64, MONTH = mm MUST BE 1-12, DAY MUST BE 1-31

Meaning:

Fatal error -- an illegal prediction date has been specified in the array IPRD. The prediction date must satisfy

year  $\geq$  64

1  $\leq$  month  $\leq$  12

1  $\leq$  day  $\leq$  31

Note: Dates such as Feb. 30 or Sept. 31 will be accepted by the program without being recognized as being in error.

Remedy:

Correct the offending dates.

7. Message:

PREDICTION DATES NOT IN ASCENDING ORDER OR DUPLICATES.

Meaning:

Fatal error -- the prediction dates entered in the array IPRD must be in ascending order with no duplicates.

Remedy:

Enter the prediction dates in ascending order and eliminate any duplicates.

5.3 PROCESSING ERRORS DETECTED BY CAS

1. Message:

DIVISION BY ZERO NOT ALLOWED  
EQN. (n), symbol = 0.

Meaning:

Fatal error -- the program detected a zero divisor in attempting to compute equation (n). The offending zero divisor is indicated symbolically by "symbol."

Remedy:

The user should attempt to discover why the indicated quantity was zero. Usually potential zero divisors were supposed to be anticipated during the analysis leading to the coding of the CAS Simulator. The program logic should avoid the calculation of zero divisors.

2. Message:

IF NT = 1, VARIANCE ERRORS AND CONFIDENCE LEVELS CAN NOT BE COMPUTED AND WILL ARBITRARILY SET TO ZERO.

Meaning:

Non-fatal error -- on the first Monte Carlo iteration it is not possible to compute the variance errors  $VEA_C$ ,  $VEP_C$ , and  $VEY_C$  and the confidence levels CLWA, CLPRD, etc. These values will arbitrarily set to zero.

Remedy:

Not required.

3. Message:

STARTING REGION  $r_{st}$  NOT FOUND ON filename FILE.  
(where filename is YESOUT, SUBHST, or CAMSF)

Meaning:

Fatal error -- the starting region  $r_{st}$  specified by STARTR on the CAS control cards was not found on the indicated file. Either STARTR is incorrect or something is wrong with the indicated file.

Remedy:

Change STARTR or mount the correct file. It might be necessary to dump part of the file to determine the starting region and zone numbers.

4. Message:

STARTING ZONE  $z_{st}$  NOT FOUND ON filename FILE  
(where filename is YESOUT, SUBHST, or CAMSF)

Meaning:

Fatal error -- the starting zone  $z_{st}$  specified by STARTZ on the CAS control cards was not found on the indicated file. Either STARTZ is incorrect or something is wrong with the indicated file.

Remedy:

Change STARTZ or mount the correct file. It might be necessary to dump part of the file to determine the starting region and zone numbers.

5. Message:

ENDING REGION  $r_{end}$  NOT FOUND ON filename FILE  
(where filename is YESOUT, SUBHST, or CAMSF)

Meaning:

Non-fatal error -- the ending region  $r_{end}$  specified by ENDR on the CAS control cards was not found on the indicated file. Either ENDR is incorrect or something is wrong with the indicated file. The program will use all regions up to the end of data on the file.

Remedy:

Change ENDR. Zero is a permissible value indicating to use all regions up to the end of data.

6. Message:

ENDING ZONE  $z_{\text{end}}$  NOT FOUND ON filename FILE ..  
(where filename is YESOUT, SUBHST, or CAMSF)

Meaning:

Non-fatal error -- the ending zone  $z_{\text{end}}$  specified by ENDZ on the CAS control cards was not found on the indicated file. Either ENDZ is incorrect or something is wrong with the indicated file. The program will use all zones up to the end of the last region or the region indicated by ENDR.

Remedy:

Change ENDZ. Zero is a permissible value indicating to use all zones of the final region (ENDR).

7. Message:

ZERO PREDICTION DATES ON YESOUT FILE FOR REGION  $r$ ,  
ZONE  $z$ , STRATUM  $s$  (DATA RECORD  $n$ )

Meaning:

Fatal error -- all six prediction dates from the YESOUT file are zero for the indicated region, zone, and stratum. Thus the program cannot determine which value of estimated yield to use. Something must be wrong with the YESOUT file.

Remedy:

Dump out part of the YESOUT file to check the prediction dates and yields. In particular record  $n+1$  should be checked.

8. Message:

ILLEGAL GROUP NUMBER  $g$  FROM SUBHST FOR REGION  $r$ , ZONE  $z$ ,  
STRATUM  $s$ , SUBSTRATUM  $k$  (DATA RECORD  $n$ )

Meaning:

Fatal error -- the group number  $g$  from the  $n^{\text{th}}$  data record of the Substrata Historical File SUBHST is not 1, 2, or 3, indicating something is wrong with the SUBHST file.

Remedy:

Dump out the  $n+1$  record of file SUBHST to check the group number and other substrata data.

9. Message:

NAGR = n OR NA = m FROM FILE SUBHST ARE ZERO. GROUP NUMBER  $g$  IS CHANGED TO 3.

Meaning:

Non-fatal error -- one or both of the quantities NAGR and NA from the Substrata Historical File are zero. Thus the group number  $g$  was changed to 3 by the CAS Simulator.

Remedy:

The input to the LUMP program, which generated SUBHST. If NAGR or NA are zero, then the group number should be 3.

10. Message:

INCONSISTENCY BETWEEN YESOUT AND SUBHST FILES.

	RECORD	REGION	ZONE	STRATA
YESOUT	$n_1$	$r_1$	$z_1$	$s_1$
SUBHST	$n_2$	$r_2$	$z_2$	$s_2$

Meaning:

Fatal error -- the region, zone, and strata from the YESOUT and SUBHST files do not agree. Agreement was supposed to be assured by the YES module.

Remedy:

This error should never occur in production. The logic of the YES and CAS modules should be carefully checked. Also it might be necessary to dump portions of the two files.

11. Message:

INCONSISTENCY BETWEEN SUBHST AND CAMSF.

	RECORD	REGION	ZONE	STRATA	SUBSTRATA
SUBHST	n <sub>1</sub>	r <sub>1</sub>	z <sub>1</sub>	s <sub>1</sub>	k <sub>1</sub>
CAMSF	n <sub>2</sub>	r <sub>2</sub>	z <sub>2</sub>	s <sub>2</sub>	k <sub>2</sub>

Meaning:

Fatal error -- the region, zone, strata, and substrata from the SUBHST and CAMSF files do not agree. Agreement should have been assured by the CAMS module. Actually, the CAMS module uses the CROPW file rather than SUBHST, but the two files should agree with each other and thus with CAMSF.

Remedy:

This error should never occur in production. The logic of the CAMS and CAS modules should be carefully checked. Also, it might be necessary to dump portions of the two files.

12. Message:

ERROR RETURN FROM BETA DISTRIBUTION SUBROUTINE.  
ERROR FLAG = n.

Meaning:

Non-fatal or fatal error, depending upon error flag (see writeup of BETAD routine) -- an error was detected by the BETAD subroutine while CAS was attempting to compute  $PW'_K$ , the production wheat for the most recent non-epoch year (eq. (13) in CAS).

The meaning of the error flag is as follows:

1.  $\bar{X}$  not within range  $0 \leq \bar{X} \leq 1$  so was reset within BETAD.
2.  $\sigma$  not within range

$$0 \leq \sigma \leq \bar{X} \sqrt{\frac{1 - \bar{X}}{\bar{X} + \epsilon}}$$

where  $\epsilon = 10^{-4}$

so  $\sigma$  was reset within BETAD.

3. Fatal error. The random number could not be found within 35 iterations via the inverse incomplete Beta function method.

$\bar{X}$  is the mean value  $P\tilde{W}_K$

$\sigma$  is the standard deviation

$$\sigma = CV_1 * P\tilde{W}_K$$

13. Message:

NO SEGMENTS IN SUBSTRATA k, STRATA s, ZONE z, REGION r  
(SUBHST RECORD n).

Meaning:

Fatal error -- the program detected a group I substrata with no segments. Only group II or group III substrata with no segments are permitted.

Remedy:

Check record n+1 of the SUBHST file (in particular check GRPNO and NSEG). This error should never occur during production.

14. Message:

ZERO OR NEGATIVE DIVISOR IN COMPUTING TAU2A, SIGM2S  
(EQS. 93D-93F)

Meaning:

Fatal error -- the denominator  $DENOM = HWA12 + RN2(v) * (MYV12)^{1/2}$  in Eqns. 93d, 93e, and 93f in the calculation of  $\tau_S^2$  and  $\sigma_S^2$  is zero or negative (subroutine DSIO). This probably indicates that the group I, II historical wheat area and the multiyear variance are zero. The program logic should never reach this point (see message 15).

Remedy:

Modify the input to the LUMP program so the historical wheat area is non-zero.

15. Message:

WARNING... HIST PW =  $\tilde{P}W$  FOR SUBSTRATA k, STRATA s,  
ZONE z, REGION r.  
GROUP NO. CHANGED TO 3.

Meaning:

Non-fatal -- the program will not accept a group I or group II substrata with a zero (or negative) value of historical PW from the SUBHST file (see eqns. 16, 33, 39, 46, 90, 93).

Remedy:

Non required -- the program will automatically change the group number to 3 and proceed. The user may wish to enter a non-zero value of HIST PW in the LUMP input data.

16. Message:

INPUT PREDICTION DATE (m) = d  
.LT. ALL PREDICTION DATES ON YESOUT FILE FOR STRATA s,  
ZONE z, REGION r (RECORD n).

Meaning:

Non-fatal -- the  $m^{\text{th}}$  Zulu prediction date (obtained from the  $m^{\text{th}}$  prediction date on the CAS input control card data) is less than all prediction dates on the YESOUT file for the indicated stratum on the  $n^{\text{th}}$  YESOUT data record).

Remedy:

The error is non-fatal. The program will drop the indicated stratum and proceed. However, the user may wish to check the prediction dates entered on the CAS control cards.



17. Message:

TOO MANY MONTE CARLO ITERATIONS FOR THE CAS DISTRIBUTION FILE.

Meaning:

Fatal error -- a maximum of 100 Monte Carlo iterations is allowed, if the CAS distribution file is to be generated.

Remedy:

Specify NTRIAL  $\leq$  100 in the LEM control card data or specify DISTFF = 0 in the CAS control card data. If more than 100 iterations are required and if the CAS distribution file is desired, then the dimensions of the arrays CASDSB and BUFR in common block /CASCNM/ may have to be increased. Also the routine RWDISF would have to be modified.

18. Message:

SYMBOL IN EQ. n = a  
REF. VALUE = b

Meaning:

Non-fatal -- in subroutine YSUB, which calculates a quantity Y, the argument a for the square root is negative, which could cause trouble. To avoid the problem, the program resets

$$a = 0. \quad \text{if} \quad a < 0$$

and prints a warning if

$$|a| \geq b \times 10^{-7}$$

Remedy:

Non required -- the error is non-fatal, and execution will continue with  $a = 0$  and  $Y = 10^{-30}$ . However, if  $|a|$  is significantly large, the user should investigate why.

Note: To prevent excessive amounts of printout, this message will be printed a maximum of five times per iteration.

19. Message:

LESS THAN 2 ACQUIRED SEGMENTS IN CLASS c OF ZONE z REGION r  
NO. OF ACQ. SEGMENTS = n

Meaning:

Warning -- There was only one acquired segment in the indicated class c of zone z, region r. Hence, neither the regression formula nor the variance formula could be used to compute  $S^2$ , the within-class estimated area variance.  $S^2$  will be set to zero.

Remedy:

This is a non-fatal error and there probably is not much the user can do about the situation. Execution will proceed with  $S^2$  set to zero for the indicated class.

20. Message:

EITHER TOO MANY SUBSTRATA OR SEGMENTS IN REGION-NNNN  
ZONE-NNNN  
FATAL ERRORS IN PASS 0 OF CAS. RUN ABORTED.

Meaning:

Fatal error -- A maximum of 300 substrata or 300 acquired segments are allowed in a zone.

Remedy:

Reallocate the segments so that there are not so many in any one zone or increase threshold values for acquisition.

APPENDIX A  
NOMENCLATURE

A.1 Introduction

In Section A.3 of this Appendix are listed most of the engineering symbols used in the CAS Problem Description. In order to shorten the list, only the primary forms of many of the symbols are given. The conventions described below may be used to distinguish between related forms of the same basic symbol.

Let  $v$  be an arbitrary quantity (e. g. , WA for wheat area).

Then

$v$  denotes the true value;

$\tilde{v}$  denotes the historical value;

$\hat{v}$  denotes the estimated value;

$v_{\ell}$  denotes the value for level  $\ell$

where

$\ell = i$  for a segment,

$\ell = K$  for a substrata,

$\ell = S$  for a stratum,

$\ell = Z$  for a zone,

$\ell = R$  for a region,

$\ell = C$  for a country;

$v_{1\ell}$  denotes the value of  $v$  for Group I segments aggregated to level  $\ell$ ;

$v_{2\ell}$  denotes the value of  $v$  for Group II segments aggregated to level  $\ell$ ;

$v_{3\ell}$  denotes the value of  $v$  for Group III substrata aggregated to level  $\ell$ .

Thus, for example,

$\overset{\wedge}{W}A_{2S}$  denotes the estimated wheat area for Group II segments aggregated up to the strata level,

$\tilde{P}W_K$  denotes the historical proportion of wheat at the substrata level,

$\overset{\wedge}{P}RD_Z$  denotes the estimated production of wheat at the zone level.

## A.2 Summation Notation

The summation notation  $\Sigma$  is used extensively in the CAS Problem Description to indicate aggregation of various quantities up to certain levels.

Thus,

$\overset{K}{\Sigma}$  denotes aggregation of segments up to the substrata level,

$\left. \begin{array}{l} \overset{S}{\Sigma} \\ \overset{S}{\Sigma} \\ \overset{S}{\Sigma} \\ i, K \end{array} \right\}$  denote aggregation up to the strata level,

$\left. \begin{array}{l} \overset{Z}{\Sigma} \\ \overset{Z}{\Sigma} \\ \overset{Z}{\Sigma} \\ i, K \end{array} \right\}$  denote aggregation up to the zone level,

$\overset{R}{\Sigma}$  denotes aggregation up to the region level,

$\overset{C}{\Sigma}$  denotes aggregation up to the country level,

$\overset{M1K}{\Sigma}$  denotes aggregation of Group I segments up to the substrata level,

$\overset{M2K}{\Sigma}$  denotes aggregation of Group II segments up to the substrata level,

$\overset{S1}{\Sigma}_{i, K}$  denotes aggregation of Group I segments up to the strata level,

- $S1$   
 $\sum_K$  denotes aggregation of Group I substrata up to the strata level,
- $S2$   
 $\sum_{i,K}$  denotes aggregation of Group II segments up to the strata level,
- $S2$   
 $\sum_K$  denotes aggregation of Group II substrata up to the strata level,
- $S3$   
 $\sum_K$  denotes aggregation of Group III substrata up to the strata level,
- $NT$   
 $\sum$  denotes accumulation over all Monte Carlo iterations,
- class  
 $\sum_{i,K}$  denotes summation over all substrata in a class.

### A.3 Definition of Engineering Symbols

	<u>Symbol</u>	<u>Data Set(s)</u>	<u>Description</u>
1.	A	—	Regression coefficient used to calculate $S^2$ .
2.	$(AREA)_K$	(SUBHST)	Land area of the $K^{th}$ substratum.
3.	AREAPS	(Block Data)	Area per segment. (Built-in value = 10289.712 hectares)
4.	B	—	Regression coefficient used to calculate $S^2$ .
5.	$CL \hat{WA}$	(13)	Confidence level about the estimated WA.
6.	$CL WA$ (True/Est.)	(13)	Confidence level about the true WA using the estimated variance.
7.	$CL WA$ (True/WC)	(13)	Confidence level about the true WA using the within county variance.
8.	$CL \hat{PRD}$	(13)	Confidence level about the estimated production.
9.	$CL PRD$ (True/Est.)	(13)	Confidence level about the true production using the estimated variance.
10.	$CL PRD$ (True/WC)	(13)	Confidence level about the true production using the within county variance.

	<u>Symbol</u>	<u>Data Set(s)</u>	<u>Description</u>
11.	CT <sub>1ℓ</sub>	(1)-(6) and (10)-(17)	Number of Group I substrata.
	CT <sub>2ℓ</sub>		Number of Group II substrata.
	CT <sub>3ℓ</sub>		Number of Group III substrata.
12.	CV <sub>1</sub>	(SUBHST)	Coefficient of variation for year-to-year change in PW.
13.	CV <sub>2</sub>	(SUBHST)	Coefficient of variation for within county variation of PW.
14.	CV <sub>3</sub>	( " )	Coefficient of variation for within county variation of proportion of mixed pixels.
15.	CV <sub>4</sub>	( " )	Ratio of 1964 Historical WA to (1969) Historical WA (used to compute T).
16.	E <sub>ℓ</sub>	(7) - (10)	Ratio of estimated group 1, 2 WA to historical group 1, 2 WA.
17.	EA <sub>ℓ</sub>	(10)-(17)	Error in WA.
18.	EP <sub>ℓ</sub>	(10)-(17)	Error in production.
19.	EY <sub>ℓ</sub>	(10)-(17)	Percent error in yield.
20.	H	(Input)	Minimum number of segments required for applying S <sup>2</sup> regression equation.
21.	M	(Input)	Number of historical years for Group III ratio calculation. (No longer used)
22.	M <sub>1j</sub>	(4)	Number of Group I segments at strata level.
23.	M <sub>1ℓ</sub>	(1)-(17)	Number of Group I segments which have been acquired.
24.	M <sub>2j</sub>	(5)	Number of Group II segments at strata level.
25.	M <sub>2ℓ</sub>	(1)-(17)	Number of Group II segments which have been acquired.
26.	NA	(SUBHST)	Number of allocated segments in the substratum (from Substrata Historical File).

<u>Symbol</u>	<u>Data Set(s)</u>	<u>Description</u>
27. $N_K$	(SUBHST)	Number of agricultural segments (NAGR from Substrata Historical File).
28. NT	—	Number of Monte Carlo iterations.
29. $PRD_{\ell}$	(10)-(17)	Production.
30. PW	—	Proportion wheat.
31. $PW_{\ell}$	(1)-(7)	Proportion wheat.
32. $PW_{1\ell}$	(1), (4)	Proportion of wheat for Group I segments.
33. $PW_{2\ell}$	(2), (5)	Proportion of wheat for Group II segments.
34. $(PW_K)_i$	—	Proportion wheat for segment i and substratum K.
35. P(X)	—	Analytic function used to compute confidence levels.
36. Q	—	Intermediate quantity used to calculate $\hat{V}_{2S}$ .
37. $R_K$	—	Intermediate quantity used to calculate $\hat{W}A_K$ .
38. RN	—	Random number used to compute $WA'_K$ .
39. $RNI(v)$	—	Random number used to compute $\tau^2$ . (No longer used)
40. $RN2(v)$	—	Random number used to compute $\tau^2$ . (No longer used)
41. $S^2$	(7)	Intermediate factor used to compute $\hat{V}_{1S}$ and $\hat{V}_{2S}$ (within county area variance).
42. $S^2_o$	—	Computed value of $S^2$ .
43. T	(5)	Intermediate factor used to compute $\hat{V}_{2S}$ .
44. $\hat{V}_{1\ell}$	—	Estimated Group I area variance.
45. $\hat{V}_{2\ell}$	—	Estimated Group II area variance.

Note  $\hat{V}_{1\ell} + \hat{V}_{2\ell} = \sum_{S=1}^{\ell} (\hat{V}_{1S} + \hat{V}_{2S})$ .

<u>Symbol</u>	<u>Data Set(s)</u>	<u>Description</u>
46. $\hat{V}AR_{\ell}$	(10)-(17)	Area variance.
47. $\hat{V}PR_{\ell}$	(10)-(17)	Production variance.
48. $\hat{V}YR_{\ell}$	(10)-(17)	Yield variance.
49. WA	(1)-(17)	Wheat area.
50. $WA_{\ell}$	(1)-(17)	Wheat area.
51. $WA_{1\ell}$	(1), (4)	Wheat area from Group I segments.
52. $WA_{2\ell}$	(2), (5)	Wheat area from Group II segments.
53. $WA_{3\ell}$	(3), (6)	Wheat area from Group III segments.
54. $WA'_K$	(2)	Most recent non-epoch year.
55. $(WA_{1,2})_{\ell}$	(7)-(10)	Combined wheat area from Group I and Group II segments.
56. $Y_{\ell}$	(10)-(17)	Yield.
57. $Y_S$	(10)	True yield for strata (from YES Output File).
58. $\nu$	—	Year index used in computing $\sigma^2$ and $\tau^2$ . (No longer used)
59. $\pi_{\alpha}$ $\pi_K$ $\pi_{K'}$	—	Intermediate quantities used to compute T. $\pi_{\alpha}$ , $\pi_K$ , $\pi_{K'}$ all represent the same set of quantities. The index $\alpha$ , K, or K' is a dummy index used to distinguish different substrata.
60. $\pi_{K''}$	—	Another intermediate quantity used to compute T. $\pi_{K''}$ is computed by a different equation than $\pi_{\alpha}$ , $\pi_K$ , $\pi_{K'}$ .
61. $\sigma$	—	Standard deviation used in Beta distribution.
62. $\sigma_{\ell}^2$	—	Intermediate quantity used to compute $\hat{V}AR_S$ . (No longer used)
63. $\tau_{\ell}^2$	—	Intermediate quantity used to compute $\hat{V}AR_S$ .



## APPENDIX B

## DATA SET DEFINITIONS

The equations within each data set are listed in approximate order of computation.

Data Set 1 (Group I Substrata)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	ISUBST			Substrata ID
2.	TWAK	$WA_{1K}$	(7)	True WA (wheat area)
3.	HWAK	$\tilde{W}A_{1K}$	(8)	Historical WA
4.	EWAK	$\hat{W}A_{1K}$	(9)	Estimated WA
5.	EPWK	$\hat{P}W_{1K}$	(2a)	Sum of estimated $PW_{Ki}$ (proportion wheat)
6.	EPW2K		(3a)	$\sum_i \hat{P}W_{li}^2$
7.	M1K	$M_{1K}$		No. of Group I segments which have been acquired
8.	SMPKPI		(4a)	$\sum_i (\tilde{P}W_K) (\hat{P}W_{li})$
9.	SUMPK2		(5a)	$\sum_i \tilde{P}W_K^2$
10.	SUMPK		(6a)	$\sum_i \tilde{P}W_K$
11.	CT1K	$CT_1$		Group I flag: = 1 if any acquired segments in substrata, = 0 otherwise
12.	ANALVK		(12)	Group I analytic variance
13.	NCLASS			Substrata class number

Data Set 2 (Group II Substrata)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	ISUBST			Substrata ID
2.	TWAK	WA <sub>2K</sub>	(7)	True WA (wheat area)
3.	HWAK	$\tilde{W}A_{2K}$	(8)	Historical WA
4.	NEYWAK	WA' <sub>K</sub>	(14)	Non-epoch year WA (No longer used)
5.	EPWK	$\hat{P}W_{2K}$	(2b)	Estimated PW (proportion wheat)
6.	EPW2K		(3b)	$\sum_i \hat{P}W_{2i}^2$
7.	M2K	M <sub>2K</sub>		No. of Group II segments which have been acquired
8.	SMPKPI		(4b)	$\sum_i (\tilde{P}W_K) (\hat{P}W_{2i})$
9.	SUMPK2		(5b)	$\sum_i \tilde{P}W_K^2$
10.	SUMPK		(6b)	$\sum_i \tilde{P}W_K$
11.	CT2K	CT <sub>2</sub>		Group II flag: = 1 if any acquired segments in substrata, = 0 otherwise
12.	ANALVK		(17)	Group II Analytic variance
13.	NCLASS			Substrata class number

Data Set 3 (Group III Substrata)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	ISUBST			Substrata ID
2.	TWAK	WA <sub>3K</sub>	(7)	True WA (wheat area)
3.	HWAK	$\tilde{W}A_{3K}$	(8)	Historical WA
4.	CT3K	CT <sub>3</sub>		Group III flag: = 1 if substrata is Group III or reclassified as Group III

Data Set 4 (Group I Component of Strata Data)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	STRATA			Strata ID
2.	TWAS1	WA <sub>1S</sub>	(19)	True WA (wheat area)
3.	HWAS1	$\tilde{W}A_{1S}$	(20)	Historical WA
4.	EWAS1	$\hat{W}A_{1S}$	(21)	Estimated WA
5.	MIJS	M <sub>1j</sub>	(22)	Number of acquired Group I segments in strata
6.	CT1S		(37)	No. of Group I substrata with acquired segments
7.	ANVS1		(25)	Group I analytic variance

Data Set 5 (Group II Component of Strata Data)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	STRA TA			Strata ID
2.	TWAS2	$WA_{2S}$	(31)	True WA (wheat area)
3.	HWAS2	$\tilde{W}A_{2S}$	(32)	Historical WA
4.	EWAS2	$\hat{W}A_{2S}$	(33)	Estimated WA
5.	M2JS	$M_{2j}$	(34)	Number of acquired Group II segments in strata
6.	CT2S		(38)	No. of Group II substrata with acquired segments
7.	T	T	(39)	Second term in variance equation for $\hat{V}_{2S}$
8.	ANVS2		(40)	Group II analytic variance
9.	P2IDPK		(46)	$\frac{\sum_{i, K} S2 \hat{PW}_{2i}}{(\tilde{PW}_K)_i}$

Data Set 6 (Group III Component of Strata Data)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	STRATA			Strata ID
2.	TWAS3	WA <sub>3S</sub>	(47)	True WA (wheat area)
3.	HWAS3	$\tilde{W}A_{3S}$	(48)	Historical WA
4.	CT3S			No. of Group III substrata

In addition to Data Sets 4, 5, and 6, the following strata-dependent quantities need to be written on an intermediate scratch file for second pass processing:

$YS = Y_S$  = True yield for strata

$ESTYS = \hat{Y}_S$  = Estimated yield for strata

$EVYRS = V\hat{Y}R_S$  = Variance of yield for strata

$V1V2S = V_{1S} + V_{2S}$  = Estimated group 1, 2 area variance

$VARS = V_S$  = Estimated area variance for strata

ANVARS = Estimated analytic area variance for strata

Data Set 7 (At Zone Level)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	ZONE			Zone ID
2.	TWAZ	$WA_Z$	(56)	True WA (wheat area) (Also in Data Set 11)
3.	HWAZ2	$(\tilde{WA}_{1,2})_Z$	(57)	Group 1, 2 historical WA (if $M1K2KZ \geq 2$ )
4.	EZ	$E_Z$	(63)	
5.	M1K2KZ		(49)	$Z$ $\sum_K (M_{1K} + M_{2K})$
6.	ANALVZ		(69)	Group 1, 2 analytic area variance
7.	NSTRAZ			No. of strata in zone
8.	HWAZ1	$(\tilde{WA}_{1,2})_Z$	(61)	Group 1, 2 historical WA (if $M1K2KZ \geq 1$ )
9.	EWAZ1	$(\hat{WA}_{1,2})_Z$	(62)	Group 1, 2 estimated WA (if $M1K2KZ \geq 1$ )
10.	HWAZ3	$\tilde{WA}_{3Z}$	(68)	Total historical wheat area for all strata in zone without acquired segments
11.	ESTVZ		(59)	Group 1, 2 variance estimate
12.	HWAZ12	$(\tilde{WA}_{1,2})_t$	(93a)	Group 1, 2 historical WA ● Obtained from zone level if $M1K2KZ \geq 2$ ; ● HWAR12 at region level if $M1K2KZ < 2$
13.	M1K2CL		(50)	class $\sum_K (M_{1K} + M_{2K})$ = number of acquired segments in class
14.	EPWCL		(51)	class $\sum_{i,K} (\hat{PW}_{1i} + \hat{PW}_{2i})$
15.	EPW2CL		(52)	class $\sum_{i,K} (\hat{PW}_{1i}^2 + \hat{PW}_{2i}^2)$

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
17.	PKPICL		(53)	$\sum_{i, K}^{class} \tilde{P}W_K (P\hat{W}_{1i} + P\hat{W}_{2i})$
18.	PK2CL		(54)	$\sum_{i, K}^{class} \tilde{P}W_K^2 = \sum_K^{class} (M_{1K} + M_{2K}) \tilde{P}W_K^2$
19.	PKCL		(55)	$\sum_{i, K}^{class} \tilde{P}W_K = \sum_K^{class} (M_{1K} + M_{2K}) \tilde{P}W_K$

Data Set 8 (At Region Level)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	REGION			Region ID
2.	TWAR	$WA_R$	(70)	True WA (wheat area) (also in Data Set 12)
3.	HVAR2	$(\tilde{WA}_{1,2})_R$	(71)	Group 1, 2 historical WA
4.	ER	$E_R$	(77)	
5.	M1K2KR		(78)	$\sum_K^R (M_{1K} + M_{2K})$
6.	ANALVR		(79)	Group 1, 2 analytic area variance
7.	NZONES			No. of zones in region
8.	HWAR1	$(\tilde{WA}_{1,2})_R$	(75)	Group 1, 2 historical WA
9.	EWAR1	$(P\hat{WA}_{1,2})_R$	(76)	Group 1, 2 estimated WA
10.	ESTVR		(73)	Group 1, 2 estimated variance
11.	M1M2ZR			Group 1, 2 flag: = 0 if $M1K2KZ < 2$ for all zones in region = 1 if $M1K2KZ \geq 2$ for any zone in region (i. e., if any zone has at least two group 1, 2 segments)

Data Set 9 (At Country Level)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	COUNTR			Country ID
2.	TWAC	$WA_C$	(80)	True WA (wheat area) (Also in Data Set 13)
3.	HWAC2	$(\tilde{WA}_{1,2})_C$	(81)	Group 1, 2 historical WA
4.	EC	$E_C$	(87)	
5.	M1K2ZC		(88)	$\sum_K^C (M_{1K} + M_{2K})$
6.	ANALVC		(89)	Group 1, 2 analytic area variance
7.	M1M2FC			Group 1, 2 flag: = 0 if $M1K2KZ < 2$ for all zones in country = 1 if $M1K2KZ \geq 2$ for any zone in country (i. e., if any zone has at least two group 1, 2 segments)
8.	HWAC1	$(\tilde{WA}_{1,2})_C$	(85)	Group 1, 2 historical WA
9.	EWAC1	$(\hat{WA}_{1,2})_C$	(86)	Group 1, 2 estimated WA
10.	ESTVC		(83)	Group 1, 2 estimated variance



Data Set 10 (At Strata Level - Part 2 Processing)  
Note: Perform only if  $M1K2KC \geq 2$

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	HWAS	$\tilde{W}A_S$	(94)	Historical WA
2.	TWAS	$WA_S$	(95)	True WA
3.	EWAS	$\hat{W}A_S$	(96)	Estimated WA
4.	AERRS	$EA_S$	(97)	Area error
5.	AVARS	$\hat{V}A_R_S$	(92b, 93c)	Area variance
6.	TPRODS	$PRD_S$	(99)	True production
7.	EPRODS	$\hat{P}R_D_S$	(100)	Estimated production
8.	PRERRS	$EP_S$	(101)	Production error
9.	PRVARS	$\hat{V}P_R_S$	(102)	Production variance
10.	YERRS	$EY_S$	(103)	Yield error
11.	ANAVS		(92c, 93d)	Analytic area variance
12.	ANPRVS		(105)	Analytic production variance
13.	ES	$E_S$	(90)	

Data Set 11 (At Zone Level - Part 2 Processing)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	HWAZ	$\tilde{W}A_Z$	(106)	Historical WA
2.	TWAZ	$WA_Z$	(107)	True WA
3.	EWAZ	$\hat{W}A_Z$	(108)	Estimated WA
4.	AERRZ	$EA_Z$	(109)	Area error
5.	AVARZ	$\hat{V}AR_Z$	(110)	Area variance
6.	TPRODZ	$PRD_Z$	(111)	True production
7.	EPRODZ	$\hat{P}RD_Z$	(112)	Estimated production
8.	PRERRZ	$EP_Z$	(113)	Production error
9.	PRVARZ	$\hat{V}PR_Z$	(114)	Production variance
10.	TYZ	$Y_Z$	(115)	True yield
11.	EYZ	$\hat{Y}_Z$	(116)	Estimated yield
12.	YERRZ	$EY_Z$	(117)	Yield error
13.	M1Z	$M_{1Z}$	(118)	Number of acquired Group I segments in zone
14.	M2Z	$M_{2Z}$	(119)	Number of acquired Group II segments in zone
15.	CT1Z	$CT_{1Z}$	(120)	Number of Group I substrata with acquired segments
16.	CT2Z	$CT_{2Z}$	(121)	Number of Group II substrata with acquired segments
17.	CT3Z	$CT_{3Z}$	(122)	Number of Group III substrata with acquired segments
18.	ANAVZ		(123)	Analytic area variance
19.	ANPRVZ		(124)	Analytic production variance

Data Set 12 (At Region Level - Part 2 Processing)

	<u>Program Symbol.</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	HWAR	$\tilde{W}A_R$	(125)	Historical WA
2.	1WAR	$WA_R$	(126)	True WA
3.	EWAR	$\hat{W}A_R$	(127)	Estimated WA
4.	AERRR	$EA_R$	(128)	Area error
5.	AVARR	$\hat{V}A_R$	(129)	Area variance
6.	TPRODR	$PRD_R$	(130)	True production
7.	EPRODR	$\hat{P}RD_R$	(131)	Estimated production
8.	PRERRR	$EP_R$	(132)	Production error
9.	PRVARR	$\hat{V}PR_R$	(133)	Production variance
10.	TYR	$Y_R$	(134)	True yield
11.	EYR	$\hat{Y}_R$	(135)	Estimated yield
12.	YERRR	$EY_R$	(136)	Yield error
13.	M1R	$M_{1R}$	(137)	Number of acquired Group I segments in region
14.	M2R	$M_{2R}$	(138)	Number of acquired Group II segments in region
15.	CT1R	$CT_{1R}$	(139)	Number of Group I substrata with acquired segments
16.	CT2R	$CT_{2R}$	(140)	Number of Group II substrata with acquired segments
17.	CT3R	$CT_{3R}$	(141)	Number of Group III substrata with acquired segments
18.	ANAVR		(142)	Analytic area variance
19.	ANPRVR		(143)	Analytic production variance

Data Set 13 (At Country Level - Part 2 Processing)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	HWAC	$\tilde{W}A_C$	(144)	Historical WA
2.	TWAC	$WA_C$	(145)	True WA
3.	EWAC	$\hat{W}A_C$	(146)	Estimated WA
4.	AERRC	$EA_C$	(147)	Area error
5.	AVARC	$\hat{V}AR_C$	(148)	Area variance
6.	TPRODC	$PRD_C$	(149)	True production
7.	EPRODC	$\hat{P}RD_C$	(150)	Estimated production
8.	PRERRC	$EP_C$	(151)	Production error
9.	PRVARC	$\hat{V}PR_C$	(152)	Production variance
10.	TYC	$Y_C$	(153)	True yield
11.	EYC	$\hat{Y}_C$	(154)	Estimated yield
12.	YERRC	$EY_C$	(155)	Yield error
13.	M1C	$M_{1C}$	(156)	Number of acquired Group I segments in country
14.	M2C	$M_{2C}$	(157)	Number of acquired Group II segments in country
15.	CT1C	$CT_{1C}$	(158)	Number of Group I substrata with acquired segments
16.	CT2C	$CT_{2C}$	(159)	Number of Group II substrata with acquired segments
17.	CT3C	$CT_{3C}$	(160)	Number of Group III substrata with acquired segments
18.	ANAVC		(161)	Analytic area variance
19.	ANPRVC		(162)	Analytic production variance

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
20.	CLEWA	CL WA <sup>^</sup>	(163)	Confidence level about estimated WA using estimated variance
21.	CLEPRD	CL PRD <sup>^</sup>	(165)	Confidence level about estimated production using estimated variance
22.	CLATEC	CL WA (True/est)	(166)	Confidence level about true WA using estimated variance
23.	CLPTEC	CL PRD (True/est)	(167)	Confidence level about true production using estimated variance
24.	CLATWC	CL WA (True/WC)	(168)	Confidence level about true WA using within county variance
25.	CLPTWC	CL PRD (True/WC)	(169)	Confidence level about true production using within county variance

Data Sets 14, 15, 16, and 17 are similar to Data Sets 10, 11, 12 and 13 with a few important exceptions:

- 1) Data Sets 10-13 are for only one Monte Carlo iteration, whereas Data Sets 14-17 represent the sums of the values accumulated over all Monte Carlo iterations. These accumulated values will be used to compute and print out average values.
- 2) Data Sets 14-17 are written onto the CAS Cumulative File.
- 3) The sums of the squares of the errors are added to Data Sets 14-17.

Thus the additional quantities for Data Sets 14-17 are as follows:

Data Set 14 (At Strata Level)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	SQAERS	$\sum^{NT} (EA_S)^2$	(170)	Sum of the squares of the area errors
2.	SQPERS	$\sum^{NT} (EP_S)^2$	(171)	Sum of the squares of the production errors
3.	SQYERS	$\sum^{NT} (EY_S)^2$	(172)	Sum of the squares of the yield errors

Data Set 15 (At Zone Level)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	SQAERZ	$\sum^{NT} (EA_Z)^2$	(173)	Sum of the squares of the area errors
2.	SQPERZ	$\sum^{NT} (EP_Z)^2$	(174)	Sum of the squares of the production errors
3.	SQYERZ	$\sum^{NT} (EY_Z)^2$	(175)	Sum of the squares of the yield errors

Data Set 16 (At Region Level)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	SQAERR	$\sum^{NT} (EA_R)^2$	(176)	Sum of the squares of the area errors
2.	SQPERR	$\sum^{NT} (EP_R)^2$	(177)	Sum of the squares of the production errors
3.	SQYERR	$\sum^{NT} (EY_R)^2$	(178)	Sum of the squares of the yield errors

Data Set 17 (At Country Level)

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	SQAERC	NT $\sum (EA_C)^2$	(179)	Sum of squares of the area errors
2.	SQPERC	NT $\sum (EP_C)^2$	(180)	Sum of the squares of the production errors
3.	SQYERC	NT $\sum (EY_C)^2$	(181)	Sum of the squares of the yield errors

Data Set 18 (At Country Level)

This data set is computed only after the last Monte Carlo trial.

	<u>Program Symbol</u>	<u>Engineer Symbol</u>	<u>Equation</u>	<u>Definition</u>
1.	CLWA	CL WA	(182)	Confidence level about the true WA
2.	CLPRD	CL PRD	(183)	Confidence level about the true production —

APPENDIX C  
IMPLEMENTATION EQUATIONS

$$(1) R_K = \frac{(AREA)_K}{NA * (AREAPS)}$$

where

$(AREA)_K$  = Substrata land area in hectares,

NA = No. of allocated segments in a substrata,

AREAPS = Area per segment in hectares.

(2) Summation of Estimated PW

$$(2a) \hat{PW}_{1K} = \sum_i^{M1K} \hat{PW}_{1i}$$

$$(2b) \hat{PW}_{2K} = \sum_i^{M2K} \hat{PW}_{2i}$$

$$(3a) EPW_{2K} = \sum_i^{M1K} \hat{PW}_{1i}^2$$

$$(3b) EPW_{2K} = \sum_i^{M2K} \hat{PW}_{2i}^2$$

$$(4a) SMPKPI = \sum_i^{M1K} (\tilde{PW}_K) (\hat{PW}_{1i}) = \tilde{PW}_K \hat{PW}_{1K}$$

$$(4b) SMPKPI = \tilde{PW}_K \hat{PW}_{2K}$$

$$(5a) SUMP_{K2} = \sum_i^{M1K} \tilde{PW}_K^2 = M_{1K} \tilde{PW}_K^2$$

$$(5b) SUMP_{K2} = \sum_i^{M2K} \tilde{PW}_K^2 = M_{2K} \tilde{PW}_K^2$$

$$(6a) SUMP_K = \sum_i^{M1K} \tilde{PW}_K = M_{1K} \tilde{PW}_K$$



$$(6b) \quad \text{SUMP}_K = \sum_1^{M_{2K}} \tilde{P}W_K = M_{2K} \tilde{P}W_K$$

(7) True wheat area

$$WA_K = N_K * R_K * (\text{AREAPS}) * PW_K$$

$$\text{where } WA_K = WA_{1K}, WA_{2K}, \text{ or } WA_{3K}$$

$$PW_K = PW_{1K}, PW_{2K}, \text{ or } PW_{3K}$$

(8) Historical wheat area

$$\tilde{W}A_K = N_K * R_K * (\text{AREAPS}) * \tilde{P}W_K$$

$$\text{where } \tilde{W}A_K = \tilde{W}A_{1K}, \tilde{W}A_{2K}, \text{ or } \tilde{W}A_{3K}$$

$$\tilde{P}W_K = \tilde{P}W_{1K}, \tilde{P}W_{2K}, \text{ or } \tilde{P}W_{3K}$$

(9) Estimated wheat area

$$\hat{W}A_{1K} = N_K * R_K * (\text{AREAPS}) * \frac{P\hat{W}_{1K}}{M_{1K}}$$

$$(10) \quad \text{MYVK} = (\tilde{W}A_{1K} * CV_4)^2 \quad (\text{no longer used})$$

$$(11) \quad \text{VMULTK} = \left(1 - \frac{M_{1K}}{N_K}\right) R_K^2 \frac{N_K^2}{M_{1K}} (\text{AREAPS})^2$$

$$(12) \quad \text{ANALVK} = (PW_{1K} * CV_2)^2 * \text{VMULTK}$$

$$(13) \quad PW'_K = f(RN, CV_1, \tilde{P}W_K) \quad (\text{no longer used})$$

is computed by the Beta Distribution subroutine given  
mean  $\tilde{P}W_K$  and  $\sigma = \tilde{P}W_K * CV_1$

$$(14) \quad WA'_K = CV_4 * \tilde{W}A_K$$

$$(15) \quad \text{MYVK} = (\tilde{W}A_{2K} * CV_4)^2 \quad (\text{no longer used})$$

$$(16) \quad \text{VMULTK} = \frac{R_K^2 (N_K^2 - N'_K)}{\tilde{W}A_{2K}} * (\text{AREAPS})^2 \quad (\text{incomplete - see Eqn. (36)})$$

$$(17) \quad \text{ANALVK} = (PW_{2K} * CV_2)^2 * \text{VMULTK} * \tilde{W}A_{2K}$$

- (18)  $MYVK = (\tilde{W}A_{3K} * CV_4)^2$  (no longer used)
- (19)  $TWAS1 = \sum_K^{S1} WA_{1K}$
- (20)  $HWAS1 = \sum_K^{S1} \tilde{W}A_{1K}$
- (21)  $EWAS1 = \sum_K^{S1} \overset{\wedge}{W}A_{1K}$
- (22)  $MIJS = \sum_K^{S1} M_{1K}$
- (23)  $MYVS1 = \sum_K^{S1} MYVK$  (no longer used)
- (24)  $VMULS1 = \sum_K^{S1} VMULTK$  (no longer used)
- (25)  $ANVS1 = \sum_K^{S1} ANALVK$
- (26)  $EPWS1 = \sum_{i,K}^{S1} \overset{\wedge}{P}W_{li} = \sum_K^{S1} EPWK$  (no longer used)
- (27)  $EPW2S1 = \sum_{i,K}^{S1} \overset{\wedge}{P}W_{li}^2 = \sum_K^{S1} EPW2K$  (no longer used)
- (28)  $PKPIS1 = \sum_{i,K}^{S1} (\tilde{P}W_K) (\overset{\wedge}{P}W_{li}) = \sum_K^{S1} SMPKPI$  (no longer used)
- (29)  $PK2S1 = \sum_{i,K}^{S1} (\tilde{P}W_K)^2 = \sum_K^{S1} SUMPK2$  (no longer used)
- (30)  $PKS1 = \sum_{i,K}^{S1} \tilde{P}W_K = \sum_K^{S1} SUMPK$  (no longer used)

$$(31) \quad \text{TWAS2} = \sum_K^{S2} \text{WA}_{2K}$$

$$(32) \quad \text{HWAS2} = \sum_K^{S2} \tilde{\text{WA}}_{2K}$$

$$(33) \quad \text{EWAS2} = \frac{\tilde{\text{WA}}_{2S}}{M_{2j}} \sum_{i,K}^{S2} \frac{\text{PW}_i}{\tilde{\text{PW}}_K} = \frac{\tilde{\text{WA}}_{2S}}{M_{2j}} * \text{P2IDPK}$$

$$(34) \quad \text{M2JS} = \sum_K^{S2} M_{2K}$$

$$(35) \quad \text{MYVS2} = \sum_K^{S2} \text{MYVK} \quad (\text{no longer used})$$

$$(36) \quad \text{VMULTK} = \frac{\tilde{\text{WA}}_{2S}}{M_{2j}} * \text{VMULTK} \quad (\text{see Eqn. (16)})$$

$$(37) \quad \text{CT1S} = \sum_K^{S1} \text{CT}_1$$

$$(38) \quad \text{CT2S} = \sum_K^{S2} \text{CT}_2$$

$$(39) \quad \text{T} = \begin{cases} 0 & (\text{at option of user or if } M2JS < 2) \\ \text{or} \\ \sum_{K=1}^{S2-1} \sum_{K'=K+1}^{S2} (\pi_K \pi_{K'} - \pi_{K''}) \left( \frac{\text{WA}'_K}{\pi_K} - \frac{\text{WA}'_{K'}}{\pi_{K'}} \right)^2 & (\text{if } M2JS > 1) \end{cases}$$

where

$$\pi_K = M_{2j} \left[ \frac{\tilde{\text{WA}}_{2K}}{\tilde{\text{WA}}_{2S}} \right]$$

$$\pi_{K'} = M_{2j} \left[ \frac{\tilde{\text{WA}}_{2K'}}{\tilde{\text{WA}}_{2S}} \right]$$

$$\begin{aligned} \pi_{K''} &= \frac{(M_{2j} - 1)}{M_{2j}} \pi_K \pi_{K'} + \frac{M_{2j} - 1}{M_{2j}^2} (\pi_K^2 \pi_{K'} + \pi_K \pi_{K'}^2) \\ &- \frac{(M_{2j} - 1)}{M_{2j}^3} \pi_K \pi_{K'} \sum_{\alpha=1}^{S2} \pi_{\alpha}^2 + \frac{2(M_{2j} - 1)}{M_{2j}^3} (\pi_K^3 \pi_{K'} + \pi_K \pi_{K'}^3 + \pi_K^2 \pi_{K'}^2) \\ &- \frac{3(M_{2j} - 1)}{M_{2j}^4} (\pi_K^2 \pi_{K'} + \pi_K \pi_{K'}^2) \sum_{\alpha=1}^{S2} \pi_{\alpha}^2 + \frac{3(M_{2j} - 1)}{M_{2j}^5} (\pi_K \pi_{K'}) \left( \sum_{\alpha=1}^{S2} \pi_{\alpha}^2 \right)^2 \\ &- \frac{2(M_{2j} - 1)}{M_{2j}^4} (\pi_K) (\pi_{K'}) \sum_{\alpha=1}^{S2} \pi_{\alpha}^3 \end{aligned}$$

$$\pi_{\alpha} = M_{2j} \left[ \frac{\tilde{W}A_{2\alpha}}{\tilde{W}A_{2S}} \right]$$

$$(40) \quad ANVS2 = \left[ \frac{\sum_{K} \text{ANALVK}}{M_{2j}} \right]$$

$$(41) \quad EPWS2 = \sum_{i, K}^{S2} \hat{P}W_{2i} = \sum_{K}^{S2} EPWK \quad (\text{no longer used})$$

$$(42) \quad EPW2S2 = \sum_{i, K}^{S2} \hat{P}W_{2i}^2 = \sum_{K}^{S2} EPW2K \quad (\text{no longer used})$$

$$(43) \quad PKPIS2 = \sum_{i, K}^{S2} (\tilde{P}W_K) (\hat{P}W_{2i}) = \sum_{K}^{S2} SMPKPI \quad (\text{no longer used})$$

$$(44) \quad PK2S2 = \sum_{i, K}^{S2} (\tilde{P}W_K)^2 = \sum_{K}^{S2} SUMPK2 \quad (\text{no longer used})$$

$$(45) \quad PKS2 = \sum_{i, K}^{S2} \tilde{P}W_K = \sum_{K}^{S2} SUMPK \quad (\text{no longer used})$$

$$(46) \quad P2IDPK = \sum_{i,K} \frac{S2 \quad \overset{\wedge}{PW}_{2i}}{(\overset{\sim}{PW}_K)_i} = \sum_K \frac{S2}{\overset{\sim}{PW}_K} \sum_i^K \overset{\wedge}{PW}_{2i}$$

$$= \sum_K \frac{S2 \quad \overset{\wedge}{PW}_{2K}}{\overset{\sim}{PW}_K}$$

$$(47) \quad WA_{3S} = \sum_K^{S3} WA_{3K}$$

$$(48) \quad \tilde{WA}_{3S} = \sum_K^{S3} \tilde{WA}_{3K}$$

$$(49) \quad M1K2KZ = \sum^Z (M1JS + M2JS)$$

$$(50) \quad M1K2CL = \overset{\text{class}}{\sum} (M1K + M2K)$$

$$(51) \quad EPWCL = \overset{\text{class}}{\sum} EPWK$$

$$(52) \quad EPW2CL = \overset{\text{class}}{\sum} EPW2K$$

$$(53) \quad PKPICL = \overset{\text{class}}{\sum} SMPKPI$$

$$(54) \quad PK2CL = \overset{\text{class}}{\sum} SUMPK2$$

$$(55) \quad PKCL = \overset{\text{class}}{\sum} SUMPK$$

$$(56) \quad TWAZ = \sum^Z (WA_{1S} + WA_{2S} + WA_{3S})$$

$$(57) \quad HWAZ2 = \begin{cases} 0 & \text{if } M1K2KZ < 2, \\ \sum^Z (\tilde{WA}_{1S} + \tilde{WA}_{2S}) & \text{if } M1K2KZ \geq 2 \end{cases}$$

$$(58) \quad MYVZ = \begin{cases} 0 & \text{if } M1K2KZ < 2, \\ \sum^Z (MYVS1 + MYVS2) & \text{if } M1K2KZ \geq 2 \end{cases} \quad \text{(no longer used)}$$

$$(59) \text{ ESTVZ} = \begin{cases} 0 & \text{if } M1K2KZ < 2, \\ Z \left[ \sum (V_{1S} + V_{2S} + T) \right] & \text{if } M1K2KZ \geq 2 \end{cases}$$

$$(60) \text{ EWAZ2} = \begin{cases} 0 & \text{if } M1K2KZ < 2, \\ Z \sum (\hat{W}A_{1S} + \hat{W}A_{2S}) & \text{if } M1K2KZ \geq 2 \end{cases} \quad \text{(no longer used)}$$

$$(61) \text{ HWAZ1} = \begin{cases} 0 & \text{if } M1K2KZ = 0, \\ Z \sum (\tilde{W}A_{1S} + \tilde{W}A_{2S}) & \text{if } M1K2KZ \geq 1 \end{cases}$$

$$(62) \text{ EWAZ1} = \begin{cases} 0 & \text{if } M1K2KZ = 0, \\ Z \sum (\hat{W}A_{1S} + \hat{W}A_{2S}) & \text{if } M1K2KZ \geq 1 \end{cases}$$

$$(63) \text{ EZ} = \begin{cases} 0 & \text{if } M1K2KZ = 0, \\ \frac{\text{EWAZ1}}{\text{HWAZ1}} & \text{if } M1K2KZ \geq 1 \end{cases}$$

$$(64) \text{ B} = \frac{M1K2CL * PKPICL - EPWCL * PKCL}{M1K2CL * PK2CL - PKCL^2}$$

$$(65) \text{ A} = \frac{EPWCL - B * PKCL}{M1K2CL}$$

$$(66) \text{ S}_o^2 = \frac{EPW2CL - \frac{EPWCL^2}{M1K2CL}}{M1K2CL - 1} \quad \text{if } 2 \leq M1K2CL < H$$

$$\text{S}_o^2 = \frac{EPW2CL - A * EPWCL - B * PKPICL}{M1K2CL - 2} \quad \text{if } M1K2KZ \geq H$$

$\text{S}_o^2$  is not defined for  $M1K2CL < 2$ .

$$(67) \quad S^2 = \text{MIN} \left( \frac{(\text{AREAPS})^2}{4}, S_o^2 \right)$$

$S^2$  is not defined for  $\text{MIK2CL} < 2$ .

$$(68) \quad \text{HWAZ3} = \sum^Z (\text{HWAS1} + \text{HWAS2} + \text{HWAS3}) \quad \text{over all strata without acquired segments}$$

$$(69) \quad \text{ANALVZ} = \begin{cases} 0 & \text{if } \text{MIK2KZ} < 2 \\ \sum^Z (\text{ANVS1} + \text{ANVS2} + \text{T}) & \text{if } \text{MIK2KZ} \geq 2 \end{cases}$$

$$(70) \quad \text{TWAR} = \sum^R \text{TWAZ}$$

$$(71) \quad \text{HVAR2} = \sum^R \text{HWAZ2}$$

$$(72) \quad \text{MYVR} = \sum^R \text{MYVZ} \quad (\text{no longer used})$$

$$(73) \quad \text{ESTVR} = \sum^R \text{ESTVZ}$$

$$(74) \quad \text{EWAR2} = \sum^R \text{EWAZ2} \quad (\text{no longer used})$$

$$(75) \quad \text{HWAR1} = \sum^R \text{HWAZ1}$$

$$(76) \quad \text{EWAR1} = \sum^R \text{EWAZ1}$$

$$(77) \quad E_R = \frac{\text{EWAR1}}{\text{HWAR1}}$$

$$(78) \quad \text{MIK2KR} = \sum^R \text{MIK2KZ}$$

$$(79) \quad \text{ANALVR} = \sum^R \text{ANALVZ}$$

$$(80) \quad \text{TWAC} = \sum^C \text{TWAR}$$

$$(81) \quad \text{HWAC2} = \sum^C \text{HVAR2}$$

$$(82) \quad \text{MYVC} = \sum^C \text{MYVR} \quad (\text{no longer used})$$

$$(83) \quad \text{ESTVC} = \sum^C \text{ESTVR}$$

$$(84) \quad \text{EWAC2} = \sum^C \text{EWAR2} \quad (\text{no longer used})$$

$$(85) \quad \text{HWAC1} = \sum^C \text{HWAR1}$$

$$(86) \quad \text{EWAC1} = \sum^C \text{EWAR1}$$

$$(87) \quad E_C = \frac{\text{EWAC1}}{\text{HWAC1}}$$

$$(88) \quad \text{M1K2KC} = \sum^C \text{M1K2KR}$$

$$(89) \quad \text{ANALVC} = \sum^C \text{ANALVR}$$

$$(90) \quad E_S = \begin{cases} \frac{\text{EWAS1} + \text{EWAS2}}{\text{HWAS1} + \text{HWAS2}} & \text{if } \text{M1JS} + \text{M2JS} \geq 1 \\ E_Z & \text{if } \text{M1JS} + \text{M2JS} = 0 \text{ and } \text{M1K2KZ} \geq 1 \\ E_R & \text{if } \text{M1K2KZ} = 0 \text{ and } \text{M1K2KR} \geq 1 \\ E_C & \text{if } \text{M1K2KR} = 0 \text{ and } \text{M1K2KC} \geq 1 \end{cases}$$

$$(91) \quad \text{V1V2S} = \sum_K \text{VMULTK} * \text{SSQ}(\text{NCLASS})$$

where NCLASS is the class number for substrata K.

The summation is over all substrata with acquired segments.



$$(92a) \quad \text{TAU2S} = \left( 1 + \frac{\text{HWAS3}}{\text{HWAS1} + \text{HWAS2}} \right)^2$$

$$(92b) \quad \text{AVARS} = \text{TAU2S} * (\text{V1V2S} + \text{T}) \quad \text{for strata with acquired segments}$$

$$(92c) \quad \text{ANAVS} = \text{TAU2S} * (\text{ANVS1} + \text{ANVS2} + \text{T}) \quad \text{for strata with acquired segments}$$

$$(93a) \quad \text{HWAZ12} = \begin{cases} \text{HWAZ2} & \text{if } \text{M1K2KZ} \geq 2 \\ \text{HWAZ2} & \text{if } \text{M1K2KZ} < 2 \text{ and } \text{M1M2ZR} \neq 0 \\ \text{HWAC2} & \text{if } \text{M1M2ZR} = 0 \end{cases}$$

$$(93b) \quad \text{WRATIO} = \left( \frac{\text{HWAS}}{\text{HWAZ12}} \right)^2$$

$$(93c) \quad \text{AVARS} = \text{WRATIO} * \text{ESTVZ} \quad \begin{array}{l} \text{if } \text{M1K2KZ} < 2 \text{ or} \\ \text{if } \text{M1JS} + \text{M2JS} = 0 \end{array}$$

$$(93d) \quad \text{ANAVS} = \text{WRATIO} * \text{ANALVZ} \quad \begin{array}{l} \text{if } \text{M1K2KZ} < 2 \text{ or} \\ \text{if } \text{M1JS} + \text{M2JS} = 0 \end{array}$$

- (94)  $HWAS = HWAS1 + HWAS2 + HWAS3$
- (95)  $TWAS = TWAS1 + TWAS2 + TWAS3$
- (96)  $EWAS = EWAS1 + EWAS2 + E_S * HWAS3$
- (97)  $AERRS = EWAS - TWAS$
- (98)  $AVARS = ESTVS * TAU2S + 2 * (EWAS12)^2 * SIGM2S$  (replaced by Eqns. 92b, 93c)
- (99)  $TPRODS = YS * TWAS$
- (100)  $EPRODS = ESTYS * EWAS$
- (101)  $PRERRS = EPRODS - TPRODS$
- (102)  $PRVAR = AVARS * (ESTYS^2 - EVYRS) + EWAS^2 * EVYRS$
- (103)  $YERRS = \left( \frac{ESTYS - YS}{YS} \right) * 100$
- (104)  $ANAVS = F * TAU2S + 2 * EWAS12^2 * SIGM2S$  (replaced by Eqns. 92c, 93d)  
where

$$F = \begin{cases} ANVS1 + ANVS2 + T & \text{if } M1JS + M2JS \geq 1 \text{ and } M1K2KZ \geq 2 \\ ANALVZ & \text{if } M1JS + M2JS = 0 \text{ and } M1K2KZ \geq 2 \\ ANALVR & \text{if } M1K2KZ < 2 \text{ and } M1M2ZR = 1 \\ ANALVC & \text{if } M1M2ZR = 0 \end{cases}$$

- (105)  $ANPRVS = ANAVS * (ESTYS^2 - EVYRS) + EWAS^2 * EVYRS$
- (106)  $HWAZ = \sum^Z HWAS$
- (107)  $TWAZ = \sum^Z TWAS$
- (108)  $EWAZ = \sum^Z EWAS$
- (109)  $AERRZ = EWAZ - TWAZ$
- (110)  $AVARZ = \sum^Z \left( V_{1S} + V_{2S} + T \right) * \left( 1 + \frac{HWAZ3}{HWAZ12} + \frac{HWAS3}{HWAS1 + HWAS2} \right)^2$
- (111)  $TPRODZ = \sum^Z TPRODS$

$$(112) \quad \text{EPRODZ} = \sum^Z \text{EPRODS}$$

$$(113) \quad \text{PRERRZ} = \text{EPRODZ} - \text{TPRODZ}$$

$$(114) \quad \text{PRVARZ} = \sum^Z \text{PRVARS}$$

$$(115) \quad \text{TYZ} = \frac{\text{TPRODZ}}{\text{TWAZ}}$$

$$(116) \quad \text{EYZ} = \frac{\text{EPRODZ}}{\text{EWAZ}}$$

$$(117) \quad \text{YERRZ} = \left( \frac{\text{EYZ} - \text{TYZ}}{\text{TYZ}} \right) * 100$$

$$(118) \quad \text{M1Z} = \sum^Z \text{M1JS}$$

$$(119) \quad \text{M2Z} = \sum^Z \text{M2JS}$$

$$(120) \quad \text{CT1Z} = \sum^Z \text{CT1S}$$

$$(121) \quad \text{CT2Z} = \sum^Z \text{CT2S}$$

$$(122) \quad \text{CT3Z} = \sum^Z \text{CT3S}$$

$$(123) \quad \text{ANAVZ} = \sum^Z (\text{ANVS1} + \text{ANVS2} + \text{T}) * \left( 1 + \frac{\text{HWAZ3}}{\text{HWAZ12}} + \frac{\text{HWAS3}}{\text{HWAS1} + \text{HWAS2}} \right)^2$$

$$(124) \quad \text{ANPRVZ} = \sum^Z \text{ANPRVS}$$

$$(125) \quad \text{HWAR} = \sum^R \text{HWAZ}$$

$$(126) \quad \text{TWAR} = \sum^R \text{TWAZ}$$

$$(127) \quad \text{EWAR} = \sum^R \text{EWAZ}$$

$$(128) \quad \text{AERRR} = \text{EWAR} - \text{TWAR}$$

- (129)  $AVARR = \sum^R AVARZ$
- (130)  $TPRODR = \sum^R TPRODZ$
- (131)  $EPRODR = \sum^R EPRODZ$
- (132)  $FRERRR = EPRODR - TPRODR$
- (133)  $PRVARR = \sum^R PRVARZ$
- (134)  $TYR = \frac{TPRODR}{TWAR}$
- (135)  $EYR = \frac{EPRODR}{EWAR}$
- (136)  $YERRR = \left( \frac{EYR - TYR}{TYR} \right) * 100$
- (137)  $M1R = \sum^R M1Z$
- (138)  $M2R = \sum^R M2Z$
- (139)  $CT1R = \sum^R CT1Z$
- (140)  $CT2R = \sum^R CT2Z$
- (141)  $CT3R = \sum^R CT3Z$
- (142)  $ANAVR = \sum^R ANAVZ$
- (143)  $ANPRVR = \sum^R ANPRVR$
- (144)  $HWAC = \sum^C HWAR$
- (145)  $TWAC = \sum^C TWAR$

$$(146) \quad EWAC = \sum^C EWAR$$

$$(147) \quad AERRC = EWAC - TWAC$$

$$(148) \quad AVARC = \sum^C AVARR$$

$$(149) \quad TPRODC = \sum^C TPRODR$$

$$(150) \quad EPRODC = \sum^C EPRODR$$

$$(151) \quad PRERRC = EPRODC - TPRODC$$

$$(152) \quad PRVARC = \sum^C PRVARR$$

$$(153) \quad TYC = \frac{TPRODC}{TWAC}$$

$$(154) \quad EYC = \frac{EPRODC}{EWAC}$$

$$(155) \quad YERRC = \left( \frac{EYC - TYC}{TYC} \right) * 100$$

$$(156) \quad M1C = \sum^C M1R$$

$$(157) \quad M2C = \sum^C M2R$$

$$(158) \quad CT1C = \sum^C CT1R$$

$$(159) \quad CT2C = \sum^C CT2R$$

$$(160) \quad CT3C = \sum^C CT3R$$

$$(161) \quad ANAVC = \sum^C ANAVR$$

$$(162) \quad ANPRVR = \sum^C ANPRVR$$

(163)  $CLEWA = [2 * P(X) - 1] * 100$

where

$$X = \frac{0.1 * EWAC}{Y}$$

$$Y = \text{MAX} [(AVARC)^{1/2}, 10^{-30}]$$

P(X) is given by Equation (164).

(164)  $P(X) = 1 - \frac{1}{2} (1 + 0.196854X + 0.115194X^2 + 0.000344X^3 + 0.019527X^4)^{-4}$   
if X is positive.

$$P(X) = \frac{1}{2} (1 + 0.196854|X| + 0.115194|X|^2 + 0.000344|X|^3 + 0.019527|X|^4)^{-4}$$

if X is negative.

(165)  $CLEPRD = [2 * P(X) - 1] * 100$

where

$$X = \frac{0.1 * EPRODC}{Y}$$

$$Y = \text{MAX} [(PRVARC)^{1/2}, 10^{-30}]$$

P(X) is given by Equation (164).

(166)  $CLATEC = [P(X_1) - P(X_2)] * 100$

where

$$X_1 = \frac{EWAC - 0.9 * TWAC}{Y}$$

$$X_2 = \frac{EWAC - 1.1 * TWAC}{Y}$$

$$Y = \text{MAX} [(AVARC)^{1/2}, 10^{-30}]$$

P(X) is given by Equation (164).

$$(167) \quad \text{CLPTEC} = [P(X_1) - P(X_2)] * 100$$

where

$$X_1 = \frac{\text{EPRODC} - 0.9 * \text{TPRODC}}{Y}$$

$$X_2 = \frac{\text{EPRODC} - 1.1 * \text{TPRODC}}{Y}$$

$$Y = \text{MAX} [(\text{PRVARC})^{1/2}, 10^{-30}]$$

P(X) is given by Equation (164).

$$(168) \quad \text{CLATWC} = [P(X_1) - P(X_2)] * 100$$

where

$$X_1 = \frac{\text{EWAC} - 0.9 * \text{TWAC}}{Y}$$

$$X_2 = \frac{\text{EWAC} - 1.1 * \text{TWAC}}{Y}$$

$$Y = \text{MAX} [(\text{ANAVC})^{1/2}, 10^{-30}]$$

P(X) is given by Equation (164).

$$(169) \quad \text{CLPTWC} = [P(X_1) - P(X_2)] * 100$$

where

$$X_1 = \frac{\text{EPRODC} - 0.9 * \text{TPRODC}}{Y}$$

$$X_2 = \frac{\text{EPRODC} - 1.1 * \text{TPRODC}}{Y}$$

$$Y = \text{MAX} [(\text{ANPRVC})^{1/2}, 10^{-30}]$$

P(X) is given by Equation (164).

$$(170) \quad \text{SQAERS} = \sum^{NT} (\text{AERRS})^2$$

$$(171) \quad \text{SQPERS} = \sum^{NT} (\text{PRERRS})^2$$

$$(172) \quad \text{SQYERS} = \sum^{NT} (\text{YERRS})^2$$

$$(173) \quad \text{SQAERZ} = \sum^{NT} (\text{AERRZ})^2$$

$$(174) \quad \text{SQPERZ} = \sum^{NT} (\text{PRERRZ})^2$$

$$(175) \quad \text{SQYERZ} = \sum^{NT} (\text{YERRZ})^2$$

$$(176) \quad \text{SQAERR} = \sum^{NT} (\text{AERRR})^2$$

$$(177) \quad \text{SQPERR} = \sum^{NT} (\text{PRERRR})^2$$

$$(178) \quad \text{SQYERR} = \sum^{NT} (\text{YERRR})^2$$

$$(179) \quad \text{SQAERC} = \sum^{NT} (\text{AERRC})^2$$

$$(180) \quad \text{SQPERC} = \sum^{NT} (\text{PRERRC})^2$$

$$(181) \quad \text{SQYERC} = \sum^{NT} (\text{YERRC})^2$$

$$(182) \quad \text{CLWA} = [P(X_1) - P(X_2)] * 100$$

where

$$X_1 = \frac{\sum^{NT} \text{EWAC} - 0.9 * \sum^{NT} \text{TWAC}}{NT * Y}$$

$$X_2 = \frac{\sum^{NT} \text{EWAC} - 1.1 * \sum^{NT} \text{TWAC}}{NT * Y}$$

$$Y = \text{MAX} [(\text{VEA}_C)^{1/2}, 10^{-30}]$$

$$\text{VEA}_C = \frac{\text{SQAERC} - (\sum^{NT} \text{AERRC})^2 / NT}{NT - 1}$$

P(X) is given by Equation (164).



$$(183) \quad \text{CLPRD} = [P(X_1) - P(X_2)] * 100$$

where

$$X_1 = \frac{\sum^{NT} \text{EPRODC} - 0.9 * \sum^{NT} \text{TPRODC}}{NT * Y}$$

$$X_2 = \frac{\sum^{NT} \text{EPRODC} - 1.1 * \sum^{NT} \text{TPRODC}}{NT * Y}$$

$$Y = \text{MAX} [(VEP_C)^{1/2}, 10^{-30}]$$

$$VEP_C = \frac{\sum^{NT} \text{SQPERC} - (\sum^{NT} \text{PERRC})^2 / NT}{NT - 1}$$

P(X) is given by Equation (164).

$$(184) \quad \left[ \begin{array}{l} \text{CV AREA EST} \\ \text{(PCT TRUE)} \end{array} \right]_S = \frac{\sqrt{\frac{\sum^{NT} \text{AVARS}}{NT}}}{\frac{\sum^{NT} \text{TWAS}}{NT}} * 100$$

$$(185) \quad \left[ \begin{array}{l} \text{AREA} \\ \text{CV ERROR} \\ \text{(PCT TRUE)} \end{array} \right]_S = \frac{\sqrt{\frac{\sum^{NT} \text{SQAERS} - (\sum^{NT} \text{AERRS})^2 / NT}{NT - 1}}}{\frac{\sum^{NT} \text{TWAS}}{NT}} * 100$$

$$(186) \quad \left[ \begin{array}{l} \text{YIELD} \\ \text{ST DEV} \\ \text{PCT ERROR} \end{array} \right]_S = \sqrt{\frac{\sum^{NT} \text{SQYERS} - (\sum^{NT} \text{YERRS})^2 / NT}{NT - 1}}$$

$$(187) \quad \left[ \begin{array}{l} \text{CV PRD EST} \\ \text{(PCT TRUE)} \end{array} \right]_S = \frac{\sqrt{\frac{\sum^{NT} \text{PRVARS}}{NT}}}{\frac{\sum^{NT} \text{TPRODS}}{NT}} * 100$$

$$(188) \left[ \begin{array}{c} \text{PRD} \\ \text{CV ERROR} \\ \text{(PCT TRUE)} \end{array} \right]_S = \frac{\sqrt{\frac{NT}{NT-1} \frac{SQPERS - (\sum PRERRS)^2/NT}{NT}}}{\frac{\sum TPRODS}{NT}} \times 100$$

$$(189) \left[ \begin{array}{c} \text{CV AREA EST} \\ \text{(PCT TRUE)} \end{array} \right]_Z = \frac{\sqrt{\frac{NT}{NT} \frac{\sum AVARZ}{NT}}}{\frac{\sum TWAZ}{NT}} \times 100$$

$$(190) \left[ \begin{array}{c} \text{AREA} \\ \text{CV ERROR} \\ \text{(PCT TRUE)} \end{array} \right]_Z = \frac{\sqrt{\frac{NT}{NT-1} \frac{SQAERZ - (\sum AERRZ)^2/NT}{NT}}}{\frac{\sum TWAZ}{NT}} \times 100$$

$$(191) \left[ \begin{array}{c} \text{YIELD} \\ \text{ST DEV} \\ \text{PCT ERROR} \end{array} \right]_Z = \sqrt{\frac{NT}{NT-1} \frac{SQYERZ - (\sum YERRZ)^2/NT}{NT}}$$

$$(192) \left[ \begin{array}{c} \text{CV PRD EST} \\ \text{(PCT TRUE)} \end{array} \right]_Z = \frac{\sqrt{\frac{NT}{NT} \frac{\sum PRVARZ}{NT}}}{\frac{\sum TPRODZ}{NT}} \times 100$$

$$(193) \left[ \begin{array}{c} \text{PRD} \\ \text{CV ERROR} \\ \text{(PCT TRUE)} \end{array} \right]_Z = \frac{\sqrt{\frac{NT}{NT-1} \frac{SQPERZ - (\sum PRERRZ)^2/NT}{NT}}}{\frac{\sum TPRODZ}{NT}} \times 100$$

$$(194) \left[ \begin{array}{l} \text{CV AREA EST} \\ \text{(PCT TRUE)} \end{array} \right]_R = \frac{\sqrt{\frac{NT}{\sum AVARR}}}{\frac{NT}{\sum TWAR}} \times 100$$

$$(195) \left[ \begin{array}{l} \text{AREA} \\ \text{CV ERROR} \\ \text{(PCT TRUE)} \end{array} \right]_R = \frac{\sqrt{\frac{NT}{\text{SQAERR} - (\sum AERRR)^2/NT}}}{\frac{NT}{\sum TWAR}} \times 100$$

$$(196) \left[ \begin{array}{l} \text{YIELD} \\ \text{ST DEV} \\ \text{PCT ERROR} \end{array} \right]_R = \sqrt{\frac{NT}{\text{SQYERR} - (\sum YERRR)^2/NT}} \times 100$$

$$(197) \left[ \begin{array}{l} \text{CV PRD EST} \\ \text{(PCT TRUE)} \end{array} \right]_R = \frac{\sqrt{\frac{NT}{\sum PRVARR}}}{\frac{NT}{\sum TPRODR}} \times 100$$

$$(198) \left[ \begin{array}{l} \text{PRD} \\ \text{CV ERROR} \\ \text{(PCT TRUE)} \end{array} \right]_R = \frac{\sqrt{\frac{NT}{\text{SQPERR} - (\sum PRERRR)^2/NT}}}{\frac{NT}{\sum TPRODR}} \times 100$$

$$(199) \left[ \begin{array}{l} \text{CV AREA EST} \\ \text{(PCT TRUE)} \end{array} \right]_C = \frac{\sqrt{\frac{NT}{\sum AVARC}}}{\frac{NT}{\sum TWAC}} \times 100$$

$$(200) \left[ \begin{array}{l} \text{AREA} \\ \text{CV ERROR} \\ \text{(PCT TRUE)} \end{array} \right]_C = \frac{\sqrt{\frac{NT}{NT-1} \frac{SQAERC - (\sum AERRC)^2/NT}{NT}}}{\frac{\sum TWAC}{NT}} \times 100$$

$$(201) \left[ \begin{array}{l} \text{YIELD} \\ \text{ST DEV} \\ \text{PCT ERROR} \end{array} \right]_C = \sqrt{\frac{NT}{NT-1} \frac{SQYERC - (\sum YERRC)^2/NT}{NT}}$$

$$(202) \left[ \begin{array}{l} \text{CV PRD EST} \\ \text{(PCT TRUE)} \end{array} \right]_C = \frac{\sqrt{\frac{NT}{NT} \frac{\sum PRVARC}{NT}}}{\frac{\sum TPRODC}{NT}} \times 100$$

$$(203) \left[ \begin{array}{l} \text{PRD} \\ \text{CV ERROR} \\ \text{(PCT TRUE)} \end{array} \right]_C = \frac{\sqrt{\frac{NT}{NT-1} \frac{SQPERC - (\sum PRERRC)^2/NT}{NT}}}{\frac{\sum TPRODC}{NT}} \times 100$$

$$(204) \begin{array}{l} \text{CV} \\ \text{ANAL WA} \\ \text{(PCT TRUE)} \end{array} = \frac{\sqrt{\frac{NT}{NT} \frac{\sum ANAVC}{NT}}}{\frac{\sum TWAC}{NT}} \times 100$$

$$(205) \begin{array}{l} \text{CV} \\ \text{ANAL PRD} \\ \text{(PCT TRUE)} \end{array} = \frac{\sqrt{\frac{NT}{NT} \frac{\sum ANPRVC}{NT}}}{\frac{\sum TPRODC}{NT}} \times 100$$

PART I

PROBLEM DESCRIPTION  
FOR THE YES SUBPROGRAM

## 1.0 SCOPE

1.1 Program Capabilities. The YES model is designed to simulate the yield estimation process of the LACIE System. The model generates the yield estimates at the strata level of from one to six given estimation points in a simulation season. The estimates are computed from the true yield given in the input data, taking into account the effects of various estimation errors. The output from YES is used by CAS in calculating the production estimates. An option allows the estimated yields to be the same as the true yields, bypassing the error simulation. A printed report of the estimated yields is optional.

1.2 Program Development and Organization. This subprogram will be developed in FORTRAN as an overlay of the LEM program. See the LEM problem description, Section 1.2.

1.3 Operational Assumptions. See the LEM problem description, Section 1.3.

## 2.0 INPUT

There is one input file. The control card input for YES is included on the LEM control card.

2.1 Cards. See the LEM control card Section 2.1. Inputs relevant to YES include:

RSEED5	the initial random number seed for use in simulating the yield error.
IYES	= 0, 1 estim. yield includes error simulation = 3 estim. yield = true yield
IPRYES	= 0 printed report for 1st and last iterations = 1 printed report for all iterations = 2 printed report for last iteration only = 3 no printed report

2.2 Files. The only input file to YES is the YES ERROR MODEL FILE (YESERR), generated by the SEE program. See Section 2.4 of the Users Manual for the format and contents.

### 3.0 PROCESSING

See Figure 1. for a flow diagram of YES. The heart of YES is the calculation of the equation:

$$YSCI = YSTR + BIAS + RN*SD$$

for each estimation point (up to 6) for each strata, where:

YSCI = estimated yield	}	input quantities from YES input file
YSTR = true yield		
BIAS = bias factor		
SD = standard deviation		
RN = random number from a normal distribution		



## 4.0 OUTPUT

4.1 Print Data. The printed report is optional, determined by the LEM control card input, IPRYES. See Figure 2 for an example report.

4.2 Files. The only output file from YES is the YES file, used by CAS. See Section 2.4 of the Users Manual for the format and contents.

YES YIELD ESTIMATE DATA REPORT - ITERATION NO. \_\_\_\_\_

COUNTRY \_\_\_\_\_ REGION \_\_\_\_\_ ZONE \_\_\_\_\_ STRATUM \_\_\_\_\_

PREDICTION DATE MO/DY/YR	TRUE YIELD QUIN/HECTAR	ESTIM. YIELD QUIN./HECTAR	PER CENT ERROR	STANDARD. DEV. QUIN./HECTAR
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____

3 STRATA  
PER PAGE

COUNTRY \_\_\_\_\_ REGION \_\_\_\_\_ ZONE \_\_\_\_\_ STRATUM \_\_\_\_\_

PREDICTION DATE TRUE YIELD ESTIM. YIELD PERCENT STANDARD DEV.

Figure 2. YES Report Format

## 5.0 ERROR PROCESSING

There are two possible errors besides system errors in YES, which generate the following messages:

YES INPUT FILE (YESERR) - BEGINNING REGION AND ZONE  
NOT FOUND

YES INPUT FILE (YESERR) - ENDING REGION AND ZONE  
NOT FOUND

If the beginning region and zone are not found, this is a fatal error, and causes return of control immediately to LEM. If the ending region and zone are not found, this generates a warning, but LEM will continue, having processed all records from the beginning region and zone to the end of file. The beginning and ending regions and zones are specified on the LEM control cards.

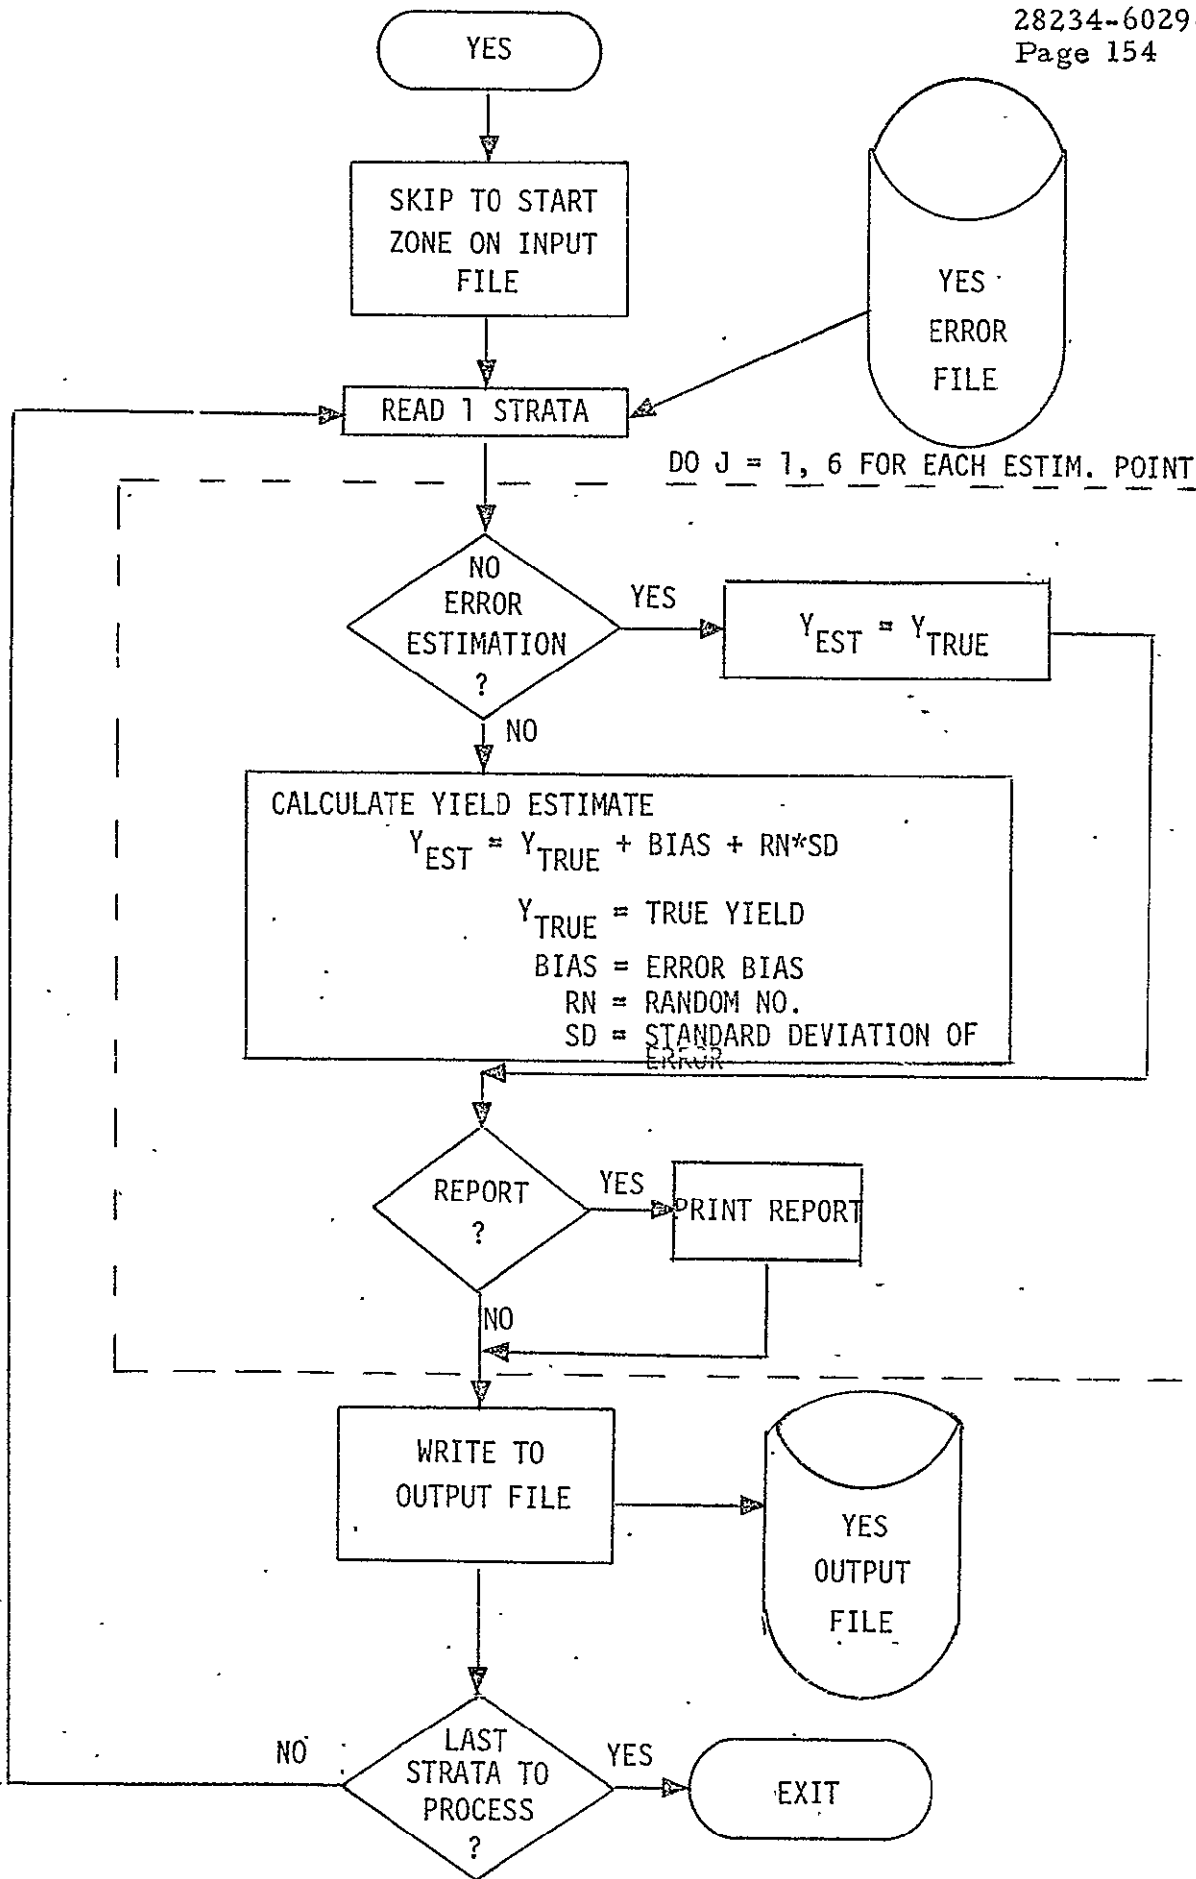


Figure 1. YES Flow Diagram

PART II

LEM COMMON BLOCKS

## COMMON BLOCKS FOR THE LEM PROGRAM

<u>COMMON BLOCK</u>	<u>DESCRIPTION</u>
ARGLST	Argument list for error processing
CAMSCM	CAMS control card input data
CASCUM	CAS control card input data and constants
CASCUM	Data block for CAS cumulative file
CASFLG	Flags and counters for CAS simulator
CNTRL	Control parameters for LEM program
CONST	Constant quantities for LEM program
DSET1	CAS data sets 1, 2, and 3
DSET4	CAS data sets 4, 5, and 6 (at strata level)
DSET7	CAS data set 7 (at zone level)
DSET8	CAS data set 8 (at region level)
DSET9	CAS data set 9 (at country level)
DSET10	CAS data set 10 (strata data -- second pass)
DSET11	CAS data set 11 (zone data -- second pass)
DSET12	CAS data set 12 (region data -- second pass)
DSET13	CAS data set 13 (country data -- second pass)
FILES	File definitions and record lengths
IXCAS	Index record for CAS cumulative file (CASF)
IXCDSF	Index record for CAS intermediate data set file (CASDSF)
IXDISF	Index record for CAS distribution file
LECM	LEM control card input data
PAGECM	Page eject control parameters for LEM
SEGDTA	Segment data from CAMS output file (CAMSF)
SSHDTA	Substrata Historical data from SUBHST file
STATS	Statistical information for LEM
STGDTA	Data for Segment Truth Generator
SUMDTA	Summary data for reports
YESDTA	Yield data from YESOUT file
FILES1	Supplemental file definitions
CLSTAB	Contains data necessary to compute class numbers
IXSUBH	Index record for CAS intermediate SUBHST file



COMMON STORAGE ALLOCATION

Name CAMSCM Size 138 Page 1 of 1  
 Function CAMS control input (see also Input, CAMS Problem Description, Section 2.1)

Name	Dimension	Format	Description	Symbol	Units
IMODEL		I1	=1 mixed crops model =2 simple model		
IMULTI		I1	=0 include multi-temporal error ≠0 bypass multi-temporal error		
ISIGEX		I1	=0 additive model ≠0 multiplicative model	} of signature extension	
ISKIP		I1	=0 skip ≠0 classify as training		} what to do if no correlation
ITMAX		I2	Max. no. days between training/ordinary segment correlation		
IREP		I1	=0 print error breakdown report ≠0 no print of error breakdown report		
IWIND		I1	1-4 which window to use 0 defaults to 4		
Multi-Temporal Matrix					
IGROUP	(3, 2, 15)	I	Dimension 3 = which M value to use for each of 15 states		
MS	(3, 2, 3)	R	Values for M1, M2, M3		
Crop Calendar Coefficients					
G	(3, 2, 2)	R	G1 and G2 values for quadratic function		
H	(3, 2, 2)	R	H1 and H2 values for quadratic function		
			Dimension 1 for IGROUP, MS, G, H = TYPE (wheat, mixed, other)		
			Dimension 2 for IGROUP, MS, G, H = SEASON (winter, spring)		
			Note: If model 2, only wheat dimension of IGROUP, MS, G, H, non-empty		



COMMON STORAGE ALLOCATION

Name CASCM

Size 100

Page 1 of 3

Function CAS Control card Input Data and Constants

Name	Dimension	Format	Description	Symbol	Units
AREACF	1	F	Area conversion factor for printout 2.471044E-4 (hectares to 10,000 acres) or 0.001 (hectares to 1000 hectares)	-	-
YCF	1	F	Yield conversion factor for printout 1.4869664 (quintals/hectare to bushels/acre) or 1.0	-	-
PRDCF	1	F	Production conversion factor for printout 3.6743544E-5 (quintals to 100,000 bushels) or 1 E-4 (quintals to 1000 metric tons)	-	-
APRUTS	4,2	4A6	Area units labels for printed reports APRUTS (1,1) - "TEN THOUSAND ACRES" APRUTS (1,2) - "THOUSAND HECTARES"	-	-
PPRUTS	5,2	5A6	Production units labels for printed reports PPRUTS (1,1) - "HUNDRED THOUSAND BUSHELs" PPRUTS (1,2) - "THOUSAND METRIC TONS"	-	-
YPRUTS	3,2	3A6	Yield units labels for printed reports YPRUTS (1,1) - "BUSHELs/ACRE" YPRUTS (1,2) - "QUINTALS/HECTARE"	-	-

COMMON STORAGE ALLOCATION

Name CASCM

Size \_\_\_\_\_

Page 2 of 3

Function CAS Input Data and Constants

Name	Dimension	Format	Description	Symbol	Units
AREAPS	1	F	Area per segment (builtin value = 10289.712)	-	hectares
S2MAX	1	F	Maximum value of $S^2$ (Built in value = $10289.712^2/4$ )	-	hectares <sup>2</sup>
NHISTY	1	I	Number of historical years for group III ratio calculations	M	years
HH	1	I	Minimum number of segments required for applying $S^2$ regression equation	H	
TOPT	1	I	T - option flag: = 0 to set T = 0, = 1 to calculate T where T is the second term of the variance equation for $\hat{v}_{2S}$	-	-
AUNITS	1	I	Units option: = 1 for metric units - Area in thousands hectares, yield in quintals/ hectare; production in thousand metric tons; = 0 for American units - area in ten thousand acres yield in bushels per acres production in hundred thousand bushels	-	-
DISTFF	1	I	CAS distribution file flag: = 0 to generate CAS distribution file, = 1 otherwise		

## COMMON STORAGE ALLOCATION

Name CASCM

Size \_\_\_\_\_

Page 3 of 3Function CAS Input Data and Constants

Name	Dimension	Format	Description	Symbol	Units
BWIND	4	I	Prediction biowindow flags: IWIND(n) = 1 to process biowindow n,  = 0 otherwise	-	-
WPRIOR	4	I	Biowindow priorities:  List of biowindows in decreasing order of priority	-	-
APREP	1	I	Area and Production Print flag:  = 1 to print Area and Production = 0 otherwise	-	-
IPRD	3,14	I	Prediction dates:  IPRD(1,n) = year - 1900  IPRD(2,n) = month (1-12)  IPRD(3,n) = day  The prediction dates must be in ascending order.  The first zero date terminates the list	-	-
NPDATE	1	I	Number of prediction dates	-	-
PRDATE	14	I	List of prediction dates  (in Zulu date format)	-	-

## COMMON STORAGE ALLOCATION

Name CASCUMSize 536Page 1 of 5Function Data Block for CAS Cumulative File

Name	Dimension	Format	Description	Symbol	Units
CASCUM	32	F	Block of data for one strata, zone, region or country for a single prediction point (see attached sheets for details of format of each block)	-	-
BUFFR	504	F	Buffer for one data record from the CAS Cumulative File 504 = 18 * 28, 18 prediction points 28 words/pred. pt.		
ICASC	32	I	Integer name equivalenced to CASCUM		
DSET14	22	F	Data set 14 (strata level)		
DSET15	22	F	Data set 15 (zone level)		
DSET16	22	F	Data set 16 (region level)		
DSET17	28	F	Data set 17 (country level)		
			NOTE: DSET14, DSET15, DSET16, DSET17 all are equivalenced to CASCUM(5).		

COMMON STORAGE ALLOCATION

Name CASCUM

Size \_\_\_\_\_

Page 2 of 5

Function Data Block for CAS Cumulative File

Name	Dimension	Format	Description	Symbol	Units
SQAERS	1	F	$\Sigma$ (area error) <sup>2</sup> for strata		
SQAERZ	1	F	$\Sigma$ (area error) <sup>2</sup> for zone		
SQAERR	1	F	$\Sigma$ (area error) <sup>2</sup> for region		
SQAERC	1	F	$\Sigma$ (area error) <sup>2</sup> for country		
			SQAERS, SQAERZ, SQAERR, and SQAERC are all equivalenced to CASCUM (24).		
SQPERS	1	F	$\Sigma$ (production error) <sup>2</sup> for strata		
SQPERZ	1	F	$\Sigma$ (production error) <sup>2</sup> for zone		
SQPERR	1	F	$\Sigma$ (production error) <sup>2</sup> for region		
SQPERC	1	F	$\Sigma$ (production error) <sup>2</sup> for country		
			SQPERS, SQPERZ, SQPERR, and SQPERC are all equivalenced to CASCUM(25).		
SQYERS	1	F	$\Sigma$ (yield error) <sup>2</sup> for strata		
SQYERZ	1	F	$\Sigma$ (yield error) <sup>2</sup> for zone		
SQYERR	1	F	$\Sigma$ (yield error) <sup>2</sup> for region		
SQYERC	1	F	$\Sigma$ (yield error) <sup>2</sup> for country		
			SQYERS, SQYERZ, SQYERR, and SQYERC are all equivalenced to CASCUM(26).		

COMMON STORAGE ALLOCATION

Name CASCUM

Size \_\_\_\_\_

Page 3 of 5

Function Data Block for CAS Cumulative File

Name	Dimension	Format	Description	Symbol	Units
CASDSB	303	F	Data Block for the CAS Distribution file  (Data Set 19)		
ICASD	303	I	Integer name for CASDSB		
HWA2K	60	F	HWA2K(K) specifies the historical WA for the  $K^{th}$ group II substrata in the current stratum	$WA_{2K}$	hectares
WAKNEY	60	F	WAKNEY(K) specifies the non-epoch year WA  for the $K^{th}$ group II substrata in the current  strata	$WA'_{2K}$	hectares
PIK	60	F	PIK(K) specifies $\pi_K$ for the $K^{th}$ group II  substrata in the current strata	$\pi_K$	-
			NOTE: CASDSB, ICASD, HWA2K are all  equivalenced to BUFFER;  WAKNEY is equivalenced to CASDSB(61);  PIK is equivalenced to CASDSB(121).		

FORMATS OF CAS CUMULATIVE FILE RECORDS

<u>CAS CUM</u>	<u>Data Set 14</u>	<u>Data Set 15</u>	<u>Data Set 16</u>	<u>Data Set 17</u>
1	region	region	region	0
2	zone	zone	0	0
3	strata	0	0	0
4	0	nstraz	0	0
5	HWA	(Historical WA)		
6	TWA	(True WA)		
7	EWA	(Estimated WA)		
8	AERR	(area error)		
9	AVAR	(area variance)		
10	TPROD	(true production)		
11	EPROD	(estimated production)		
12	PRERR	(production error)		
13	PRVAR	(production variance)		
14	TY	(true yield)		
15	EY	(estimated yield)		
16	YERR	(yield error)		
17	M1	(no. of group I segments)		
18	M2	(no. of group II segments)		
19	CT1	(no. of group I substrata)		
20	CT2	(no. of group II substrata)		
21	CT3	(no. of group III substrata)		
22	ANAV	(analytic area variance)		
23	ANPRV	(analytic production variance)		

<u>CASCUM</u>	<u>Data Set 14</u>	<u>Data Set 15</u>	<u>Data Set 16</u>	<u>Data Set 17</u>
24	SQAERS	SQAERZ	SQAERR	SQAERC
25	SQPERS	SQPERZ	SQPERR	SQPERC
26	SQYERS	SQYERZ	SQYERR	SQYERC
27	-	-	-	CLEWA
28	-	-	-	CLEPRD
29	-	-	-	CLATEC
30	-	-	-	CLPTEC
31	-	-	-	CLATWC
32	-	-	-	CLPTWC

NOTE: The quantities in CASCUM(5) - CASCUM(23) and CASCUM(27) - CASCUM(32) are the accumulated values of the indicated quantities over all iterations.



## COMMON STORAGE ALLOCATION

Name CASFLGSize 40Page 1 of 3Function: Miscellaneous Data, Flags and Counters for CAS

Name	Dimension	Format	Description	Symbol	Units
H	1	F	Minimum number of segments required for applying $S^2$ regression equation.	H	-
PPFLG	1	I	Prediction Point Flag = 0 for biowindows = 1 for prediction dates	-	-
NBW	1	I	Number of biowindows ( $\leq 4$ )	-	-
IBW	1	I	Biowindow index (1-4)	-	-
WINDOW	1	I	Window index (1-4)	-	-
IPD	1	I	Prediction Date index (1-14)	-	-
IPP	1	I	Prediction Point index (including both biowindows and prediction dates)	-	-
PPDATE	1	I	Zulu date associated with prediction point	-	-
NREGS	1	I	Number of regions in country	-	-
NZTOT	1	I	Number of zones in country	-	-
NSTRAT	1	I	Number of strata in country	-	-
NYESSK	1	I	Number of records to initially skip on YESOUT file	-	-
NSSHK	1	I	Number of records to initially skip on SUBHST file	-	-

COMMON STORAGE ALLOCATION

Name CASFLG

Size 40

Page 2 of 3

Function Miscellaneous Data, Flags and Counters for CAS

Name	Dimension	Format	Description	Symbol	Units
NCAMSK	1	I	Number of records to initially skip on CAMS file	-	-
NRYES	1	I	Data record count on YESOUT	-	-
NRSSH	1	I	Data record count on SUBHST	-	-
NRCAMS	1	I	Data record count on CAMSF	-	-
ENDC	1	I	End of country flag: ≠ 0 if end region, end zone	-	-
ENDREG	1	I	End of region flag: ≠ 0 if end of region reached	-	-
ENDZON	1	I	End of zone flag: ≠ 0 if end of zone reached	-	-
IRSTR	1	I	Record number of strata record on CASCUM and CASDSF	-	-
IRZONE	1	I	Record number of zone record on CASCUM and CASDSF	-	-
IRREG	1	I	Record number of region record on CASCUM and CASDSF	-	-
LDS1	1	I	Length of Data Sets 1, 2, 3	-	-
LDS4	1	I	Length of Data Sets 4, 5, 6	-	-
LDS7	1	I	Length of Data Set 7	-	-
LDS8	1	I	Length of Data Set 8	-	-
LDS9	1	I	Length of Data Set 9	-	-
LDS10	1	I	Length of Data Set 10	-	-
LDS11	1	I	Length of Data Set 11	-	-





## COMMON STORAGE ALLOCATION

Name CONSTSize 5Page 1 of 1Function CONSTANTS

Name	Dimension	Format	Description	Symbol	Units
NTRMX	1	I	Maximum number of Monte Carlo trials in a single run (=100)	-	-
MAXR	1	I	Maximum region number (=999)	-	-
MAXZ	1	I	Maximum zone number (=999)	-	-
IMXSEG	1	I	Maximum number of segments in any substrata (read from header record of Substrata Historical file)	-	-
ENDFIL	1	F	End of file indicator (=4HZZZZ)	-	-
ITSFG	1	I			
MXCLSS	1	I	Maximum number of substrata classes per zone (10)		

## COMMON STORAGE ALLOCATION

Name DSET1Size 14Page 1 of 2Function Data Sets 1, 2, 3 (Substrata Data)

Name	Dimension	Format	Description	Symbol	Units
ISUBST	1	I	Substrata ID	-	-
TWAK	1	F	True Wheat Area (WA)	$WA_K$	hectares
HWAK	1	F	Historical Wheat Area	$\tilde{WA}_K$	hectares
EWAK	1	F	Estimated Wheat Area	$\hat{WA}_K$	hectares
M1K	1	F	No. of group I segments in substratum.	$M_{1K}$	-
CT1K	1	F	Group I flag: = 1 if substrata is in group I, = 0 otherwise	$CT_{1K}$	-
ANALVK	1	F	Analytic area variance	-	hectares <sup>2</sup>
EPWK	1	F	Estimated proportion of wheat	$\hat{PW}_K$	-
EPW2K	1	F		$\hat{PW}_K^2$	-
SMPKPI	1	F	$\sum_i (\tilde{PW}_K) (\hat{PW}_i)$		
SUMPK2	1	F	$\sum_i (\tilde{PW}_K)^2 = M_{1K} \tilde{PW}_K^2$	-	-
SUMPK	1	F	$\sum_i \tilde{PW}_K = M_{1K} \tilde{PW}_K^2$	-	-
KSUB	1	F	Index used to count no. of group II substrata in strata.	-	-
NCLASS	1	I	Substrata class number for current prediction point		



COMMON STORAGE ALLOCATION

Name DSET4

Size 24

Page 1 of 3

Function Data Sets 4, 5, 6 (at Strata level)

Name	Dimension	Format	Description	Symbol	Units
STRATA	1	I	Strata ID	S	-
TWAS1	1	F	True WA (wheat area)	WA <sub>1S</sub>	ha
HWAS1	1	F	Historical WA (Group I)	$\tilde{WA}_{1S}$	ha
EWAS1	1	F	Estimated WA (Group I)	$\hat{WA}_{1S}$	ha
XMLJS	1	F	No. of acquired group I segments in strata	M <sub>1i</sub>	-
XCT1S	1	F	No. of group I substrata with acquired segments	CT <sub>1S</sub>	-
ANVS1	1	F	Group I Analytic variance	-	ha <sup>2</sup>
TWAS2	1	F	True WA for group II segments	WA <sub>2S</sub>	ha
HWAS2	1	F	Historical WA (Group II)	$\tilde{WA}_{2S}$	ha
EWAS2	1	F	Estimated WA (Group II)	$\hat{WA}_{2S}$	ha
XM2JS	1	F	No. of acquired group II segments in strata	M <sub>2j</sub>	-
XCT2S	1	F	No. of group II substrata with acquired segments	CT <sub>2S</sub>	-







COMMON STORAGE ALLOCATION

Name DSET7

Size 81

Page 1 of 2

Function Data Set 7 (at zone level)

Name	Dimension	Format	Description	Symbol	Units
ZONE	1	I	Zone ID	Z	-
HWAZ2	1	F	Historical Wheat area (for group 1, 2 segments) Computed only if M1K2KZ ≥ 2 Otherwise = 0	$\widetilde{WA}$	ha
EZ	1	F		$E_z$	
M1K2KZ	1	F	Number of group 1, 2 segments in zone	$M_{1z}$	
ANALVZ	1	F	Group 1, 2 Analytic area variance	-	ha <sup>2</sup>
NSTRAZ	1	I	Number of strata in zone	-	-
HWAZ1	1	F	Historical wheat area (group 1,2)	$\widetilde{WA}_{1,2}$	ha
EWAZ1	1	F	Estimated wheat area (group 1, 2)	$\widehat{WA}_{1,2}$	ha
HWAZ3	1	F	Total historical wheat area for all strata without valid segments	-	ha
ESTVZ	1	F	Group 1, 2 variance estimate		ha <sup>2</sup>
HWAZ12	1	F	Effective group 1, 2 WA for compute area variance for strata without segments	-	ha
M1K2CL	10	F	Number of segments in each substrata class $= \sum_{CLASS} (M_{1K} + M_{2K})$	-	-
EPWCL	10	F	$\sum_{i,K}^Z (\widehat{PW}_{1K} + \widehat{PW}_{2K})$ (for each substrata class)	-	-
EPW2CL	10	F	$\sum_{i,K}^Z (\widehat{PW}_{1K}^2 + \widehat{PW}_{2K}^2)$ "	-	-
PKPICL	10	F	$\sum_{i,K} PW_K (\widehat{PW}_{1K} + \widehat{PW}_{2K})$ "	-	-

COMMON STORAGE ALLOCATION

Name DSET7

Size 81

Page 2 of 2

Function Data Set 7 (at zone level)

Name	Dimension	Format	Description	Symbol	Units
PK2CL	10	F	$\sum_{i,K} \widetilde{PW}_K^2$ (for each substrata class)	-	-
PKCL	10	F	$\sum_{i,K} \widetilde{PW}_K$ "	-	-
SSQ	10	F	S <sup>2</sup> factor in variance equations	S <sup>2</sup>	-
			(for each substrata class)		
DSET7	81	F	Data Set 7	-	-
			Note: DSET7 is equivalenced to ZONE		

D-3

COMMON STORAGE ALLOCATION

Name DSET8 Size 10

Page 1 of 2

Function Data Set 8 (at Region level)

Name	Dimension	Format	Description	Symbol	Units
REGIØN	1	I	Region ID	R	
HWAR2	1	F	Group 1, 2 Historical WA	$\tilde{WA}_{1,2}$	ha
ER	1	F		$E_R$	
M1K2KR	1	F	Number of group 1, 2 segments in region	$M_{1R}$	-
ANALVR	1	F	Analytic area variance	-	ha <sup>2</sup>
NZØNES	1	I	Number of zones in region	-	--
HWAR1	1	F	Historical wheat area (group 1, 2)	$\tilde{WA}_{1,2}$	ha
EWAR1	1	F	Estimated wheat area (group 1, 2)	$\hat{WA}_{1,2}$	ha
			Note: HWAR1 and EWAR1 are always computed if there is at least one group I or group II segment in the region.. HWAR2 and EWAR2 are computed only if some zone in the region contains at least two group 1, 2 segments.		
ESTVR	1	F	Group 1, 2 variance estimate		ha <sup>2</sup>
MIM2ZR	1	I	Group 1, 2 substrata flag: = 1 if M1K2KZ > for any zone in region, = 0 otherwise		
FILL8	1	F	Filler to make a 25 word block for writing onto CASDSF		



COMMON STORAGE ALLOCATION

Name DSET9

Size 9

Page 1 of 1

Function Data Set 9 (at Country level)

Name	Dimension	Format	Description	Symbol	Units
COUNTR	1	A6	Country ID	-	-
HWAC2	1	F	Group 1, 2 Historical WA	$\tilde{WA}_{1,2}$	ha
EC	1	F		$E_C$	-
M1K2KC	1	F	Number of group 1, 2 segments in country	$M_{1C}$	
ANALVC	1	F	Analytic area variance	-	ha <sup>2</sup>
M1M2ZC	1	F	Group 1, 2 substrata flag: = 1 if M1K2KZ>1 for any zone in country = 0 otherwise	-	-
HWAC1	1	F	Historical wheat area (Group 1, 2)	$\tilde{WA}_{1,2}$	ha
EWAC1	1	F	Estimated wheat area (Group 1, 2)	$\hat{WA}_{1,2}$	ha
			Note: HWAC2 = $\sum$ HWAZ2 HWAC1 = $\sum$ HWAZ1 over all zones		
			EWAC2 = $\sum$ EWAZ2 EWAC1 = $\sum$ EWAZ1		
ESTVC	1	F	Group 1, 2 variance estimate	-	ha <sup>2</sup>
DSET9	9	F	Data Set 9		
			Note: DSET9 is equivalenced to COUNTR		

COMMON STORAGE ALLOCATION

Name DSET10

Size 20

Page 1 of 2

Function Data Set 10 (Strata Data - Second Pass)

Name	Dimension	Format	Description	Symbol	Units
HWAS	1	F	Historical WA	$\widetilde{WA}_S$	ha
TWAS	1	F	True WA	$WA_S$	ha
EWAS	1	F	Estimated WA	$\widehat{WA}_S$	ha
AERRS	1	F	Area error	$EA_S$	ha
AVARS	1	F	Area variance	$\widehat{VAR}_S$	ha <sup>2</sup>
TPRODS	1	F	True production	$PRD_S$	Quintals
EPRODS	1	F	Estimated production	$\widehat{PRD}_S$	Quintals
PRERRS	1	F	Production error	$EP_S$	Quintals
PRVARS	1	F	Production variance	$\widehat{VPR}_S$	Quintals
YS	1	F	True yield	$Y_S$	Quintals ha
ESTYS	1	F	Estimated yield	$\widehat{Y}_S$	Quintals ha
YERRS	1	F	Error in yield	$EYS$	Quintals ha
M1JS	1	F	Number of group I segments in strata	$M_{1j}$	-





COMMON STORAGE ALLOCATION

Name DSET11

Size 19

Page 1 of 2

Function Data Set 11 (Zone Data - Final Pass)

Name	Dimension	Format	Description	Symbol	Units
HWAZ	1	F	Historical WA	$\tilde{W}_Z$	ha
TWAZ	1	F	True WA	$W_Z$	ha
EWAZ	1	F	Estimated WA	$\hat{W}_Z$	ha
AERRZ	1	F	Area error	$E_{A_Z}$	ha
AVARZ	1	F	Area variance		ha <sup>2</sup>
TPRODZ	1	F	True production	$PRD_Z$	Quintals
EPRODZ	1	F	Estimated production	$\hat{PRD}_Z$	Quintals
PRERRZ	1	F	Production error	$EP_Z$	Quintals
PRVARZ	1	F	Production variance		Quintals
TYZ	1	F	True yield	$Y_Z$	$\frac{\text{Quintals}}{\text{ha}}$
EYZ	1	F	Estimated yield	$\hat{Y}_Z$	$\frac{\text{Quintals}}{\text{ha}}$
YERRZ	1	F	Yield error	$EY_Z$	$\frac{\text{Quintals}}{\text{ha}}$
M1Z	1	F	Number of group I segments in zone	$M_{1Z}$	-
M2Z	1	F	Number of group II segments in zone	$M_{2Z}$	-
CT1Z	1	F	Number of group I substrata in zone	$CT_{1Z}$	-
CT2Z	1	F	Number of group II substrata in zone	$CT_{2Z}$	-
CT3Z	1	F	Number of group III substrata in zone	$CT_{3Z}$	-
ANAVZ	1	F	Analytic area variance	-	ha <sup>2</sup>



COMMON STORAGE ALLOCATION

Name DSET12

Size 19

Page 1 of 2

Function Data Set 12 (region data-final pass)

Name	Dimension	Format	Description	Symbol	Units
HWAR	1	F	Historical WA	$\tilde{W}_R$	ha
TWAR	1	F	True WA	$W_R$	ha
EWAR	1	F	Estimated WA	$\hat{W}_R$	ha
AERRR	1	F	Area error	$E_A R$	ha
AVARR	1	F	Area variance		ha <sup>2</sup>
TPRODR	1	F	True production	$PRD_R$	Quintals
EPRODR	1	F	Estimated production	$\hat{PRD}_R$	Quintals
PRERRR	1	F	Production error	$EP_R$	Quintals
PRVARR	1	F	Production variance		Quintals <sup>2</sup>
TYR	1	F	True yield	$Y_R$	<u>Quintals</u> ha
EYR	1	F	Estimated yield	$\hat{Y}_R$	<u>Quintals</u> ha
YERRR	1	F	Yield error	$EY_R$	<u>Quintals</u> ha
M1R	1	F	Number of group I segments in region	$M_{1R}$	-
M2R	1	F	Number of group II segments in region	$M_{2R}$	-
CT1R	1	F	Number of group I substrata in region	$CT_{1R}$	-
CT2R	1	F	Number of group II substrata in region	$CT_{2R}$	-
CT3R	1	F	Number of group III substrata in region	$CT_{3R}$	-
ANAVR	1	F	Analytic area variance	-	ha <sup>2</sup>



COMMON STORAGE ALLOCATION

Name DSET13

Size 25

Page 1 of 2

Function Data Set 13 (country level-final pass)

Name	Dimension	Format	Description	Symbol	Units
HWAC	1	F	Historical WA	$\widetilde{WA}_C$	ha
TWAC	1	F	True WA	$WA_C$	ha
EWAC	1	F	Estimated WA	$\widehat{WA}_C$	ha
AERRC	1	F	Area error	$EA_C$	ha
AVARC	1	F	Area variance		ha <sup>2</sup>
TPROD	1	F	True production	$PRD_C$	Quintals
EPRODC	1	F	Estimated production	$\widehat{PRD}_C$	Quintals
PRERRC	1	F	Production error	$EP_C$	Quintals
PRVARC	1	F	Production variance		Quintals <sup>2</sup>
TYC	1	F	True yield	$Y_C$	$\frac{\text{Quintals}}{\text{ha}}$
EYC	1	F	Estimated yield	$\widehat{Y}_C$	$\frac{\text{Quintals}}{\text{ha}}$
YERRC	1	F	Yield error	$EY_C$	$\frac{\text{Quintals}}{\text{ha}}$
M1C	1	F	No. of group I segments in country	$M_{1C}$	-
M2C	1	F	No. of group II segments in country	$M_{2C}$	-
CT1C	1	F	No. of group I substrata in country	$CT_{1C}$	-
CT2C	1	F	No. of group II substrata in country	$CT_{2C}$	-
CT3C	1	F	No. of group III substrata in country	$CT_{3C}$	-
ANAVC	1	F	Analytic area variance		ha <sup>2</sup>



COMMON STORAGE ALLOCATION

Name CLSTAB

Size 2724

Page        of       

Function Contains tables necessary to determine class sets within a zone.

Name	Dimension	Format	Description	Symbol	Units
ISTRAT	300	I	Contains strata ID for all strata in a zone		
ISBSTR	300	I	Contains substrata ID for all substrata in a zone		
NSCNT	300	I	No. of acquired segments for each substrata		
IGROUP	300	I	Group no. assignment for each substrata		
IDAT1	300	I	Variable usage. Set to AREAK in CLASSN for use by SEGTAB. SEGTAB resets it to first subscript PTR into XORD for each substrata segment set $\equiv$ DAT1 (used by ASSCLS)		
IDAT2	300	I	Variable usage. Set to HISTPW by CLASSN for use by SEGTAB. ASSCLS puts the assigned class number for each substrata $\equiv$ DAT2		
XORD	300	Flt pt	Ratio for each substrata used to determine class	$X_i$	
IXPT	300	I	Sorted pointers into XORD (in ascending order)		
IBPT	10	I	For each class the beginning subscript in XORD (found indirect via IXPT lookup)		
IEPT	10	I	For each class the ending subscript in XORD (found indirect via IXPT)		
MAXCLS	1	I	Maximum no. of classes allowed $\equiv$ (10-1)		
ICLCNT	1	I	Actual count on number of classes		
IRANK	300	I	Table of gap rankings of sorted $X_i$ for each substrata in a zone	$\equiv$ rank	
ISUB1	1	I	Count of no. of substrata in zone		
NACQ	1	I	No. of acquired segments in a zone		







COMMON STORAGE ALLOCATION

Name FILES

Size 30

Page 1 of 2

Function File Definitions and Record Lengths

Name	Dimension	Format	Description	Symbol	Units
SEGID	1	I	Logical file number for segment ID file		
LSEGID	1	I	Record length for segment ID file		
CROPW	1	I	Logical file number for Crop Window file		
LCROPW	1	I	Record length for Crop Window file		
SUBHST	1	I	Logical file number for Substrata Historical file		
LSUBH	1	I	Record length for Substrata Historical file		
ACQUIS	1	I	Logical file number for Data Acquisition file		
LACQ	1	I	Record length for Data Acquisition file		
CAMSF	1	I	Logical file number for CAMS Output file		
LCAMSF	1	I	Record length for CAMS Output file		
CAMERR	1	I	Logical file number for CAMS Error Model file		
LCAMER	1	I	Record length for CAMS Error Model file		
CASF	1	I	Logical file number for CAS Cumulative Output file		
LCASF	1	I	Record length for CAS Cumulative Output file		
YESOUT	1	I	Logical file number for YES Output file		
LYESØ	1	I	Record length for YES Output file		
SIGEXT	1	I	Logical file number for Signature Extension file		
LSIGEX	1	I	Record length for Signature Extension file		







COMMON STORAGE ALLOCATION

Name IXCDSF

Size 389

Page 1 of 1

Function Index Record for CAS Intermediate file

Name	Dimension	Format	Description	Symbol	Units
IXCDSF	388	I	Index record for CAS Intermediate data set	-	-
			file (CASDSF)		
			(Need on CDC 6000 computing system)		
LIXCDS	1	I	Length of index record for CASDSF	-	--

COMMON STORAGE ALLOCATION

Name LEMCM

Size 57

Page 1 of 5

Function LEM Control Card Input Data

Name	Dimension	Format	Description	Symbol	Units
TITLE	10	A6	Problem header printed at the top of each page	-	-
ICASE	1	I	Case number	-	-
CUNTRY	1	A6	Country	-	-
NTRIAL	1	I	Number of Monte Carlo iterations at end of run	-	-
RSTART	1	I	=n ≠ 0 to restart after n Monte Carlo iterations	-	-
IPRINT	1	I	Print flag for segment truth	-	-
			= 0 to print first and last iterations, = 1 to print every iteration, = 2 to print last iteration, = 3 to skip printing.		
STARTR	1	I	Starting region number	-	-
STARTZ	1	I	Starting zone number	-	-
ENDR	1	I	Ending region number	-	-
ENDZ	1	I	Ending zone number	-	-
ISTG	1	I	Segment Truth Generator Error flag:	-	-
			= 0 to vary error, = 1 to hold error constant using first iteration results throughout run, = 2 to hold error constant using a previously generated segment truth file, = 3 to eliminate error (error is zero)		



COMMON STORAGE ALLOCATION

Name LEMCM

Size 57

Page 2 of 5

Function LEM Control Card Input Data

Name	Dimension	Format	Description	Symbol	Units
ICAMS	1	I	(Use is similar to use of CAMS Error Flag: ISTG described above)	-	-
IYES	1	I	(Use is similar to use of YES Error flag: ISTG described above)	-	-
IACQ	1	I	Segment Acquisition flag = 0 to include segment acquisition conditions, = 1 to eliminate segment acquisition conditions.	-	-
ICLASS	1	I	Classification Error flag: = 0 to vary classification error, = 1 to hold error constant, = 2 if error is zero.	-	-
ISEXT	1	I	Signature Extension error: = 0 to vary error, = 1 to hold error constant, = 2 if error is zero.	-	-
ISCC	1	I	Segment Crop Calendar error: = 0 to vary error, = 1 to hold error constant, = 2 if error is zero.	-	-
ICAS2	1	I	CAS Group II Error flag: = 0 to vary error, = 1 to hold error constant, = 2 if error is zero.	-	-
ICAS3	1	I	CAS Group III Error flag: = 0 to vary error, = 1 to hold error constant, = 2 if error is zero.	-	-



COMMON STORAGE ALLOCATION

Name LEMCM

Size 57

Page 4 of 5

Function LEM Control Card Input Data

Name	Dimension	Format	Description	Symbol	Units
ICSESG	1	I	Case number for Segment ID file	-	-
ICSECW	1	I	Case number for Crop Window (Calendar) file	-	-
ICSESH	1	I	Case number for Substrata Historical file	-	-
ICSECE	1	I	Case number for CAMS Error Model file	-	-
ICSEYM	1	I	Case number for YES Data file	-	-
ICSESE	1	I	Case number for Signature Extension file	-	-
ICSEAC	1	I	Case number for Data Acquisition file	-	-
RSEED1	1	DP	Initial random number seed for Segment Truth Error	-	-
RSEED2	1	DP	Initial random no. seed for Classification Error	-	-
RSEED3	1	DP	Initial random no. seed for Signature Ext. Error	-	-
RSEED4	1	DP	Initial random number seed for segment Crop Calendar Error	-	-
RSEED5	1	DP	Initial random no. seed for yield error	-	-
RSEED6	1	DP	Initial random no. seed for CAS Group II Error	-	-
RSEED7	1	DP	Initial random number seed for CAS Group III Error	-	-
RSEED	7	DP	RSEED ≡ RSEED1	-	-







COMMON STORAGE ALLOCATION

Name SSHDTA

Size 39

Page 1 of 2

Function Substrata Historical Data from SUBHST

Name	Dimension	Format	Description	Symbol	Units
COUN2	1	A6	Country ID	-	-
IREG	1	I	Region ID	R	-
IZONE2	1	I	Zone ID	Z	-
ISTRA2	1	I	Strata ID	S	-
ISUBS2	1	I	Substrata ID	K	-
NSEG	1	I	Number of segments	-	-
IDSEG	1	I	List of sample segments in this substrata	-	-
GRPNØ	1	I	Group number	-	-
HISTPW	1	F	Historical PW for substrata	PW <sub>K</sub>	-
			(fraction converted from %)		
AREAK	1	F	Land area of the substrata		ha
			(in ha converted from KM <sup>2</sup> )		
PWK	1	F	True PW for substrata	PW <sub>K</sub>	
			(fraction converted from %)		
NAGR	1	I	No. of agricultural segments in substrata	N <sub>K</sub>	
NA	1	I	No. of allocated segments in substrata	N <sub>A</sub>	
DELTPW	1	F	Bias of true PW	-	
DELTPM	1	F	Ratio of true mixed pixels	-	
CV1	1	F	Coefficient of variation for year to year	CV <sub>1</sub>	

change in PW

COMMON STORAGE ALLOCATION

Name SSHDTA

Size 20

Page 2 of 2

Function Substrata Historical Data from SUBHST

Name	Dimension	Format	Description	Symbol	Units
CV2	1	F	Coefficient of variation for within country variation of PW	CV <sub>2</sub>	
CV3	1	F	Coefficient of variation for within county variation of proportion of mixed pixels	CV <sub>3</sub>	
CV4	1	F	Ratio of 1964 ref. WA to Historical (1969) WA	CV <sub>4</sub>	-
RDSSH	1	I	Read flag for SUBHST = 0 to read SUBHST ≠ 0 otherwise	-	-
SSHDTA	38		Substrata Historical Data  Note: SSHDTA is equivalenced to COUN2	-	-
VMULTK	1	F	Variance multiplier	-	-
CLASS	18	I	Array of class numbers (one per prediction point)	-	-
MXK	1	I	Count on no. of acquired segments (for GROUP 1/2) only	Not Used	



COMMON STORAGE ALLOCATION

Name STATS

Size 13

Page 1 of 1

Function Statistical Information for LEM

Name	Dimension	Format	Description	Symbol	Units
ITER	1	I	Current Monte Carlo iteration number	-	-
NSEGTR	1	I	Number of data records written onto the Segment Truth file	-	-
NCAMSR	1	I	Number of data records written onto the CAMS Output file	-	-
NYESR	1	I	Number of data records written onto the YES Output file	-	-
NREC	7	I	Number of data records read from the input files	-	-
			1 = Segment ID file		
			2 = Crop Window file		
			3 = Substrata Historical file		
			4 = CAMS Error Model file		
			5 = YES Error Model file		
			6 = Signature Extension file		
			7 = Data Acquisition file		
NCASCR	1	I	Number of data records written onto the CAS Cumulative file		
NCASDR	1	I	Number of data records written onto the CAS Distribution file		
NT	1	I	Equivalenced to ITER		

## COMMON STORAGE ALLOCATION

Name STGDTASize 643Page 1 of 3Function Data for Segment Truth Generator

Name	Dimension	Format	Description	Symbol	Units
COUN	1	A6	Country ID from SEGID file	-	-
IREG	1	I	Region ID from SEGID file	-	-
IZONE	1	I	Zone ID from SEGID file	-	-
ISTRAT	1	I	Strata ID from SEGID file	-	-
ISUBS	1	I	Substrata ID from SEGID file	-	-
ISEG	1	I	Segment ID from SEGID file	-	-
ITRAIN	1	I	Training Segment Indicator 1 = normal, 0 training	-	-
ITSPRL	6	I	Training Segment Priority List	-	-
SLAT	1	F	Segment latitude	-	radians
SLONG	1	F	Segment longitude	-	radians
GRIDNO	1	I	Grid number	-	-
ISW	1	I	Spring/Winter wheat indicator (0 = winter, 1 = spring)	-	-
COUN2	1	A6	Country ID from SUBHST file	-	-
IREG2	1	I	Region ID from SUBHST file	-	-
IZONE2	1	I	Aone ID from SUBHST file	-	-
ISTRA2	1	I	Strata ID from SUBHST file	-	-
ISUBS2	1	I	Substrata ID from SUBHST file	-	-
NSEG	1	I	Number of segments in substrata	-	-

COMMON STORAGE ALLOCATION

Name STGDTA

Size 643

Page 2 of 3

Function Data for Segment Truth Generator

Name	Dimension	Format	Description	Symbol	Units
IDSEG	150	I	List of sample segments in substrata	-	-
GRPNØ	1	I	Substrata Group number	-	-
HISTPW	1	F	Historical proportion wheat	-	%
AREA	1	F	Substrata land area	A	KM <sup>2</sup>
PWK	1	F	True proportion wheat	PW <sub>K</sub>	%
NAGR	1	I	Number of agricultural segments in substrata	N <sub>K</sub>	-
NA	1	I	Number of allocated segments in substrata	N <sub>A</sub>	-
DELTPW	1	F	Bias of true PW	δPW	-
DELTPM	1	F	Ratio of true mixed pixels	δPM	-
CV1	1	F	Coefficient of variation for year-to-year change	CV <sub>1</sub>	-
CV2	1	F	Coefficient of variation for <sup>in PW</sup> within county variation of PW	CV <sub>2</sub>	-
CV3	1	F	Coefficient of variation for within county variation of PM	CV <sub>3</sub>	-
CV4	1	F	Coefficient of variation of multi-year historical WA	CV <sub>4</sub>	-
PWKI	1	F	True proportion wheat for segment i	PW <sub>Ki</sub>	%
PMKI	1	F	True proportion mixed pixels for segment i	MN <sub>Ki</sub>	%
AVEPW	1	F	Average segment PW for substrata	$\overline{PW}_{Ki}$	%
SUMPW	1	F	Sum of PW <sub>Ki</sub> for all segments in substrata	-	%
SNBR	1	F	Number of segments in substrata	-	-





COMMON STORAGE ALLOCATION

Name YESDTA

Size 21

Page 1 of 1

Function Yield Data from YESOUT file

Name	Dimension	Format	Description	Symbol	Units
YSTR	1	F	True yield for stratum	$Y_S$	<u>Quintals</u> ha
IZPRDD	6	I	Zulu yield data for up to six prediction points	-	-
YSCI	6	F	Estimated yields for the six prediction points	$Y_S$	<u>Quintals</u> ha
VSYCI	6	F	Variances of yield for the six prediction points	$VYR_S$	<u>Quintals</u> ha
RDYES	1	I	Flag used to control reading YESOUT file: = 0 to read YESOUT, ≠ 0 otherwise	-	-
NYESPP	1	I	No. of YES prediction points for one stratum	-	-

2

## ISUBH2 FILE

SUBHST scratch file for CAS. This file is generated from the SUBHST file and augmented with class numbers in pass 0. This file then is used in place of SUBHST in subsequent CAS passes.

Access Method: Direct with fixed length records -- uses FORTRAN V direct access routines.

Status: Temporary, regenerated everytime CAS runs.

Sort: Country, region, zone, strata, then substrata. 3201 records max.

Media: Disk - FASTRAND

Record Length: 39 words

Recommended Blocking Factor: 5

File Size: 124,839 words

Record Formats:

### Detail Record

COUN2	-	See SUBHST file definition
IREG2	-	"
IZON2	-	"
ISTRA2	-	"
ISUBS2	-	"
NSEG	-	"
IDSEG	-	Dummy cell (not used in CAS)
GRPNO	-	See SUBHST file definition
HISTPW	-	"
AREAK	-	"
PWK	-	"
NAGR	-	"
NA	-	"
DELTPW-	-	"

Detail Record (cont'd)

DELTPM - See SUBHST file definition  
CV1 - "  
CV2 - "  
CV3 - "  
CV4 - "  
VMULTK - 1 word flt. pt., variance multiplier in hectares  
CLASS - 18 word array (integer), class no. assignment for  
each of up to 18 prediction points, 0-10  
MXK - 1 word integer, count on no. of acquired segments  
(for group 1/2 only), 0-300

Trailer Record

COUN2 - Contains 'ZZZZ'.  
The remainder of the record contains 38 zeros.



CAMS COMMON BLOCKS









COMMON STORAGE ALLOCATION

Name ERROR Size 40

Page 1 of 1

Function Values for CAMS report

Name	Dimension	Format	Description	Symbol	Units
TITLE	4		Window title		
IDATE			Acquisition date		
PESTIM			Estimated proportion of wheat		
TOT			Total error		
ALOCAL			Ordinary segment error without signature. extension error		
ERTOT	3		Total error		
ERBIAS	3		Total bias error, dimension = type (wheat, mixed, other).		
ERRAND	3		Total random error		
CLTOT	3		Classification error		
CLBIAS	3		Classification bias component		
CLRAND	3		Classification random component		
DELTA			Crop calendar error factor		
CROPD			Crop calendar error factor		
Z	3, 2		Signature extension error factors, dimension 2 = Z1 or Z2		
MULT	3		Multi-temporal error factors		
TID			Segment ID of training segment correl. w/ordinary		
TRAINA			% agreement - training w/ordinary		
TRAIND			% disagreement - training w/ordinary		









COMMON STORAGE ALLOCATION

Name TRAINS

Size 1032

Page 1 of 1

Function Holds training segments - 1 actual record of scratch DA file TACQ  
(same as ACQUIS file record + extra information) + information for  
CAMSF record

Name	Dimension	Format	Description	Symbol	Units
COUN7			Country ID		
IREG7			Region ID		
IZONE7			Zone ID		
ISTRA7			Strata ID		
ISUB7			Substrata ID		
ISEG7			Segment ID		
ITWIN	4, 25		Up to 25 acquisition dates for 4 windows		
ITTOT			Total no. acquisition dates		
TMM	3, 4, 25		M values (multi-temporal error)		
TBB	3, 4, 25		Bias values		
TVV	3, 4, 25		Variance values		
TPTRUE			True proportion wheat		
TIZULU	4		Acquisition dates		
TPEST	4		Estimated proportions of wheat		
TPERR	4		Error in estimates		
TERTOT	3		Error total - calculated from TM, TB, TV		
TM	3				
TV	3				
TB	3				

## File Description

### CAMS DA SCRATCH FILE - TACQ

This file is generated in CAMS to store training segment information to use later in CAMS.

Access Method: Direct with fixed length records - uses FORTRAN V direct access routines.

Status: Temporary, regenerated everytime CAMS run.

Sort: By I, I=1, 2000 for up to 2000 training segments. These are indexed by segment ID in array IPOINT, COMMON /INDX/, then array IPNT2 to get the actual index.

Media: Disk - FASTRAND

Record Formats: No header or trailer.

Record Length: 1020 words

Blocking Factor: 1

File Size: 2,040,000 words, assuming a maximum of 2000 training segments.

Detail of 1 Record:

Country ID - 4 bytes, 4 alpha characters

Region ID - 1 word integer, 3 digit no., 1 to 10

Zone ID - 1 word integer, 3 digit no., 1 to 100

Strata ID - 1 word integer, 4 digit no., 1 to 500

Substrata ID - 1 word integer, 4 digit no., 1 to 3200

Segment ID - 1 word integer, 5 digit no., 1 to 4000

For each of 4 Crop Windows:

25 entries for

Acquisition Date - 1 word integer, Zulu date

Total No. of Accesses - 1 word integer, 3 digit no.

Multi-temporal error factors:

- for wheat - 1 word, floating point, 0-1
- for mixed - 1 word, floating point, 0-1
- for other - 1 word, floating point, 0-1

Bias error factors:

- for wheat - 1 word, floating point
- for mixed - 1 word, floating point
- for other - 1 word, floating point

Variance error factors:

- for wheat - 1 word, floating point
- for mixed - 1 word, floating point
- for other - 1 word, floating point

True proportion of wheat this segment, flt. pt., % 0-100

Zulu Acquisition Day - 1 word integer (zero for no acquisition)

Estimated Proportion of Wheat - Flt. pt.

Error in Proportion of Wheat Estimate, flt. pt.

} One  
ordered set  
for each of  
4 windows

YES COMMON BLOCKS









PART III

LIST OF SUBROUTINES AND SUBROUTINE  
CALL STRUCTURE

LEM Subroutine Call Structure

LEM

START

INPUT

ERRMES

INPCHK

ERRMES

EJECT

CAMSIN

EJECT

ERRMES

PAGER

CASIN

EJECT

ERRMES

PAGER

INPERR

CAMERS

CASER1

CAMER2

CASER2

SIGERR

WRAPUP

RANACF

EJECT

LFPA

RANACF

PAGER

INIT

ERRMC

SETPRF

STG

ERRMES  
BETAD  
RDMIA  
IBETAI  
ALGAMA

CAMS

EJECT  
INITI  
ERRMES  
TSAVE  
RANACF  
ERRMES  
SORTAG

INPT

ERRMES  
TSAVE

REPORT

PAGER  
FZULU

MULTI

QROP

BETAD

CLASS

BETAD

TSAVE

CORREL

TSAVE

SGEXT

BETAD

ERRMES

YES

ERRMES

EJECT

FZULU

PAGER

BETAD

CAS

CASPP

CLASSN

SEGTAB

DETCLS

ASSCLS

CASINL

GETYS

ERRMES

ERRMES

DS123

ERRMES

GROUP

ERRMES

BETAD

DS456

RANACF

DS7

RANACF

RANACF

CAS2

PAGER

RANACF

DS10

RANACF

RDMIA

ERRMES

RWCASF

RANACF

CASOUT

APHDR

EJECT

PAGER

CONFL

RWCASF

RWDISF

ERRMES

RANACF

CASOUT

DS18

YSUB

CAS3

CASPP (cont'd)

SUMREP

EJECT

PAGER

WRAPUP

RANACF

EJECT

PART IV  
SUBROUTINE DESCRIPTION  
AND FLOWCHARTS

List of Subroutines in LEM

<u>Name</u>	<u>Function</u>
1. LEM	Main driver for LACIE error model.
2. EJECT	Restores page and prints the page header.
3. ERRMC	Initializes the random number seeds for each error source.
4. ERRMES	Controls the printing of all error messages for LEM.
5. FZULU	To convert Zulu date to year, month and day.
6. PAGER	Automatic paging control routine.
7. RANACF	Standardized random access I/O routine.
8. SETPRF	Controls the printing of reports by subprogram and module.
9. CASIN	This routine reads in and checks the CAS control cards.
10. CASERI	This routine contains the input error messages for CAS.
11. INIT	Initializes random number seeds.
12. INPCHK	Checks the validity of the input parameters on the LEM control cards and checks the header records of all input files for valid case numbers.
13. INPERR	Prints error messages for the LEM input processor.
14. INPUT	Reads and checks LEM control card input and controls reading of all other data cards.
15. LFPA	Given month, day and year, this routine returns the Zulu date.
16. START	Initializes storage, flags and counters.
17. STG	Segment truth generator subprogram for LEM.
18. WRAPUP	This routine writes header records on CAS output files and prints status information at end of run.
19. STGERR	Prints error messages for the segment truth generator.
20. CAMSIN	Reads and checks CAMS control cards.

<u>Name</u>	<u>Function</u>
21. CAMSERS	Prints out CAMS control card error messages.
22. BETAD	Controls the calculation of the incomplete beta function.
23. IBETAI	Computes the incomplete beta function integral.
24. ALGAMA	Computes the gamma function.
25. RDM1A	Uniform random number generator CAMS subprogram subroutine set.
26. CAMS	Driver for the CAMS subprogram which calculates the estimated proportion of wheat.
27. REPORT	Prints the CAMS report.
28. INITI	This routine initializes the input files and output files.
29. CORREL	This routine tries to correlate a training segment with the ordinary segment being processed.
30. MULTI	This routine calculates the multi-temporal error for training segments.
31. SGEXT	This subroutine calculates the signature extension error for ordinary segments.
32. CROP	This subroutine calculates the crop calendar error for training segments.
33. TSAVE	This subroutine handles the I/O for the scratch RA file TACQ for CAMS.
34. CLASS	This subroutine calculates the input classification error for training segments and the total classification error.
35. INPT	This subroutine gets the next set of records to process from the input files.
36. CAMER2	This subroutine contains the processing error messages for the CAMS module.
37. YES	This subroutine calculates the estimated yield from the true yield.
38. CAS	Main driver for the CAS simulator.
39. APHDR	This routine prints the headers for the area and production summary report.



	<u>Name</u>	<u>Function</u>
40.	CASER2	This routine prints the processing error messages for CAS simulators.
41.	CASINL	This routine performs initialization tasks for each prediction point.
42.	CASINT	This routine performs miscellaneous tasks for the CAS simulator.
43.	CASPP	This routine performs the first pass CAS computations generating data sets 1-9.
44.	CASOUT	This routine prints the area and production report and saves data for the country report.
45.	CAS2	This routine generates data sets 10-17, 19, using data sets 1-9 read from the CAS intermediate file.
46.	CONFL	This routine computes the confidence levels in data set 13.
47.	DS123	This routine processes data sets 1, 2 and 3 at the substrata level.
48.	DS456	This routine processes data sets 4, 5 and 6 at the strata level.
49.	DS7	This routine processes data set 7 at the <u>zone</u> level.
50.	DS10	This routine processes data set 10 at the strata level.
51.	DS18	This routine computes CLWA and CLPRD in data set 18 on the final iteration.
52.	GETYS	This routine reads strata data from YESOUT file and obtains the proper value of estimated yield for the current bio-window or prediction date.
53.	GROUP	This routine reads segment data from the CAMS output file, selects the estimated proportion wheat for the proper bio-window for each segment, and aggregates the segment data up to the substrata level.
54.	PSUB	This function computes function P(X) for confidence level calculations.
55.	RWCASF	This routine reads a data set from the CAS cumulative file or writes a data set onto the CAS cumulative file.
56.	RWDISF	This routine reads and writes data from/onto the CAS distribution file.

<u>Name</u>	<u>Function</u>
57. SUMREP	This routine prints the CAS country summary report.
58. TSUB	This routine computes the quantity T from Equation 39.
59. YSUB	This function computes the quantity Y used in the confidence level calculations.
60. CLASSN	This routine controls the computation of class numbers for all zones.
61. SEGTAB	This routine forms the segment tables to be used to determine class.
62. DETCLS	This routine determines how many classes and how many data points in each class.
63. ASSCLS	This routine assigns the class number to each substrata in a zone.
64. CAS3	This routine generates data sets 10-19 on final pass.

SUPPLIED UTILITY ROUTINES

Routine Day

Call Day (IYMD, IDAY)

Given IYMD (3) where

IYMD (1)	IS Day No.
IYMD (2)	IS Month No.
IYMD (3)	IS Year No.

Compute year day no. in IDAY

Routine PIMOD

Call PIMOD (A)

Convert  $\pm A$  in radians to an angle  $0-2\pi$

Routine SOL (Entry ALPHA)

Call ALPHA (IFLAG)

For ephemeris usage as called by hector

computes ALPHAM and ALPHAT and IFLAG = 1

Routine PAGER (Entry Eject)

Call PAGER (NLINES)

Updates line count in NLINE with NLINES

NPAGE = 0 causes page to be restored prior to print.

NPAGE - page no.

HEADER- 80 char. 20A5

ICASE- case no.

KO - 6 print unit

INMAX is max no. of lines allowed

Initially NLINE should be set  $>$  LINMAX and NPAGE = 0

SUPPLIED UTILITY ROUTINES  
(CONTINUED)

Call EJECT (NLINES)

Causes page to be restored automatically and then prints headers.

Routine CLDAY

Call CLDAY

Given IDAY-DAY no. of the year compute in LMO-the month  
and in LDA the day no.

Need: IYEAR = 0 - Leap Year, ≠ 0 not Leap Year

Routine KEPLER

Call KEPLER (XM, XECC, XE, ERROR)

Given XM - Mean anomaly, XECC - eccentricity

Compute: E-eccentric anomaly, error = 0 means OK

Routine LFPA

Call LFPA [ FLDA, LMO, LYR, ALFGM (can be dummy), DAYS ]

Given: FLDA - day of month no., LMO - month no.,

LYR - year no. compute ALFGM - right ascension and

DAYS - Zulu day no.

Routine DEGMOD

Call DEGMOND (RAD, IDEG)

Given: angle rad in radians store the angle in deg., min., sec.,  
in IDEG(1) - (3).

Routine FZULU

Call FZULU (IOATE, IOUT)

Given Zulu date in IDATE, compute year, month and day in  
IOUT(1) - IOUT(3).

Routine RDMIA

Call RDMIA(FL, U)

Given double precision random no. seed in FL, compute random  
no. U (0-1) based on uniform distribution.

SUBROUTINE LEM

Purpose:

The subroutine LEM is the main driver for the LEM program. It defines all global common blocks used in the LEM program and calls the drivers for the various subprograms within LEM (INPUT, STG, CAMS, YES, and CAS).

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
NFATAL	ARGLST	INPUT STG CAMS YES CAS
NTRIAL	LEMCM	INPUT
RSTART	LEMCM	INPUT
IPRINT	LEMCM	INPUT
ISTG	LEMCM	INPUT
ICAMS	LEMCM	INPUT
IYES	LEMCM	INPUT
IPRCAM	LEMCM	INPUT
IPRYES	LEMCM	INPUT
IPRCAS	LEMCM	INPUT

Output:

<u>Quantity</u>	<u>Common Block</u>	<u>Destination</u>
NSTART	CNTRL	CAS and related routines
ITER = NT	STATS	STG CAMS YES CAS and related routines

Linkage:

LEM, being the main program is called by the operating system.

Subroutines Used:

START	SETPRF
INPUT	STG
ERRMES	CAMS
INIT	YES
ERRMC	CAS
	WRAPUP

Processing:

LEM calls START to initialize a few flags and counters, then calls INPUT to read and check all control card input data. If any fatal input errors are detected in the input data, subroutine ERRMES is called to abort the run.

If no fatal input errors are detected, then subroutine INIT is called to initialize the random number seeds.

Next for each Monte Carlo iteration (starting with iteration number RSTART + 1 and continuing through iteration NTRIAL) the following subroutines are executed in order:

ERRMC	sets random number seeds
STG	Segment Truth Generator
CAMS	CAMS Simulator
YES	Yield Estimation Model
CAS	CAS Simulator

(Prior to each of the calls to STG, CAMS, YES, and CAS, LEM calls subroutine SETPRF to properly set the print flag PRINTF.)

Finally after the last Monte Carlo iteration has been completed subroutine WRAPUP is called to print the program status information and to close random access files.

SUBROUTINE ERRMC

Purpose:

Subroutine ERRMC provides the Error Model control for the LEM program by properly initializing the random number seeds for the following error sources:

- Classification error
- Signature extension error
- Segment Crop Calendar error
- CAS Group II error "Most Recent Non-Epoch Year" Historical Proportion of Wheat
- CAS Group III Multi-year Proportion of Wheat

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
ICAMS	LEMCM	INPUT
ICLASS	LEMCM	INPUT
ISEXT	LEMCM	INPUT
ISCC	LEMCM	INPUT
ICAS	LEMCM	INPUT
ICAS2	LEMCM	INPUT
ICAS3	LEMCM	INPUT
RSEED	LEMCM	INPUT

Output:

<u>Quantity</u>	<u>Common Block</u>	<u>Used By</u>
SEED	CNTRL	STG, CAMS, YES, CAS, WRAPUP

Linkage:

CALL ERRMC

There are no arguments. All input/output quantities are transmitted through COMMON storage.

Subroutine Used:

None.


Local Variables:

None.

Processing:

See flow chart.



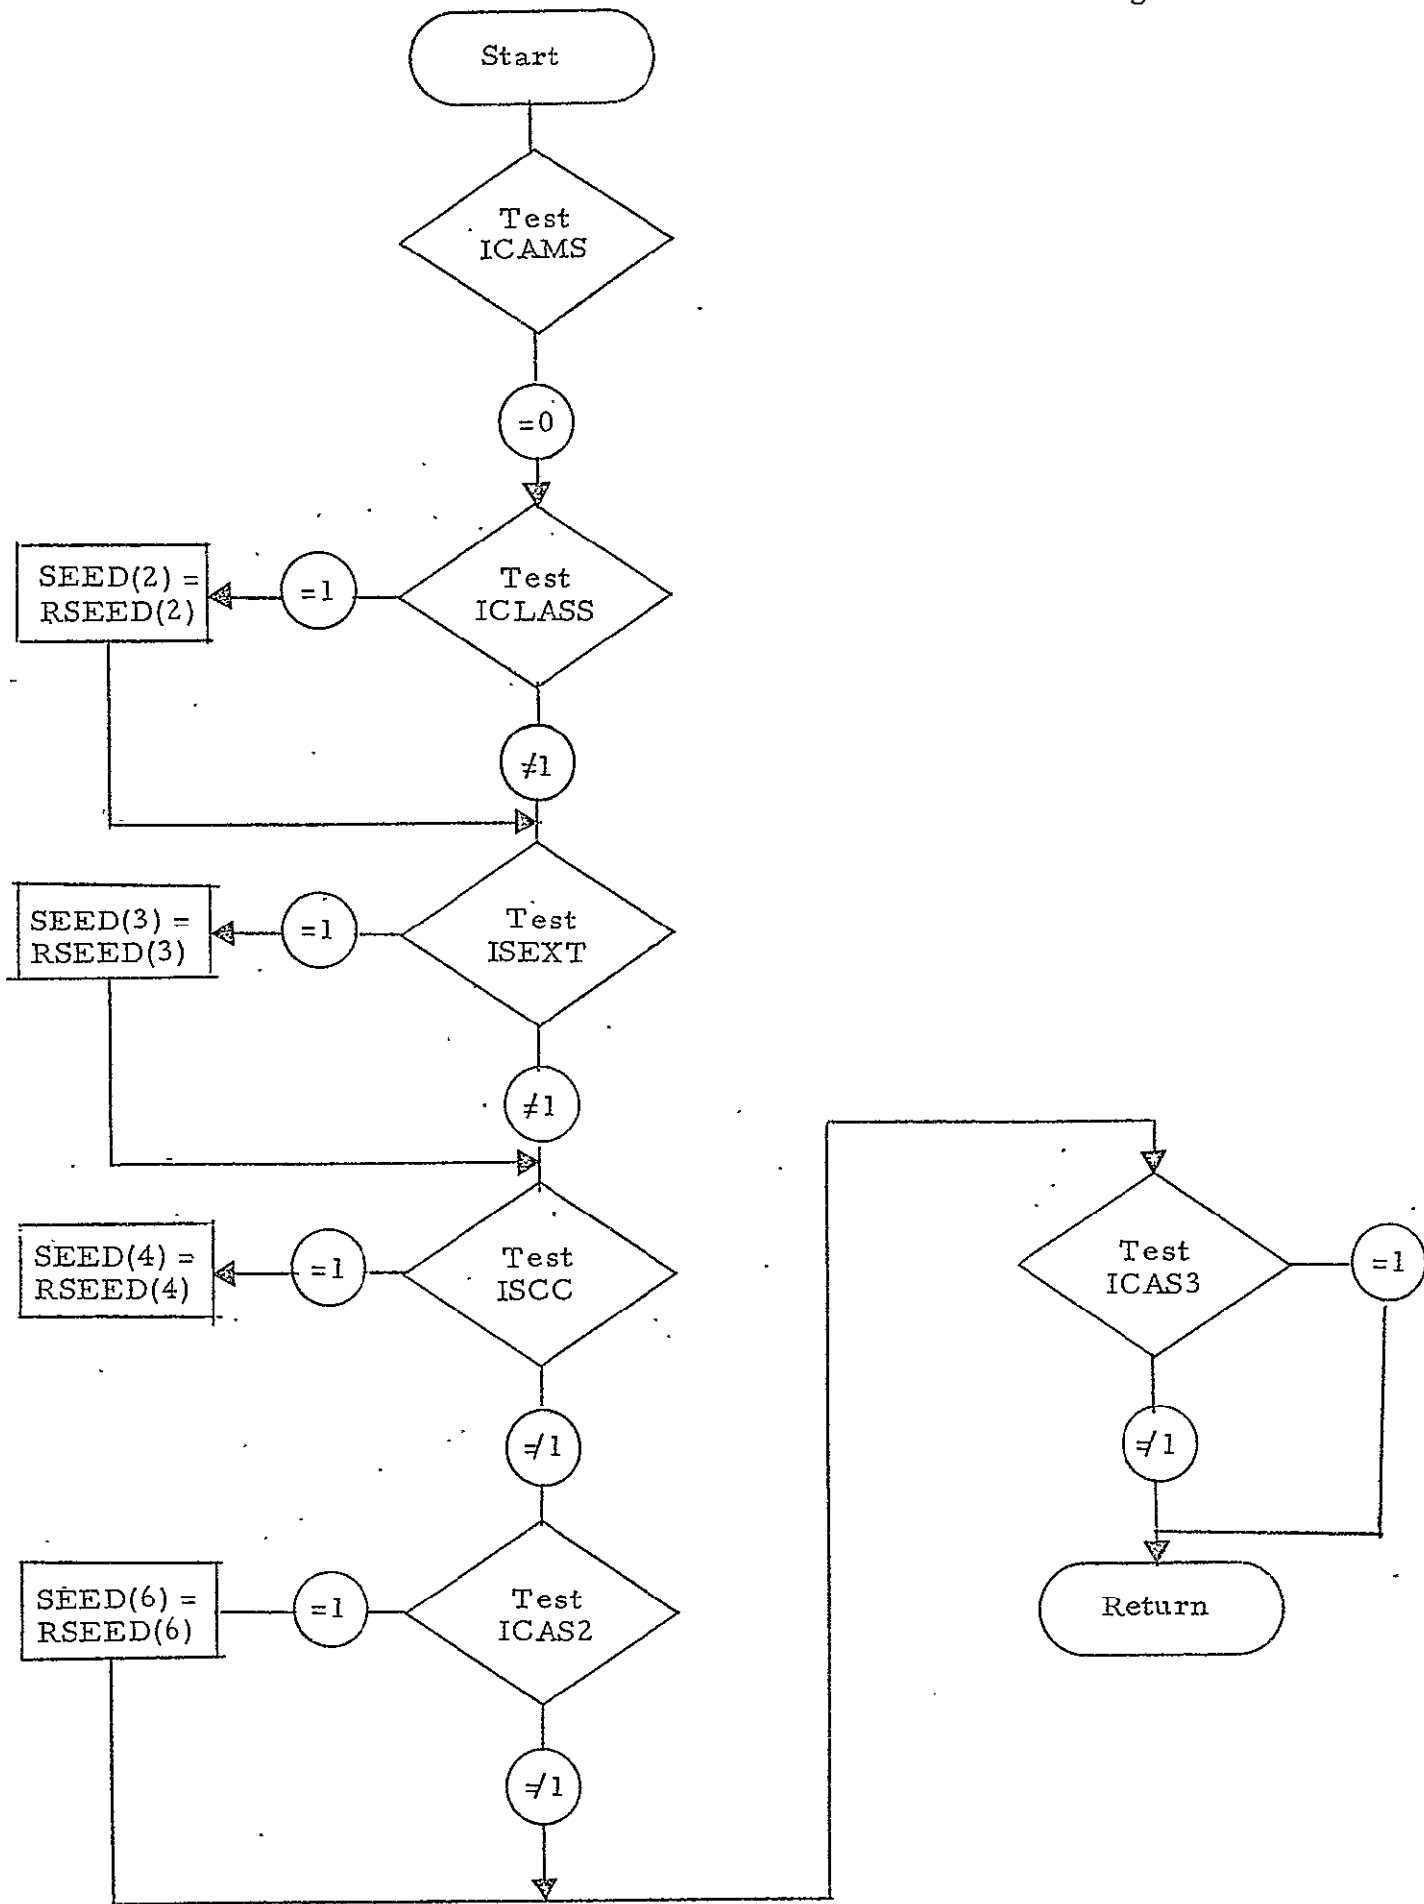

SUBROUTINE ERRMES

Purpose:

Subroutine ERRMES prints an error message as directed by the input parameters.

Input:

PROG, SUBR, ICODE, and LEVEL are input parameters transmitted through the calling sequence. In addition, the following quantities are passed through COMMON storage:

<u>Quantity</u>	<u>Common Block</u>
NERRS	ARGLST
NFATAL	ARGLST
NPERRS	ARGLST
NARG	ARGLST
ARG	ARGLST

Output:

<u>Quantity</u>	<u>Common Block</u>
NERRS	ARGLST
NFATAL	ARGLST
NPERRS	ARGLST

In addition to the error counters being advanced, an error message is written onto the printed report. Parameters obtained from the array ARG may be included in the error message.

Linkage:

CALL ERRMES(PROG, SUBR, ICODE, LEVEL)

where

PROG is the subprogram name in A6 format (e. g., 4H CAMS, 3H YES, etc.)

SUBR is the name of the subroutine within the subprogram  
also in A6 format (e.g., INPCHK)

ICODE is the error code. (See processing for a list of codes  
and associated messages.)

LEVEL is the level of the error.  
= 0 for non fatal  
= 1 for fatal  
= 2 for step fatal - skip this step, e.g., CAMS, but  
continue with the run.

In addition, a list of arguments (to be printed out as part of the error  
message) is stored in the array ARG within the COMMON block ARGLST  
and the argument count is stored in NARG.

Subroutines Used:

PAGER	CAMER2
INPERR	CASER2
CAMERS	STGERR
CASER1	WRAPUP

Local Variables:

IMES	Error code
BLANK	Word of blanks (format 1H )
NONFTL	Part of error message (3 H NON)
ERRLVL	Blank or = NONFTL (used to fill part of error message)

Processing:

For non-fatal errors the following general message is printed out  
on the report followed by a specific error message:

```
***** NONFATAL ERROR IN SUBPROGRAM _____ SUBROUTINE
_____ ERROR CODE ____ *****
```

For step fatal errors the following general message is printed out  
on the report followed by a specific error message:

```
***** FATAL ERROR n IN SUBPROGRAM _____ SUBROUTINE _____  
        ERROR CODE __ *****
```

## Subroutine RANACF

### Purpose:

RANACF is a standardized random access I/O subroutine. Written in Fortran, it provides a central location for all operations on random access files (opening, closing, reading, and writing). RANACF contains calls to the installation-dependent random access routines.

### Input:

IFILE, IREC, N, L, IOPT (See Linkage)

In addition, if IOPT = 2, then BUF is input to RANACF.

### Output:

If IOPT = 1, then BUF is output by RANACF.

### Linkage:

CALL RANACF (IFILE, IREC, BUF, N, IX, L, IOPT)

where

IFILE = Logical unit number of the random access file.  
IREC = Record number to read or write.  
BUF = Array of N words to be read from or written onto the random access file.  
N = Number of words to read or write.  
IX = Index array (length L). (Required on CDC computer but not on UNIVAC.)  
L = Length of index.  
IOPT = Entry point option:  
=0 to open the file  
=1 to read a record  
=2 to write a record  
=-1 to close the file

### Subroutines Used:

OPENMS  
READMS  
WRITMS  
CLOSEMS

} Used on CDC computer. Similar routines are required on UNIVAC.

Local Variables:

None.

Processing:

The appropriate routine is called to open, close read, or write the file as specified by IOPT.

SUBROUTINE SETPRF

Purpose:

Subroutine SETPRF sets the print flag PRINTF to print reports or suppress printing for a given module depending upon the iteration number and the input print flag for that module.

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
IPR	(see Linkage)	LEM
RSTART	LEMCM	INPUT
NTRIAL	LEMCM	INPUT
ITER	STATS	LEM

Output:

<u>Quantity</u>	<u>Common Block</u>	
PRINTF	CNTRL	{ = 0 to suppress printing = 1 to print this iteration

Linkage:

CALL SETPRF (IPR)

where

IPR is the input print flag (e.g., IPRINT, IPRCAM, etc.)

- = 0 to print first and last iterations of each run
- = 1 to print every iteration
- = 2 to print only the last iteration
- = 3 to suppress all printing of reports

Subroutines Used:

None.

Local Variables:

None.

Processing:


See flow chart.



Subroutines Used:  
None

Local Variables:  
None

Processing:

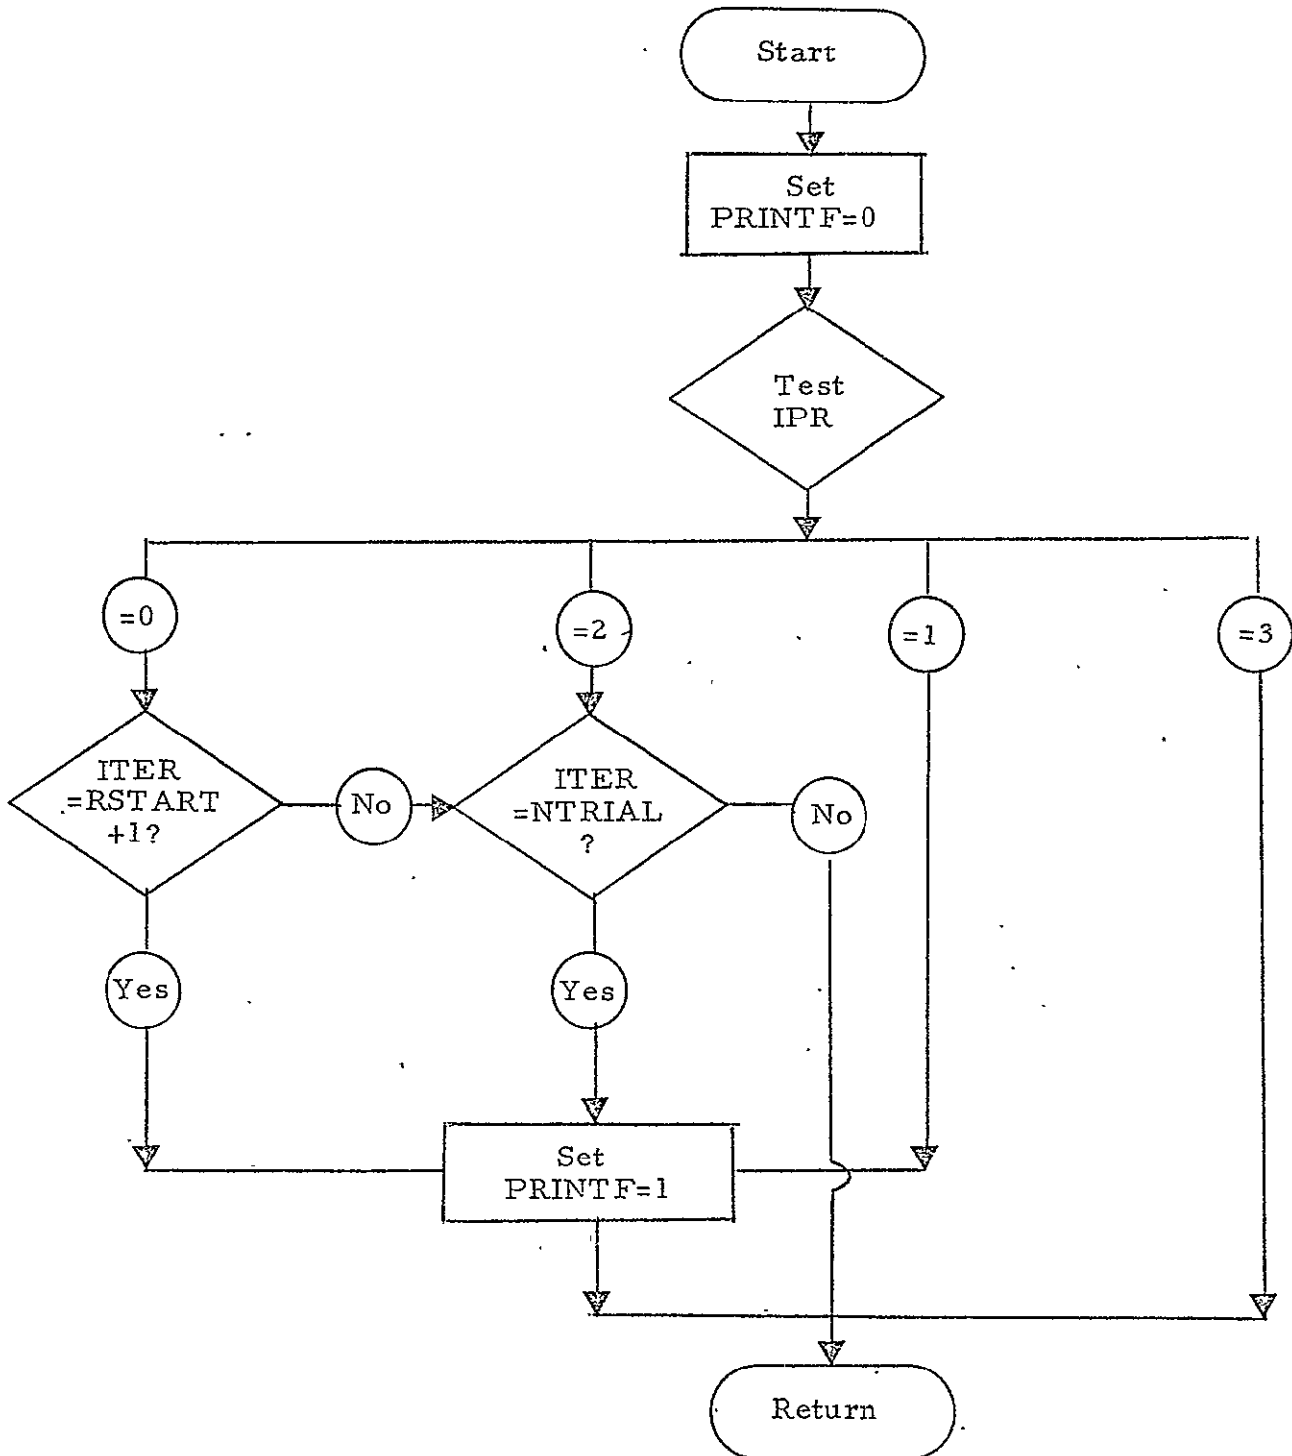

## SUBROUTINE INPCHK

### Purpose:

Subroutine INPCHK checks the validity of the LEM Control Card parameters. It also reads the header records of each required input file and checks the file name, case number and country on that file.

### Input:

All of the quantities in the COMMON blocks LEMCM and FILES are inputs to INPCHK.

In addition, the following quantities are input to INPCHK:

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
NTRMX	CONST	Block Data
MAXR	CONST	Block Data
MAXZ	CONST	Block Data

Also, the following files may be input to INPCHK so the header information may be checked:

- Segment ID file
- Crop Window file
- Substrata Historical file
- CAMS Error Model file
- YES Error Model file
- Signature Extension file
- Data Acquisition file
- Segment Truth file
- CAMS Output file
- YES Output file
- CAS Cumulative Output file

Output:

<u>Quantity</u>	<u>Common Block</u>	<u>Used By</u>
NERRS	ARGLST	LEM, WRAPUP
NFATAL	ARGLST	WRAPUP

Linkage:

CALL INPCHK

There are no parameters in the calling sequence.

Subroutines Used:

ERRMES  
RANACF

Local Variables:

FILL        Filler for header records of input files  
NFILL       Number of words of filler necessary to complete record

Processing:

- Check Input Data  
(Control Card parameters and File Headers)
1. NTRIAL - RSTART  $\leq$  NTRMX?
  2. RSTART  $<$  NTRIAL?
  3.  $0 \leq$  STARTR  $\leq$  ENDR  $\leq$  MAXR?
  4.  $0 \leq$  STARTZ  $\leq$  ENDZ  $\leq$  MAXZ?
  5. ISTG, ICAMS, IYES, must be 0, 1, 2, or 3.
  6. If CAMS  $\neq$  0, then ISTG  $\neq$  0?

7. If ISTG = 0 or if ISTG = 1 or 3 and RSTART = 0, then read and check Segment ID file header
  - a) filename = "SEGMENT"
  - b) case number = ICSESG
  - c) country = COUNTRY
8. If ICAMS = 0 or if ICAMS = 1 or 3 and RSTART = 0, then read and check Crop Window file header.
  - a) filename = "CROPWIND"
  - b) case number = ICSECW
  - c) country = COUNTRY
9. If ICAMS = 0 or if ICAMS = 1 or 3 and RSTART = 0, then read and check CAMS Error Model file header.
  - a) filename = "CAMSERR"
  - b) case number = ICSECE
  - c) country = COUNTRY
10. If ICAMS = 0 or if ICAMS = 1 or 3 and RSTART = 0, then read and check Signature Extension file header.
  - a) filename = "SIGEXTEN"
  - b) case number = ICSESE
  - c) country = COUNTRY
11. If ICAMS = 0 or if ICAMS = 1 or 3 and RSTART = 0, then read and check Data Acquisition file header.
  - a) filename = "ACQUIST"
  - b) case number = ICSEAC
  - c) country = COUNTRY
12. If IYES = 0 or if IYES = 1 or 3 and RSTART = 0, then read and check YES Error Model file header.
  - a) filename = "YESERROR"
  - b) case number = ICSEYM
  - c) country = COUNTRY

13. Read and check header of Substrata Historical file.
  - a) filename = "SUBHIST"
  - b) case number = ICSESH
  - c) country = COUNTRY
14. If ISTG = 2 or if ISTG = 1 or 3 and RSTART > 0, then read and check header of Segment Truth file.
  - a) filename = "SEGTRUTH"
  - b) case number = ICSEST
  - c) country = COUNTRY
15. If ICAMS = 2 or if ICAMS = 1 or 3 and RSTART > 0, then read and check header of CAMS Output file.
  - a) filename = "CAMSOUT"
  - b) case number = ICSECO
  - c) country = COUNTRY
16. If IYES = 2 or if IYES = 1 or 3 and RSTART > 0, then read and check header of YES Output file.
  - a) filename = "YES"
  - b) case number = ICSEYS
  - c) country = COUNTRY
17. Open CAS Cumulative Output file (a random access file).
18. If RSTART > 0, then read and check header of CAS Cumulative Output file.
  - a) filename = "CASCUM"
  - b) case number = ICASE
  - c) country = COUNTRY
  - d) NT = RSTART

Rewind each file before and after reading its header record.

## SUBROUTINE INPUT

### Purpose:

LEM reads the LEM control cards and calls INPCHK to check the LEM control card data. INPUT also calls CAMSIN and CASIN to read the remaining control card input data.

### Input:

All of the quantities in Common block LEMCM are input to INPUT from the input file.

In addition the following quantities are inputs to INPUT.

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
INP	FILES	Block Data
OUTP	FILES	Block Data
NERRS	ARGLST	ERRMES
NFATAL	ARGLST	ERRMES

### Output:

All of the quantities in common block LEMCM.

In addition, the following quantities are output from INPUT.

<u>Quantity</u>	<u>Common Block</u>	<u>Destination</u>
ARG(1)	ARGLST	ERRMES
NPAGE	PAGECM	EJECT

### Linkage:

CALL INPUT

There are no parameters in the calling sequence.

Subroutines Used:

ERRMES  
EJECT  
INPCHK  
CAMSIN  
CASIN  
PAGER

Local Variables:

LBL           Label on LEM control cards  
LBL1          Label on first LEM control card

Processing:

1.       The first two LEM control cards are read in.
2.       The labels on the first two LEM control cards are checked. They must be LEM 01 and LEM 02.
3.       Next subroutine EJECT is called to eject a page on the output file and to write the case header at the top of the page.
4.       The data from the first two LEM control cards is printed out.
5.       Next the third and fourth LEM control cards are read, their labels are checked and the data is printed out.
6.       Next subroutine INPCHK is called to check the LEM control card data for errors.
7.       Then routines CAMSIN and CASIN are called to read and check the CAMS control card data and the CAS control card data.
8.       Finally the number of non fatal and fatal errors detected in the LEM, CAMS, and CAS control cards is printed out.

SUBROUTINE STG

Purpose:

The purpose of the Segment Truth Generator (STG) is to generate the true proportion wheat and the true proportion mixed pixels for each sample segment. STG interfaces with the Segment ID file and the Substrata Historical file to obtain the data necessary to produce the Segment Truth file.

Input:

The following quantities are obtained from the Segment ID file:

COUN	Country ID
IREG	Region ID
IZONE	Zone ID
ISTRAT	Strata ID
ISUBS	Substrata ID
ISEG	Segment ID
ITRAIN	Training Segment Indicator
ITSPRL	Training Segment Priority List
SLAT	Segment latitude (not used)
SLONG	Segment longitude (not used)
GRIDNO	Grid Number (not used)
ISW	Sprin/Winter wheat indicator

The following quantities are obtained from the Substrata Historical file:

COUN2	Country ID
IREG2	Region ID
IZONE2	Zone ID
ISTRA2	Strata ID
ISUB2	Substrata ID.
NSEG	Number of sample segments in this substratum
IDSEG	List of sample segments in this substrata (dimensioned IMXSEG)



GRPNO	Group number (not used)
HISTPW	Historical PW (not used)
AREA	Substrata land area (not used)
PWK	True proportion of wheat
NAGR	Number of agricultural segments in the substrata (not used)
NA	Number of allocated segments in the substrata (not used)
DELTPW	$\delta PW$ = bias of true proportion of wheat (not used)
DELTPM	$\delta PM$ = ratio of true mixed pixels
CV1	Coefficient of variation for year-to-year change in PW (not used)
CV2	Coefficient of variation for within county variation of PW
CV3	Coefficient of variation for within county variation of proportion of mixed pixels
CV4	Coefficient of variation of multi-year historical wheat area (not used)

The following input quantities are obtained from labeled COMMON:

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
PRINTF	CNTRL	SETPRF
SEED(1)	CNTRL	ERRMC
ENDFIL	CONST	Block Data
IMXSEG	CONST	Block Data
ITSFLG	CONST	INPCHK
SEGID	FILES	INPCHK
LSEGID	FILES	INPCHK
SUBHST	FILES	Block Data
LSUBH	FILES	Block Data
SEGTRU	FILES	Block Data
LSEGTR	FILES	Block Data
ICASE	LEMCM	INPUT
CUNTRY	LEMCM	INPUT
NTRIAL	LEMCM	INPUT
RSTART	LEMCM	INPUT

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
IPRINT	LEMCM	INPUT
STARTR	LEMCM	INPUT
STARTZ	LEMCM	INPUT
ENDR	LEMCM	INPUT
ENDZ	LEMCM	INPUT
ISTG	LEMCM	INPUT
ICASE1	LEMCM	INPUT
ICASE2	LEMCM	INPUT
ICASE3	LEMCM	INPUT
NLINE	PAGECM	PAGER
MXLINE		Block Data
ITER	STATS	LEM

Output:

The following quantities are written onto the Segment Truth file:

Variable

ICASE

ITSFLG

Training Segment flag

CUNTRY

Country ID

IREG

Region ID

IZONE

Zone ID

ISTRAT

Strata ID

ISUBS

Substrata ID

ISEG

Segment ID

ITRAIN

Training Segment Indicator

ITSPRL

Training Segment Priority List

ISW

Spring/Winter indicator

PWKI

$PW_{ki}$  = True proportion wheat for this segment

PMKI

$PM_{ki}$  = True proportion mixed pixels for this segment

In addition, the following quantities are printed on the Segment Truth report:

PWK	Substrata true PW
PWKI	
PMKI	
AVEPW	Average PW for current substrata
ERRPW	Error in segment PW (segment True PW - Substrata True PW)

The following output quantities are stored in COMMON:

<u>Variable</u>	<u>Common Block</u>	<u>Used By</u>
NREC(1)	STATS	WRAPUP
NSEGTR	STATS	WRAPUP

Linkage:

CALL STG

There are no arguments in the calling sequence. All input/output quantities are transmitted through COMMON storage.

Subroutines Used:

BETAD	Beta Distribution routine CALL BETAD (SEED, AVE, SIGMA, RN, IOPT, IERROR)
ERRMES	CALL ERRMES (PROG, SUBR, ICODE, LEVEL)
EJECT	Page Eject routine
PAGER	Automatic Paging routine

Processing:

A detail flow chart for the Segment Truth Generator is given on the following pages.

The true PW and true PM for each segment are computed as follows:

a) If ISTG = 3 (zero error case)

$$PWKI = PWK$$

$$PMKI = PWK * DELTPM$$

(i. e., segment truth values = substrata truth values)

b) If ISTG = 0 or 1

PWKI is computed by the BETAD subroutine with


$$\text{mean} = PWK/100.0$$


$$SIGMA = PWK * CV2/100.0$$


PMKI is computed by the BETAD subroutine with


$$\text{mean} = (PWKI * DELTPM)/100.0$$

$$SIGMA = \text{mean} * CV3$$

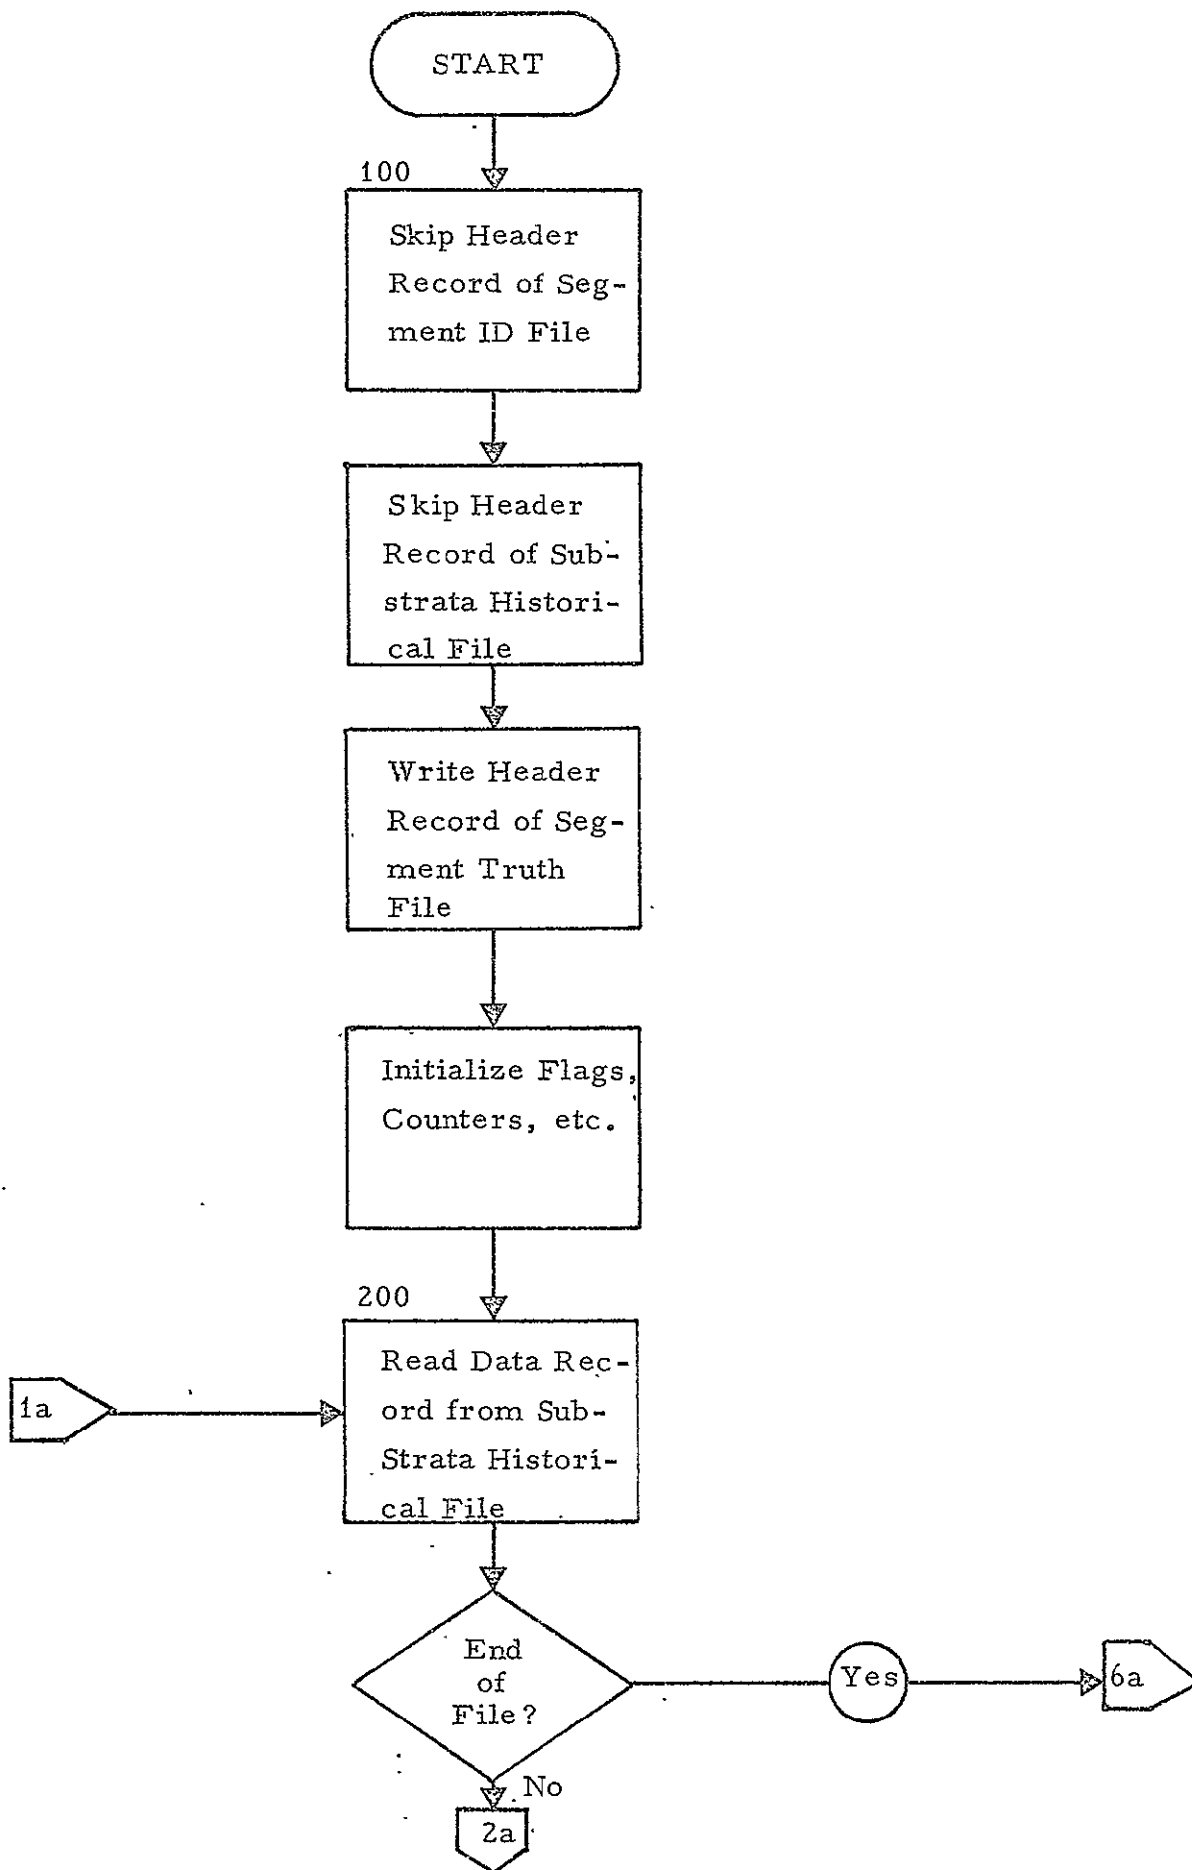


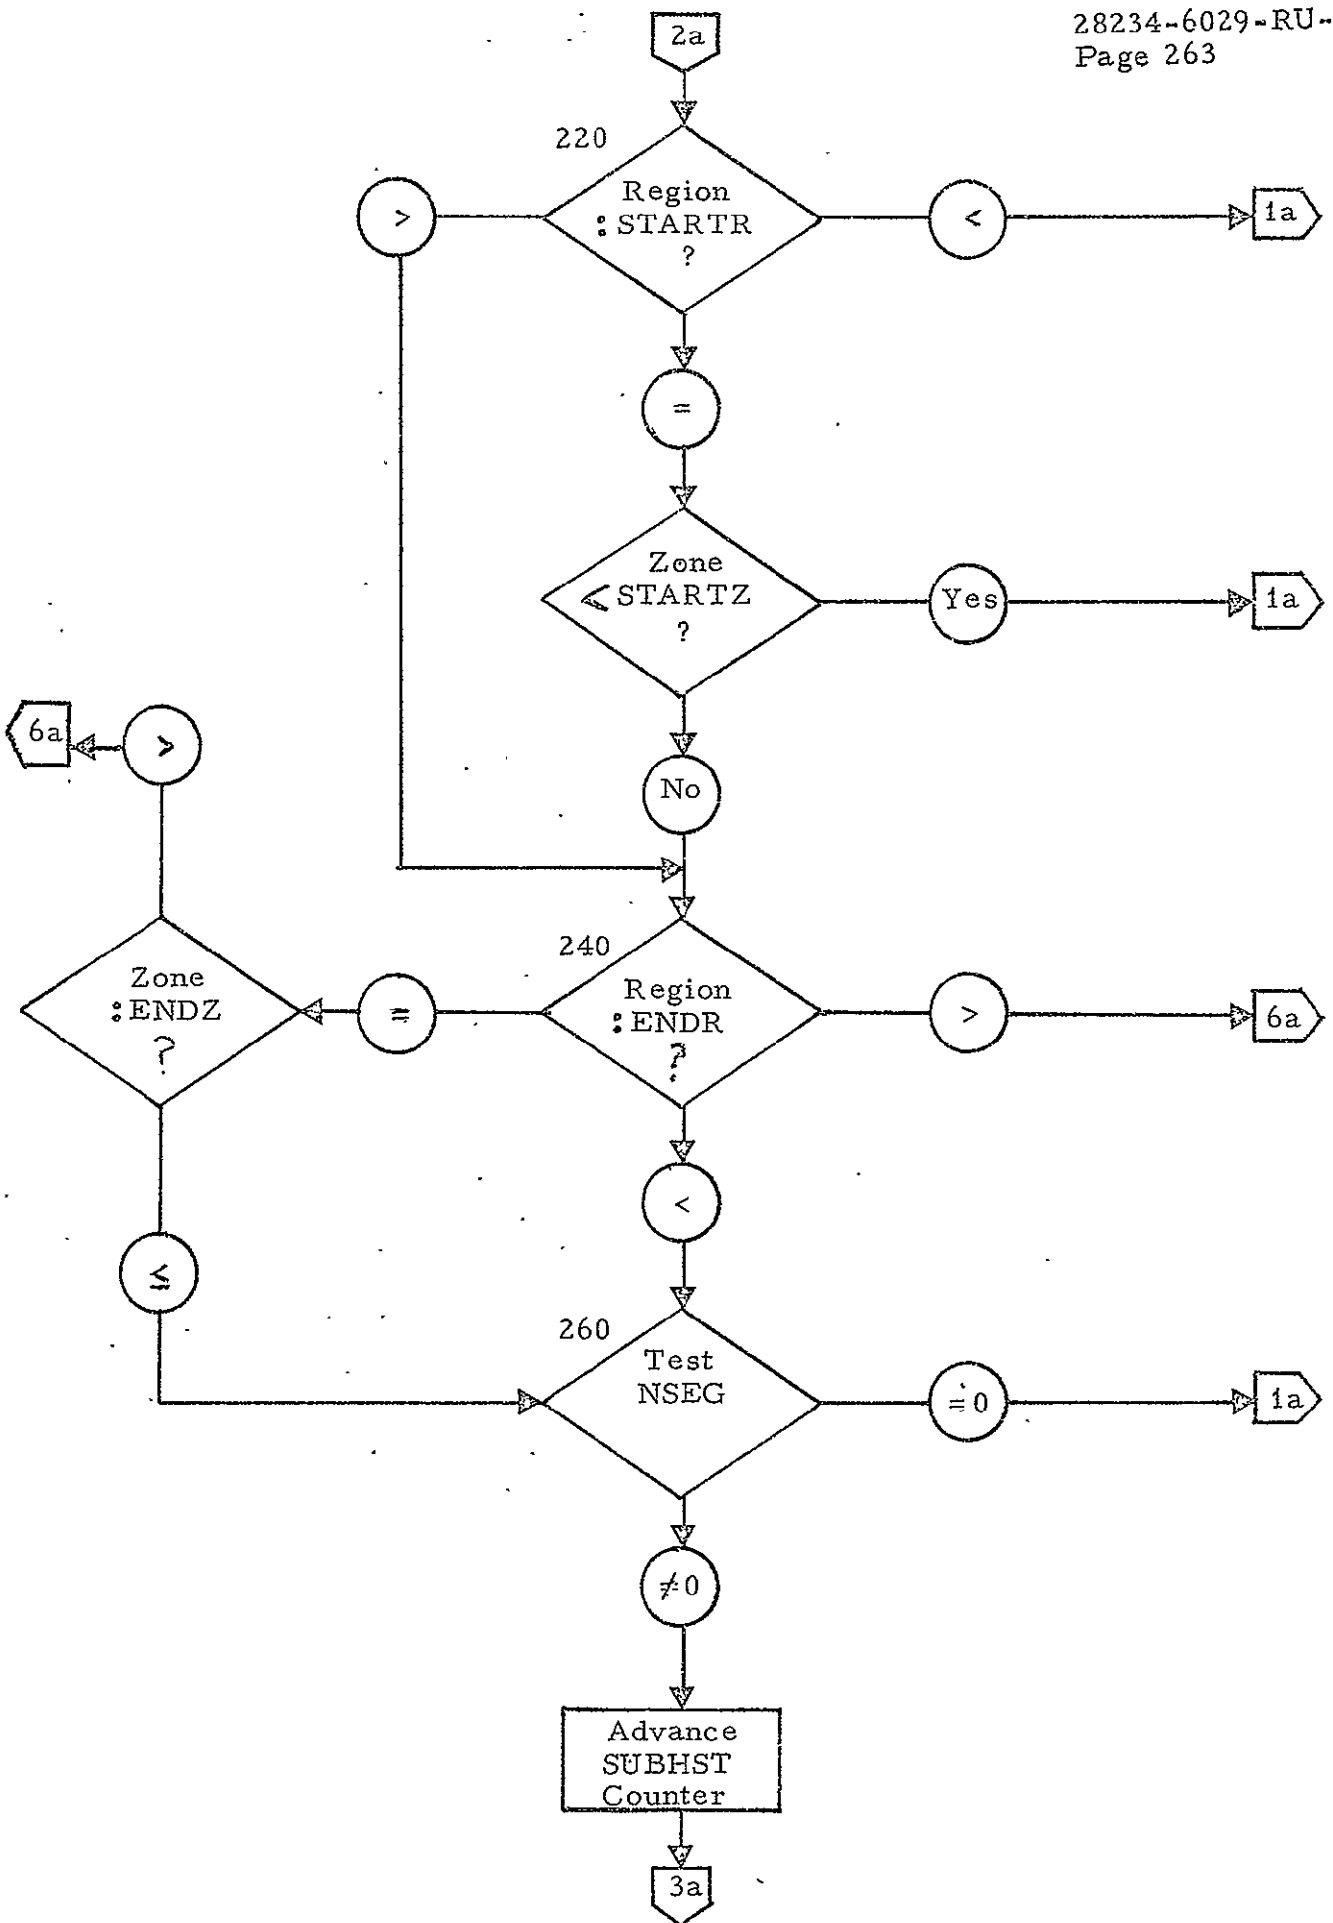


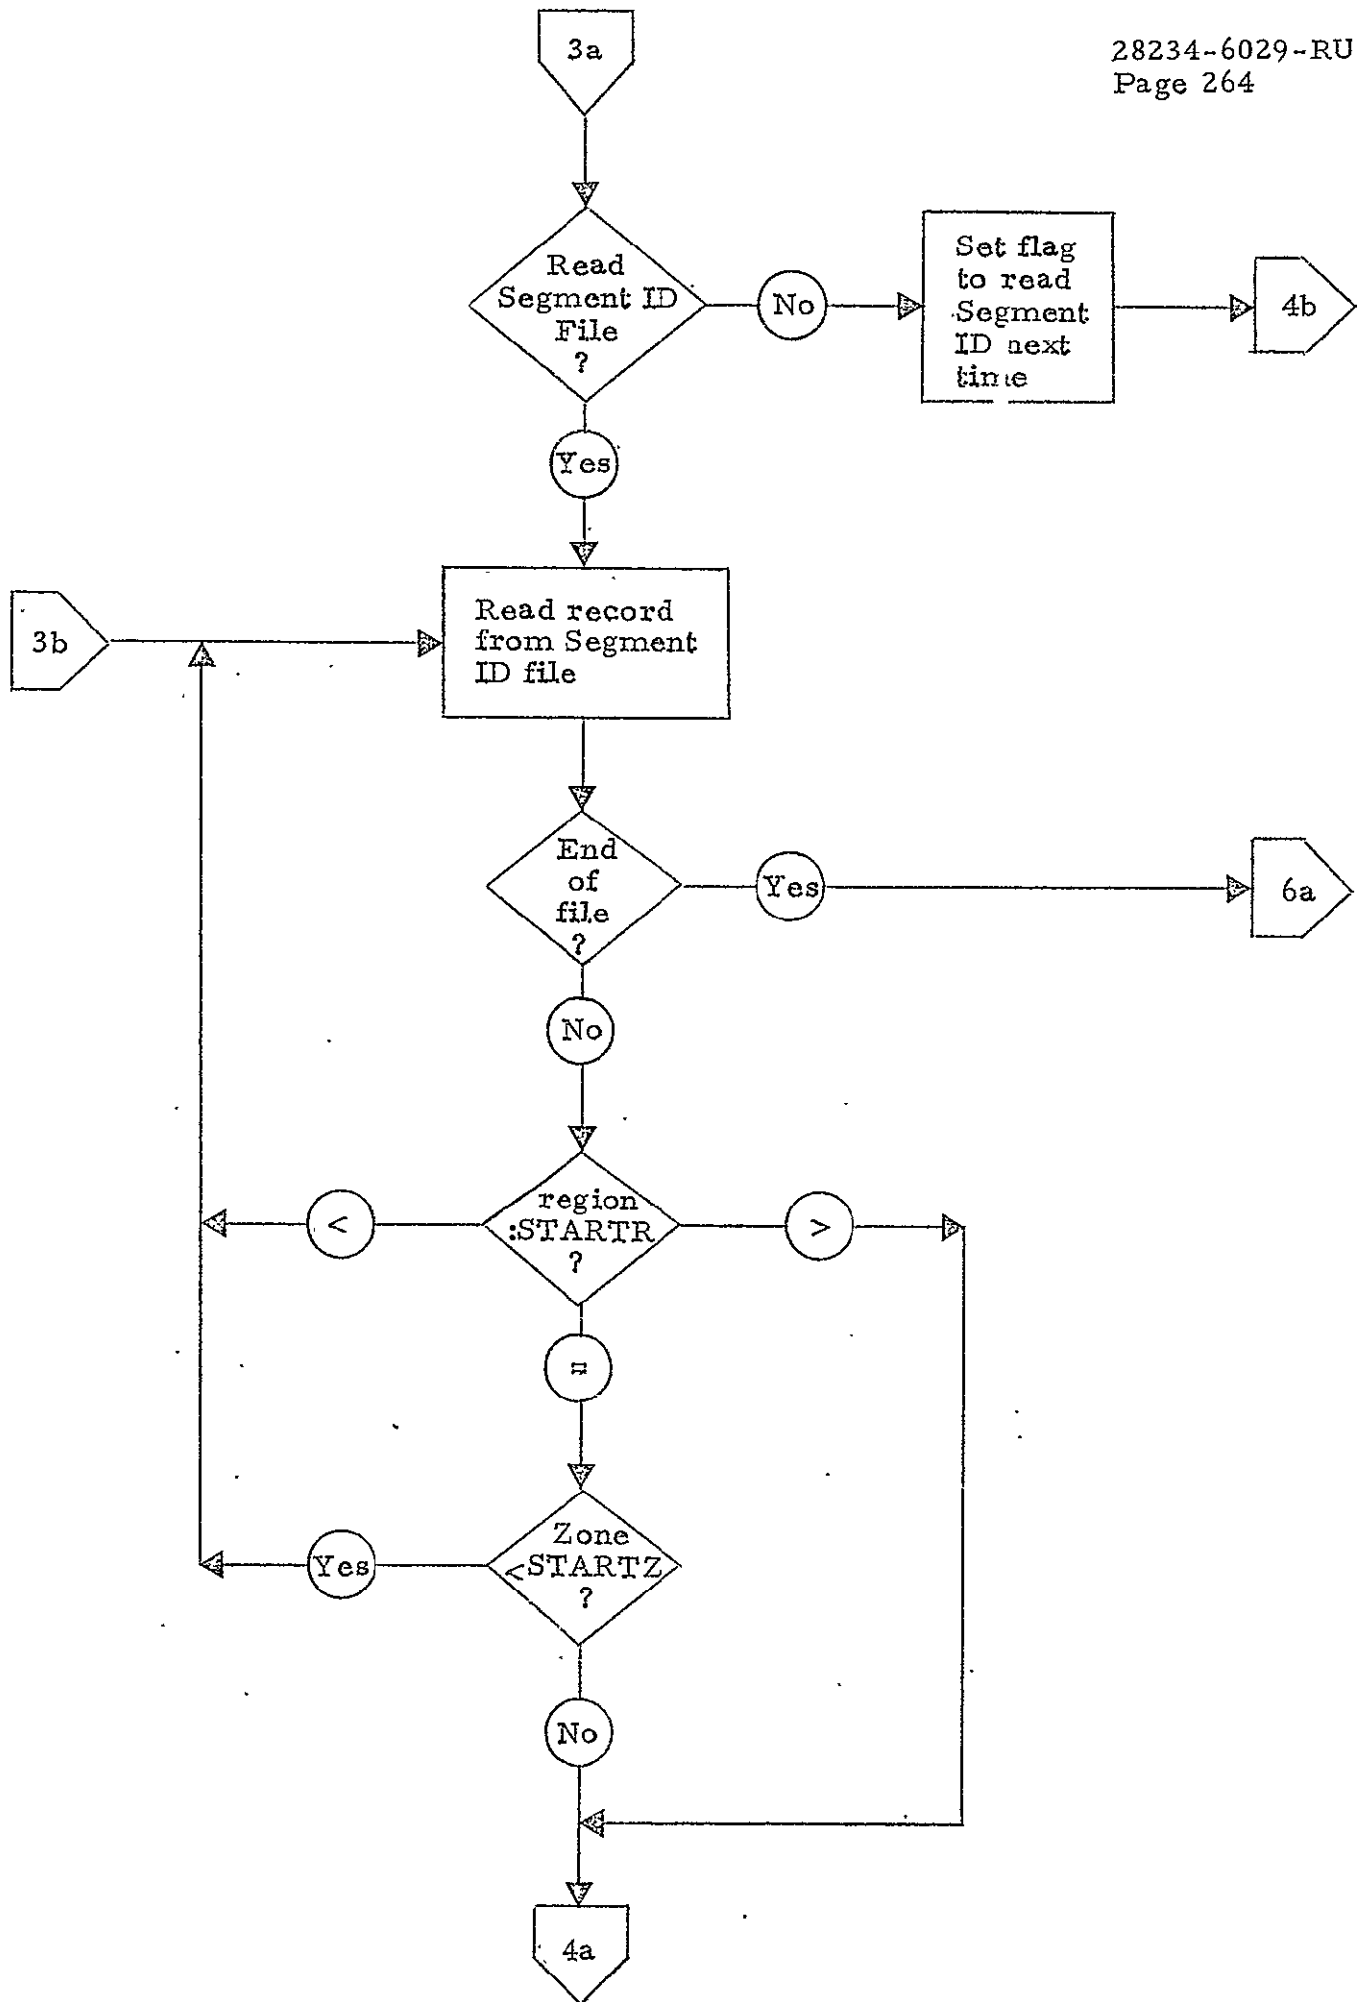

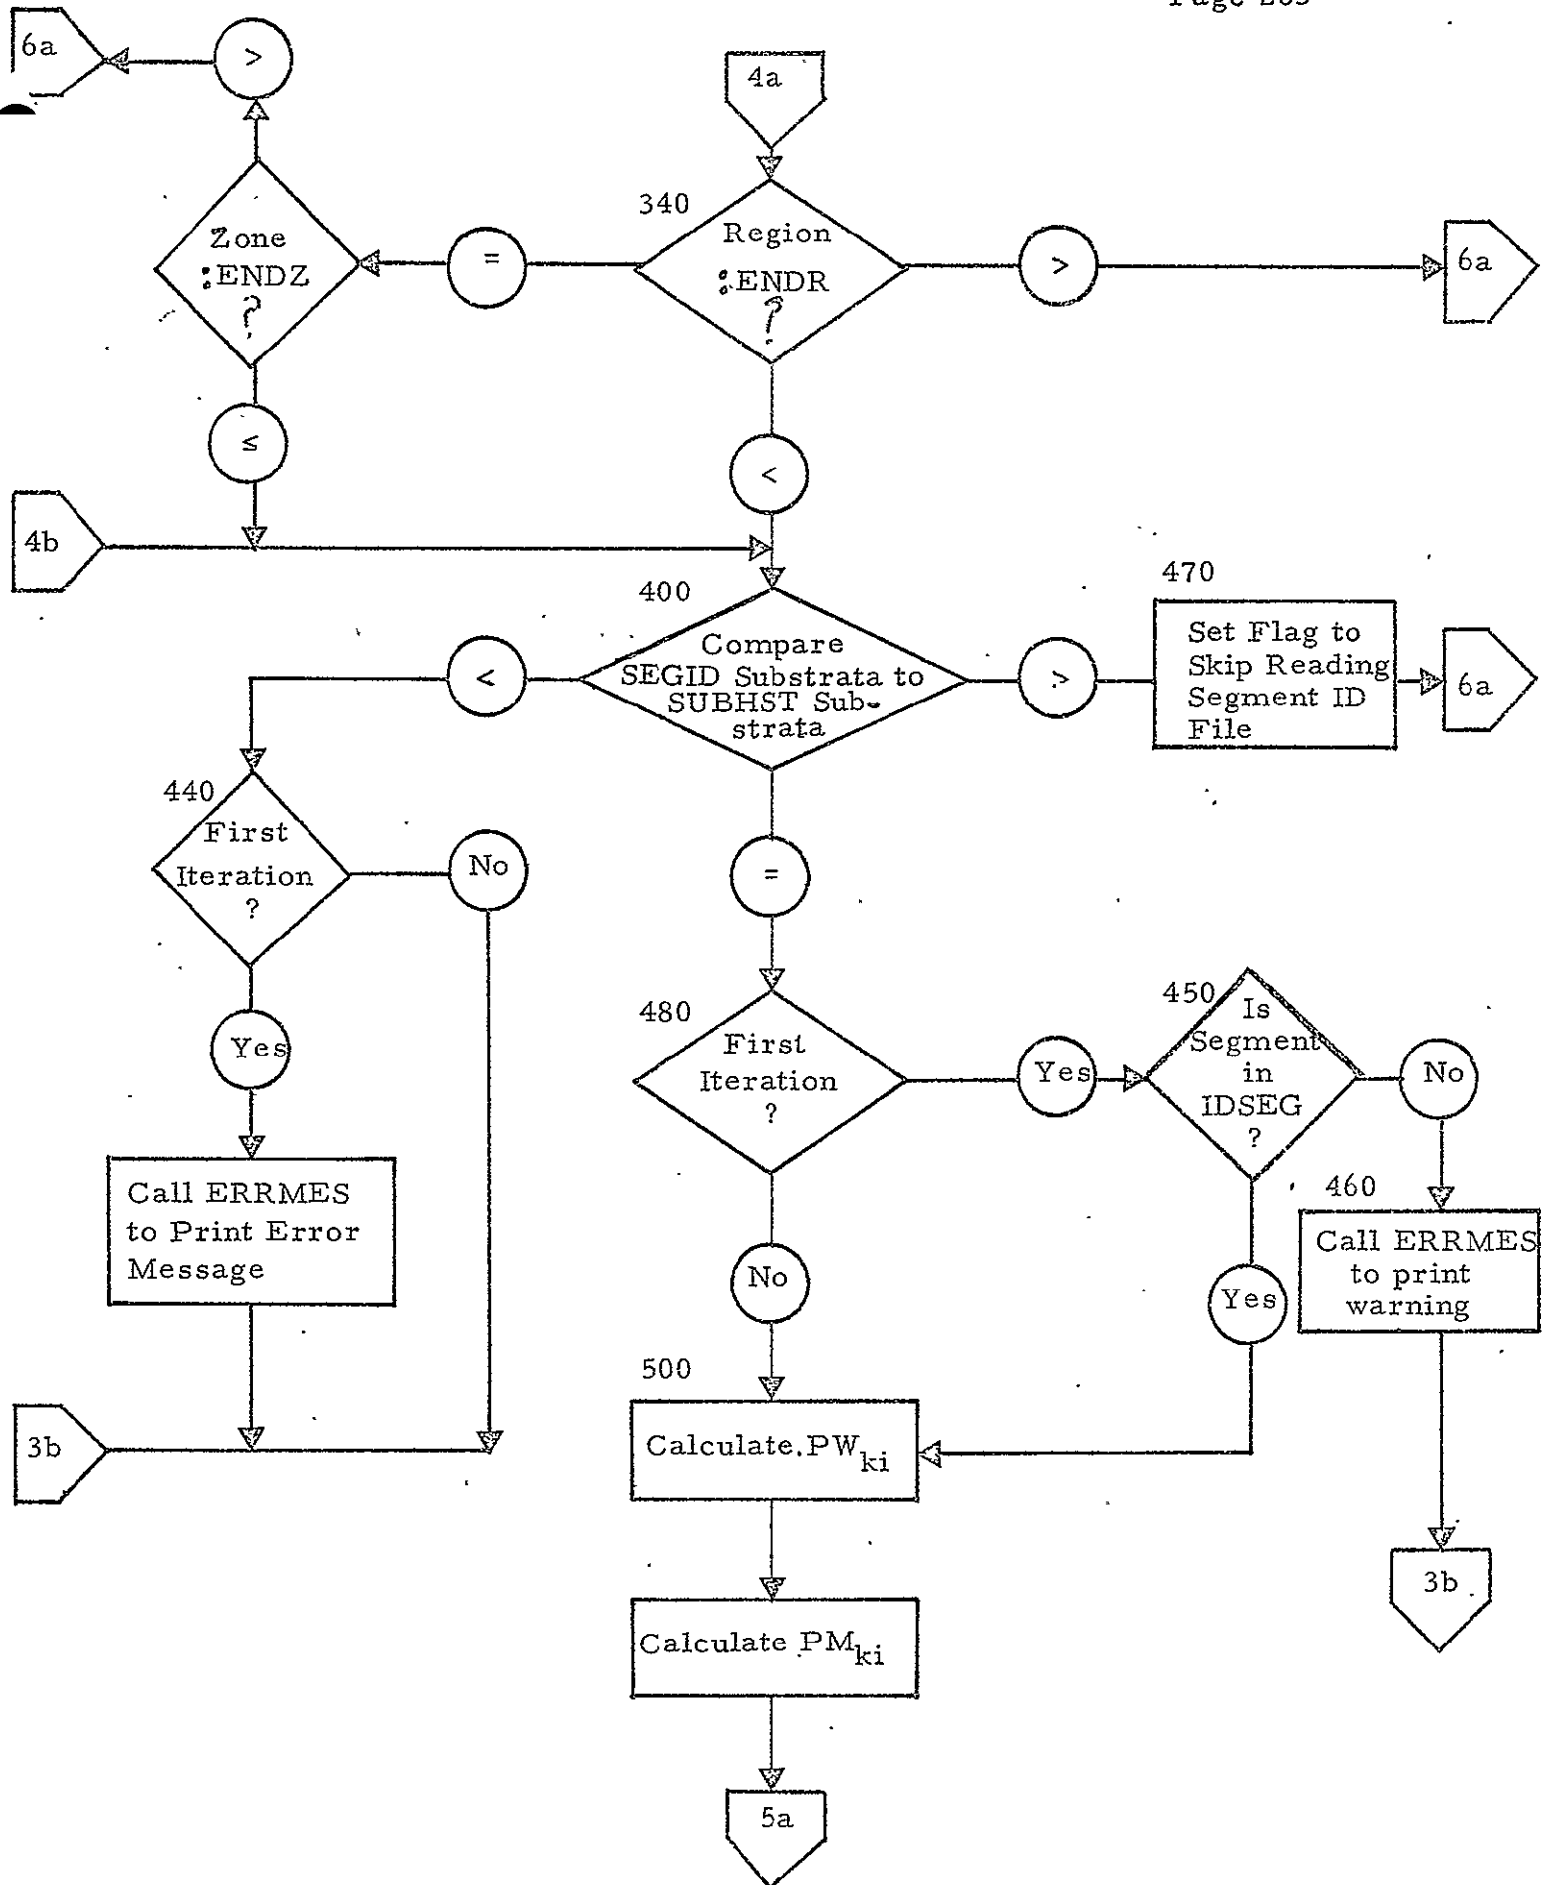



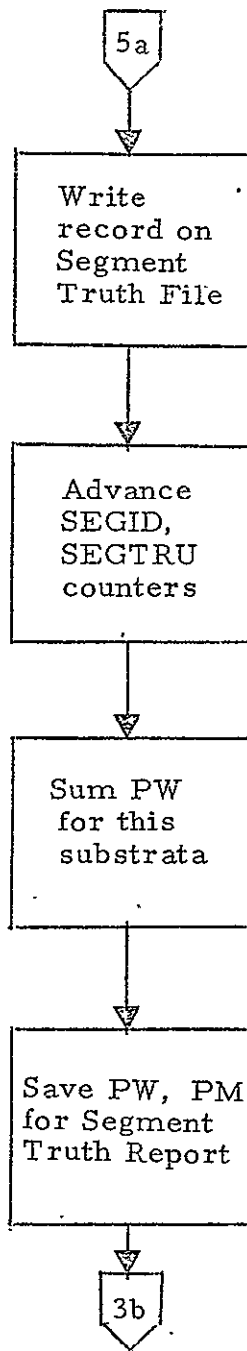

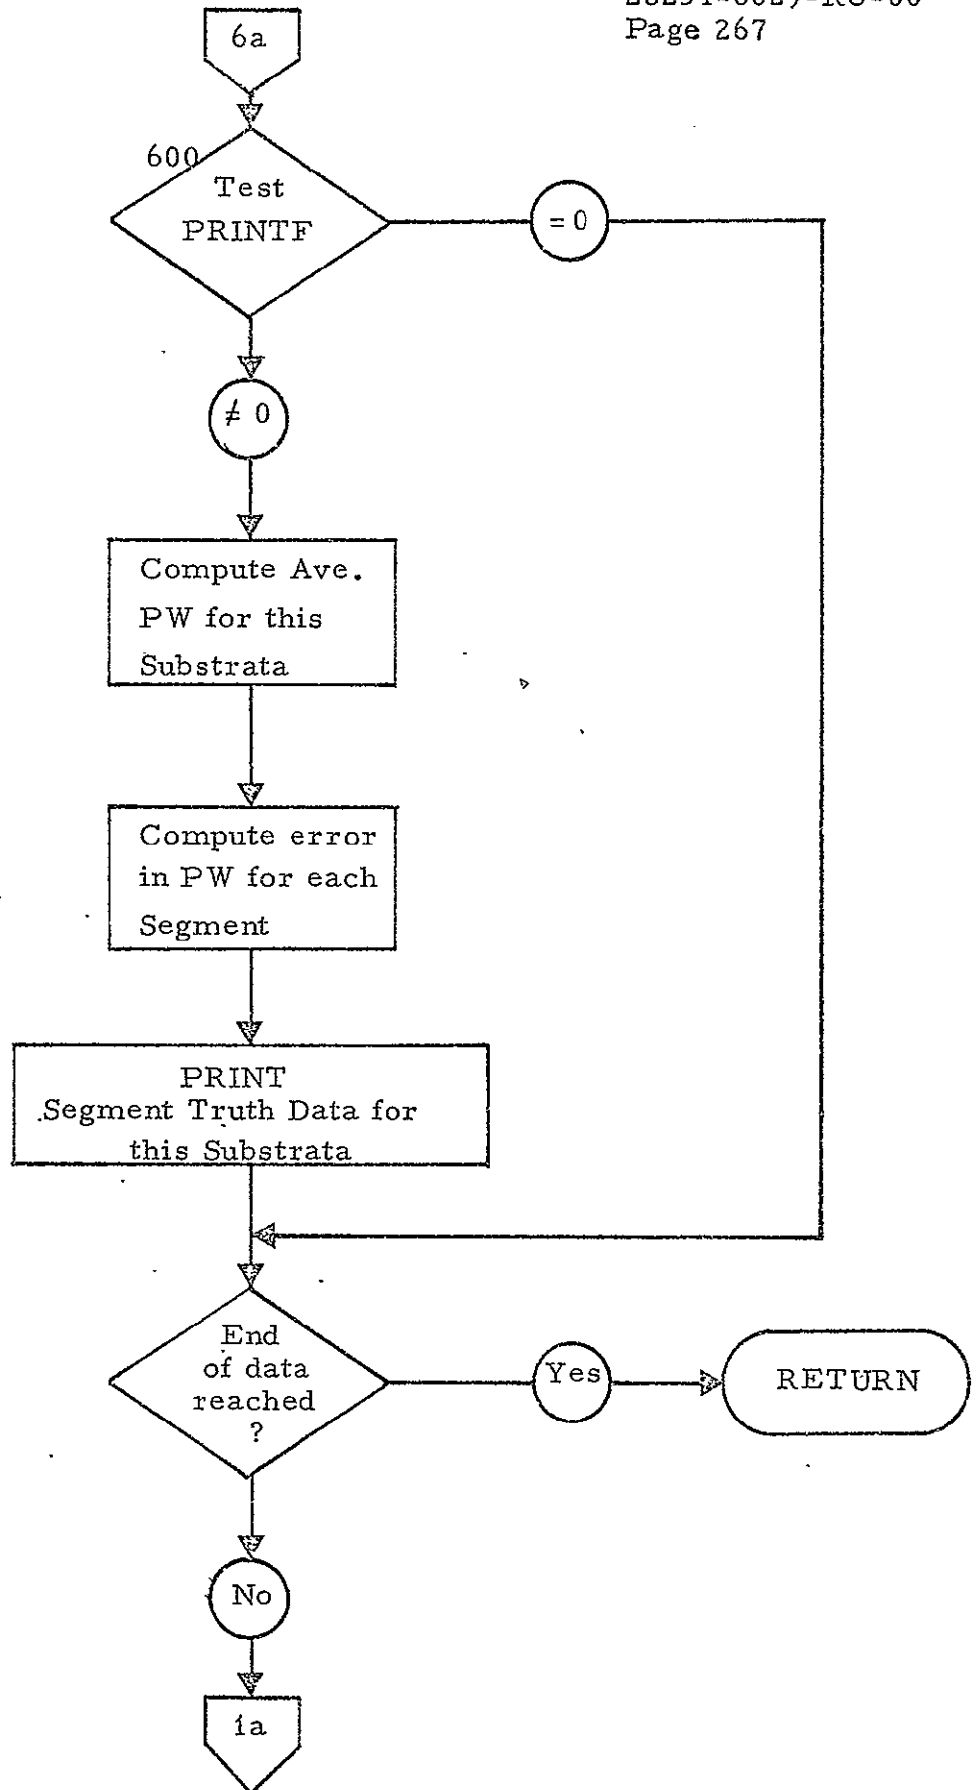

CAMS SUBROUTINE DESCRIPTION

## SUBROUTINE CAMSIN

### Purpose:

This subroutine reads in the CAMS control cards, echos the data on the printer, and stores it in the COMMON block /CAMSCM/. The data consists of 13 cards, one CAMS control card, eight multi-temporal sampling matrix cards, and four crop calendar coefficient cards. CAMSIN checks for errors in the data and, if found, prints appropriate messages and aborts.

### Input:

The main inputs are the 13 input data cards. See the CAMS Problem Description, Figures 1-4, for the format and contents.

Also needed are the COMMON block quantities:

/FILES/	INP	input device number
	OUTP	output device number
/PAGECM/		used by PAGER and EJECT subroutines
/LEMCM/	TITLE	used by PAGER and EJECT subroutines

### Output:

The main output is the COMMON block /CAMSCM/.

/CAMSCM/	IMODEL	
	IMULTI	
	ISIGEX	CAMS control card inputs; see
	ISKIP	Figure 1, CAMS Problem Description
	ITMAX	
	IREP	
	IWIND	
	IGROUP(3, 2, 15)	multi-temporal sampling matrix data; see Figure 2, CAMS Problem Description - dimension 1 = type (wheat, mixed, other) 2 = season (winter, spring) 3 = for IGROUP, which M (1, 2, or 3)

MS(3, 2, 3)	for MS, values of M (M(2) and M(3) from input, M(1) = 1) if model 1, ignore model 2 data if model 2, ignore model 1 data and store in type = wheat (type = mixed, other values set to 0)
G(3, 2, 2) H(3, 2, 2)	crop calendar coefficients data; see Figure 3, CAMS Problem Description - dimension 1 = type 2 = season 3 = for G, which G (G1 or G2) for H, which H (H1 or H2) if model 1, ignore model 2 data if model 2, ignore model 1 data and store in type = wheat only (mixed and other set to 0)

Also output to the printer is an echo of the input data, with the same quantities as are on the input data cards. Blank default columns will contain 0.0 values.

Also, possible output are the input error messages. See CAMS Problem Description, Section 5.2.

Linkage:

CALL CAMSIN

Subroutines Used:


CALL EJECT(IND)	to help printing echo of data - supplied utility
CALL PAGER(IND)	routines
ABS(X)	absolute value

Local Variables:


ICLK(4, 2, 15)	holds IGROUP array for error checking dimension 1 = type, model 1 wheat = 1 model 1 mixed = 2 model 1 other = 3 model 2 = 4 dimension 3 = which M to use, 1-4 = 1 5-15 = input data
CHKM(4, 2, 3) ISEQ(4, 2)	holds MS array for checking, M(1) = 1 holds sequence numbers for matrix
CHKG(4, 2, 2) CHKH(4, 2, 2)	holds G and H arrays for error checking

C-4

SUBROUTINE CAMSIN BLOCK DIAGRAM

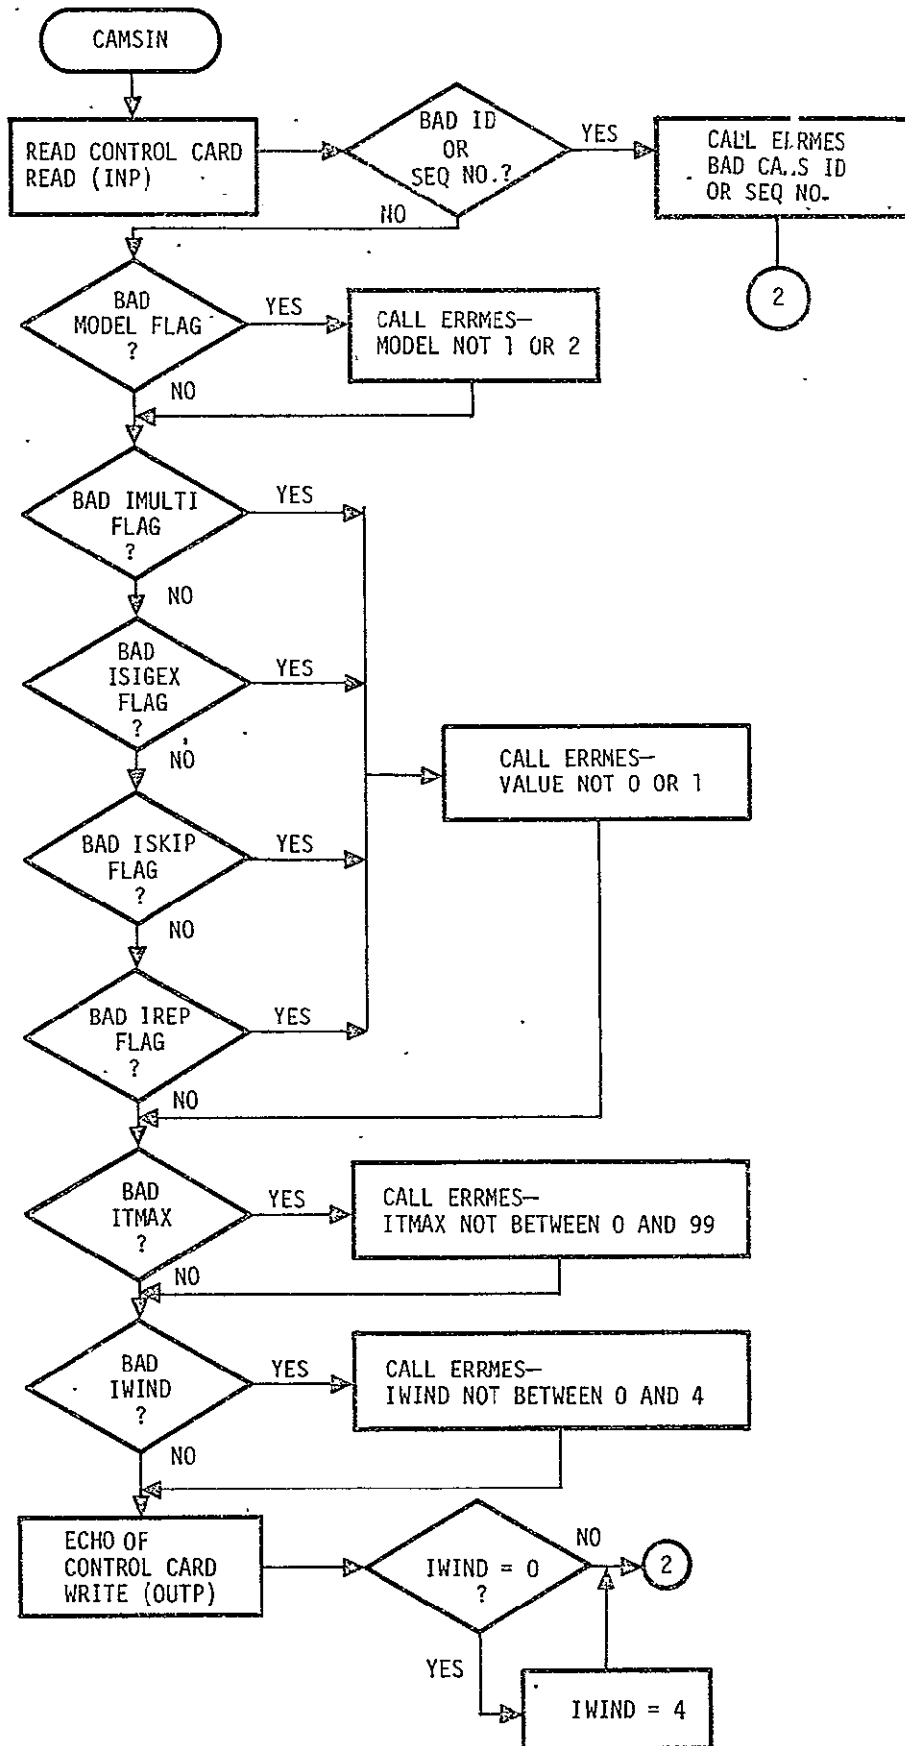


CAMSIN (CONT'D)

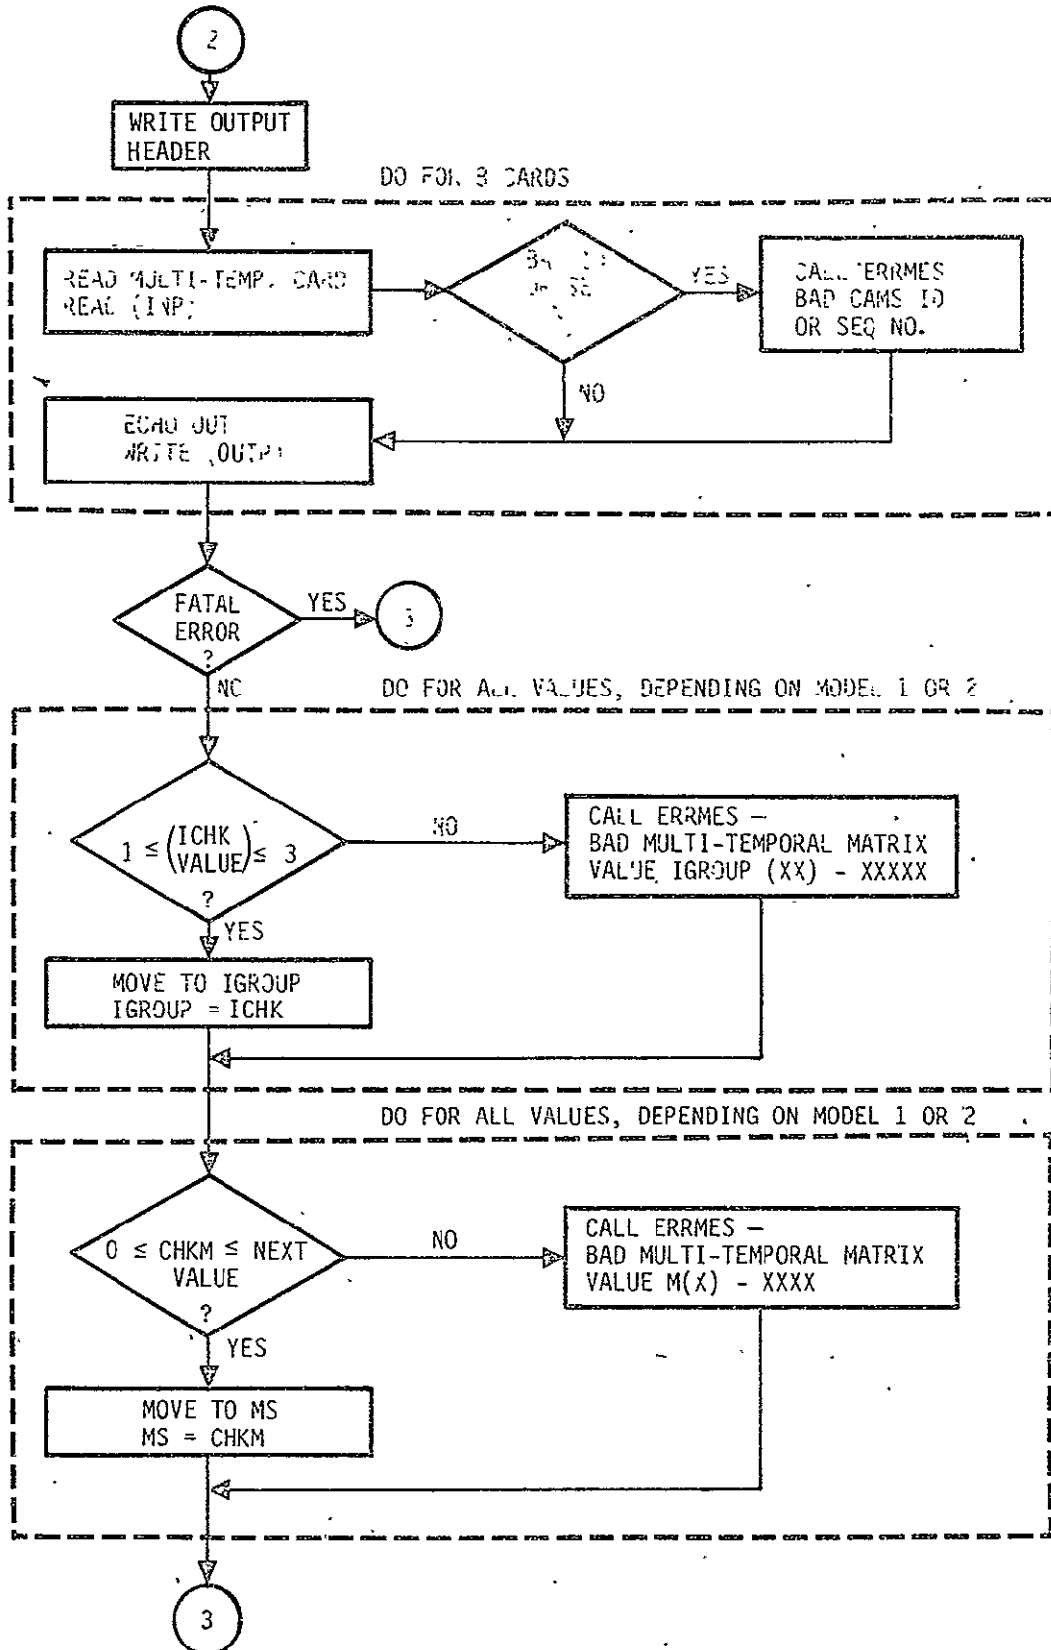


ORIGINAL PAGE IS  
OF POOR QUALITY

CAMSIN (CONT'D)

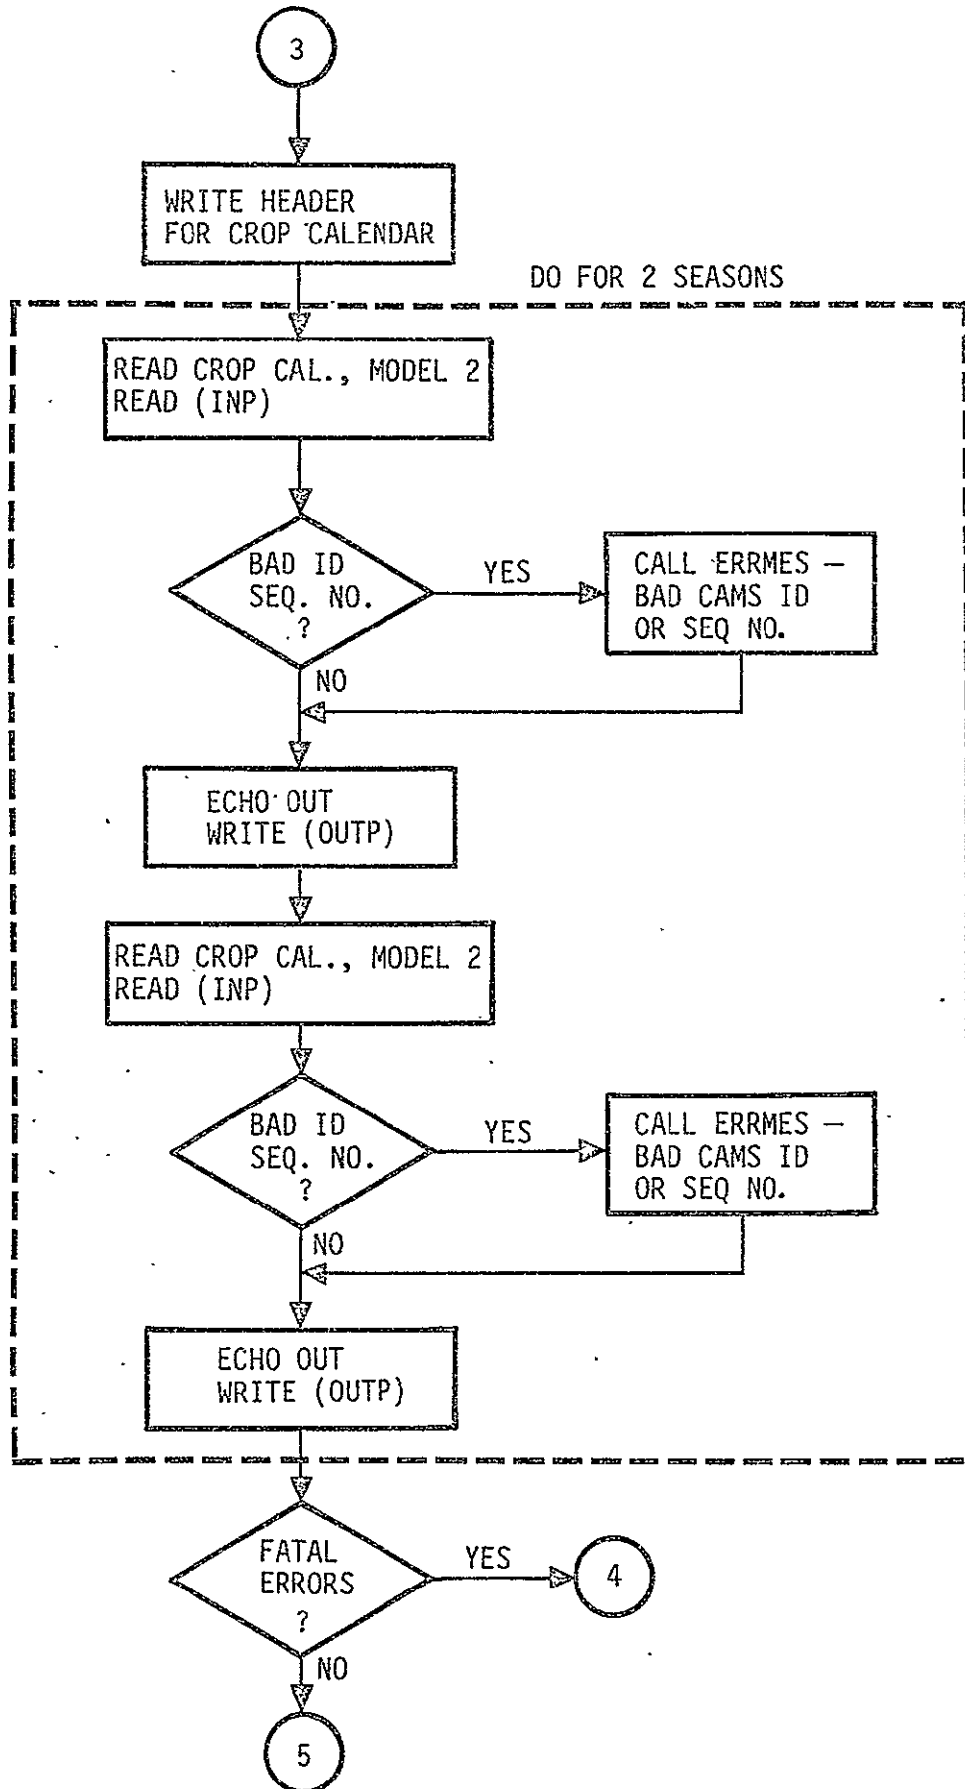



CAMSIN (CONT'D)

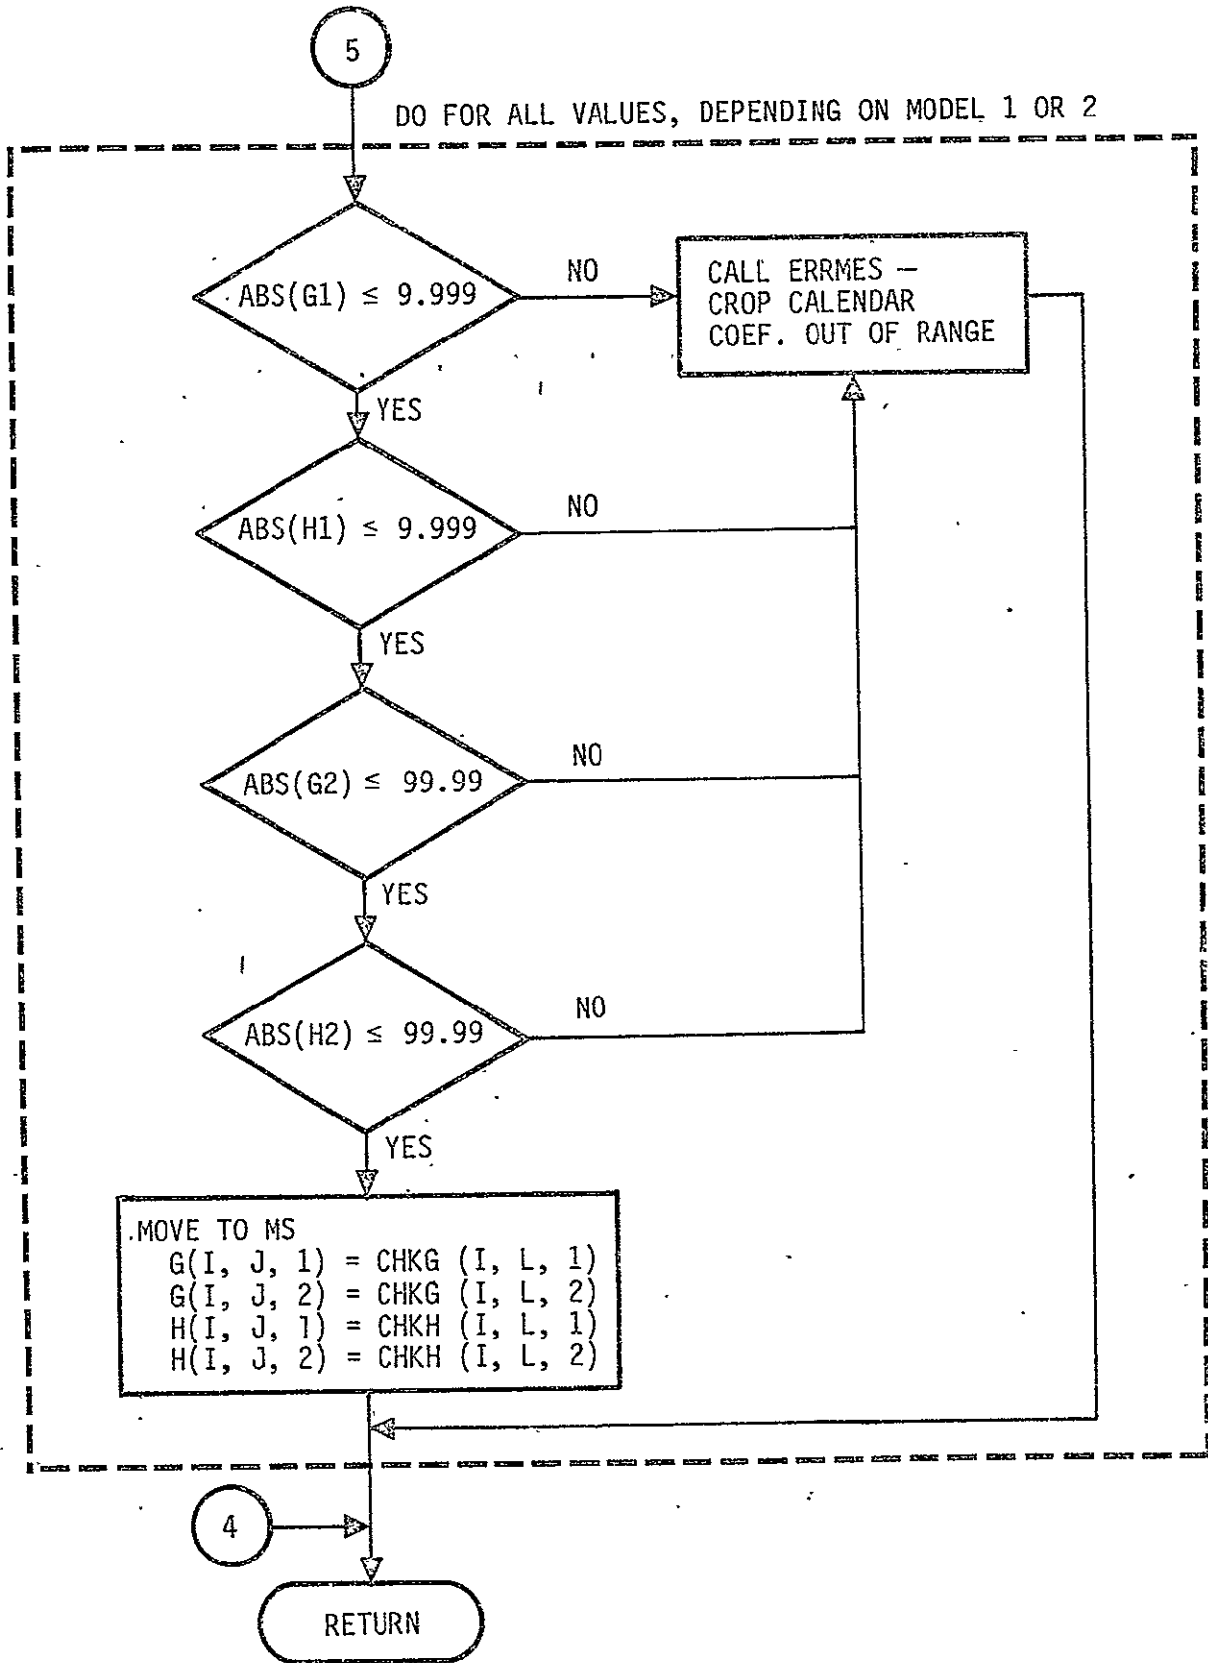

SUBROUTINE BETAD

Purpose: To compute a random number based on the Beta distribution or normal distribution, given a random number seed.

Input: No input from COMMON or files.

Output: No output to COMMON or files.

Linkage: CALL BETAD (SEED, XBAR, SIGMA, XI, IOPT, IER)

Input:	SEED	A double precision random number seed used to get a uniform random number P, $0 < P < 1$
	XBAR	Mean value $\bar{X}$ , $0 \leq \bar{X} \leq 1$
	SIGMA	Standard deviation $\sigma$ , $0 \leq \sigma$
	IOPT	= 0 use Beta distribution ≠ 0 use normal distribution
Output:	XI	Random number based on Beta or normal distribution $X_i$
	IER	Error flag = 0 no errors = 1 XBAR not in range, $0 \leq \bar{X} \leq 1$ so was reset within subroutine = 2 SIGMA not in range, $0 \leq \sigma \leq \bar{X} \sqrt{\frac{1 - \bar{X}}{\bar{X} + \epsilon}}$ so was reset within subroutine, $\epsilon = 10^{-4}$ = 3 Fatal error, XI could not be found within constraints of subroutine; e. g., within 35 iterations via the inverse incomplete beta function method
	SEED	To be used for next call to BETAD (a double precision number)

Subroutines used:

CALL RDMIA (SEED, P) to get uniform random number P  
SEED = double precision

CALL IBETAI (X, A, B, P, IER) to get incomplete beta function

Note: IBETAI is algorithm AS 63 Appl. Statist. (1973), Vol. 22, No. 3

SQRT (X)	squareroot
A LOG (X)	exponential
EXP (X)	natural logarithm
A LOG(X)	natural logarithm

Local variables:

A		First Beta parameter
B		Second Beta parameter
BP		Recalculated second Beta parameter
CHK		Normal distribution parameter
DIFF		Accuracy check
DIFF1		Check if XI close to 0
EP		$10^{-4}$ , accuracy of answer
FLAG	INTEGER	Flag to signal $XBAR > .5$
H		Beta approx. parameter
I		Loop counter
K	REAL	2., method threshold constant
P		Output from RDMLA, $f(X)$ for Beta function
PHI		Limit for iteration of P
PLO		Limit for iteration of P
PO		Output from IBETA1
R		88., Gamma constraint
RN		Normal distribution parameter
SIG		Stores SIGMA, or SIGMAL, for use in routine
SG		$10^{-10}$ check on successive answers in loop
SIGMAL		Upper limit on SIGMA
SIGSQ		$SIG * SIG$ , intermediate calculation
SIGT		Method threshold sigma
T		Normal distribution parameter
W		Beta approx. parameter
XAVG		$XBAR$ , or $1 - XBAR$ if $XBAR > .5$
XHI		Limit for iteration of X
XLO		Limit for iteration of X
XSQ		$XBAR * XBAR$ , intermediate calculation
Y		Beta approx. parameter
YP		Beta approx. parameter

BETAD Subroutine Equations

Equation set 1 - normal distribution parameters:

$$T = \begin{cases} \sqrt{\ln \frac{1}{P^2}} & 0 < P \leq .5 \\ \sqrt{\ln \frac{1}{(1-P)^2}} & .5 < P < 1 \end{cases}$$

$$CHK = T - \frac{2.30753 + .27061T}{1. + .99229T + .04481T^2}$$

$$RN = \begin{cases} -CHK & 0 < P \leq .5 \\ +CHK & .5 < P < 1 \end{cases}$$

Equation set 2 - SIGMA upper limit:

$$SIGMAL = XBAR \sqrt{\frac{1 - XBAR}{XBAR + EP}} \quad EP = 10^{-4}$$

Equation set 3 - Beta function parameters:

$$A = \frac{XBAR^2 - XBAR (XBAR^2 + SIGMA^2)}{SIGMA^2}$$

$$B = \left( \frac{1 - XBAR}{XBAR} \right) A$$

Equation set 4 - method threshold:

$$SIGT = XBAR \sqrt{\frac{1 - XBAR}{XBAR + K}} \quad K = 2$$

Equation set 5 - Beta approximation parameters:

$$YP = -RN$$

$$H = 2 \left( \frac{1}{2A - 1} + \frac{1}{2B - 1} \right)^{-1}$$

$$Y = \frac{YP^2 - 3}{6}$$

$$W = \frac{YP (H + Y)^{1/2}}{H} - \left( \frac{1}{2B - 1} - \frac{1}{2A - 1} \right) \left( Y + \frac{5}{6} - \frac{2}{3H} \right)$$

Equation set 6 - XI for Beta approximation:

$$XI = \frac{A}{A + B \cdot e^{2W}} \quad \text{ABS}(A \text{ LOG}(B) + 2 * W) \leq 87$$


Equation set 7 - recompute A and B, Beta parameters:

$$B^1 = \frac{B}{A + B} \cdot (R - 1)$$

$$A^1 = \frac{BP}{B} \cdot A$$

Equation set 8 -


$$XI = \frac{(XH1 + XL0)}{2}$$

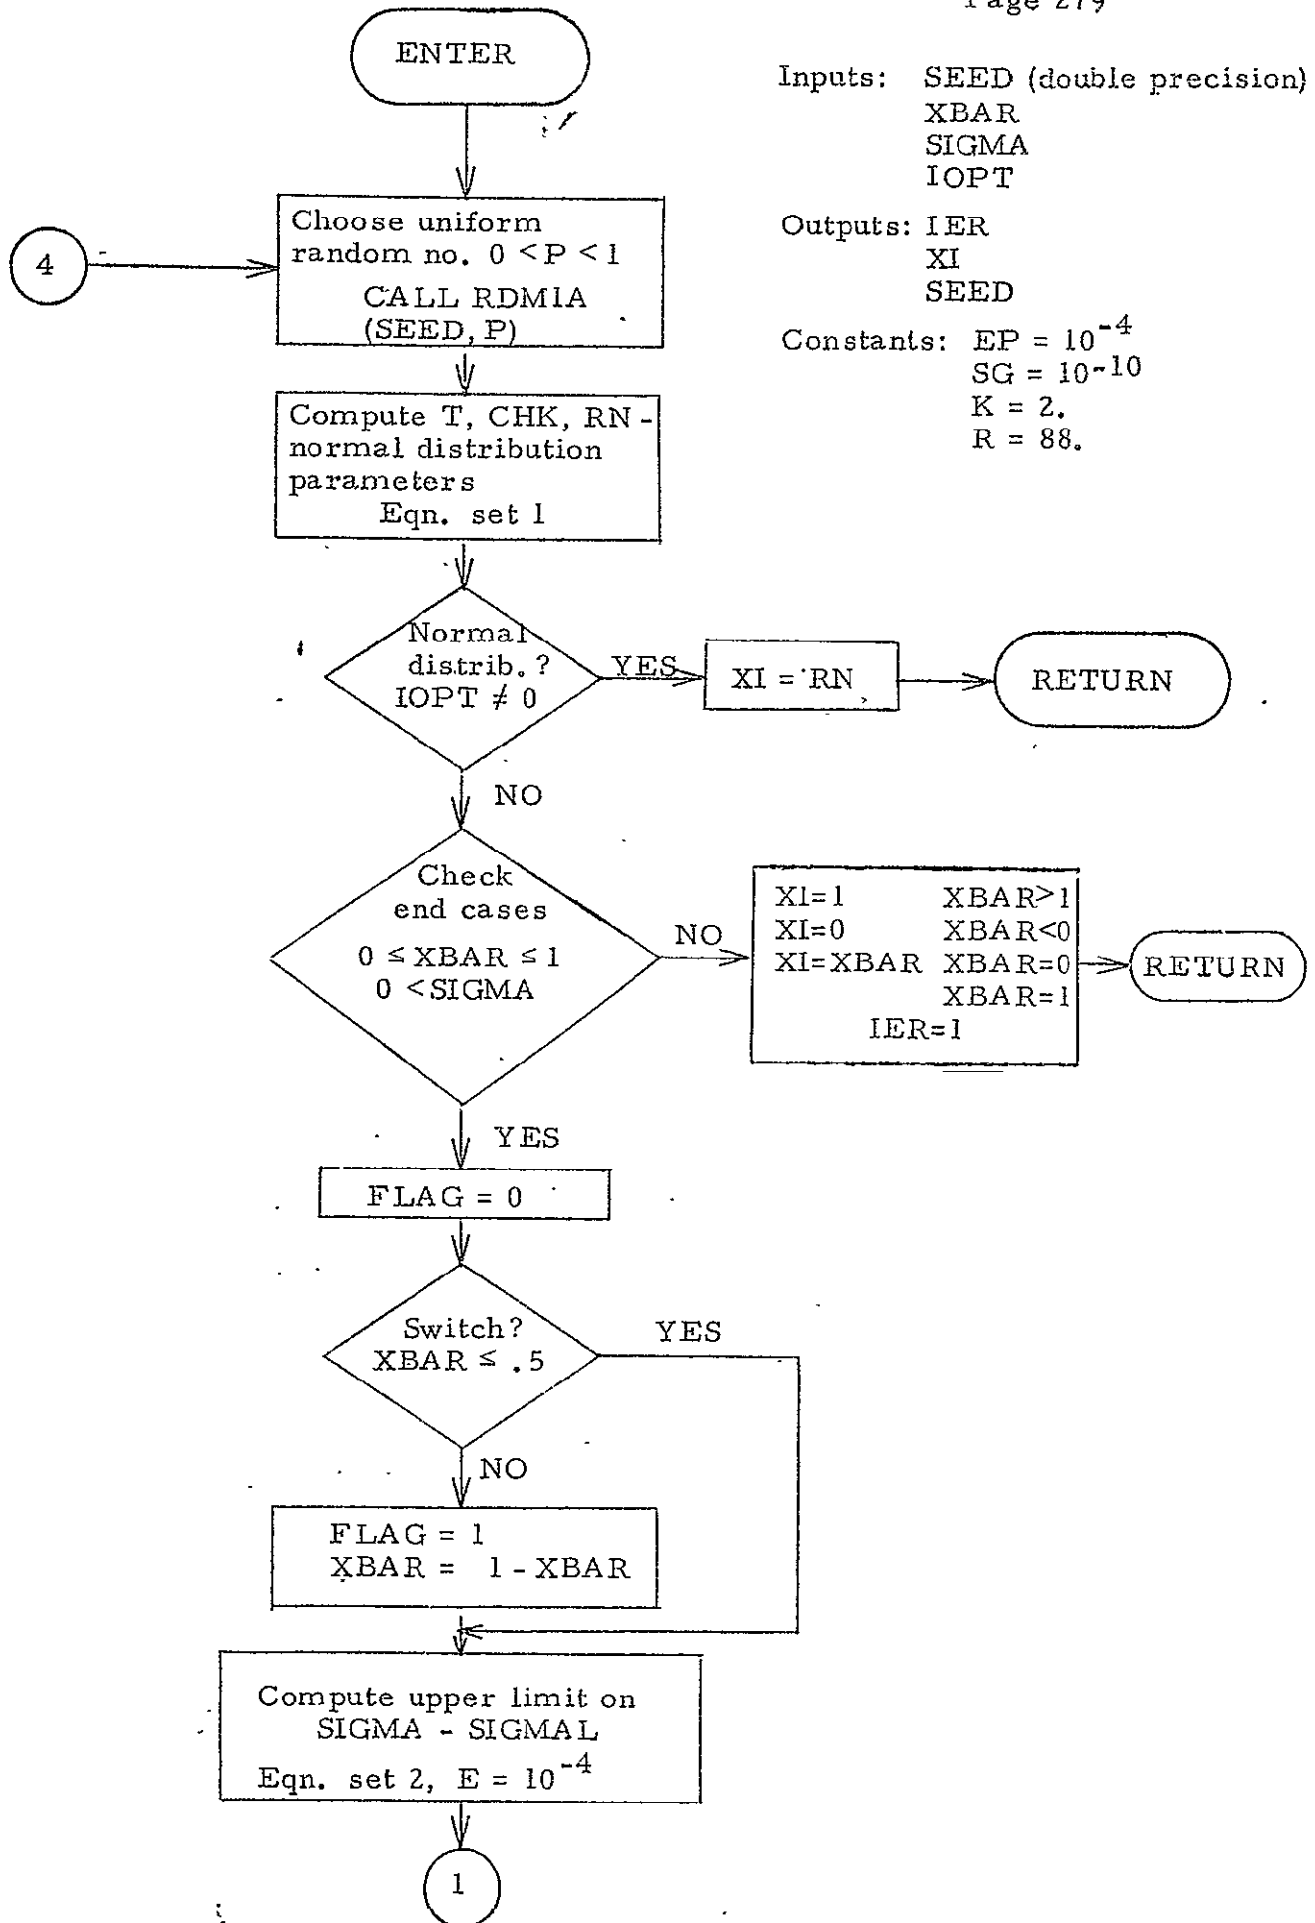


Inputs: SEED (double precision)  
XBAR  
SIGMA  
IOPT

Outputs: IER  
XI  
SEED

Constants: EP = 10<sup>-4</sup>  
SG = 10<sup>-10</sup>  
K = 2.  
R = 88.

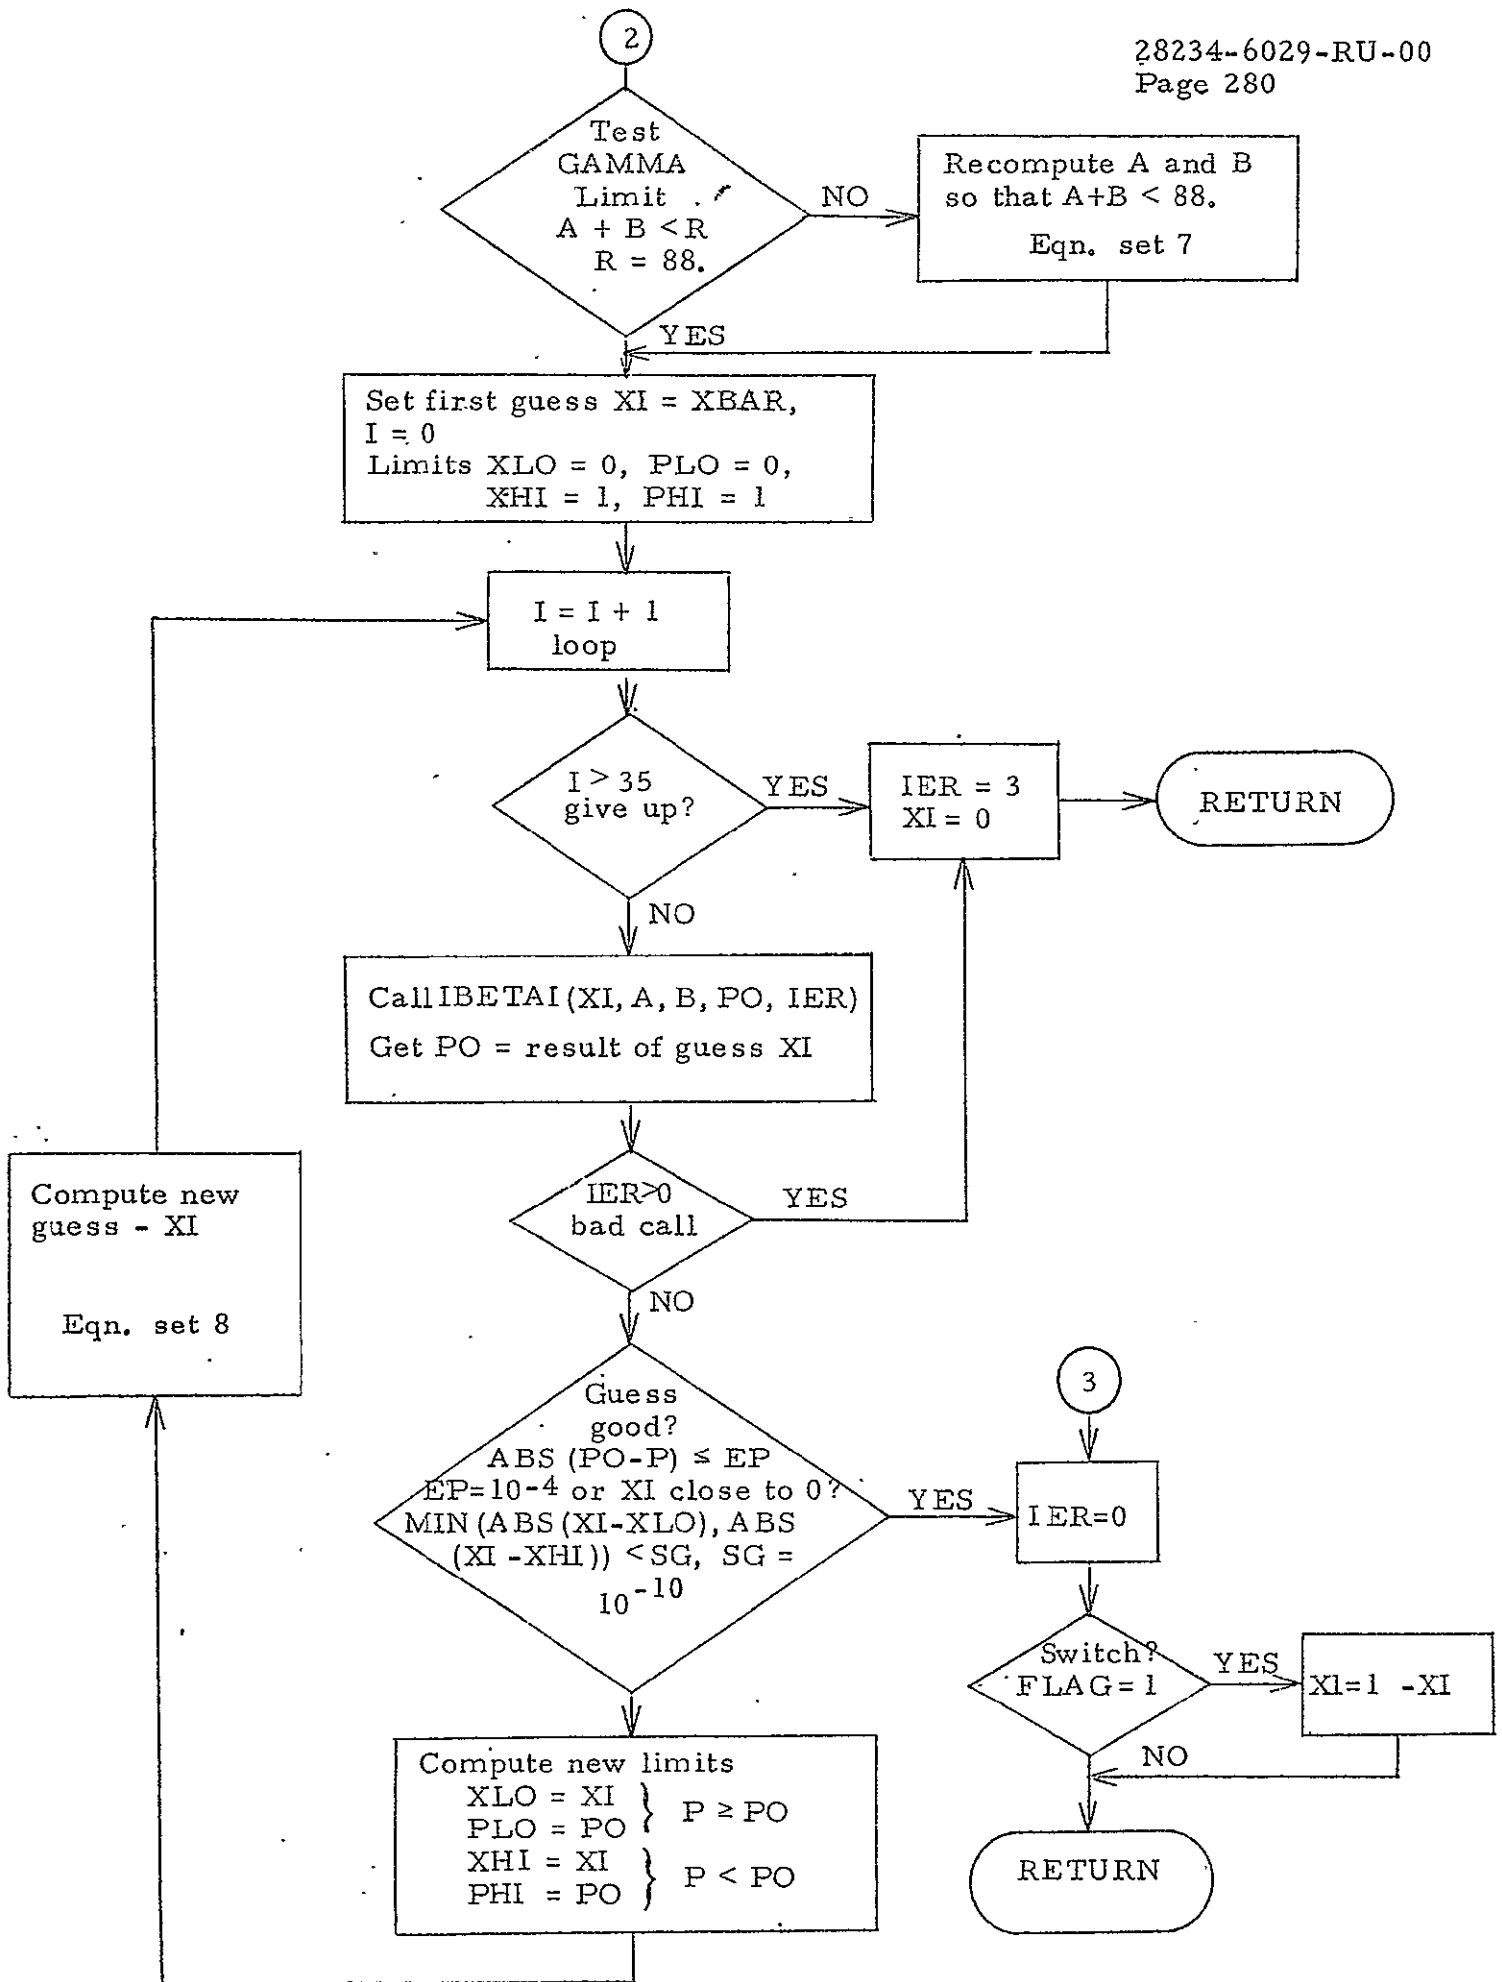

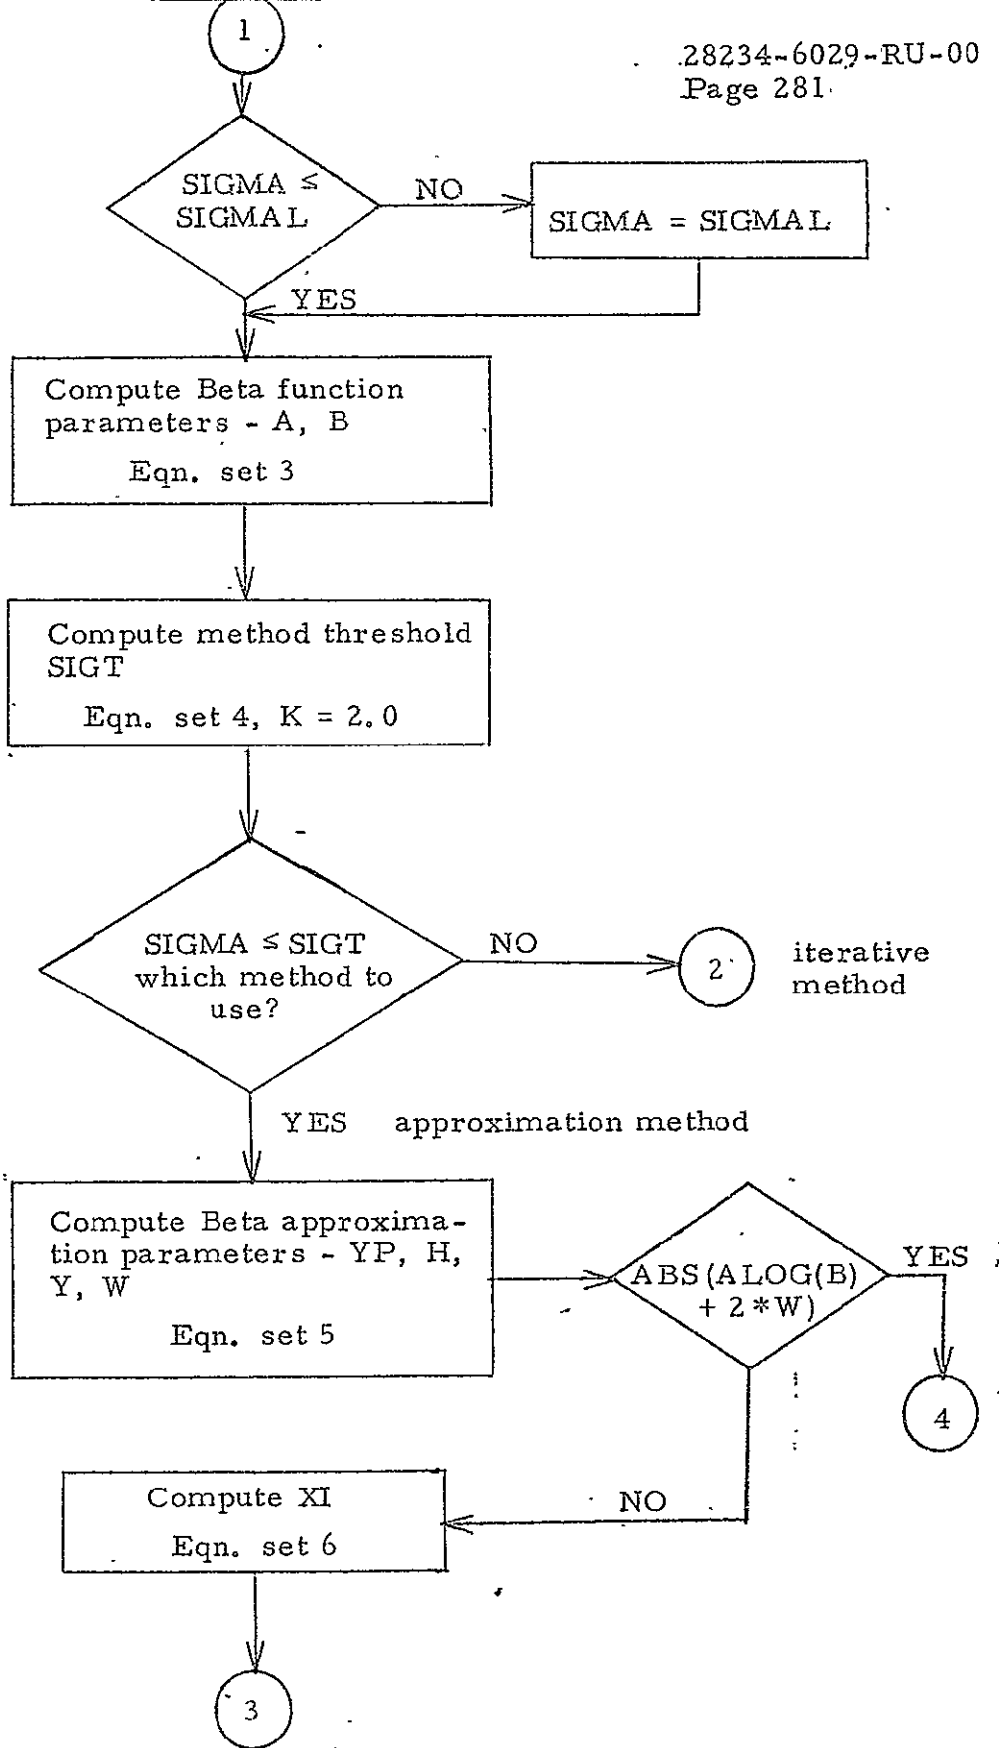

BETAD Subroutine Flowchart (Sheet 2 of 3)



## SUBROUTINE CAMS

### Purpose:

This is the driver for the CAMS module. It calls the appropriate subroutines to calculate intermediate error quantities and then combines them for the estimated proportion of wheat for each acquisition date for each segment. Depending on error bypass flags, certain error calculations may be bypassed. Model 2 is treated as a subset case of the more complex model 1, where the error factors for mixed and other fields are not computed. To do this, data from the input files and cards must be read in and stored depending on which model is used. Figure 6 of the CAMS Problem Description gives the flow of this subroutine.

### Input:

```
    /CAMSCM/  IMODEL
              IMULTI
              ISIGEX
              ISKIP
              ITMAX
              IREP
              IWIND
              IGROUP (3, 2, 15)
              MS (3, 2, 3)
              G (3, 2, 2)
              H (3, 2, 2)

    /LEMCM/   ISEXT
              ISCC
              ICLASS
              ICAMS
              IACQ
              STARTZ
              ENDZ
              STARTR
              ENDR
              ICASE

    /CNTRL/   PRINTF
              SEED(2)
              SEED(3)
              SEED(4)
```

Output:

```
/CNTRL/      SEED(2)  
              SEED(3)  
              SEED(4)  
  
/ARGLST/     NFATAL  
  
/PAGECM/     NPAGE  
              NLINE  
  
/STATS/      NREC(2)  
              NREC(4)  
              NREC(6)  
              NREC(7)  
              NCAMSR
```

CAMS output file (CAMSF) - see file descriptions.

CAMS printed report - see CAMS Problem Description, Figure 7.

CAMS error messages - see CAMS Problem Description, Section 5.3.

Linkage:

CALL CAMS - called from LEM program.

Subroutines Used:

CALL INPT (ISEG, IACQU, ICAMER, ICROP, ISIGEX, IMODEL,  
IPASS, IDONE, IEND) to read in input file records.

CALL INITI (ISEG, IACQ, ICAMER, ICROPW, ISIGEX, HEAD) to  
initialize input files, ready to read.

CALL CLASS (SEED(2), TYPE, WINDOW, M, BCC, SIGCC, XI)  
to compute classification error.

CALL MULTI (TYPE, SEASON, IWIN, M) to compute multi-temporal  
error.

CALL CROP (SEED(4), TYPE, SEASON, WINDOW, IFIRST, BCC,  
SIGCC, ITSEG) to compute crop calendar error.

CALL CORREL (ITMAX, ACQUIS, WINDOW, IUSE) to correlate  
training segment with ordinary segment.

CALL SIGEXT (SEED(3), TYPE, WINDOW, IUSE, ISIGEX, XI) to  
compute signature extension error.

CALL TSAVE (0, -1, IBAD) to close RA file TACQ.


CALL REPORT (IPASS, IFIRST, IREP) to write report.

CALL EJECT (IND) to start report.


Local Variable Description:

WHE	integer, =1, wheat component
MLX	integer, =2, mixed component
OTH	integer, =3, other component
ERR	10 <sup>-6</sup> to keep from dividing by zero
IFIRST	flag for report, =1 if first acquisition for segment , >1 otherwise
SEASON	integer, which type wheat, 1 = winter, 2 = spring
WINDOW	integer, which window acquisition in, 1-4
TYPE	integer, which component (1 = wheat, 2 = mixed, 3 = other)
MODEL	integer, how many iterations to do (1 = model 2, 3 = model 1)
HEAD(4, 4)	holds window titles from INITI subroutine
XI(3)	holds total error from CLASS or SIGEXT
M(3)	holds multi-temporal error from MULTI
BCC(3)	holds crop calendar bias from CROP
SIGCC(3)	holds crop calendar sigma from CROP
P(3)	holds proportions, wheat, mixed, other
IWINDO(4)	flags for MULTI, = 0 no acquisition in window = 1 at least 1 acquisition in window
ICROPW	flag for INITI and INPT, CROPW file bypass
ISIG	flag for INITI and INPT, SIGEXT file bypass
ISEG	flag for INPT, SEGTRU file bypass
IACQNO	what acquisition no. on, 1-25
IDONE	output of INPT
IEND	output of INPT
IUSE	output of CORREL
I, J	indexes for DO loops
IFILL	filler for trailer record, output file
ITOT	no. of words of filler IFILL
ZERO1	used to prevent divides by 0
ZERO2	
ZZZZ	contains ZZZZ for trailer record


SUBROUTINE CAMS BLOCK DIAGRAM

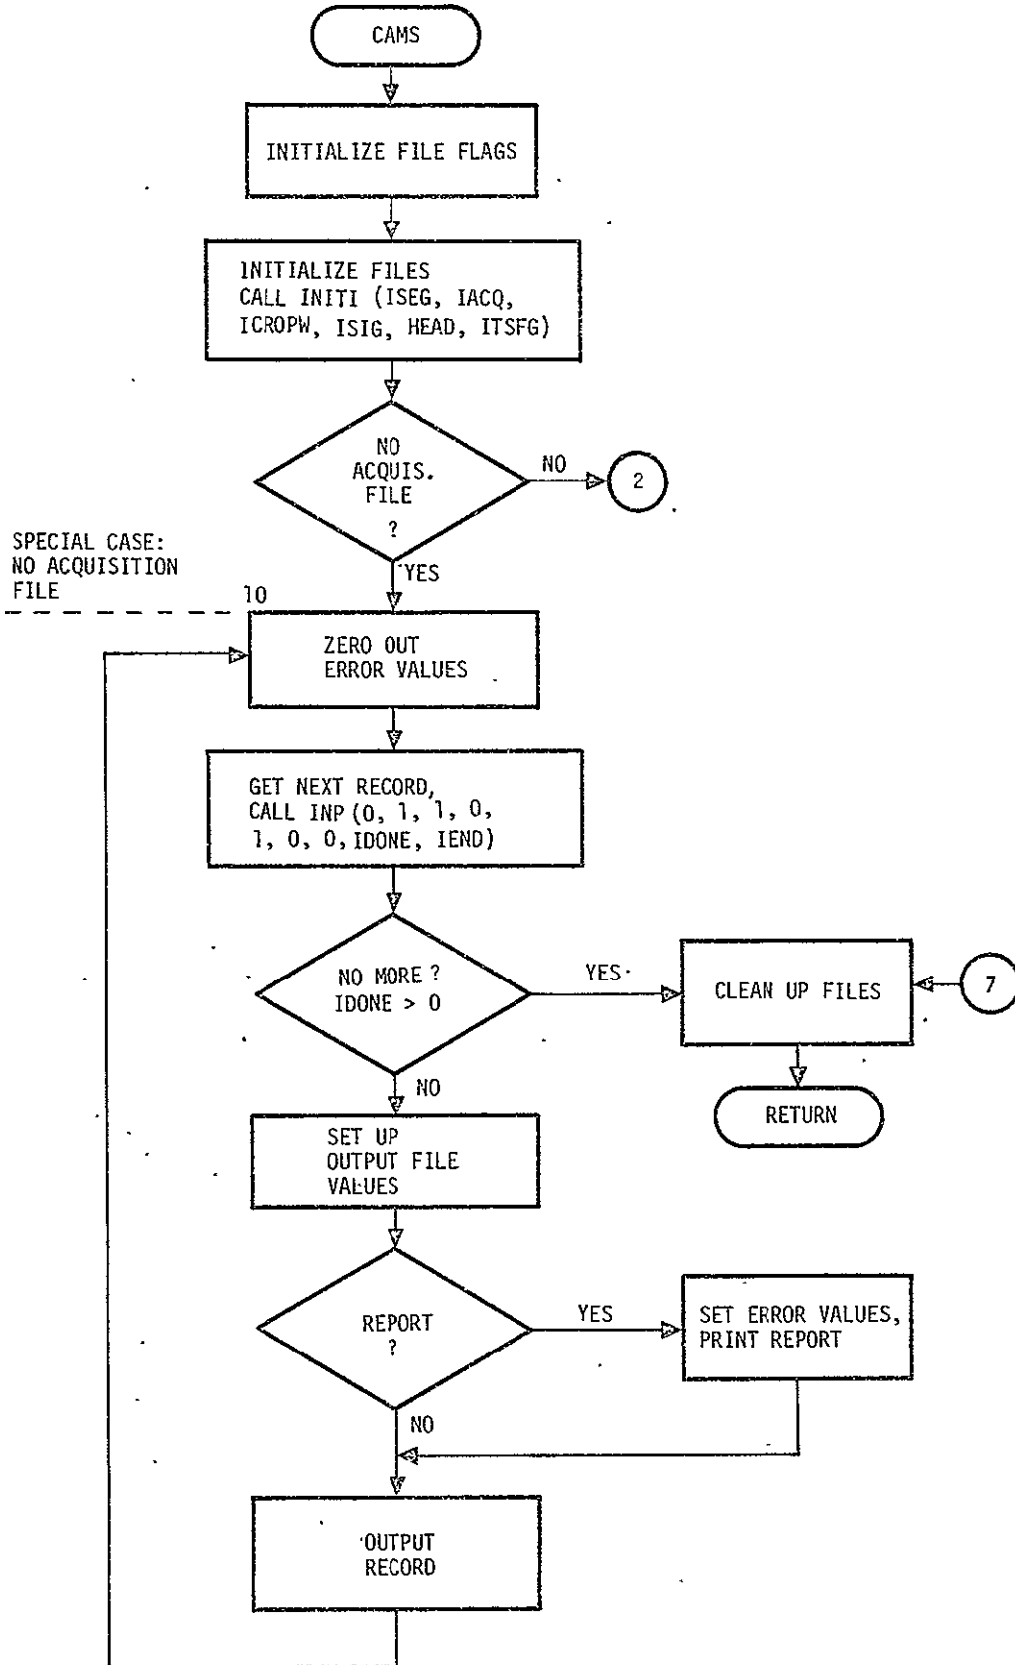

PASS 1 - TRAINING SEGMENTS

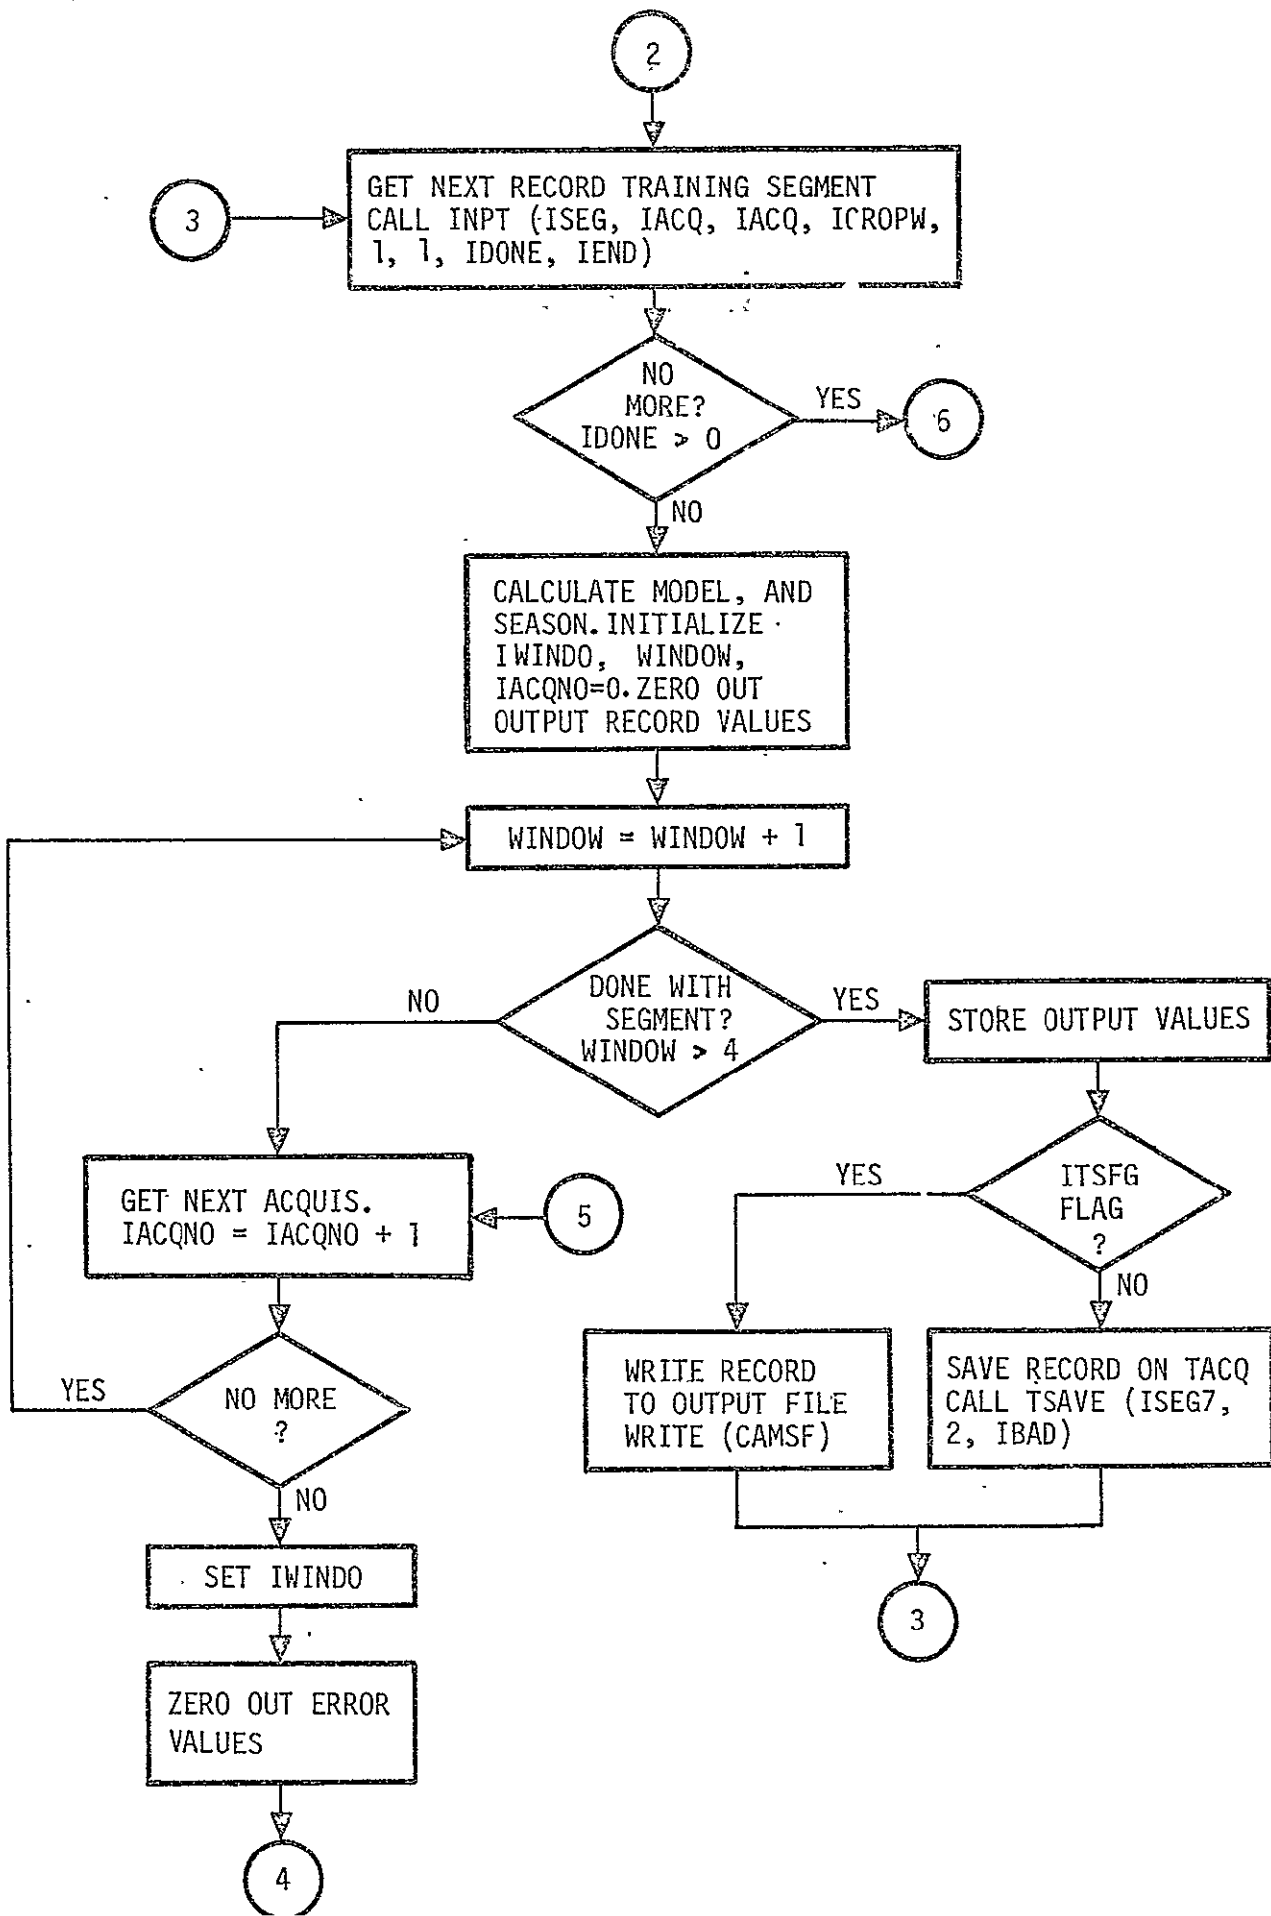


CAMS (CONT'D)

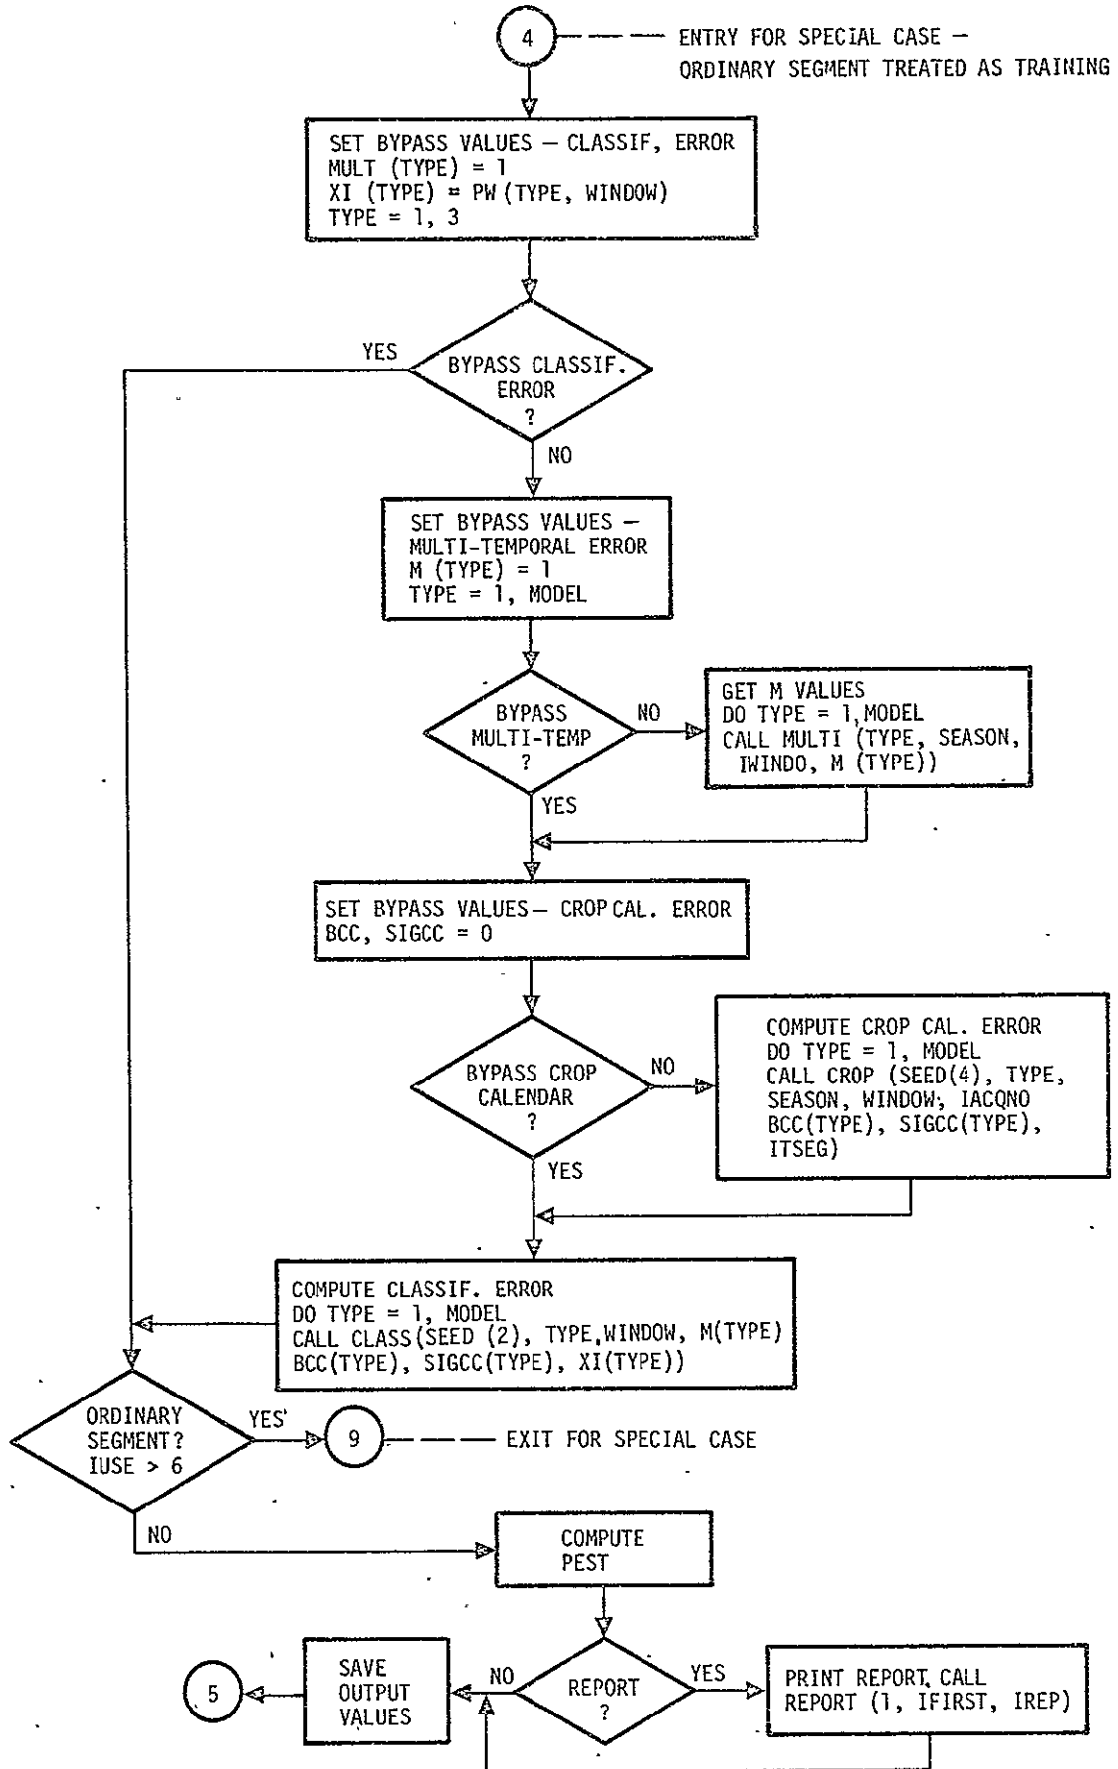


ORIGINAL PAGE IS  
OF POOR QUALITY

CAMS (CONT'D)  
PASS 2 - ORDINARY SEGMENTS

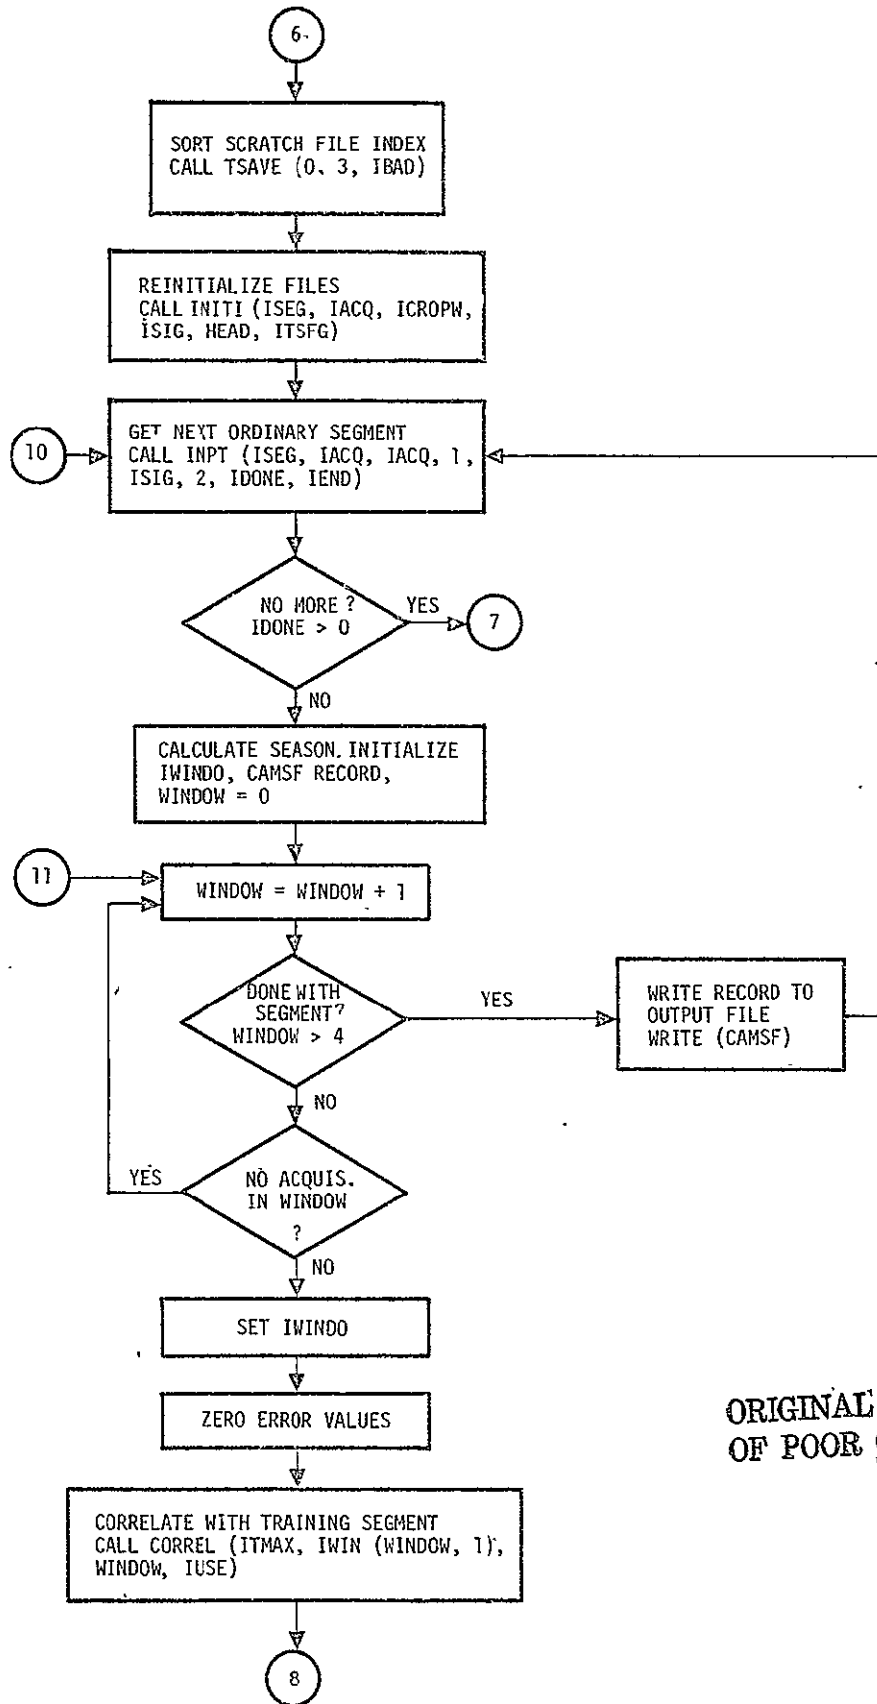

**ORIGINAL PAGE IS  
OF POOR QUALITY**

CAMS (CONT'D)

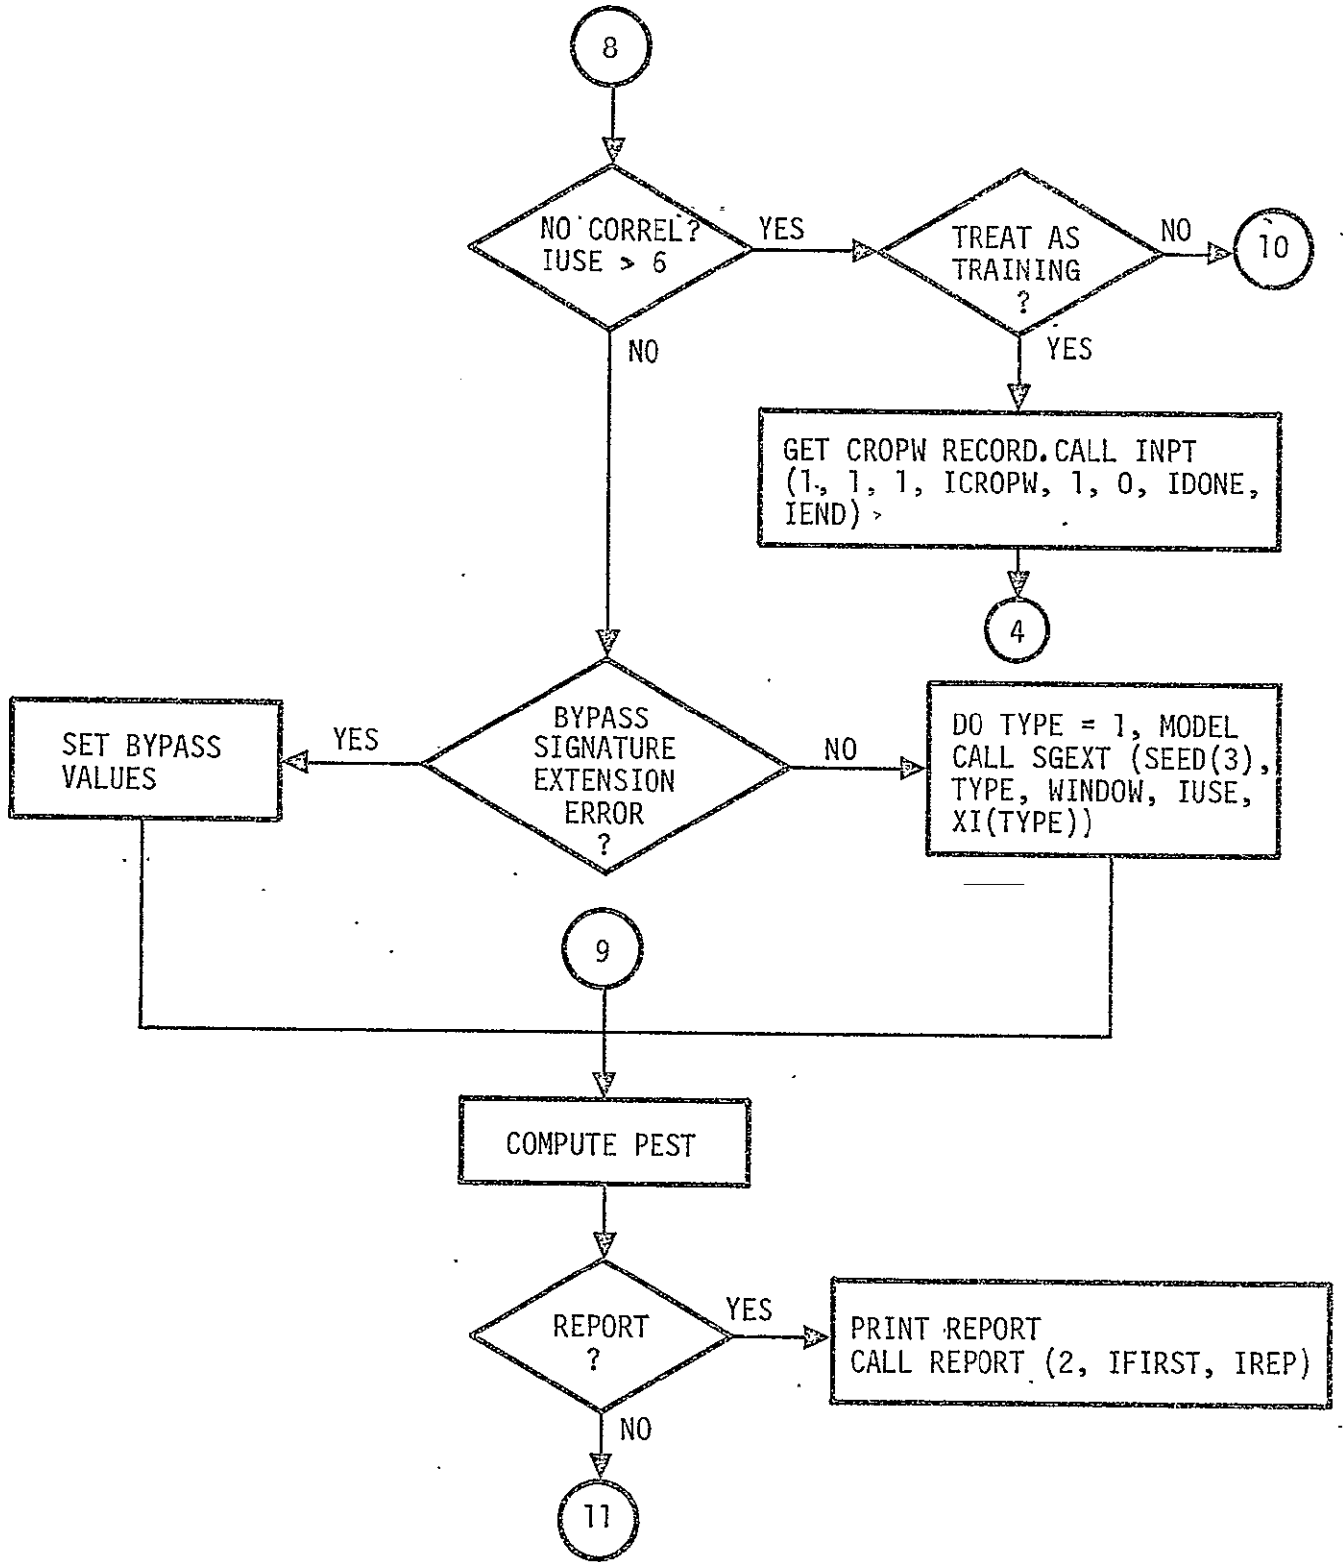



SUBROUTINE REPORT

Purpose:

This subroutine outputs the printed report for CAMS. On option, the breakdown of error values can be omitted. REPCRT is organized into two passes -- training segments are listed first, then ordinary segments. The special case, no acquisition file, is handled separately. For model 2, with fewer values, zeros appear in the irrelevant fields. For the special case of an ordinary segment acquisition with no training segment correlation, the data is flagged.

Input:

/ERROR/	TITLE(4) IDATE PESTIM TOT ALOCAL ERTOT(3) ERBIAS(3) ERRAND(3) CLTOT(3) CLBIAS(3) CLRAND(3) CROPF CROPD SIGZ(3, 2) MULT(3) TID TRAINA TRAIND
---------	--

/SEGTRU/	COUN4 IREG4 IZONE4 ISTR4 ISUB4 ISEG4 PT(1)
----------	--

/FILES/	CROPW ACQUIS CAMS CAMERR SIGEXT SEGTRU INP OUTP TACQ LCAMSF
---------	--

Output:

Printed report only. See CAMS Problem Description, Figure 7.

Linkage:

CALL REPORT (IPASS, IFIRST, IREP)

Inputs: - IPASS       =0 special case - no acquisition file  
              =1 training segment pass  
              =2 ordinary segment pass

          IFIRST      =1 first acquisition for segment  
                      >1 not first acquisition for segment

          IREP        report flag from CAMS control card  
                      =1 no error breakdown, just estimates  
                      =0 print error breakdown report too


Subroutines Used:

CALL PAGER (IND) to print headings.



CALL FZULU (DATE, IOUT) to get calendar date from Zulu date.

Local Variable Description:

IOUT(3) holds calendar date from FZULU subroutine

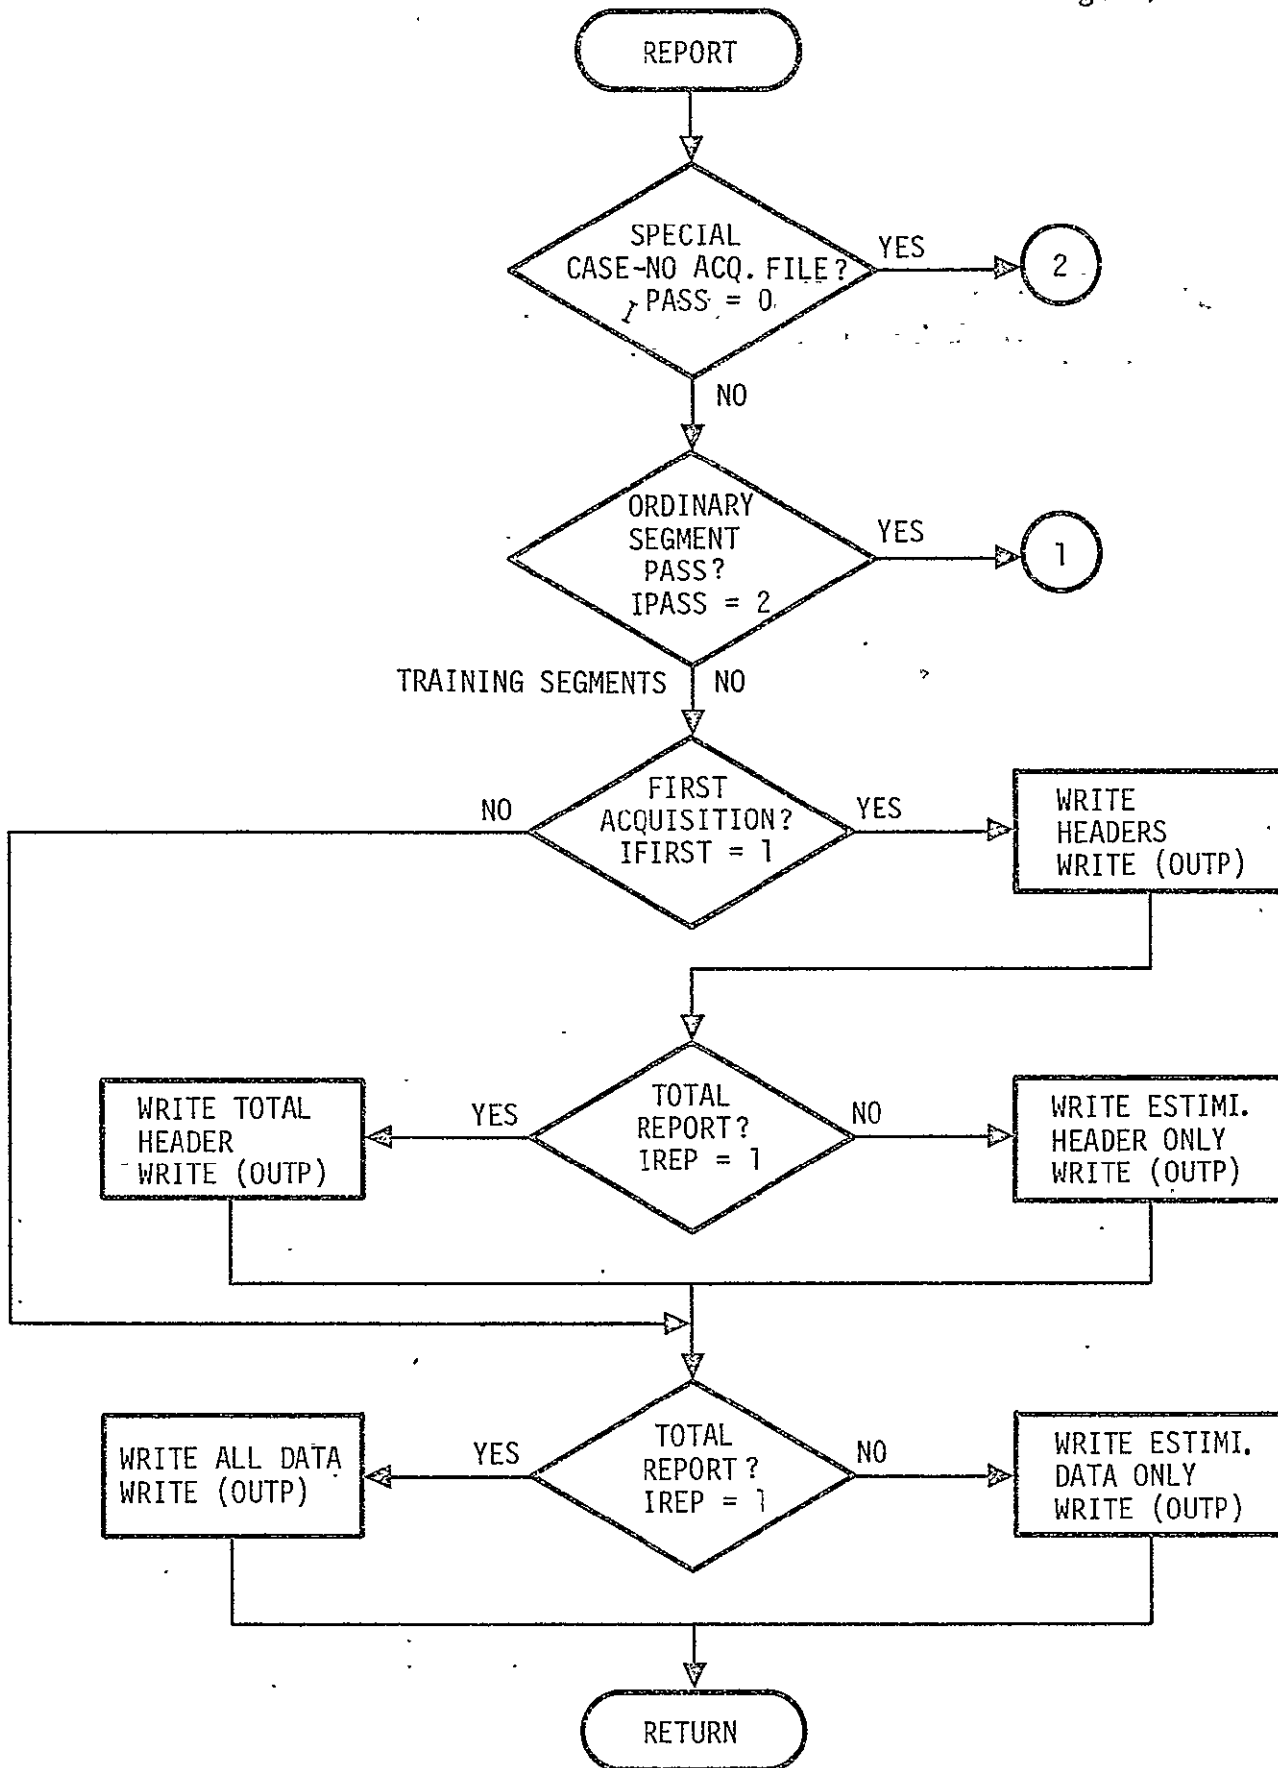

REPORT (CONT'D)

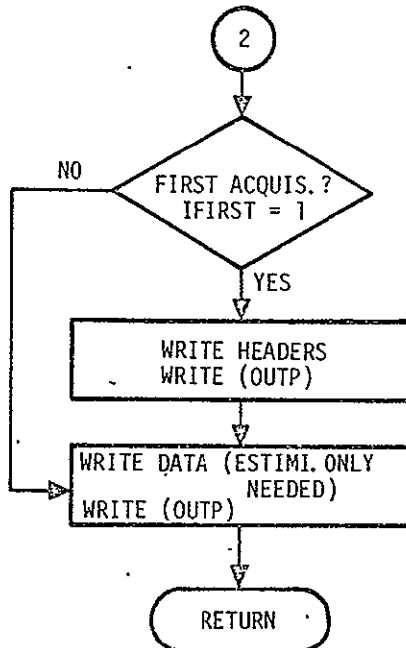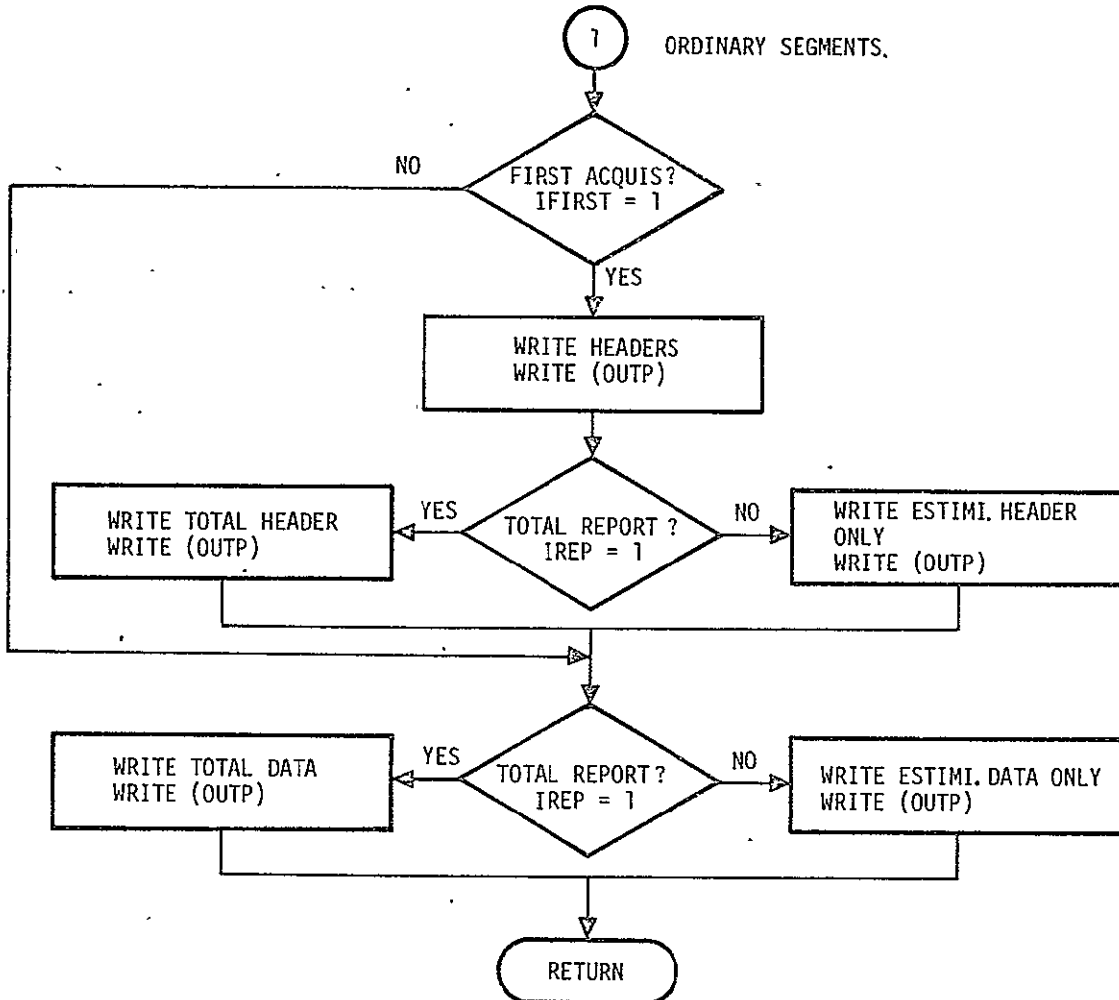

ORIGINAL PAGE IS  
OF POOR QUALITY

SUBROUTINE INITI

Purpose:

This subroutine initializes the input and output files, plus the intermediate direct access file, for CAMS. It finds the first record to process on the key file SEGTRU, passes over the headers of the other input files, opens the direct access file, and outputs the header on the output CAMSF file. Depending on which error conditions are bypassed, some steps may be bypassed.

Input:

/LEMCM/	STARTR	starting region and zone, integers
	STARTZ	
	IACQ	} for output file header
	ISCC	
	ICLASS	
	ISEXT	
	ICAMS	
ICASE	case no. of output file	
/FILES/	SEGTRU	} logical file unit nos., integers
	ACQUIS	
	TACQ	
	CAMERR	
	CROPW	
	SIGEXT	
	CAMSF	
LCAMSF	length of output record	
/CAMSCM/	IMODEL	model no. (1 or 2)
	IMULTI	for output file header

See also linkage.

Output:

/INDX/	INDEX	index for RA scratch file TACQ
/ARGLST/	NERRS	error count passed back from ERRMES subroutine
	NFATAL	
	NPERRS	

See also linkage.

## Linkage:

CALL INITI (ISEG, IACQU, ICAMER, ICROPW, ISGEX, HEAD, ITSFG)

Inputs: . ISEG  
 IACQU flags for input files - 0 read file  
 ICAMER >0 skip reading file  
 ICROPW  
 ISGEX

Outputs: HEAD(4, 4) headings for the four crop windows from  
 ACQUIS file unless bypassed, then defaults to  
 \*\*\*\*WINDOW 1\*\*\*\*  
 \*\*\*\*WINDOW 2\*\*\*\*  
 \*\*\*\*WINDOW 3\*\*\*\*  
 \*\*\*\*WINDOW 4\*\*\*\*

ITSFG flag if all training segments  
 =0 all training  
 #0 training and ordinary

## Subroutines Used:

CALL ERRMES (4HCAMS, 4HINIT, 1, 1) to report error message.

CALL TSAVE (0, 0, IBAD) to open scratch file TACQ.

## Local Variable Description:

NAME(2) name of output file  
 ICAS(5) case nos. of input files  
 IFILL filler, = 0


/ARGLST/ NARG no. of arguments in error routine list

/SEGTRU/ COUN4 from SEGTRU input file record  
 IREG4  
 IZON4


ISKP to skip over words

ITOT no. of filler words on header output file record

SUBROUTINE INITI BLOCK DIAGRAM

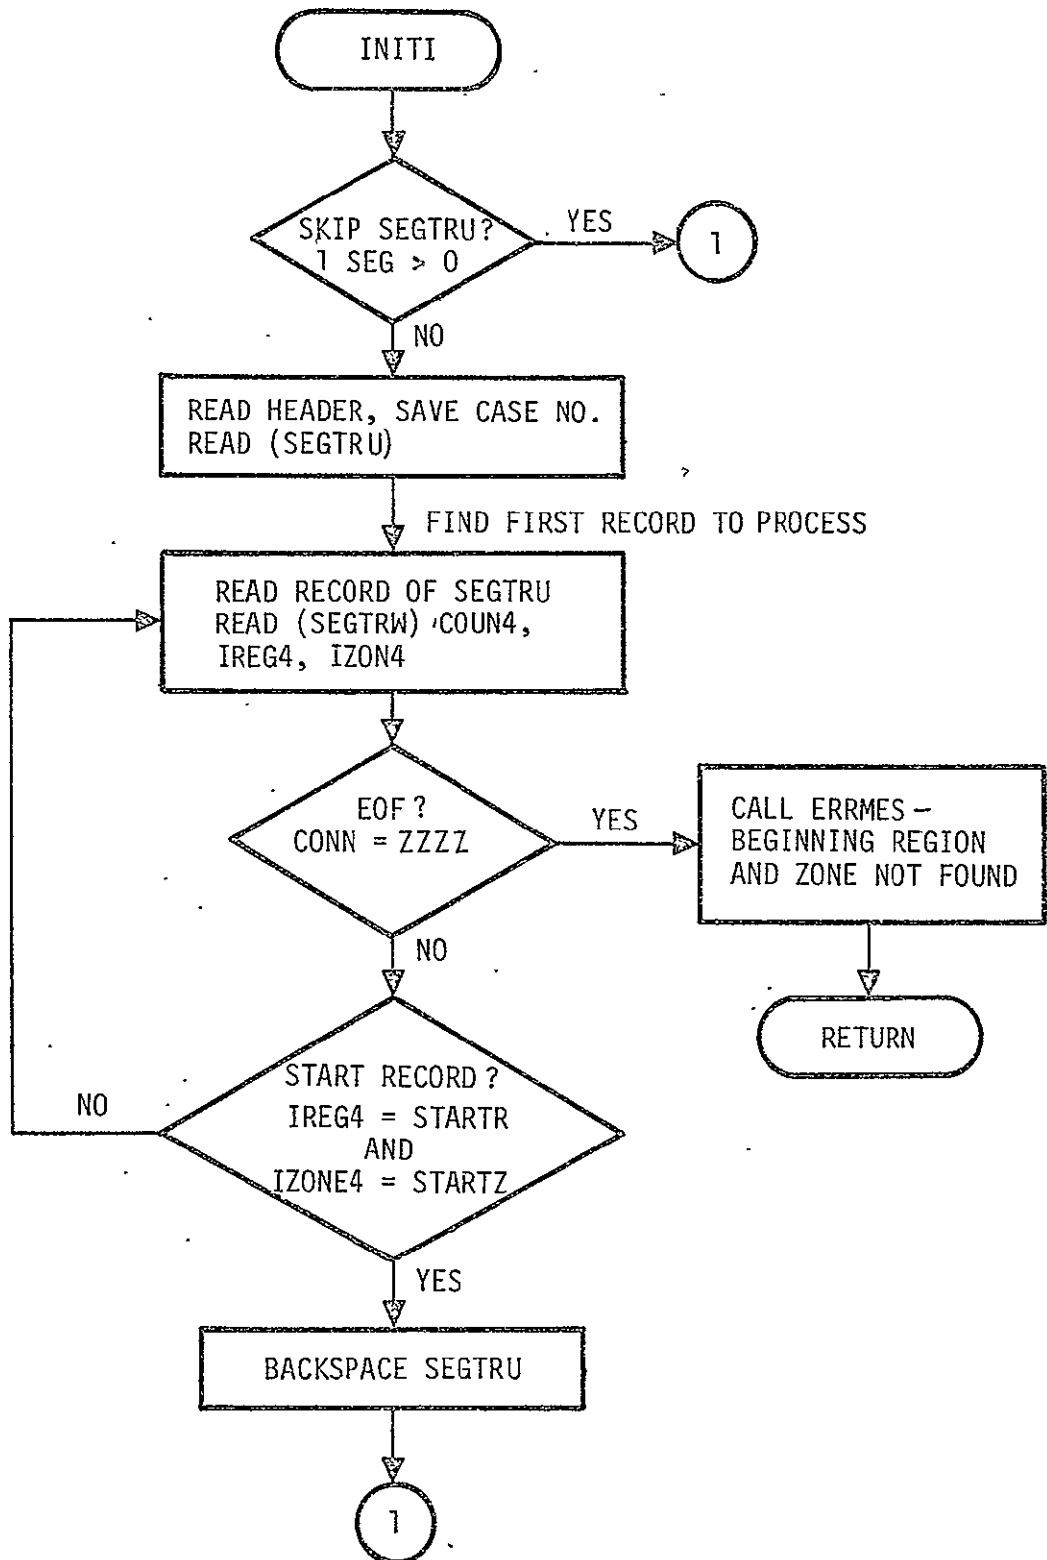

INITI (CONT'D)

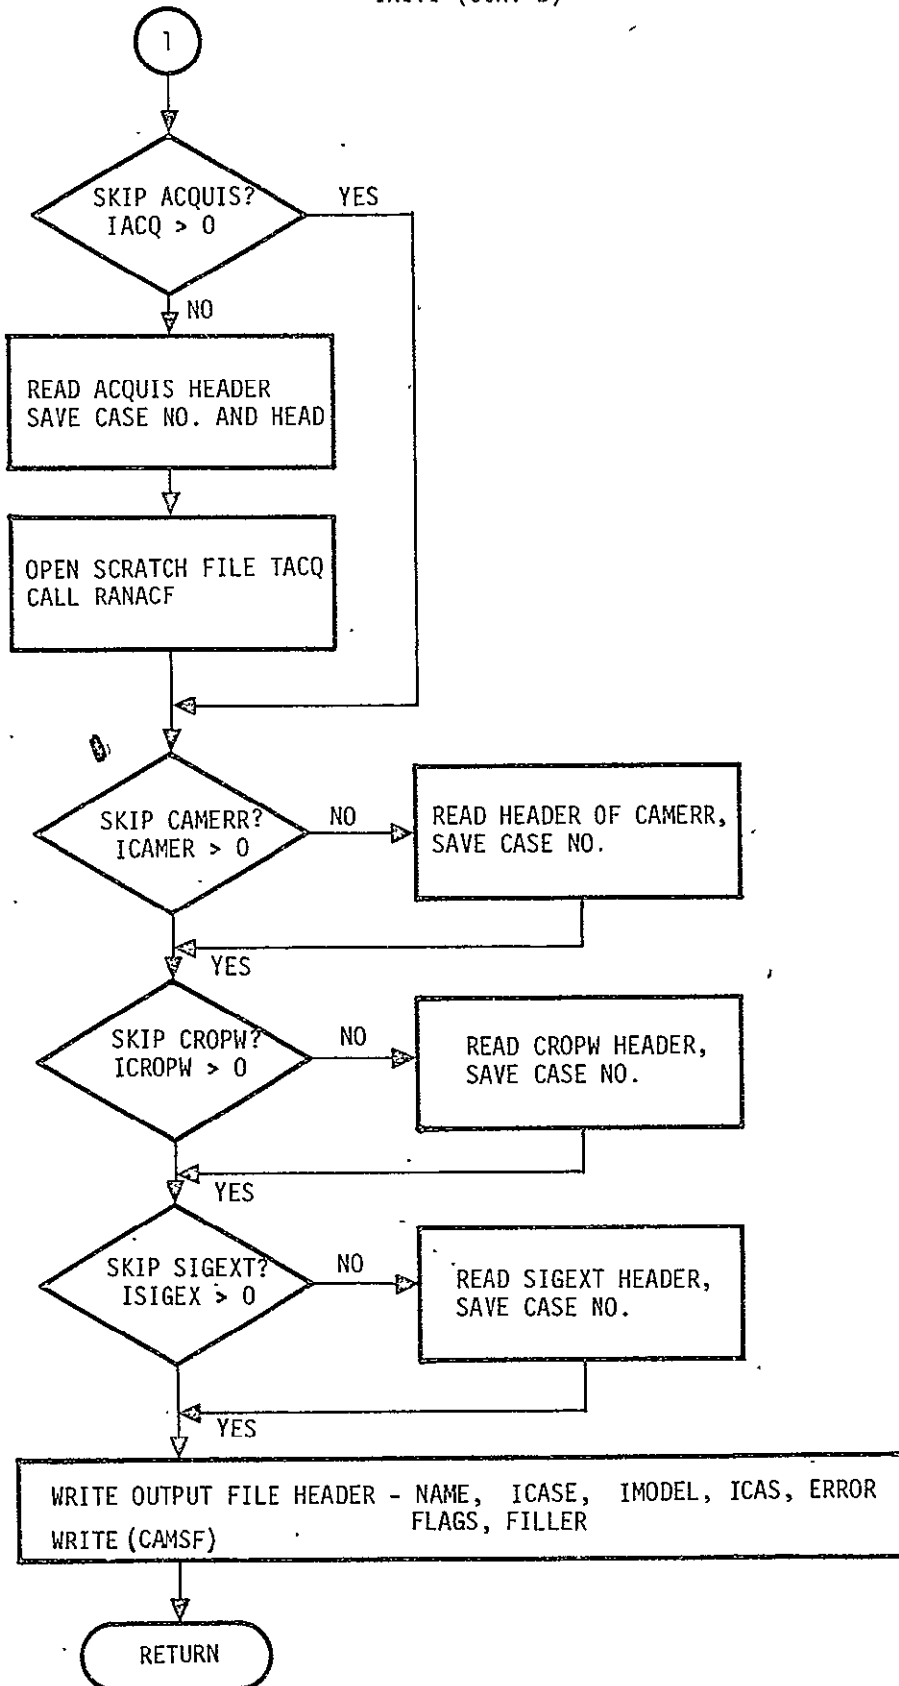



## SUBROUTINE MULTI

### Purpose:

This subroutine returns the multi-temporal sampling error factor from the card input matrix, depending on the kind of wheat (winter, spring), the type (wheat, mixed, other), and which windows have had acquisitions. Model 2 is treated as though kind of wheat is wheat only. A value for the error report is saved.

### Input:

/CAMSCM/ IGROUP(3, 2, 15) from card input  
MS(3, 2, 3)

See also linkage.

### Output:

/ERROR/ MULT(3) for error report

See also linkage.

### Linkage:

CALL MULTI (TYPE, SEASON, IWIN, M)

### Inputs:

TYPE integer, which component of mixed crops (1 = wheat,  
2 = mixed, 3 = other; for model 2, 1 = wheat only used)  
SEASON integer, which kind of wheat (1 = winter, 2 = spring)  
IWIN(4) integer flag for each window, if had acquisition = 1,  
if not = 0

### Outputs:

M multi-temporal error factor

### Subroutines Used:


None.

## Local Variable Description:

IFIND            calculates which grouping to use, given which windows have acquisitions. It works as though INDEX(IFIND) really were INDEX (IWIN(1) + 1, IWIN(2) + 1, IWIN(3) + 1, IWIN(4) + 1), a 4-dimensional array, where, for example: INDEX(2, 1, 1, 1) gives which group to use if only acquisitions for first window; INDEX(1, 2, 1, 1) group if only acquisitions for second window.

INDEX(16)        index to which group to use  
I STATE         which group to use, equation B4-6b  
IWHATM          which M to use, equation B4-6c

SUBROUTINE MULTI BLOCK DIAGRAM

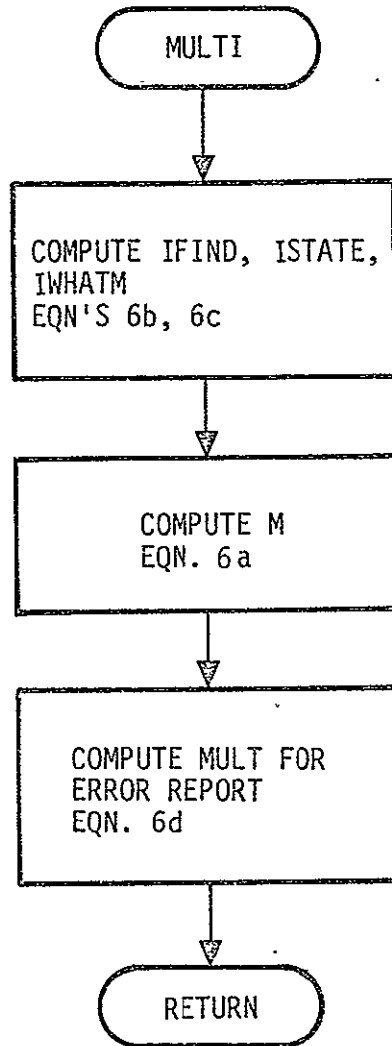

ALL EQUATIONS  
FROM CAMS PROBLEM  
DESCRIPTION,  
SECTION 3.3,B

SUBROUTINE SGEXT

Purpose:

This subroutine calculates the signature extension error. It uses the bias and sigma from the SIGEXT input file to generate a random number from a beta distribution. Quantities for the error report are also computed and saved if needed.

Input:

/CAMERR/	PW(3, 4)	probabilities
/TRAINS/	TM(TYPE) TB(TYPE) TV(TYPE) TERTOT(TYPE)	error quantities of training segment
/SIGEXT/	ZB(3, 2) ZSIG(3, 2, 6)	bias and sigma for signature extension error
/CNTRL/	PRINTF	print flag, integer
/CAMSCM/	IREP ISIGEX	print flag for error report

See also linkage.

Output:

/ERROR/	ERTOT(TYPE) SIGZ(TYPE, 1) SIGZ(TYPE, 2) X(TYPE, 1) X(TYPE, 2)	error report quantities
---------	---	-------------------------

See also linkage.

Linkage:

CALL SIGEXT (SEED(3), TYPE, WINDOW, IUSE, XI)

Inputs:

SEED(3)	double precision random no. from beta distribution for signature extension error
TYPE	integer, which component of mixed crops (1 = wheat, 2 = mixed, 3 = other; model 2 uses 1 = wheat only)
WINDOW	integer, which kind of wheat (1 = winter, 2 = spring)
IUSE	from CORREL subroutine, which training segment using

Outputs:

XI            total error factor  
SEED(3)      double precision random no. seed after use

Subroutines Used:


CALL BETAD (SEED(3), XBAR, SIGMA, XI, 0, IER) to get random  
no. from beta distribution

Local Variation Description:

SIGMA }      sigma and average X for signature extension error,  
XBAR    }      equations C. 2b, 2c  
IER      }      error flag from BETAD subroutine

SUBROUTINE SGEXT BLOCK DIAGRAM

ALL EQUATIONS FROM  
CAMS PROBLEM  
DESCRIPTION,  
SECTION 3.3,C

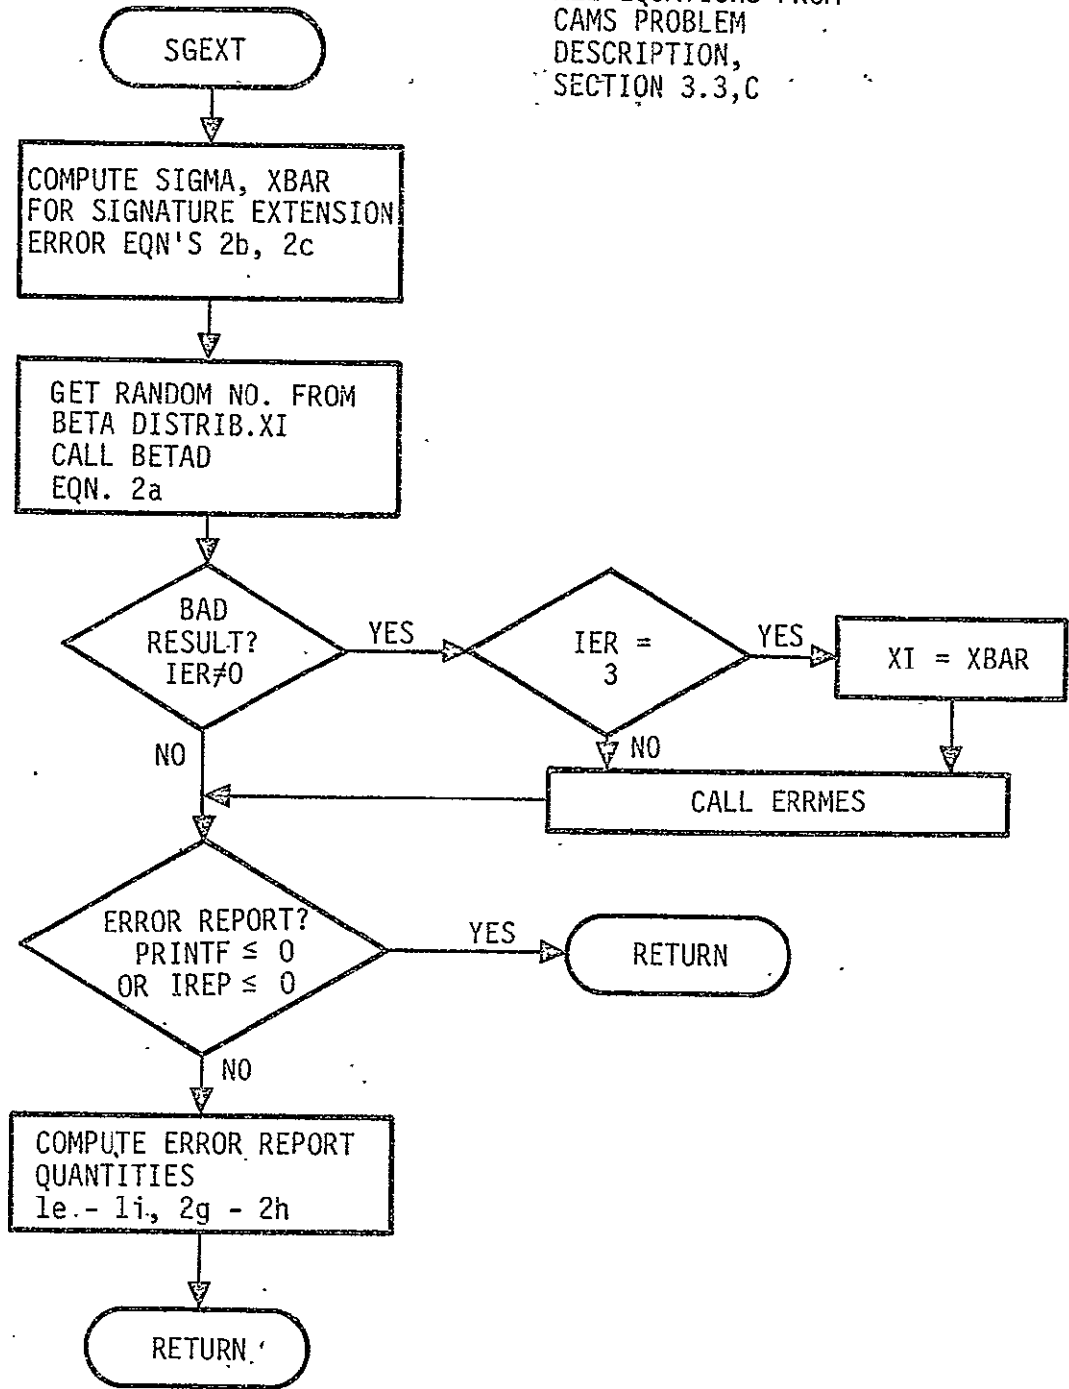

SUBROUTINE CROP

Purpose:

This subroutine calculates the crop calendar error. It gets a random number from a normal distribution, the difference between the window start for the zone (from the CROPW file) and the actual window start for the segment. It then computes a bias and sigma, including this random number and quadratic function coefficients inputted from control cards. It also computes and saves values for the error report.

Input:

/CAMSCM/	G(3, 2, 2) H(3, 2, 2)	quadratic function coefficients
/CROPW /	START(2, 4) END(2, 4) SD(2) ERR(2, 5)	true start and end times for windows on zone level plus standard deviation and bias for actual start of segment within zone

Also input parameters.

Output:

/ERROR/	CROPF CROPD	error factors for error report
---------	----------------	--------------------------------

Also output parameters.

Linkage:

CALL CROP (SEED(4), TYPE, SEASON, WINDOW, IFIRST, BCC, SIGCC, ITSEG)

Inputs:

SEED(4)	random no. seed for random number from normal distribution (double precision)
TYPE	which component of mixed crops, integer (1 = wheat, 2 = mixed, 3 = other; wheat only for model 2)
SEASON	which kind of wheat (winter, spring), integer
WINDOW	which window acquisition date in (1, 2, 3, or 4), integer
IFIRST	flag for first acquisition window, =1 for first >1 for rest

Outputs:

ITSEG	$\Delta t$ saved, since only calculated for first acquisition in each window (equation 5d)
BCC	bias of crop calendar error
SIGCC	sigma of crop calendar error
SEED(4)	random number seed after used to calculate DELTA, double precision (used only for first acquisition in each window)

Subroutines Used:


CALL BETAD (SEED(4), 0, 0, RN, 1, IER) for returns RN, a random number from a normal distribution, from SEED(4).

Local Variable Description:

RN	}	random no. from normal distribution
BGNSEG		see equations B3, 5b-5d, CAMS Problem Description
ENDSEG		
TSTART		
IER		from call to BETAD; always returns 0



SUBROUTINE CROP BLOCK DIAGRAM

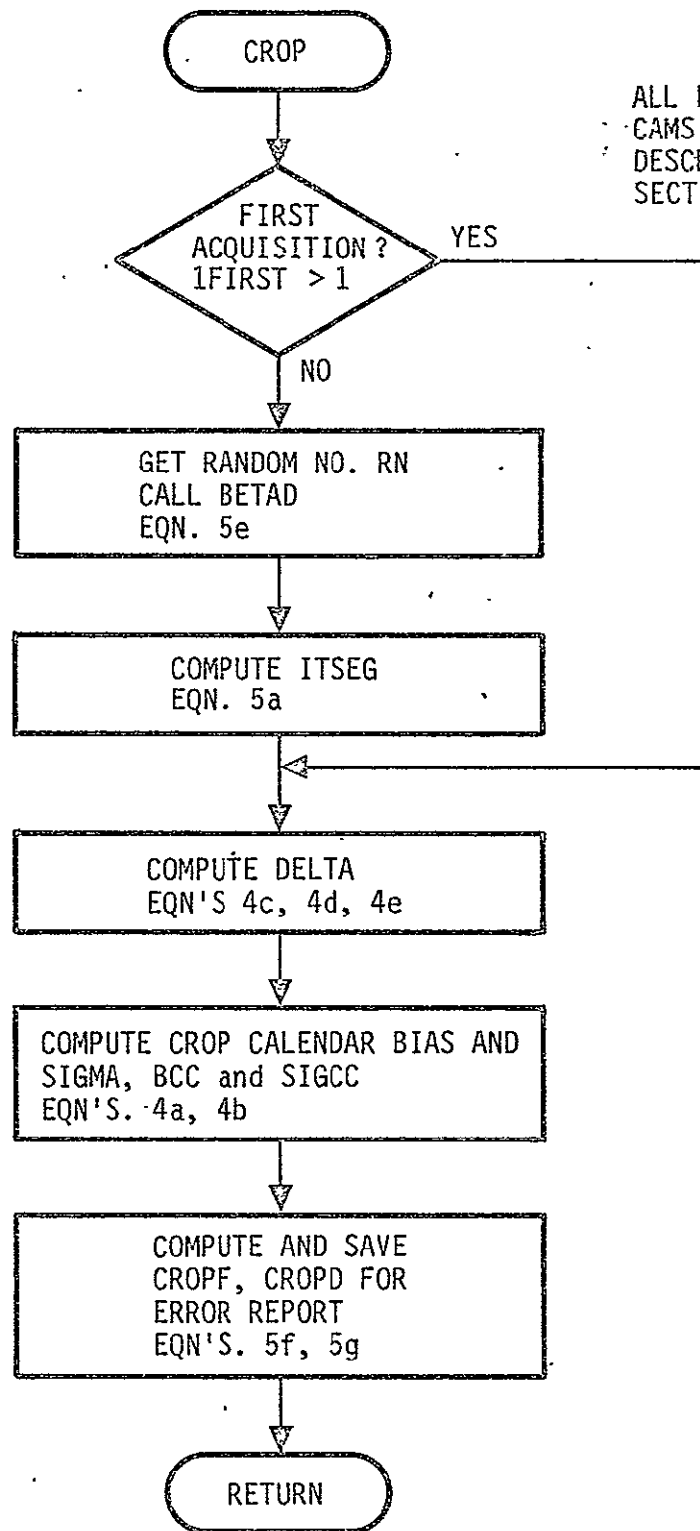

ALL EQUATIONS FROM  
CAMS PROBLEM  
DESCRIPTION,  
SECTION 3.3, B

SUBROUTINE TSAVE

Purpose:

This subroutine handles the I/O for the scratch DA file TACQ.

Input:

/TRAINS/	COUN7 IREG7 IZONE7 ISTR7 ISUB7 ISEG7 ITWIN(4, 25) ITTOT TMM(3, 4, 25) TBB(3, 4, 25) TV(3, 4, 25) TPTRUE TIZULU TPEST TPERR TERTOT(3) TM(3) TV(3) TB(3)	}	1 record for file TACQ - see COMMON or file descriptions ISEGT = ID number = key to file
/INDEX/	INDEX (2000) IPOINT (2001) IPNT2 (2001)  IPEND IPIN		index to TACQ (needed for CDC version) index to IPNT2 (contains segment ID's) index to INDEX (after sort, is not necessarily the same as INDEX) pointer to last word of IPOINT, IPNT2 pointer to last record read in (so no reread)
/FILES/	TACQ		logical unit no.

See also linkage.

Output:

/TRAINS/	same as INPUT description - depends on whether TACQ is being written to or read from
/INDEX/	same as INPUT description
/ARGLST/NFATAL	TSAVE has fatal error if too many records

See also linkage.

## Linkage:

CALL TSAVE (ISEG, IOPT, IBAD)

Inputs: ISEG    segment ID no. of segment being written or read

IOPT    = 0    open file  
          = 1    read file  
          = 2    write file  
          =-1    close file  
          = 3    sort index, after all writes

IBAD    = 0    segment found and read  
          = 1    segment not found to read (may happen when  
                  start and end zones specified)

## Subroutines Used:

CALL RANACF (IFILE, IREC, BUF, N, IX, L, IOPT) to use CDC  
 RA routines.


CALL ERRMES (4HCAMS, 5HTSAVE, 4, 1) to print error message.

CALL SORTAG (IPOINT, 1, IPEND, IPNT2) to sort files IPOINT,  
 IPNT2 as IPOINT.

## Local Variable Description:

IH        for binary search - the high limit  
 IL        for binary search - the low limit  
 ILOOK    for binary search - the current guess  
 L         the total no. of records allowed in file TACQ  
 NARG     no. of arguments for ERRMES routine (in 'COMMON /ARGLST/')

SUBROUTINE TSAVE BLOCK DIAGRAM

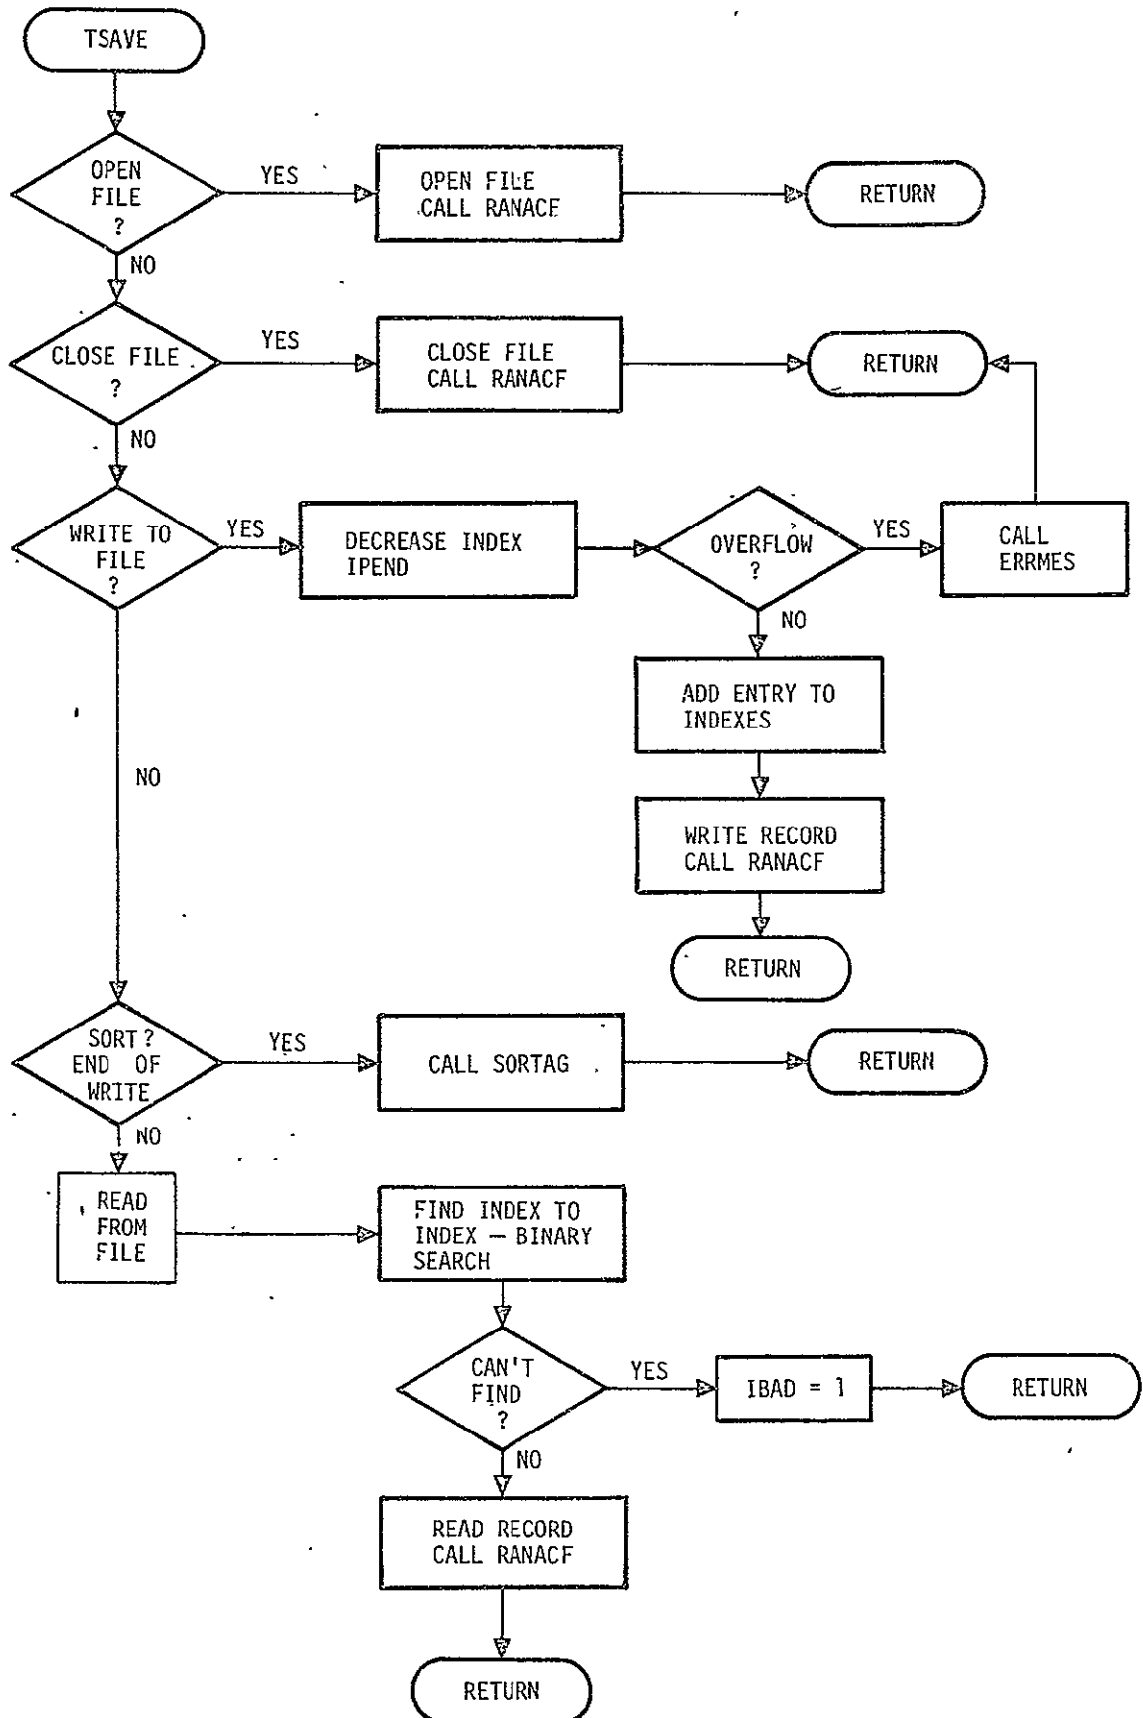

SUBROUTINE CLASS

Purpose:

This subroutine adds the input classification error to the crop calendar error using the bias and sigma from the CAM ERR file. It then computes the total classification error, getting a random number from a beta distribution. It also computes and saves values for the error report, if needed.

Input:

/CAMERR/	PW(3, 4) BERR(3, 4) SIGERR(3, 4)	from CAMERR input file: bias and sigma for input classification error
/CNTRL/	PRINTF	print flag
/CAMSCM/	IREP	print flag for error report

See also linkage.

Output:

/ERROR/	CLTOT(TYPE) CLBIAS(TYPE) CLRAND(TYPE) ERTOT(TYPE) ERBIAS(TYPE) ERRAND(TYPE)	} for error report: equations B. 1d-1g, 2d-2f from CAMS Problem Description
/TRAINS/	TV(TYPE)	

See also linkage.

Linkage:

CALL CLASS (SEED(2), TYPE, WINDOW, M, BCC, SIGCC, XI)

Inputs:

SEED(2)	double precision random no. seed used to generate classification error random no. from beta distribution
TYPE	integer, which component of mixed crops (1 = wheat, 2 = mixed, 3 = other; for model 2, 1 = wheat only used)
WINDOW	integer, which window current acquisition in (1, 2, 3 or 4)
M	} outputs from MULTI subroutine, multi-temporal error
BCC	
SIGCC	

Outputs:

XI                    total error factor  
SEED(2)              double precision random no. seed after use

If error in BETA routine, prints message:

BETA DISTRIBUTION ERROR - FLAG = X , : . .

Subroutines Used:

CALL BETAD (SEED(2), XBAR, SIGMA, XI, 0, IER) to get random number from beta distribution.


SQRT(X)              square root function

CALL ERRMES (4HCAMS, 5HCLASS, 4, 0) to report error in BETA routine.

Local Variable Description:

S	}	bias and sigma of input classification plus crop calendar errors, equations 3a, 3b
SIG		
XBAR	}	total error bias and sigma, equations 2b, 2c
SIGMA		
IER		

## SUBROUTINE CLASS BLOCK DIAGRAM

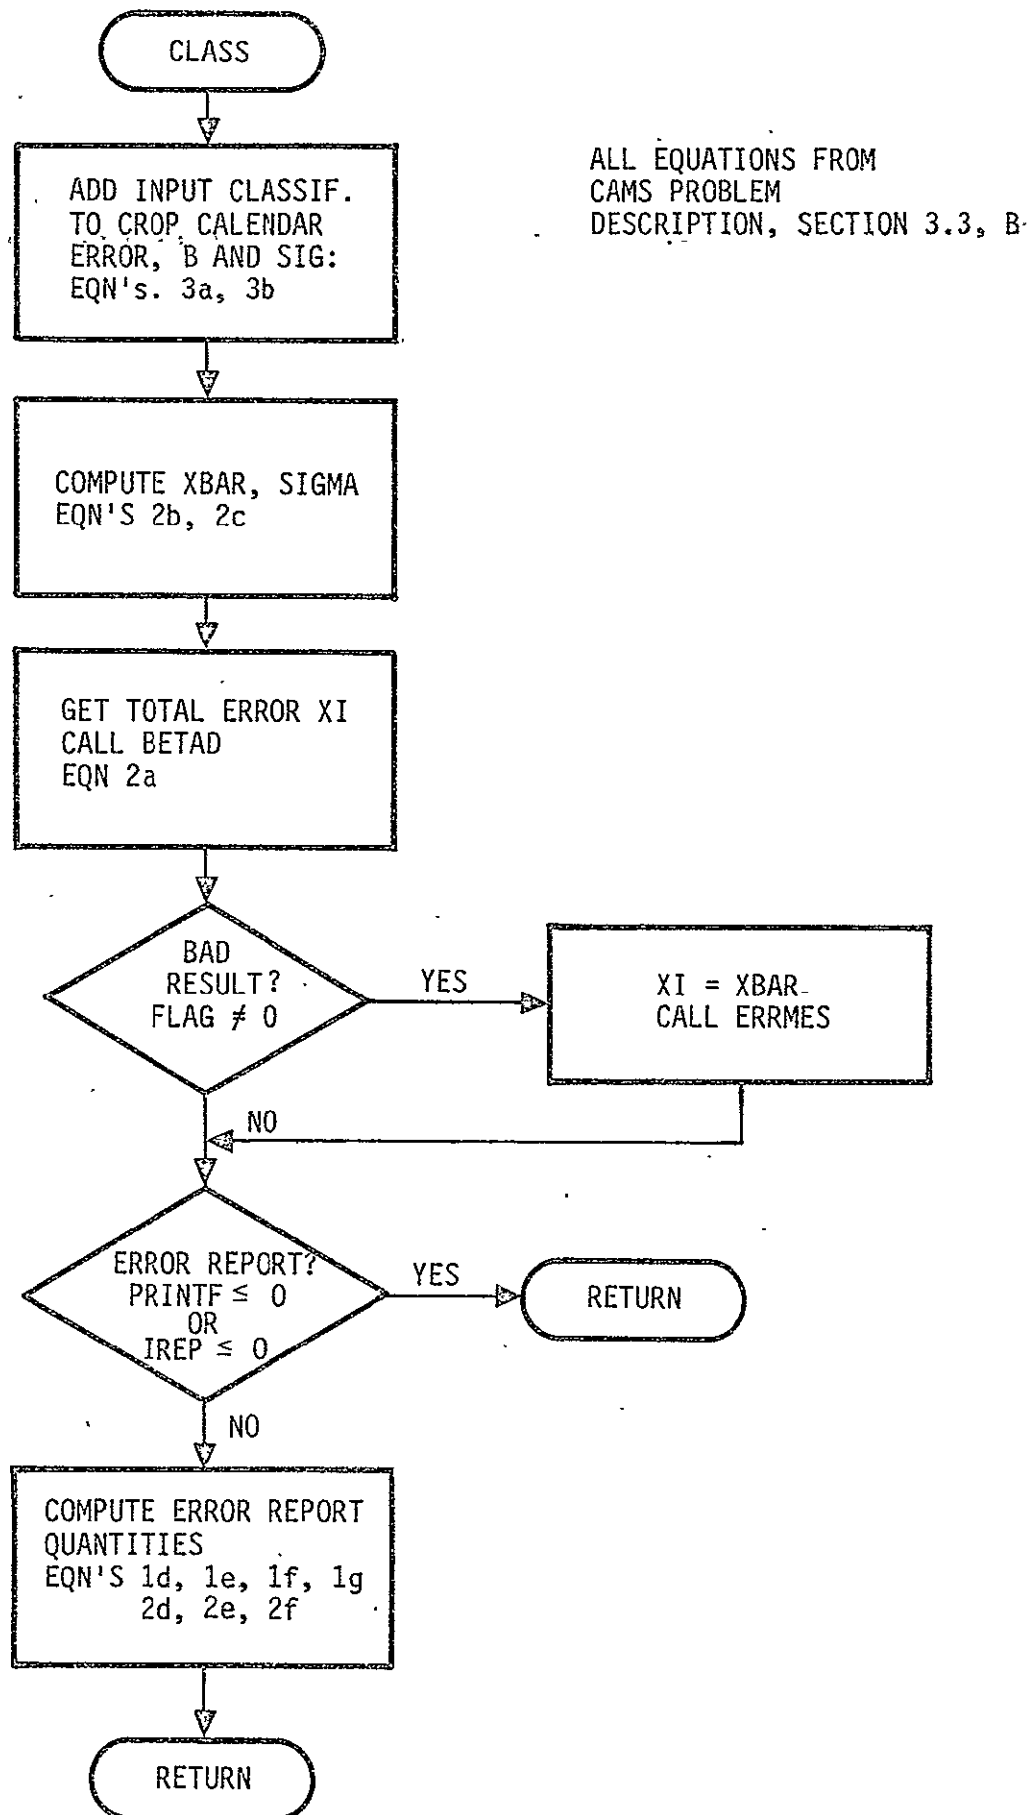

SUBROUTINE INPT

Purpose:

This subroutine sets up the next records to process on the five input files. It keys on the SEGTRU file. The data is set up differently depending on the model being used for some files. Some range checks are done. The reading of each file can be bypassed to handle error condition bypassing and the data requirements of each pass (training segments, ordinary segments, special cases - no acquisition file or no training segment ID match). As a side effect of the ordinary segment read pass, training segments are outputted to the output file CAMSF. At the return of INPT to CAMS, all necessary data is present and ready to use.

Input:

/FILES/	TACQ SEGTRU ACQUIS CAMERR CROPW SIGEXT CAMSF LCAMSF	} logical file unit nos., integers  } length of output record
/INDX/	INDEX	index for RA scratch file TACQ
/LEMCM/	ENDZ ENDR	zone and region to end processing at, integers
/CAMSCM/	IWIND IMODEL	which window to use for recalculation of PT(M) if needed which model (1 or 2)

See also linkage.

Output:

Records for each input file are outputted, unless bypassed, in COMMON blocks. See Section 2.4 of the Users Manual for the file descriptions, and Programmers Manual for the COMMON block descriptions.



```

/SEGTRU/  COUN4
          IREG4
          IZONE4  holds 1 record from SEGTRU file
          ISTR4
          ISUB4
          ISEG4
          IT
          IPRIOR(6)
          ISPW
          PT(2)   PT(2) will be recalculated if file input
                  out of range
                  If  PT(2) * PW(2, IWIND) < (PT(2) + PT(1) - 100)
                      then  PT(2) =  $\frac{100 - PT(1)}{100 - PW(2, IWIND)}$ 
                  If  PT(2) * PW(2, IWIND) > PT(1)  then
                      PT(2) =  $\frac{PT(1)}{PW(2, IWIND)}$ 

/CAMERR/  COUN2          holds 1 record from CAMERR file
          IREG2          if model 1, last 2 words of file ignored
          IZONE2          (BPW, σPW)
          ISTR2          if model 2, middle 6 words ignored from
          ISUBST2         file (BW/W, σW/W, BW/O, σW/O, BW/M,
          ISEG2          σW/M) and BPW, σPW stored in wheat
          PW(3, 4)       dimension of BERR, SIGERR; also PW
          BERR(3, 4)     for wheat reset to PT (wheat)/100; PW
          SIGERR(3, 4)   for mixed reset to 0

/ACQUIS/  COUN1
          IREG1
          IZONE1  holds 1 record from ACQUIS file
          ISTR1
          ISUBST1
          ISEG1
          IWIN(4, 25)
          ITOTAL

/CROPW/   COUN3
          IREG3
          IZONE3
          ISTR3
          ISUBST3
          START(2, 4) } read in groups; see file description,
          END(2, 4)   } Section 2.4 of the Users Manual.
          SD(2)
          ERR(2, 5)

```

/SIGEXT/	COUN5 IREG5 IZONE5 ZB(3, 2) ZSIG(3, 2, 6)	holds 1 record from SIGEXT file if model 1, ignore model 2 data if model 2, store in wheat dimension and ignore model 1 data ZB(I, 1) = ZB(I, 1) + 1 for all ZB's for dimension 1
/ARGLST/	NERRS NFATAL NPERRS	error count passed back from ERRMLT subroutine
/INDX/	INDEX	index for RA scratch file TACQ
/STATS/	NREC(2) NREC(4) NREC(6) NREC(7) NCAMSR	no. of records processed for input files

See also linkage.

Linkage:

```
CALL INPT (ISEG, IACQU, ICAMER, ICROPW, ISGEX, IPASS, IDONE,
           IEND)
```

Inputs:

ISEG IACQU ICAMER ICROPW ISGEX	}	flags for input files 0 read file >0 skip reading file
IPASS		which pass, 0 = special cases 1 = training segment pass 2 = ordinary segment pass

Outputs:

IDONE	flag	0 = normal return 1 = end of file reached 2 = error return
IEND	flag	0 = end zone has not been reached 1 = end zone has been reached

Subroutines Used:


CALL ERRMES (4HCAMS, 3HINP, 8, 1) to report error message.

CALL TSAVE (ISEG, 1, IBAD) to write record from scratch RA  
 file to output file.


Local Variable Description:


W	=1, wheat component
M	=2, mixed component
/ARGLST/NARG	for error subroutine ERRMES
ITOTAL	no. of filler words
ISKIP	used to skip over words
IEND	flag to signal end zone has been reached, 0 = not yet, 1 = has been reached

SUBROUTINE INPT BLOCK DIAGRAM

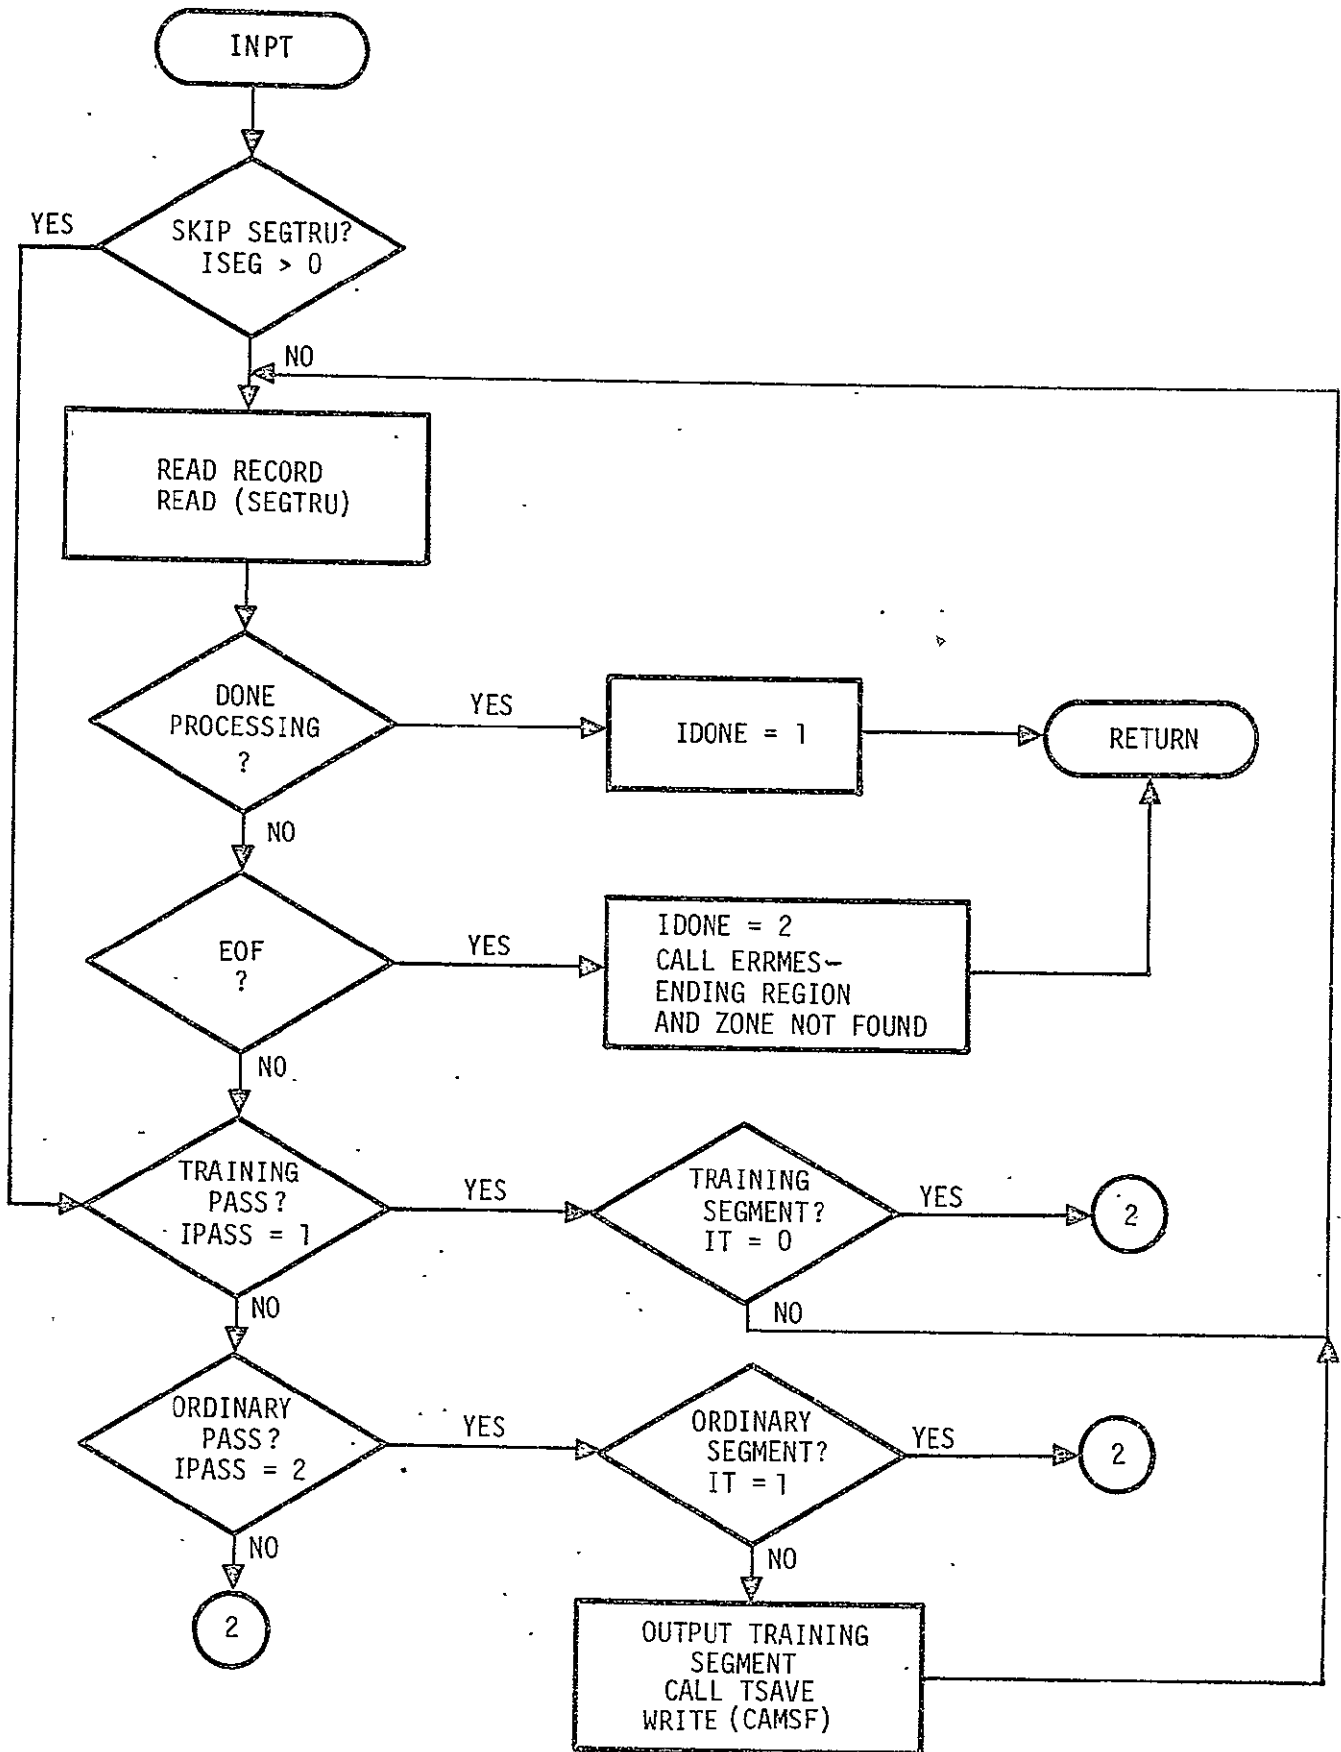

INPT (CONT'D)

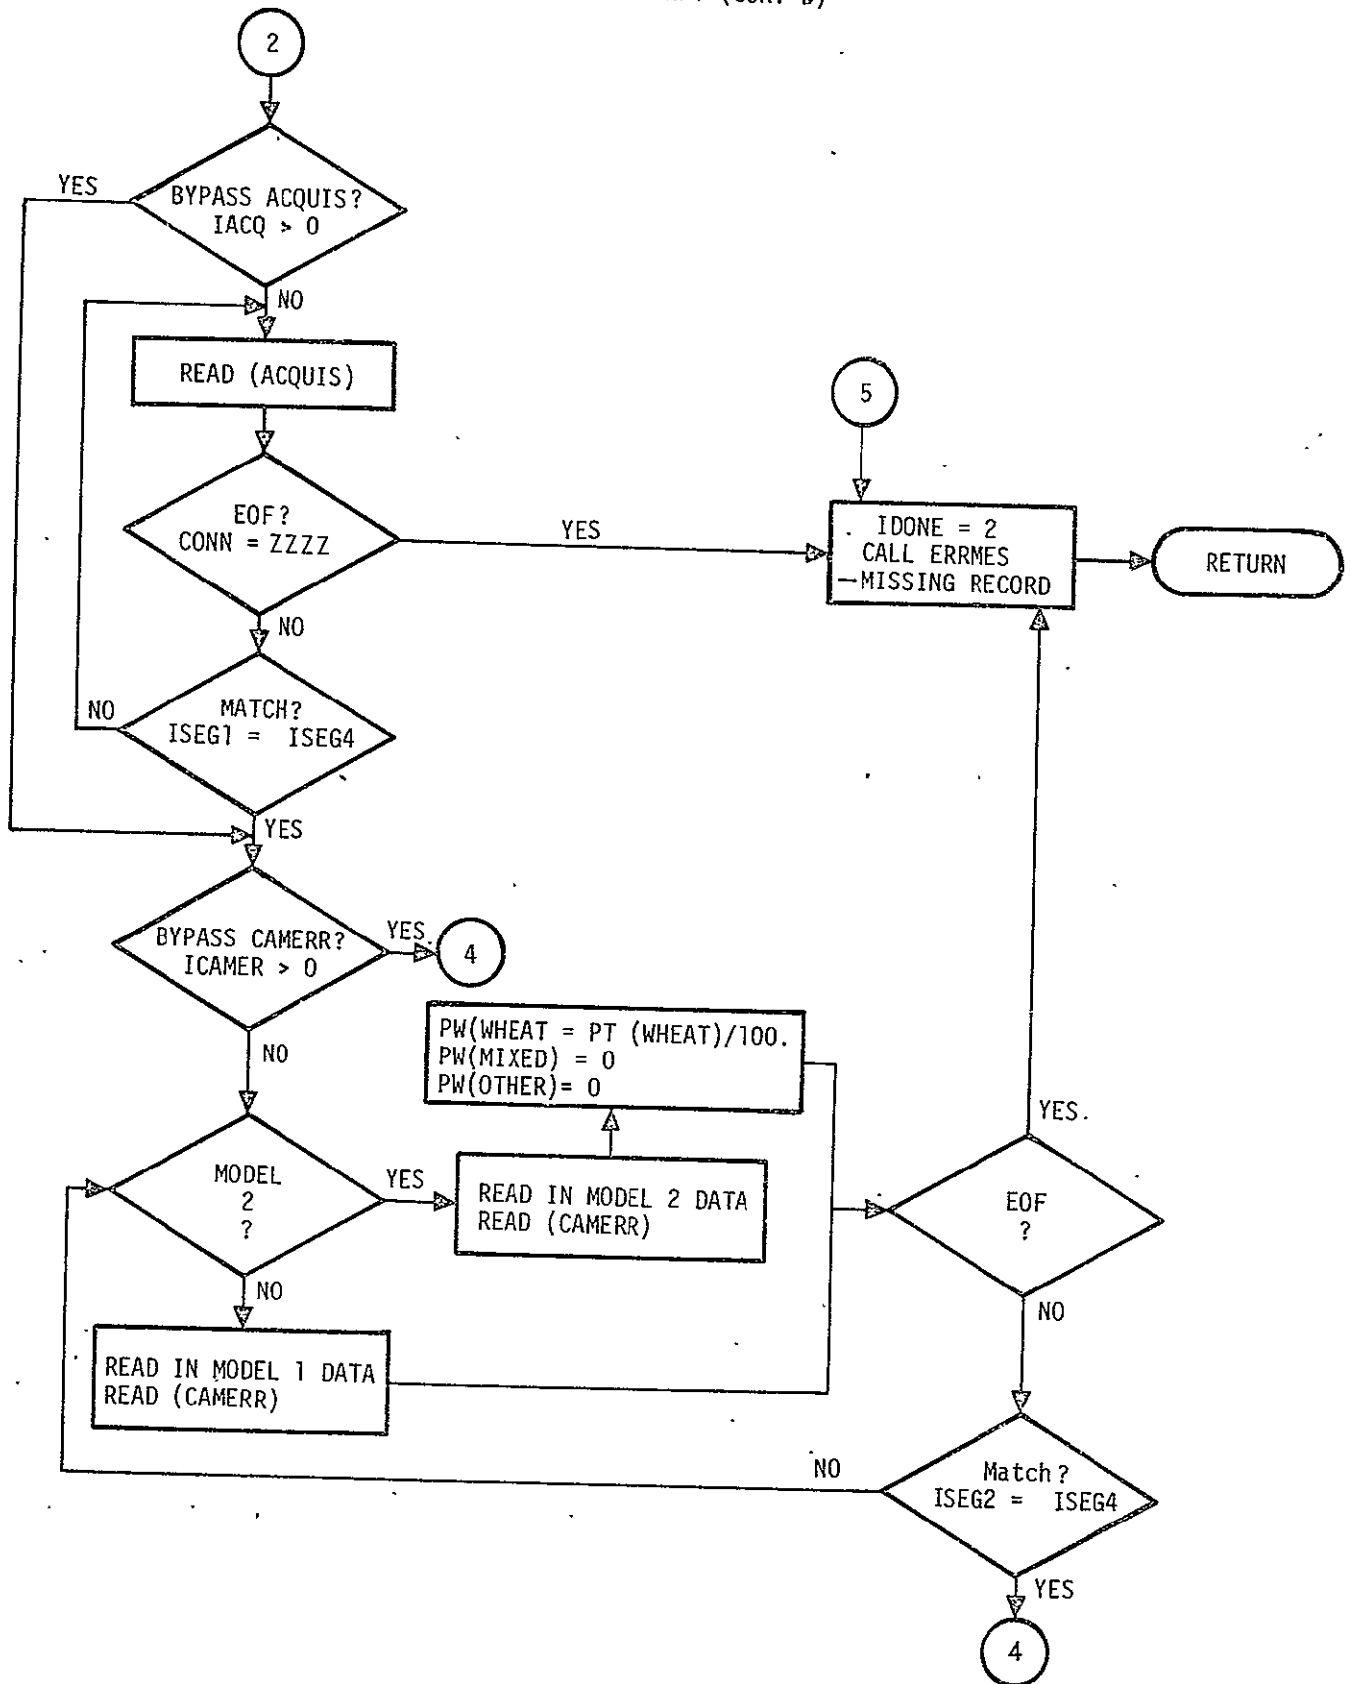

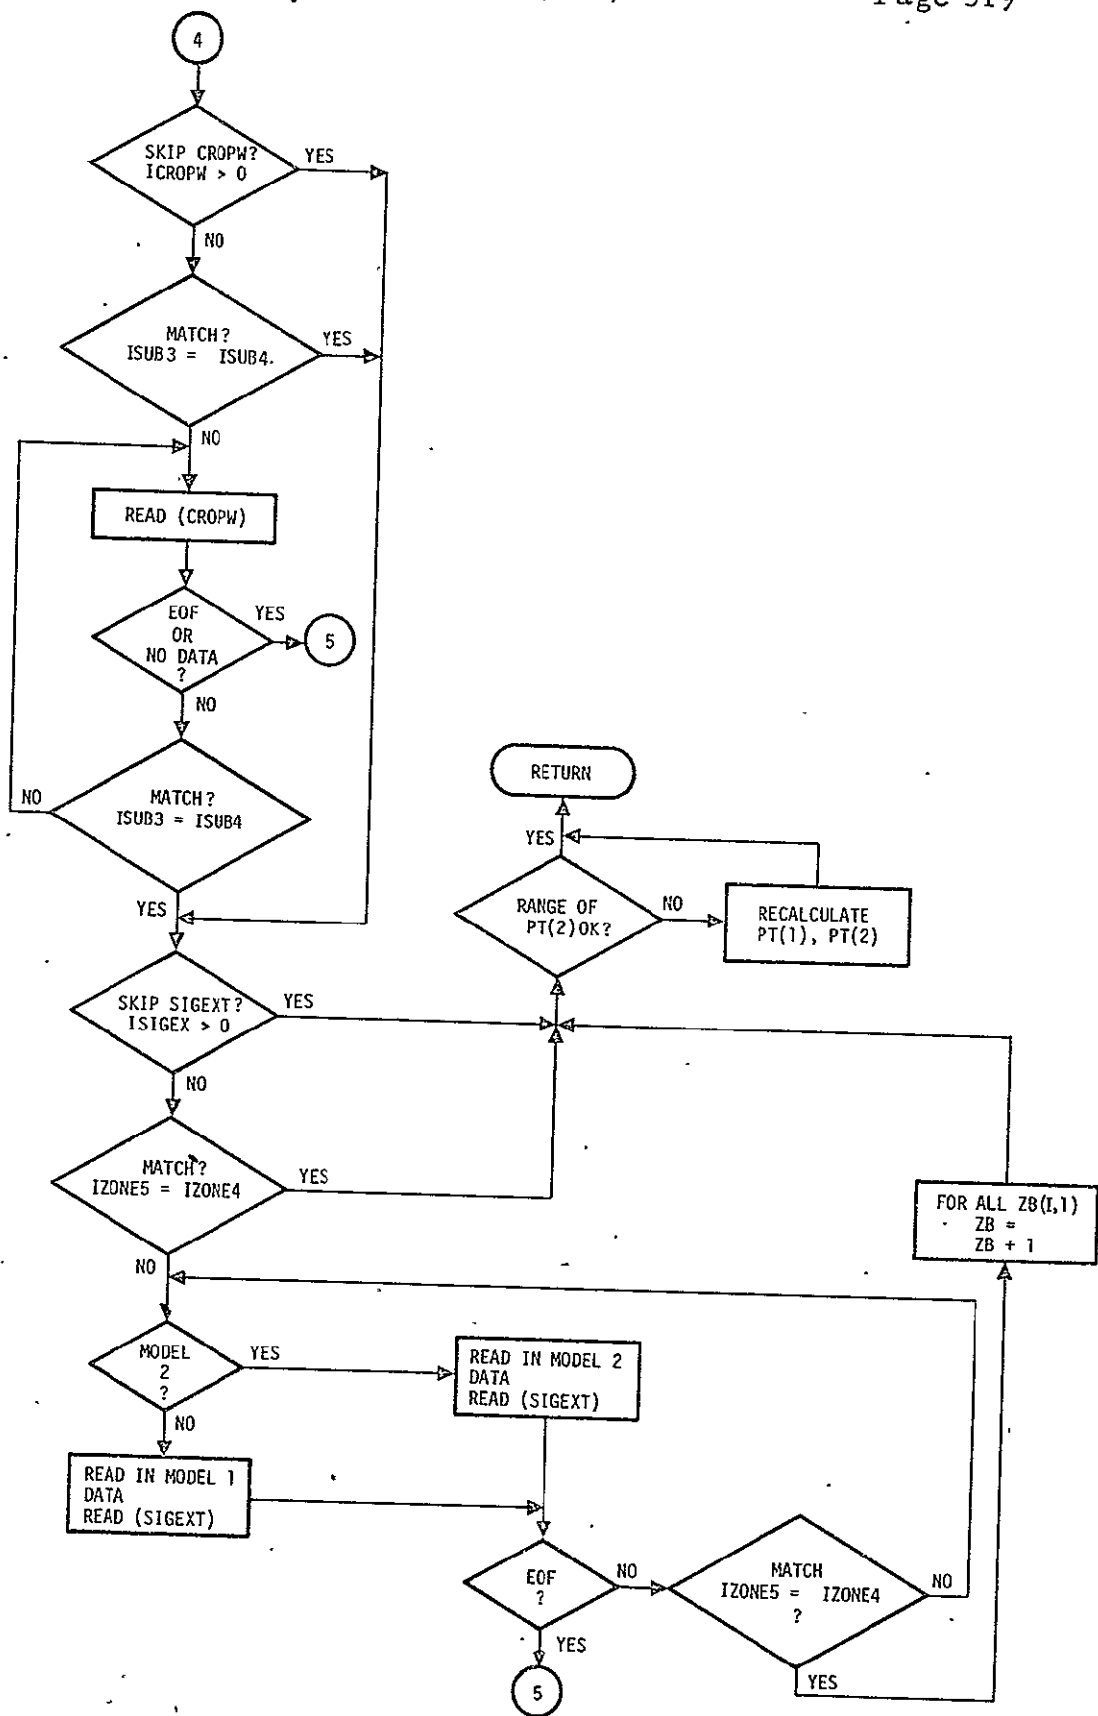

ORIGINAL PAGE IS  
OF POOR QUALITY

CAS SUBROUTINE DESCRIPTIONS

Subroutine CAS

Purpose:

CAS is the driver for the CAS simulator. It controls the looping for the bio-windows and prediction dates, calling CASPP to perform the CAS computations for each bio-window and each prediction date.

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
BWIND	CASCM	CASIN
NPDATE	CASCM	CASIN
PRDATE	CASCM	CASIN
PRINTF	CONTRL	LEM (SETPRF)
NFATAL	ARGLST	ERRMES

Output:

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
IBW	CASFLG	GROUP, CAS2
IPD	CASFLG	GETYS, GROUP, CAS2
- PPFLG	CASFLG	GETYS, GROUP CAS2
PPDATE	CASFLG	GETYS, GROUP

Linkage:

CALL CAS


Subroutines Used:

CASINT  
CASPP  
SUMREP

Local Variables:

None.



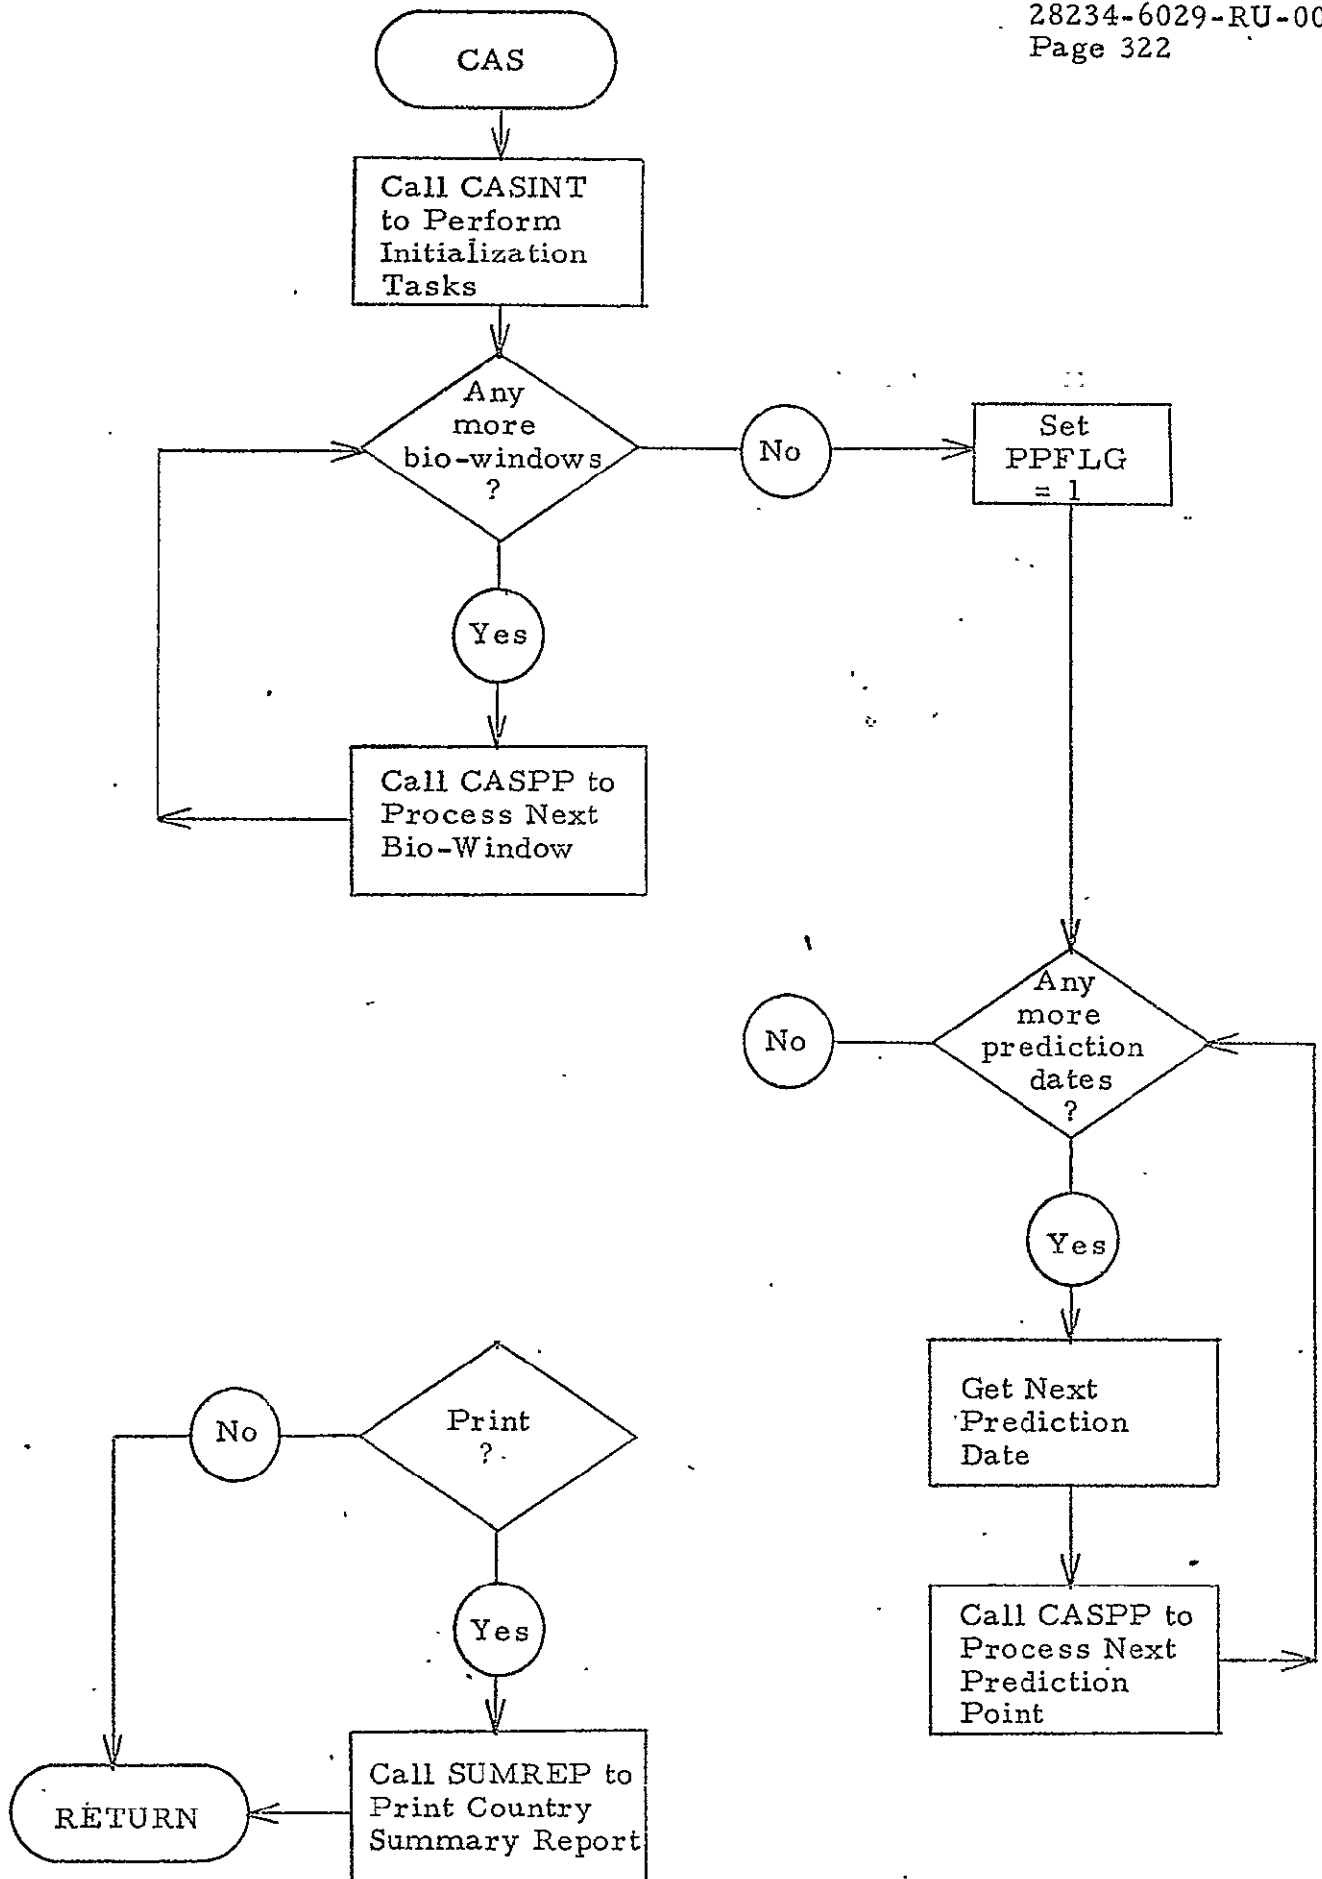

CAS Flow Diagram

## Subroutine CASPP

Purpose:

Subroutine CASPP performs the first pass CAS computations generating data sets 1-9. It also calls CAS2 to compute the estimated group 1, 2 area variances and calls CAS3 to generate data sets 10-19.

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Source</u>
NFATAL	ARGLST		ERRMES
IRREG	CASFLG		CASINL
IPP	CASFLG		CASINT
LDS 4	CASFLG		Block Data
LDS 7	CASFLG		Block Data
LDS 8	CASFLG		Block Data
LDS 9	CASFLG		Block Data
NSTART	CNTRL		LEM
IMXSEG	CONST		Block Data
ENDFIL	CONST		Block Data
STRATA	DSET4	YESOUT	GETYS
ZONE	DSET7	YESOUT	GETYS
REGION	DSET8	YESOUT	GETYS
TWAR	DSET8		DS7
HWARI	DSET8		DS7
EWARI	DSET8		DS7
DSET8	DSET8		DS7
CASDSF	FILES		Block Data
LCASDS	FILES		Block Data
ISUBH2	FILES1		Block Data
LSUBH2	FILES1		Block Data
LIXSSH	IXSUBH		Block Data
LIXCDS	IXCDSF		Block Data
ENDR	LEMCM		INPUT
ENDZ	LEMCM		INPUT
SSHDTA	SSHDTA	ISUBH2	

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Source</u>
COUN2	SSHDTA	ISUBH2	See description of 'SSHDTA/'
IREG2	SSHDTA	ISUBH2	
⋮	⋮	⋮	
CV4	SSHDTA	ISUBH2	
CLASS	SSHDTA	ISUBH2	
NT = ITER	STATS		LEM
YSTR	YESDTA	YESOUT	GETYS

Output:

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Used By</u>
IPP	CASFLG		CAS2
KSUB	CASFLG		DS123
DSET4	DSET4		DS456, CAS2
DSET7	DSET7		DS7, CAS2
DSET8	DSET8		CAS2
DSET9	DSET9		CAS2
ARG(1)	ARGLST		ERRMES
NRSSH	CASFLG		WRAPUP
IRREG	CASFLG		RANACF
NREGS	CASFLG		CAS2
ER	DSET8		CAS2
EC	DSET9		CAS2
MIM2ZC	DSET9		CAS2
HWAC1	DSET9		CAS2
EWAC1	DSET9		CAS2

Linkage:


CALL CASPP


Subroutines Used:

CASINL  
CLASSN  
GETYS  
ERRMES  
DS123  
DS456  
DS7  
RANACF  
CAS2  
CAS3

Processing:

See Flow Diagram on the following pages.

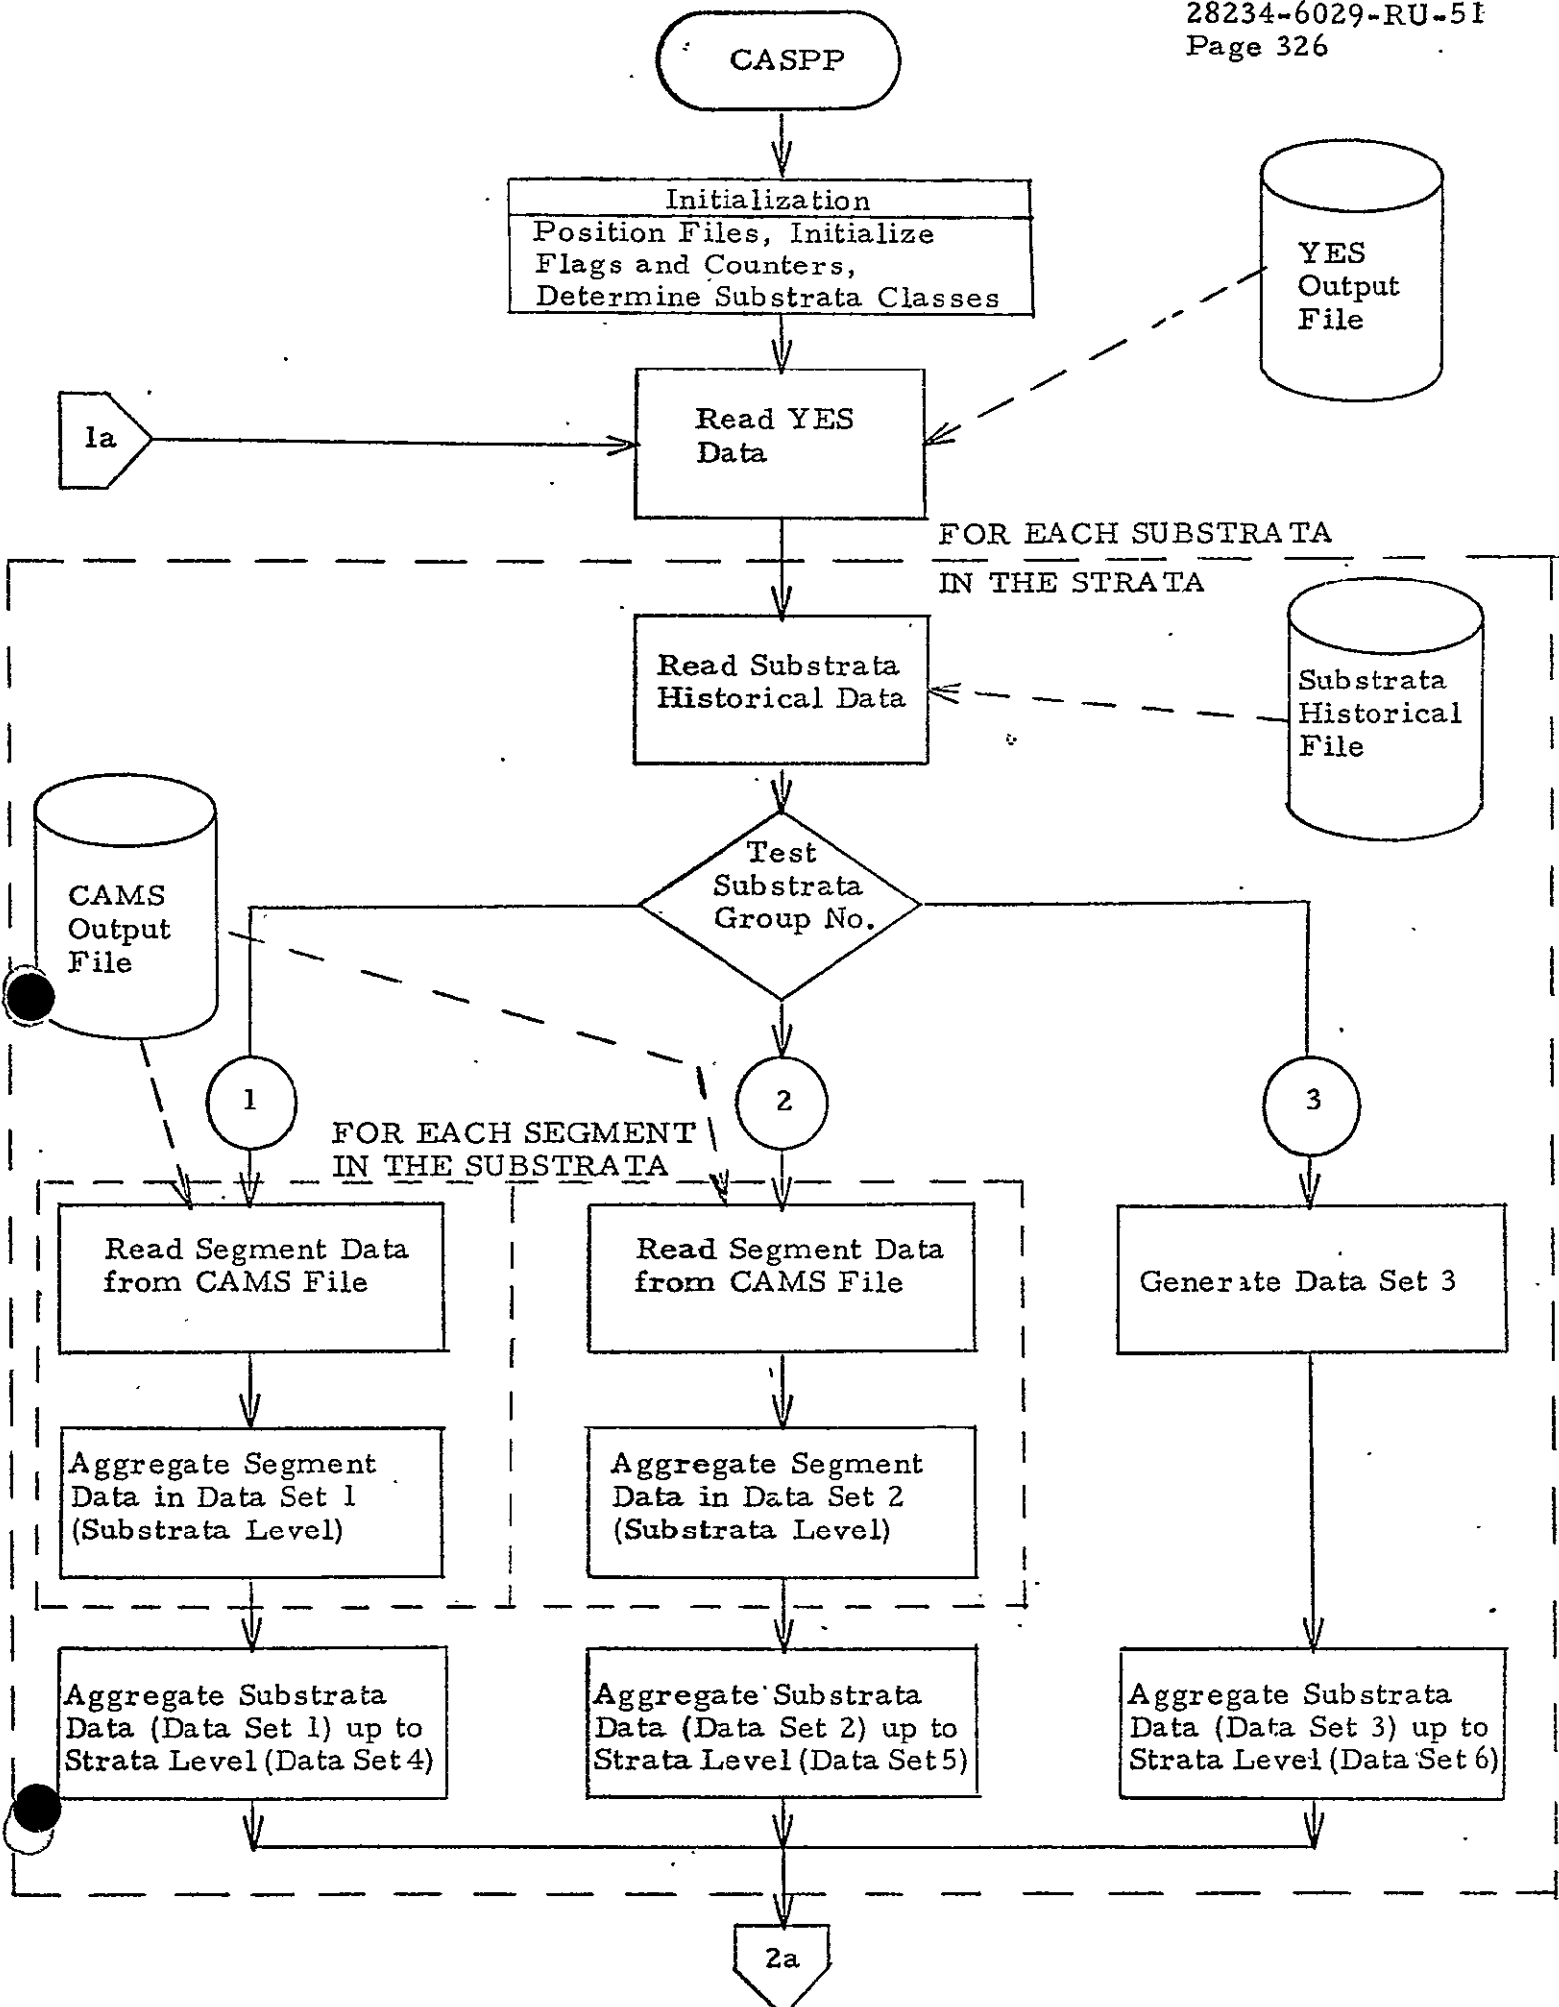

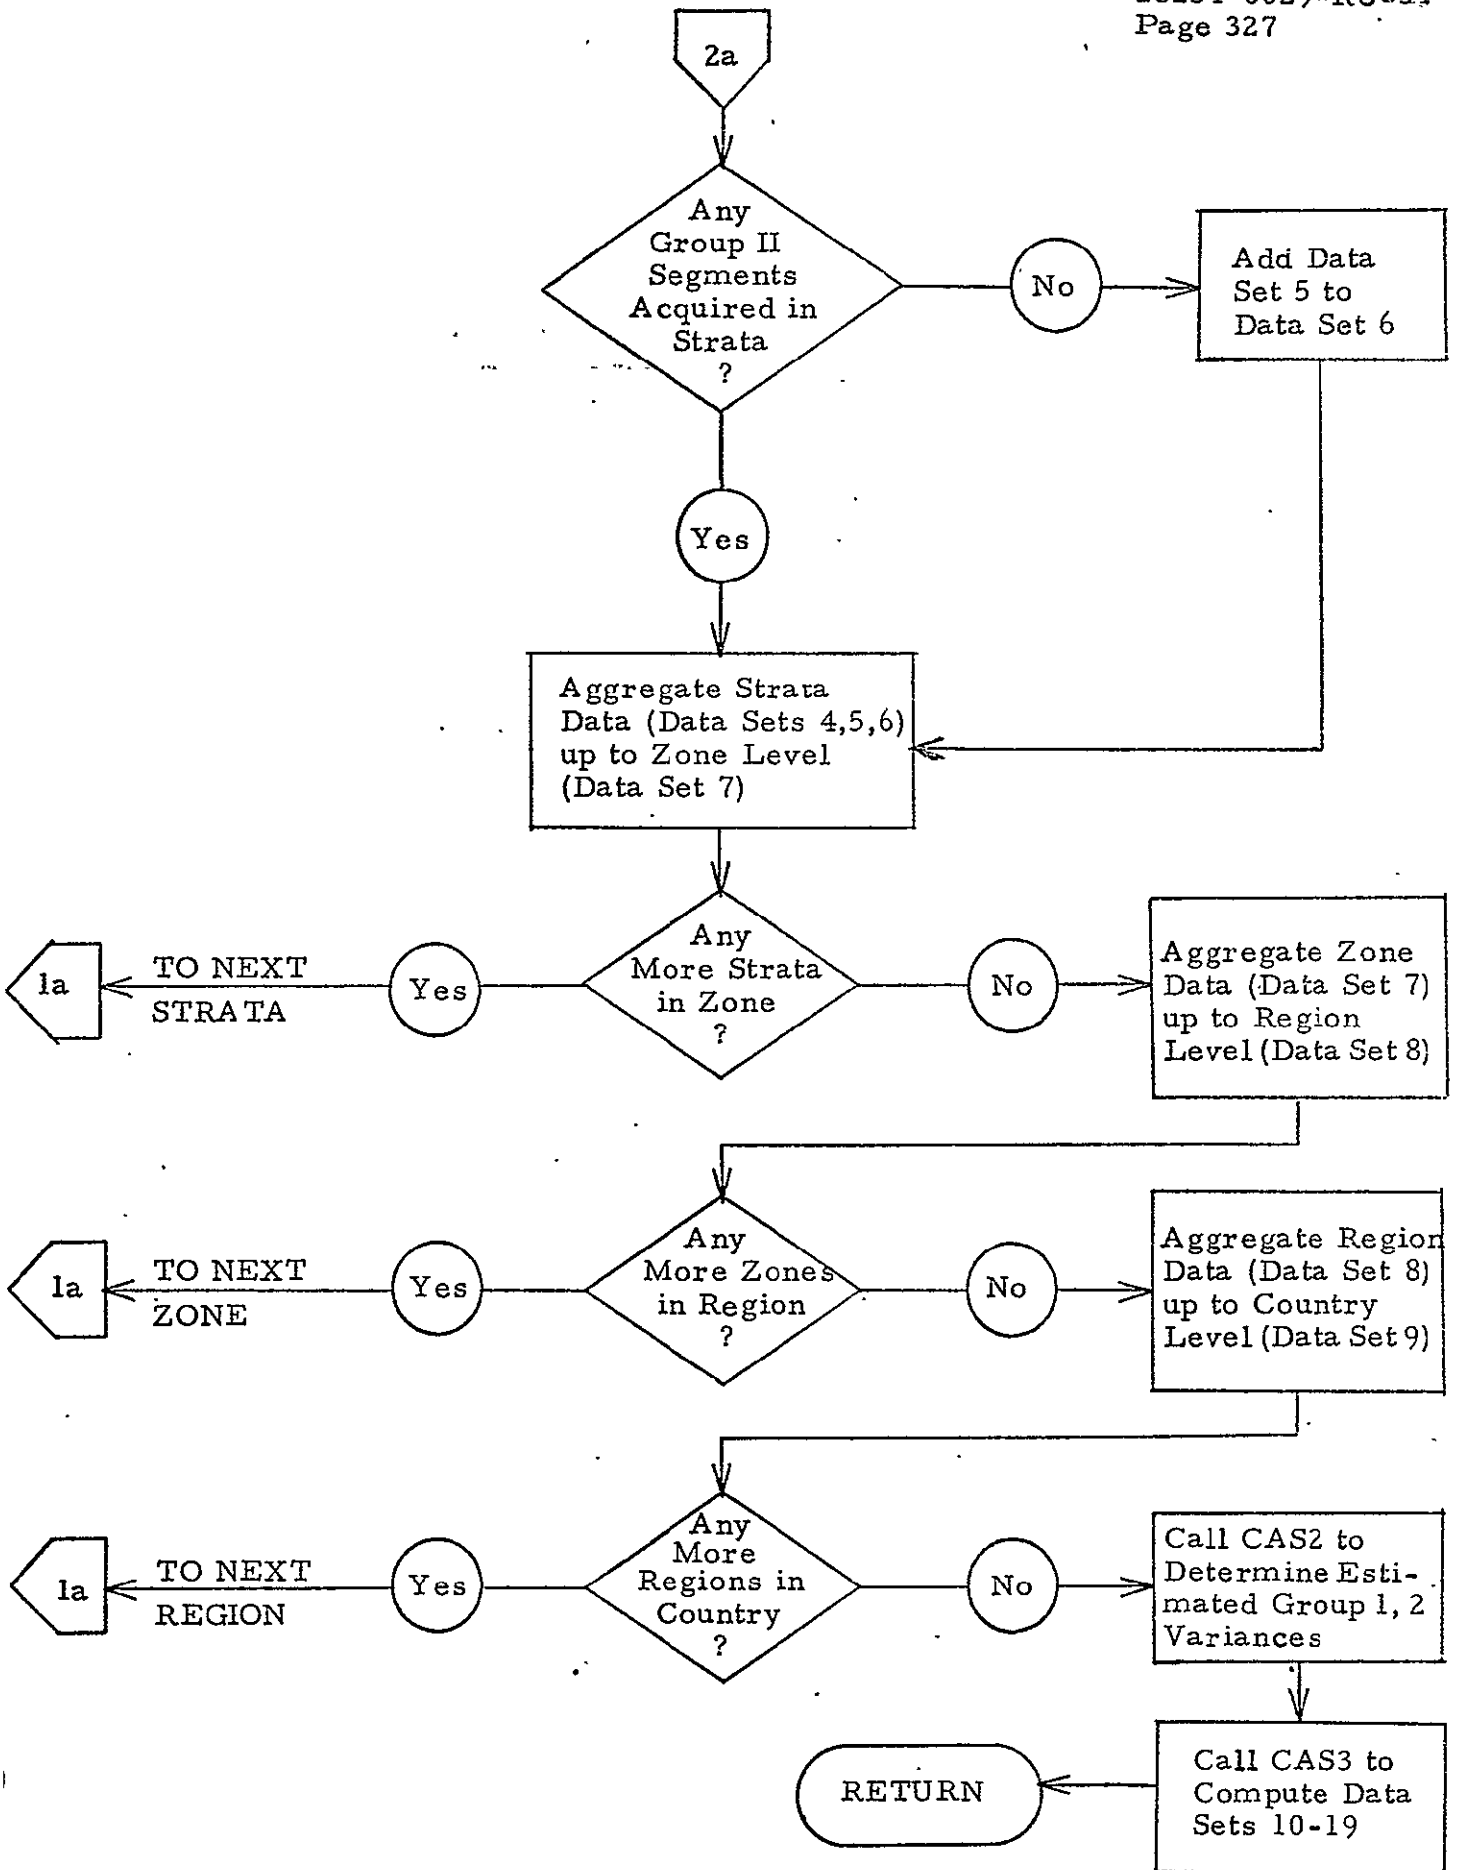

Subroutine CASOUT

Purpose:

Subroutine CASOUT processes the CAS Output data for the CAS Area and Production Summary Report and the CAS Country Summary Report. It converts data to output units, computes mean values, and on option prints a portion of the Area and Production Summary Report.

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
ILEVEL	Calling sequence parameter	CAS2, DS10
OUTP	FILES	Block Data
AREACF	CASCM	CASIN
YCF	CASCM	CASIN
PRDCF	CASCM	CASIN
APREP	CASCM	CASIN
CASCUM	CASCUM	DS10, CAS2
IREG		
IZONE		
ISTRA		
HWA		
TWA		
EWA		
AERR		
AVAR		
TPROD		
EPROD		
PRERR		
PRVAR		
TY		
EY		

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
YERR	CASCUM	DS10, CAS2
ANAV	↓	↓
ANPRV		
SQAER		
SQPER		
SQYER		
CLEWA		
CLEPRD		
CLATEC		
CLPTEC		
CLATWC		
CLPTWC		
IPP	CASFLG	LEM
ENDREG	CASFLG	CAS2
NLINE	PAGECM	PAGER
MXLINE	PAGECM	PAGER
NT	STATS	LEM
NSTRAZ	DSET7	CAS2

Output:

- 1) Printed Output

<u>Quantity</u>	<u>Common Block</u>
IREG	CASCUM
IZONE	CASCUM
ISTRA	CASCUM
TWA	CASCUM
EWA	CASCUM
CT1	
CT2	
CT3	
M1J	
M2J	



<u>Quantity</u>	<u>Common Block</u>
CVAEPT	
CVEPTA	
TY	CASCUM
EY	CASCUM
SDPER	CASCUM
TPROD	CASCUM
EPROD	CASCUM
CVPEPT	
CVEPTP	

2) Output to Common Blocks

<u>Quantity</u>	<u>Common Block</u>	<u>Used By</u>
SQAER	CASCUM	DS18
SQPER	CASCUM	DS18
TWA	CASCUM	DS18
EWA	CASCUM	DS18
AERR	CASCUM	DS18
TPROD	CASCUM	DS18
EPROD	CASCUM	DS18
PRERR	CASCUM	DS18
CSUMR	SUMDTA	SUMREP

Note: The quantities SQAER, SQPER, . . . , PRERR are converted from the internal units (hectares and quintals) to the appropriate output units. In addition, the mean values of TWA, EWA, AERR, TPROD, EPROD, and PRERR are computed.

Linkage:

CALL CASOUT (ILEVEL)

where

ILEVEL =0 for country,  
 =-1 for region,  
 =-2 for zone,  
 =+n for n<sup>th</sup> strata in zone

Subroutines Used:

APHDR - Prints Area and Production Summary Report headers  
PAGER - Automatic paging routine  
SQRT - Square root routine

Processing:

1. Convert units from internal units to appropriate output units and compute mean values; e. g.,

HWA = HWA \* AREACF/NT  
⋮  
AVAR = AVAR \* AREACF\*\*2/NT  
TPROD = TPROD \* PRDCF/NT  
⋮  
PRVAR = PRVAR \* PRDCF\*\*2/NT  
TY = TY \* YCF/NT  
⋮  
MIJ = MIJ/NT  
⋮  
CT3 = CT3/NT  
ANAV = ANAV \* AREACF\*\*2/NT  
ANPRV = ANPRV \* PRDCF\*\*2/NT  
SQAER = SQAER \* AREACF\*\*2  
SQPER = SQPER \* PRDCF\*\*2  
SQYER = SQYER \* YCF\*\*2

2. If ILEVEL = 0 (country level), compute average values of confidence levels; e. g.,

CLEWA = CLEWA/NT

3. Compute coefficients of variance for Country Summary Report

o 
$$CVAEPT = \frac{\sqrt{AVAR}}{TWA} * 100$$

[CV Area Est.]  
[% True]

o 
$$CVPEPT = \frac{\sqrt{PRVAR}}{TPROD} * 100$$

[CV Prod. Est.]  
[% True]

$$\bullet \text{ CVEPTA} = \frac{\sqrt{\frac{\text{SQAER} - \text{AERR}^2 * \text{NT}}{\text{NT} - 1}} * 100}{\text{TWA}}$$

[Area  
CV Error  
(% True)]

$$\bullet \text{ SDPEP} = \sqrt{\frac{\text{SQYER} - \text{YERR}^2 * \text{NT}}{\text{NT} - 1}}$$

[Yield  
Std. Dev.  
(% True)]

$$\bullet \text{ CVEPTP} = \frac{\sqrt{\frac{\text{SQPER} - \text{PRERR}^2 * \text{NT}}{\text{NT} - 1}} * 100}{\text{TPROD}}$$

[Prod.  
CV Error  
(% True)]

4. If APREP  $\neq$  0, then one data line is printed for the Area and Production Summary Report. For the first strata of each zone, the data line may be preceded by several lines of identification information such as the input problem header, the bio-window number or prediction date, the current iteration number, and data levels.
5. Finally, if ILEVEL = 0 (country level), values are saved in the array CSUMR for the current prediction for later printout in subroutine SUMREP.

Subroutine CAS2

Purpose:

Subroutine CAS2 computes the area variances and analytic area variances for all strata which have acquired segments. CAS2 also aggregates quantities at the zone, region, and country levels which will be used to compute the area variances for strata without acquired segments.

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Source</u>
IPRD	CASCM		CASIN
PPFLG	CASFLG		CAS, CASINT
IBW	CASFLG		CAS
IPD	CASFLG		CAS
IPP	CASFLG		CAS
NREGS	CASFLG		CASPP
ISUBH2	FILES1		Block Data
LSUBH2	FILES1		Block Data
MXCLSS	FILES1		Block Data
DSET4	DSET4	ISUBH2	DS456
HWAS1			
XM1JS			
XCT1S			
ANVS1			
HWAS2			
XM2JS			
XCT2S			
ANVS2			
T			
HWAS3			
XCT3S	DSET4	ISUBH2	DS456

Input: (cont'd)

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Source</u>
DSET7	DSET7	ISUBH2	DS7
M1K2KZ	↓	↓	↓
NSTRAZ	↓	↓	↓
M1K2CL	↓	↓	↓
SSQ	DSET7	ISUBH2	DS7
DSET8	DSET8	ISUBH2	CASPP
M1K2KR	DSET8	ISUBH2	CASPP
NZONES	DSET8	ISUBH2	CASPP
DSET9	DSET9	ISUBH2	CASPP
M1K2KC	DSET9	ISUBH2	CASPP
QUTP	FILES		Block Data
CASDSF	FILES		Block Data
LCASDS	FILES		Block Data
LIXCDS	IXCDSF		Block Data
LIXSSH	IXSUBH		Block Data
SSHDTA	SSHDTA	ISUBH2	DS123
GRPNO	SSHDTA	ISUBH2	DS123
VMULTK	SSHDTA	ISUBH2	DS123
CLASS	SSHDTA	ISUBH2	CLASSN

Output:

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Used By</u>
NRSSH	CASFLG		RANACF
IRSTR	↓		↓
IRZONE	↓		↓
IRREG	CASFLG		RANACF
DSET4	DSET4	CASDSF	CAS3, DS10
V1V2S	↓	↓	↓ ↓
VARs	↓	↓	↓ ↓
ANVARs	DSET4	CASDSF	CAS3, DS10

Output: (cont'd)

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Used By</u>
DSET7	DSET7	CASDSF	CAS3, DS10
ANALVZ	↓	↓	↓ ↓
HWAZ3	↓	↓	↓ ↓
ESTVZ	DSET7	CASDSF	CAS3, DS10
DSET8	DSET8	CASDSF	CAS3, DS10
ANALVR	DSET8	CASDSF	CAS3, DS10
ESTVR	DSET8	CASDSF	CAS3, DS10
DSET9	DSET9	CASDSF	CAS3, DS10
ANALVC	DSET9	CASDSF	CAS3, DS10
ESTVC	DSET9	CASDSF	CAS3, DS10

Linkage:

CALL CAS2

Subroutines Used:


PAGER  
RANACF


Local Variables:

- I - Index in DO loops
- IREG - Region index
- IZONE - Zone index
- ISTRAZ - Strata index
- NSUB - Number of substrata in the current stratum
- ISUB - Substrata index
- TAU2S -  $\tau_s^2$
- ICL - Substrata class index


Processing:


See Flow Diagram.

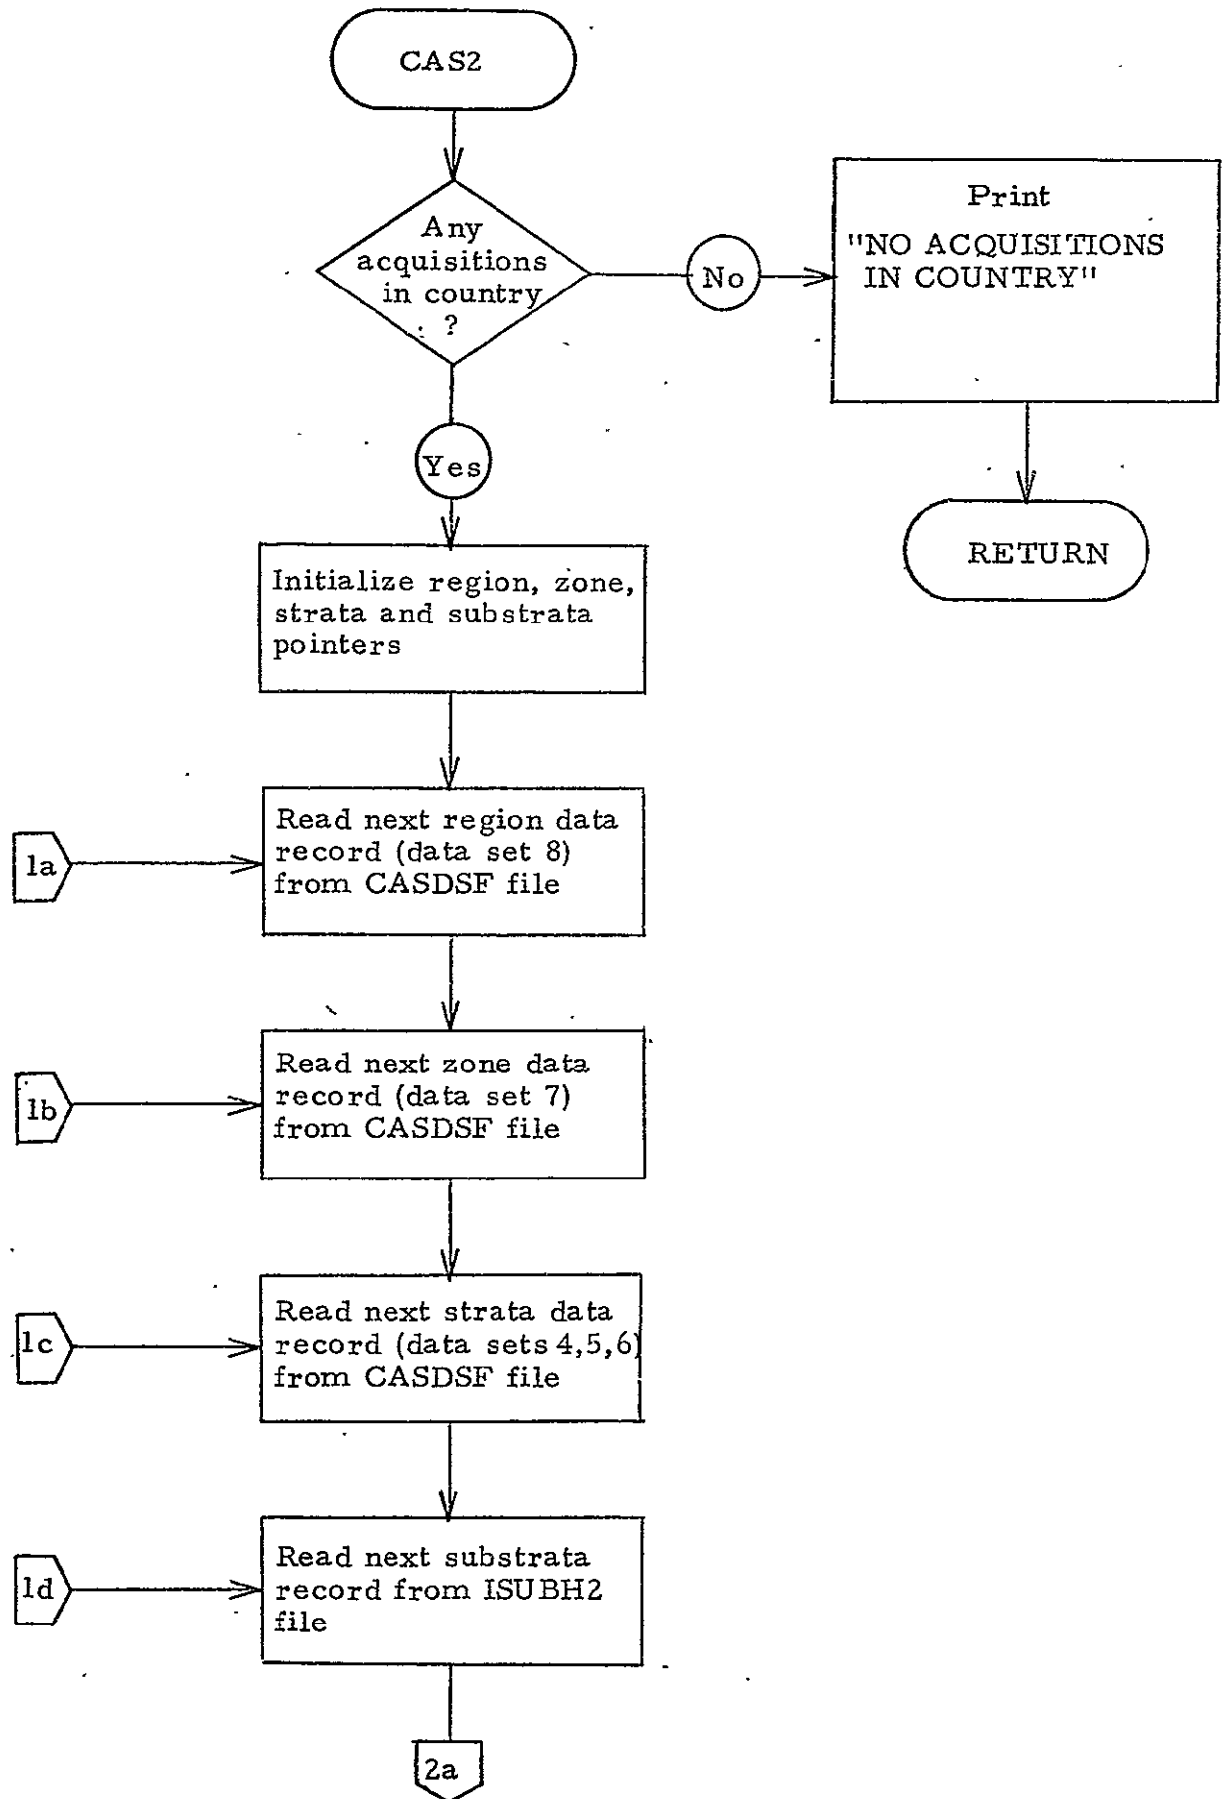


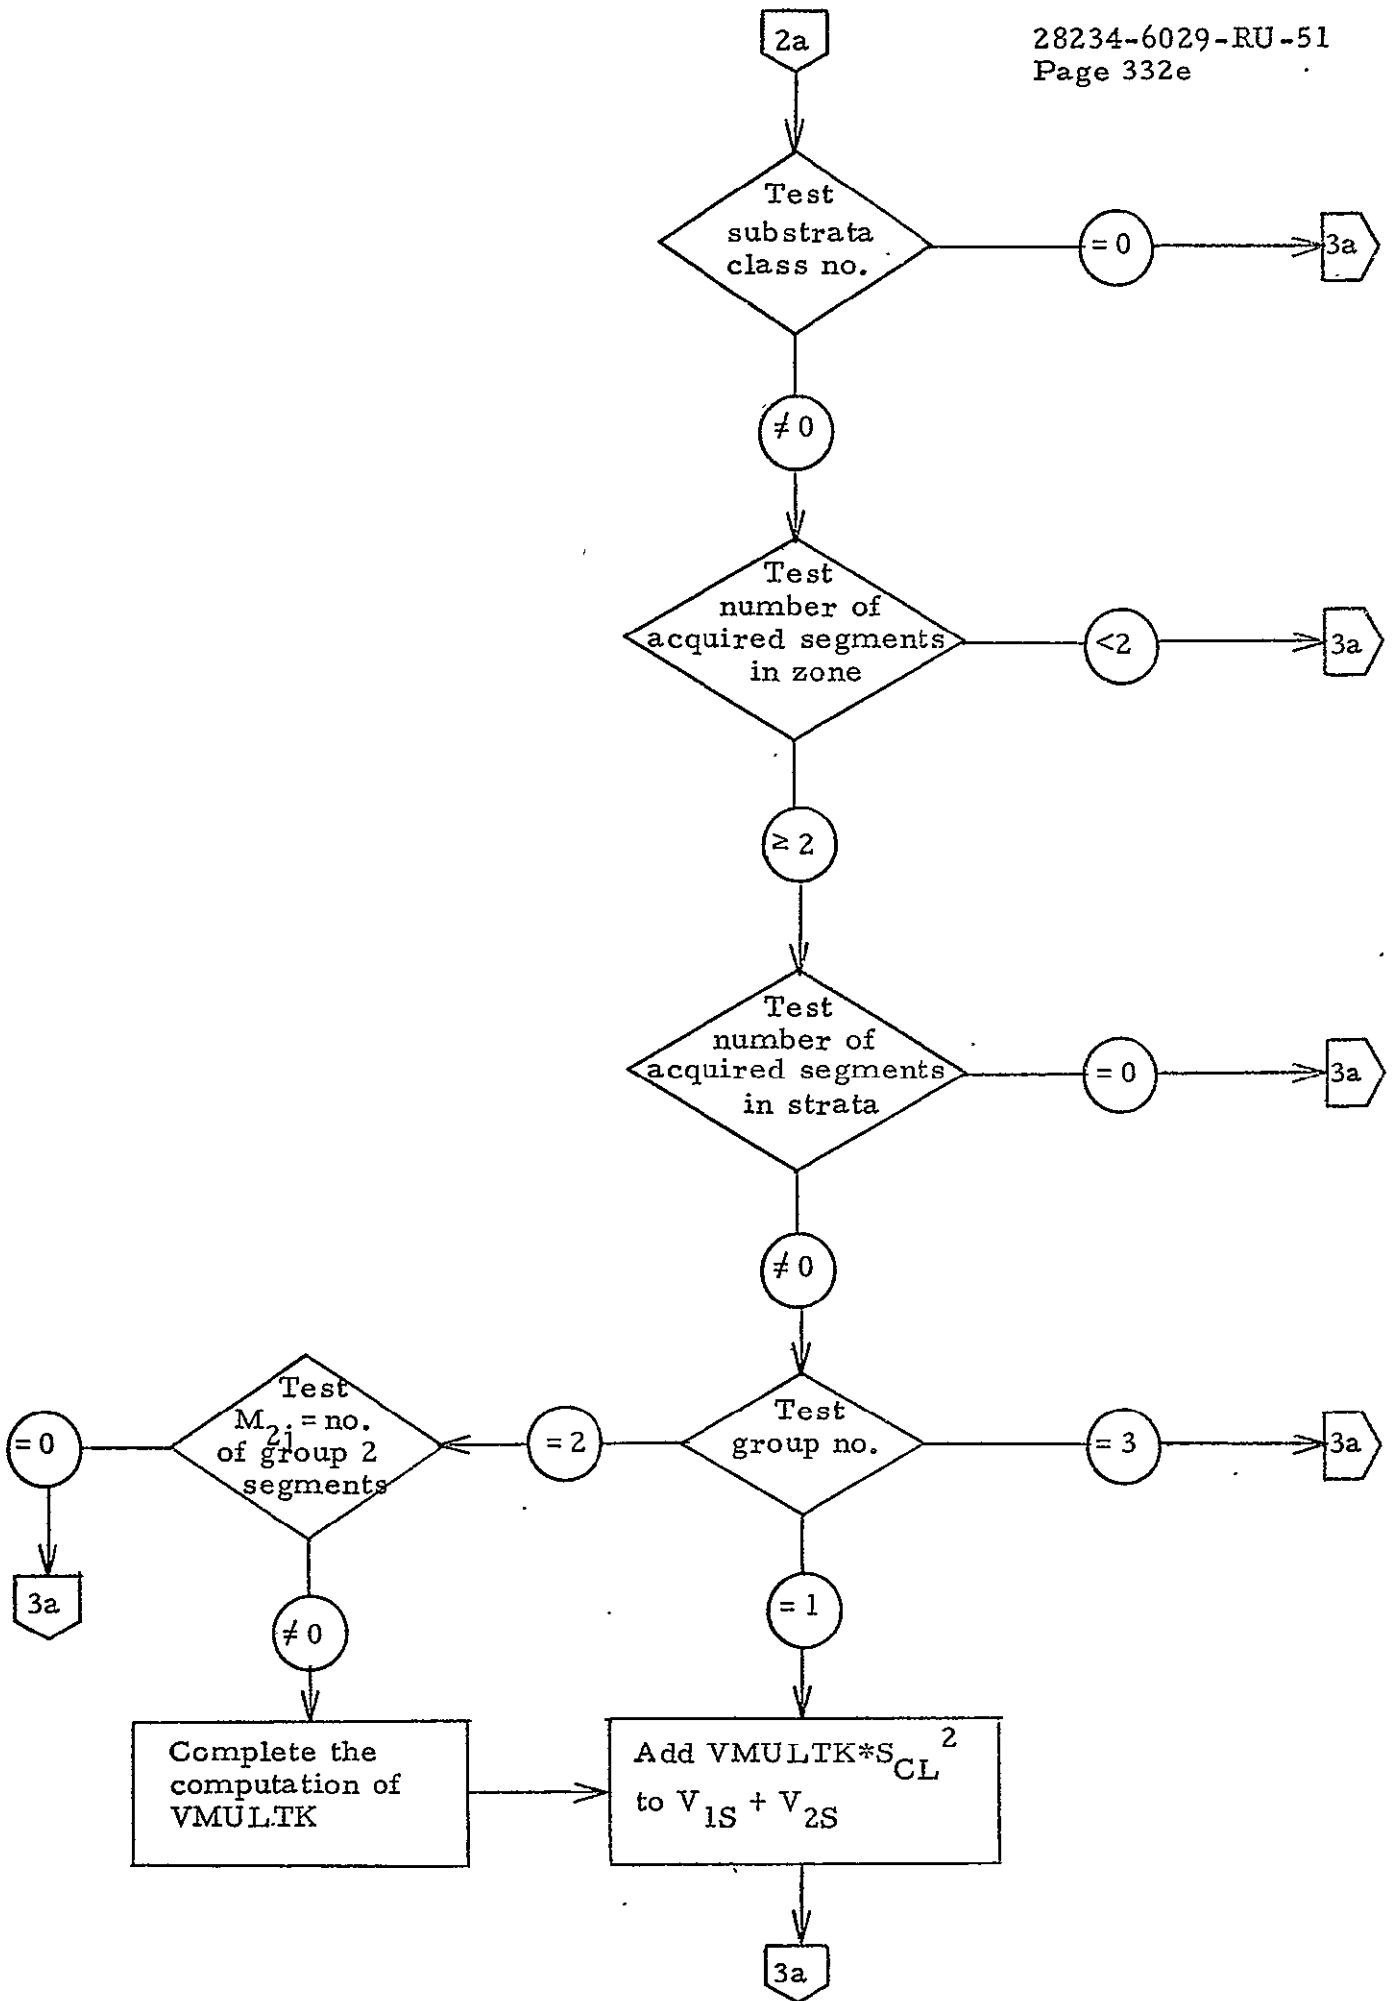



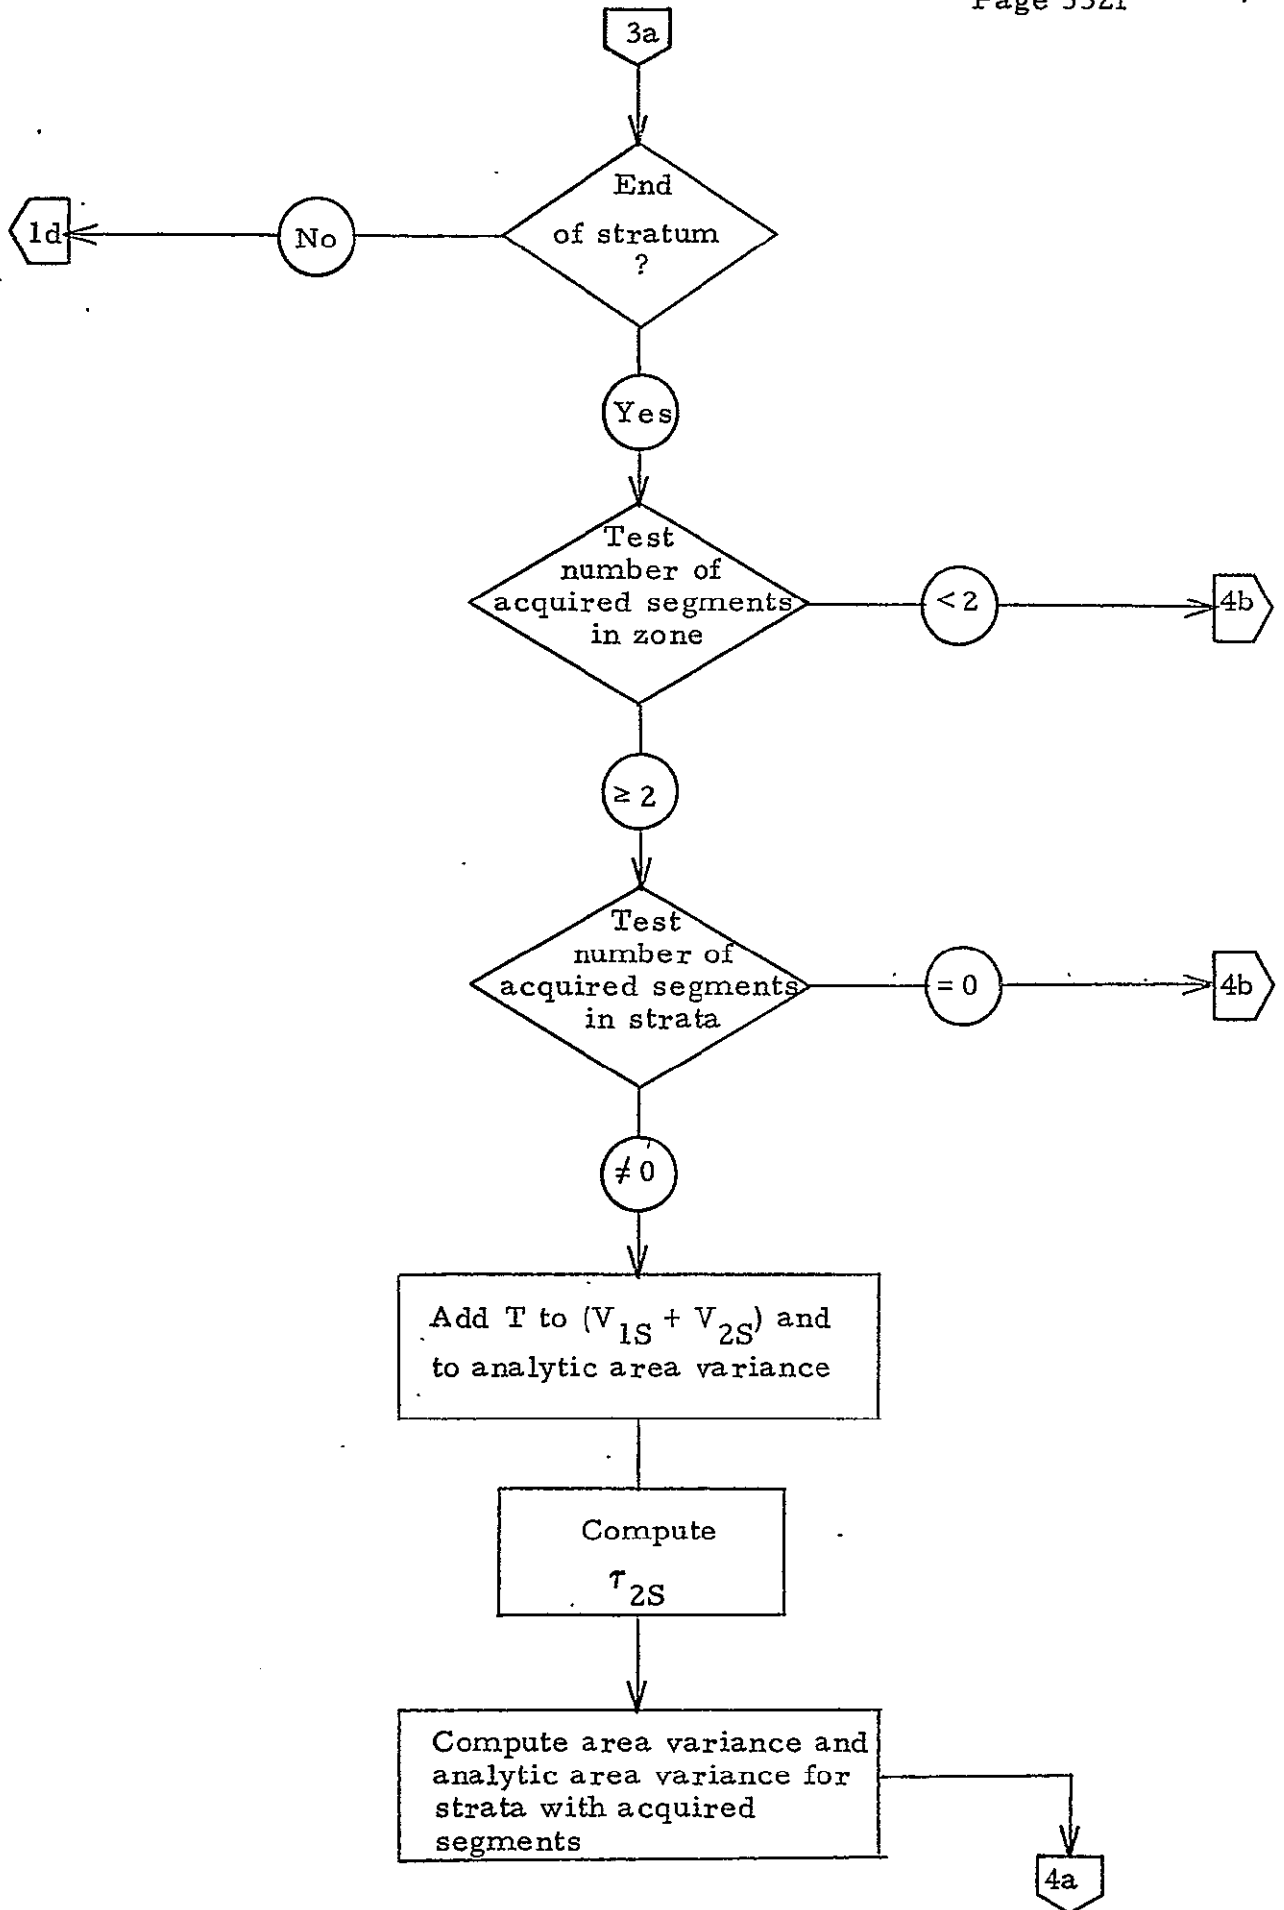

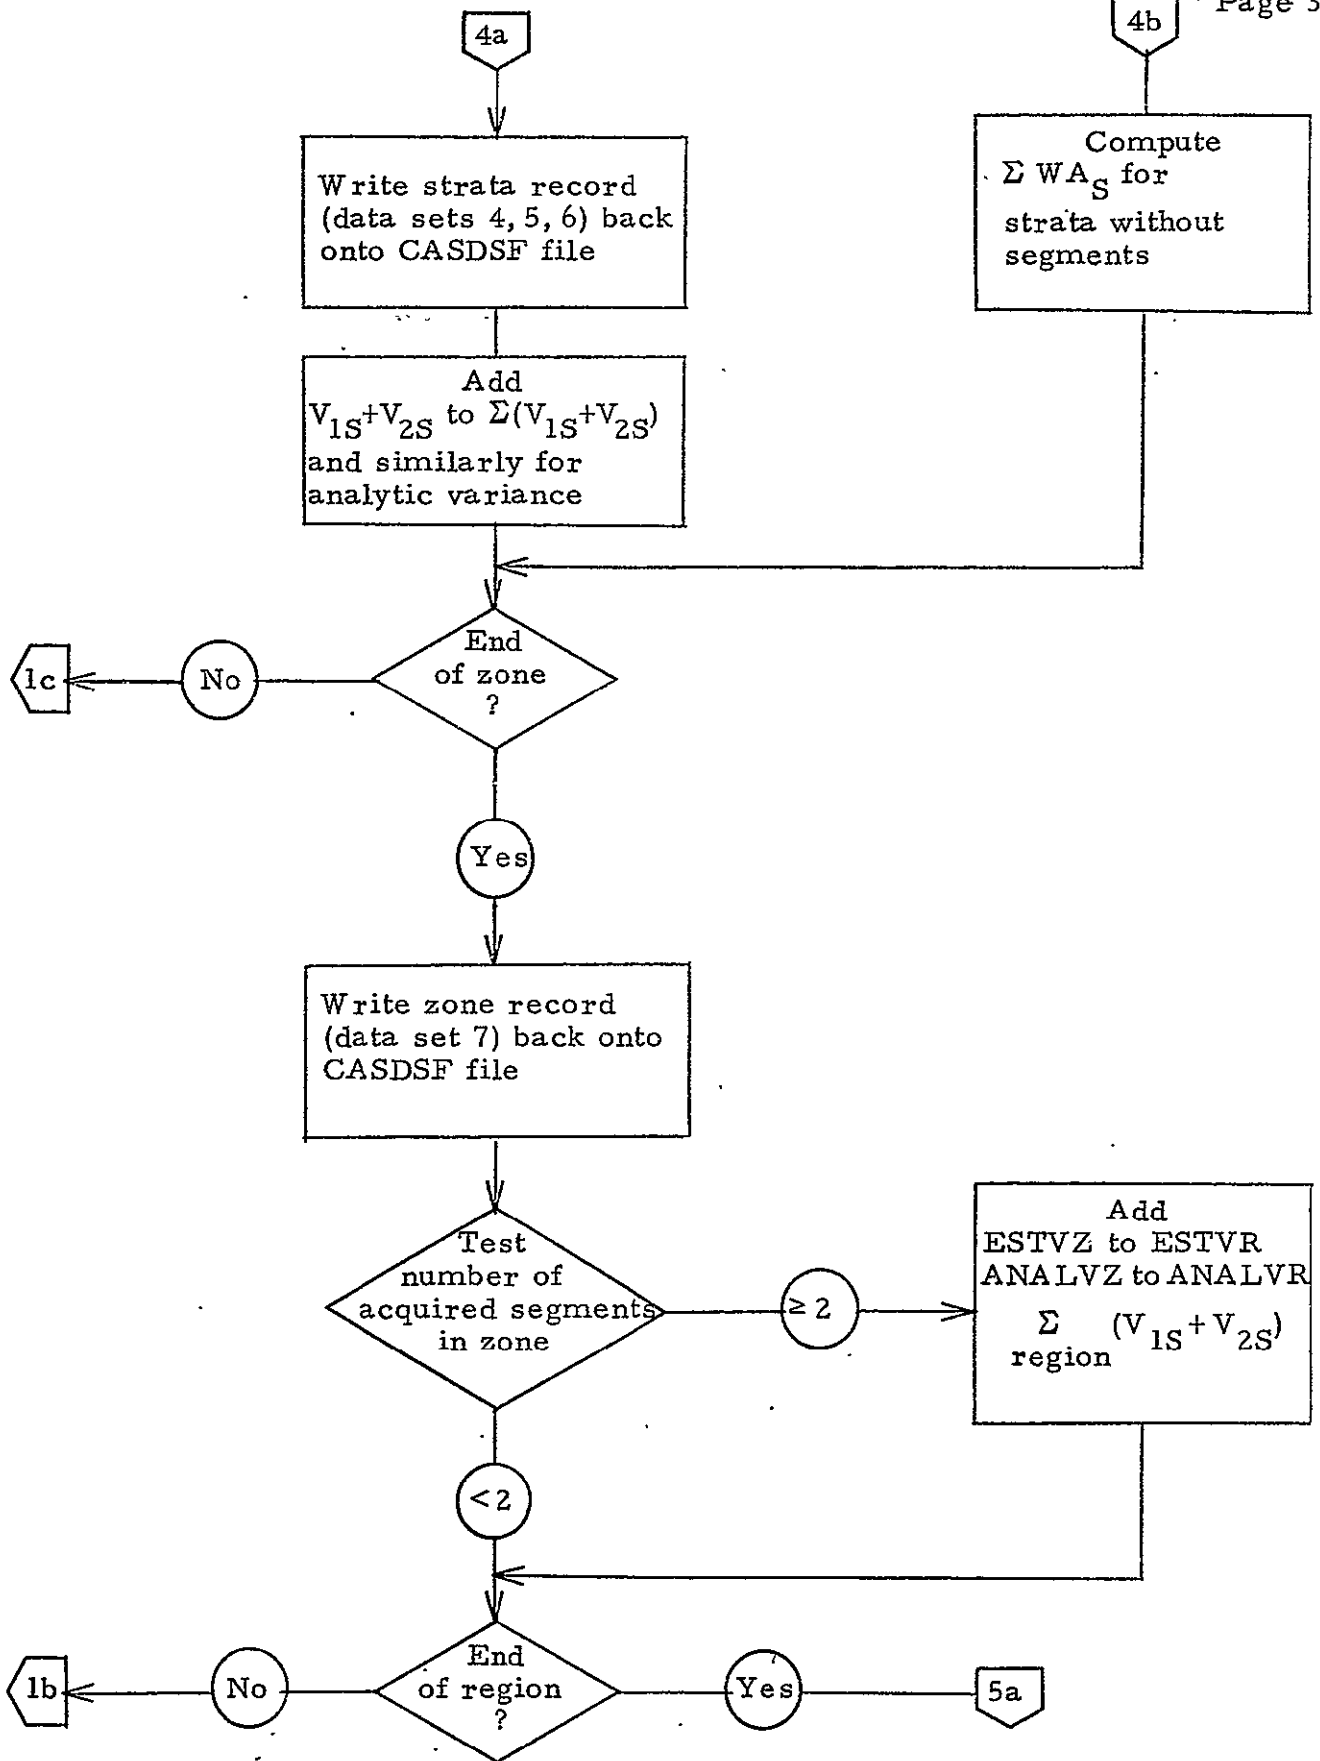

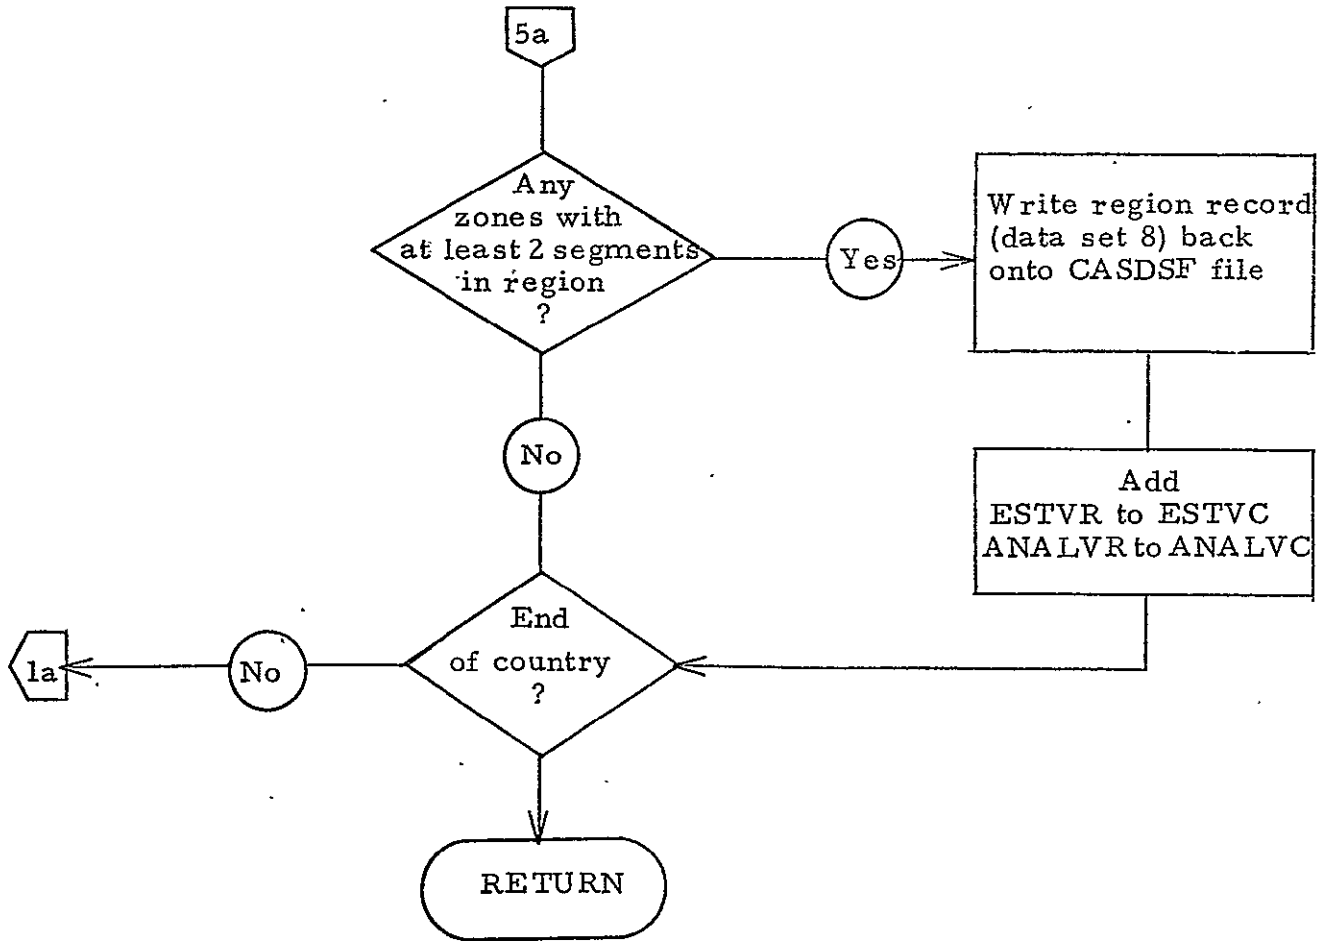

Subroutine CAS3

Purpose:

CAS3 performs the final pass CAS computations generating data sets 10-19.

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Source</u>
NFATAL	ARGLST		ERRMES
DISTFF	CASCM		CASIN
APREP	CASCM		CASIN
IPRD	CASCM		CASIN
CASCUM	CASCUM	CASCUM	RWCASF
ICASC	CASCUM	CASCUM	RWCASF
DSET15	CASCUM	CASCUM	RWCASF
DSET16	CASCUM	CASCUM	RWCASF
DSET17	CASCUM	CASCUM	RWCASF
SQAERS	CASCUM	CASCUM	RWCASF
SQPERS	CASCUM	CASCUM	RWCASF
SQYERS	CASCUM	CASCUM	RWCASF
⋮	⋮	⋮	⋮
SQYERC	CASCUM	CASCUM	RWCASF
PPFLG	CASFLG		CAS
IBW	CASFLG		CAS
IPD	CASFLG		CAS
IPP	CASFLG		CAS
NREGS	CASFLG		CAS
LDS 11	CASFLG		CAS
LDS 12	CASFLG		CAS
LDS 13	CASFLG		CAS
LDS 15	CASFLG		CAS
LDS 16	CASFLG		CAS
LDS 17	CASFLG		CAS

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Source</u>
PRINTF	CNTRL		SETPRF
DSET7	DSET7	CASDSF	CASPP
ZONE	DSET7	CASDSF	CASPP
NSTRAZ	DSET7	CASDSF	CASPP
DSET8	DSET8	CASDSF	CASPP
REGION	DSET8	CASDSF	CASPP
DSET9	DSET9	CASDSF	CASPP
DSET11	DSET11		DS10
TWAZ	DSET11		DS10
EWAZ	DSET11		DS10
TPRODZ	DSET11		DS10
EPRODZ	DSET11		DS10
OUTP	FILES		Block Data
CASDSF	FILES		Block Data
LCASDS	FILES		Block Data
LIXCDS	IXCDSF		Block Data
NTRIAL	LEMCM		LEMCF
MXLINE	PAGECM		Block Data
NT=ITER	STATS		LEM

Output:

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Used By</u>
CASCUM	CASCUM	CASCUM	RWCASF
DSET15	CASCUM	CASCUM	RWCASF
DSET16	CASCUM	CASCUM	RWCASF
DSET17	CASCUM	CASCUM	RWCASF
IRSTR	CASFLG		DS10
IRZONE	CASFLG		RWCASF, RANACF
IRREG	CASFLG		RWCASF, RANACF
ENDREG	CASFLG		CASOUT
DSET11	DSET11	CASDIS	RWDISF
AERRZ	DSET11	CASDIS	RWDISF
PRERRZ	DSET11	CASDIS	RWDISF

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Used By</u>
TYZ	DSET11	CASDIS	RWDISF
EYZ	DSET11	CASDIS	RWDISF
YERRZ	DSET11	CASDIS	RWDISF
* DSET12	DSET12	CASDIS	RWDISF
AERRR	DSET12	CASDIS	RWDISF
PRERRR	DSET12	CASDIS	RWDISF
PRVARR	DSET12	CASDIS	RWDISF
TYR	DSET12	CASDIS	RWDISF
EYR	DSET12	CASDIS	RWDISF
YERRR	DSET12	CASDIS	RWDISF
DSET13	DSET13	CASDIS	RWDISF
NPAGE	PAGECM		PAGER

Linkage:

CALL CAS3

Subroutines Used:


PAGER  
 RANACF  
 DS10  
 RWCASE  
 RWDISF  
 CASOUT  
 CONFL  
 DS10


Local Variables:

I - Index in DO loops  
 IREG - Region counter  
 IZONE - Zone counter (within a region)


Processing:

See Flow Diagram.

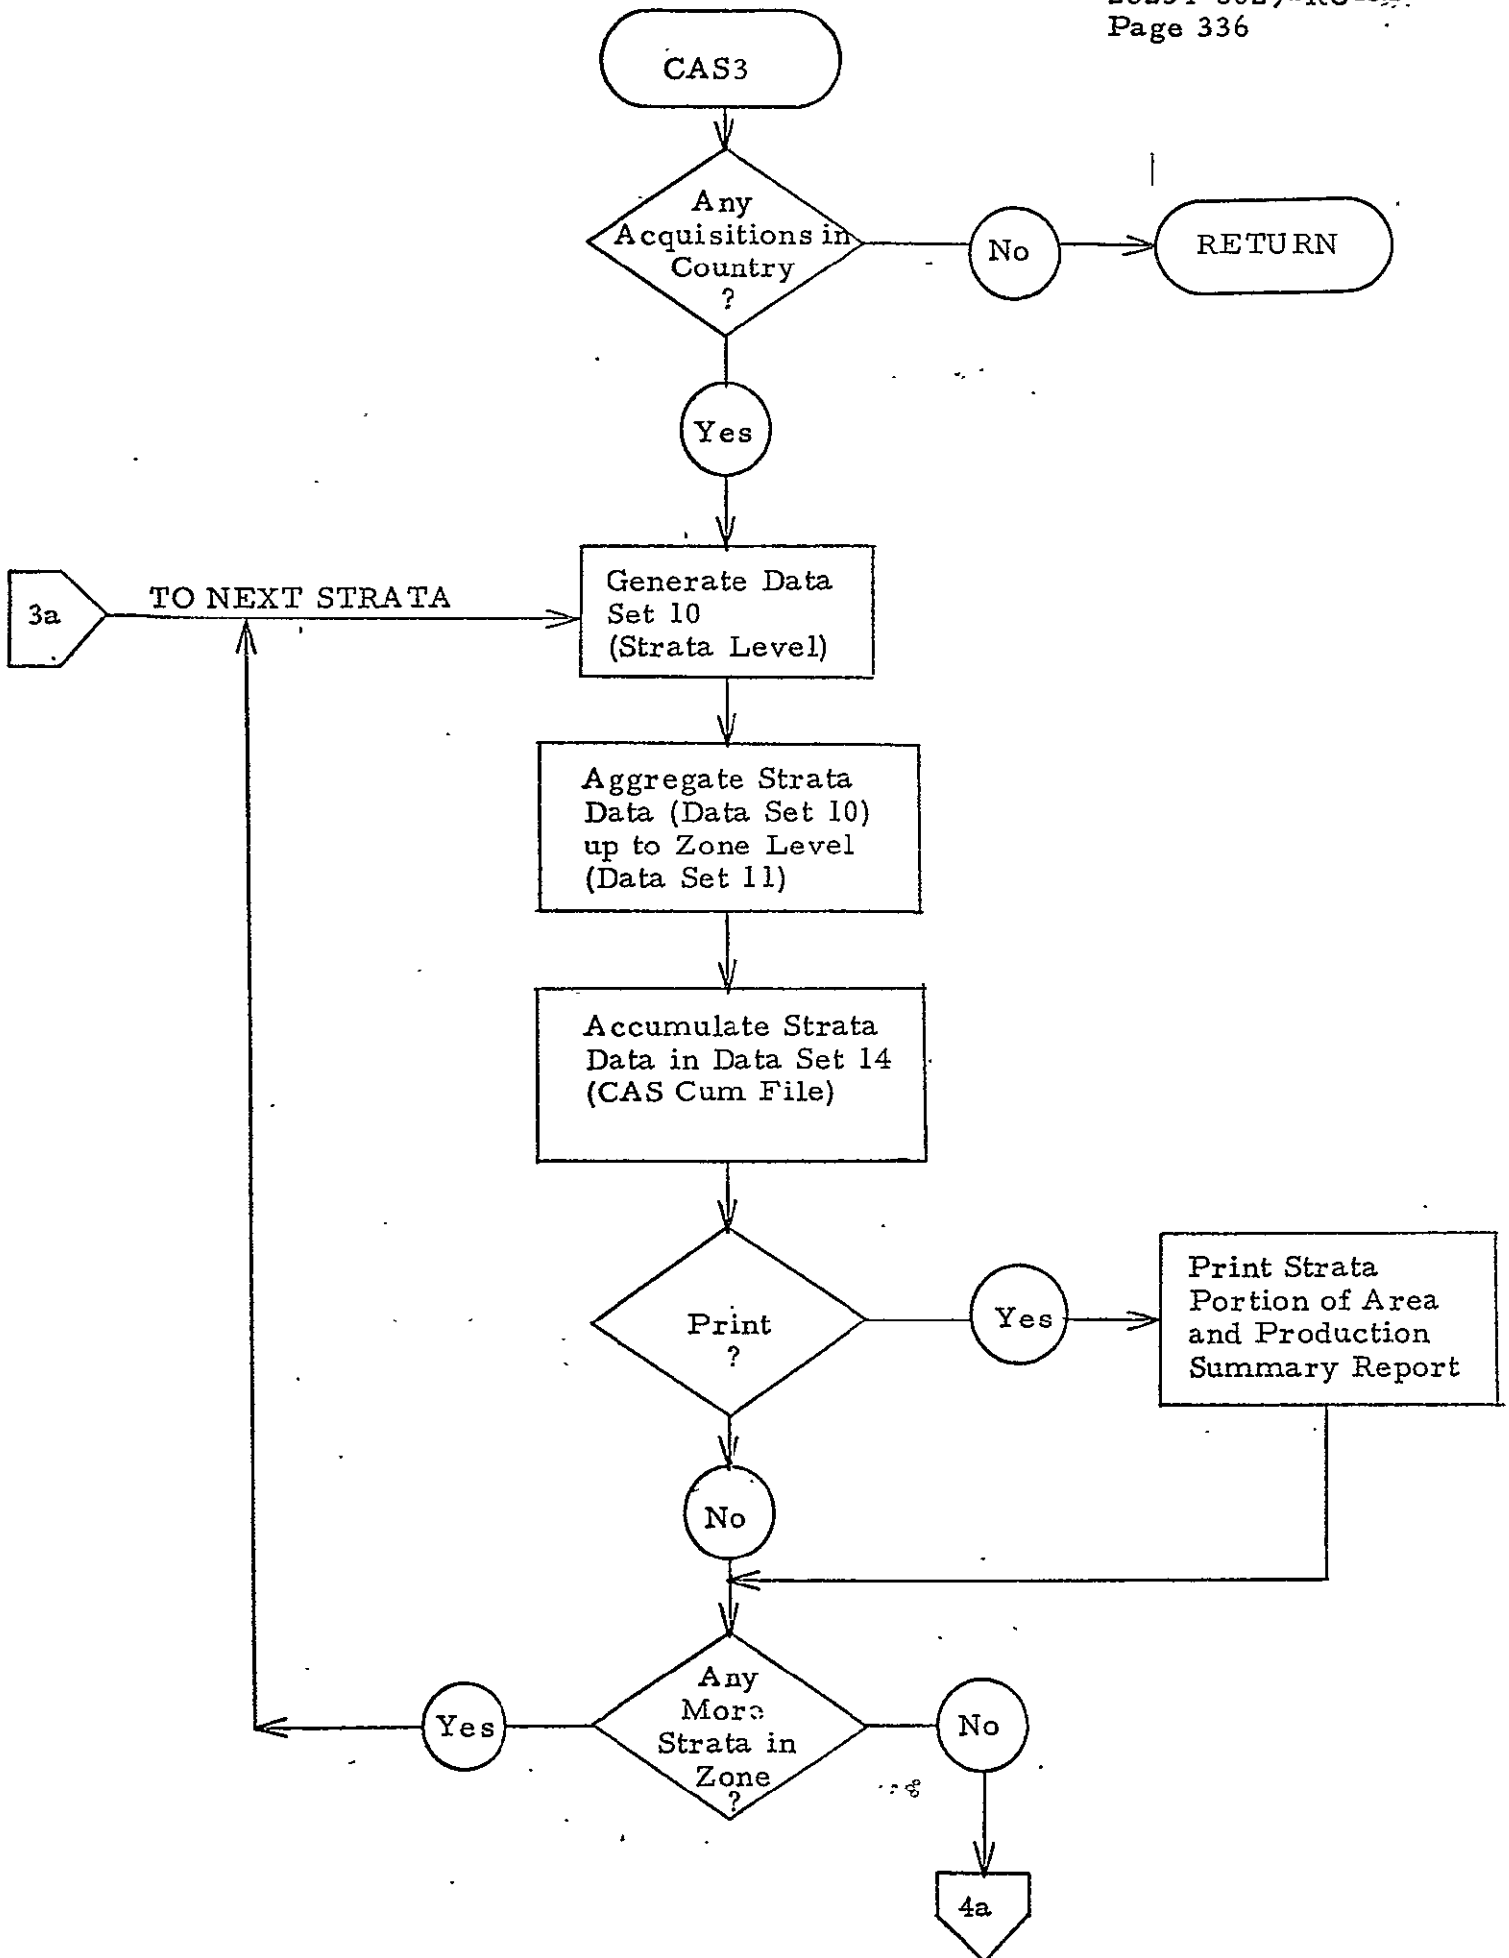


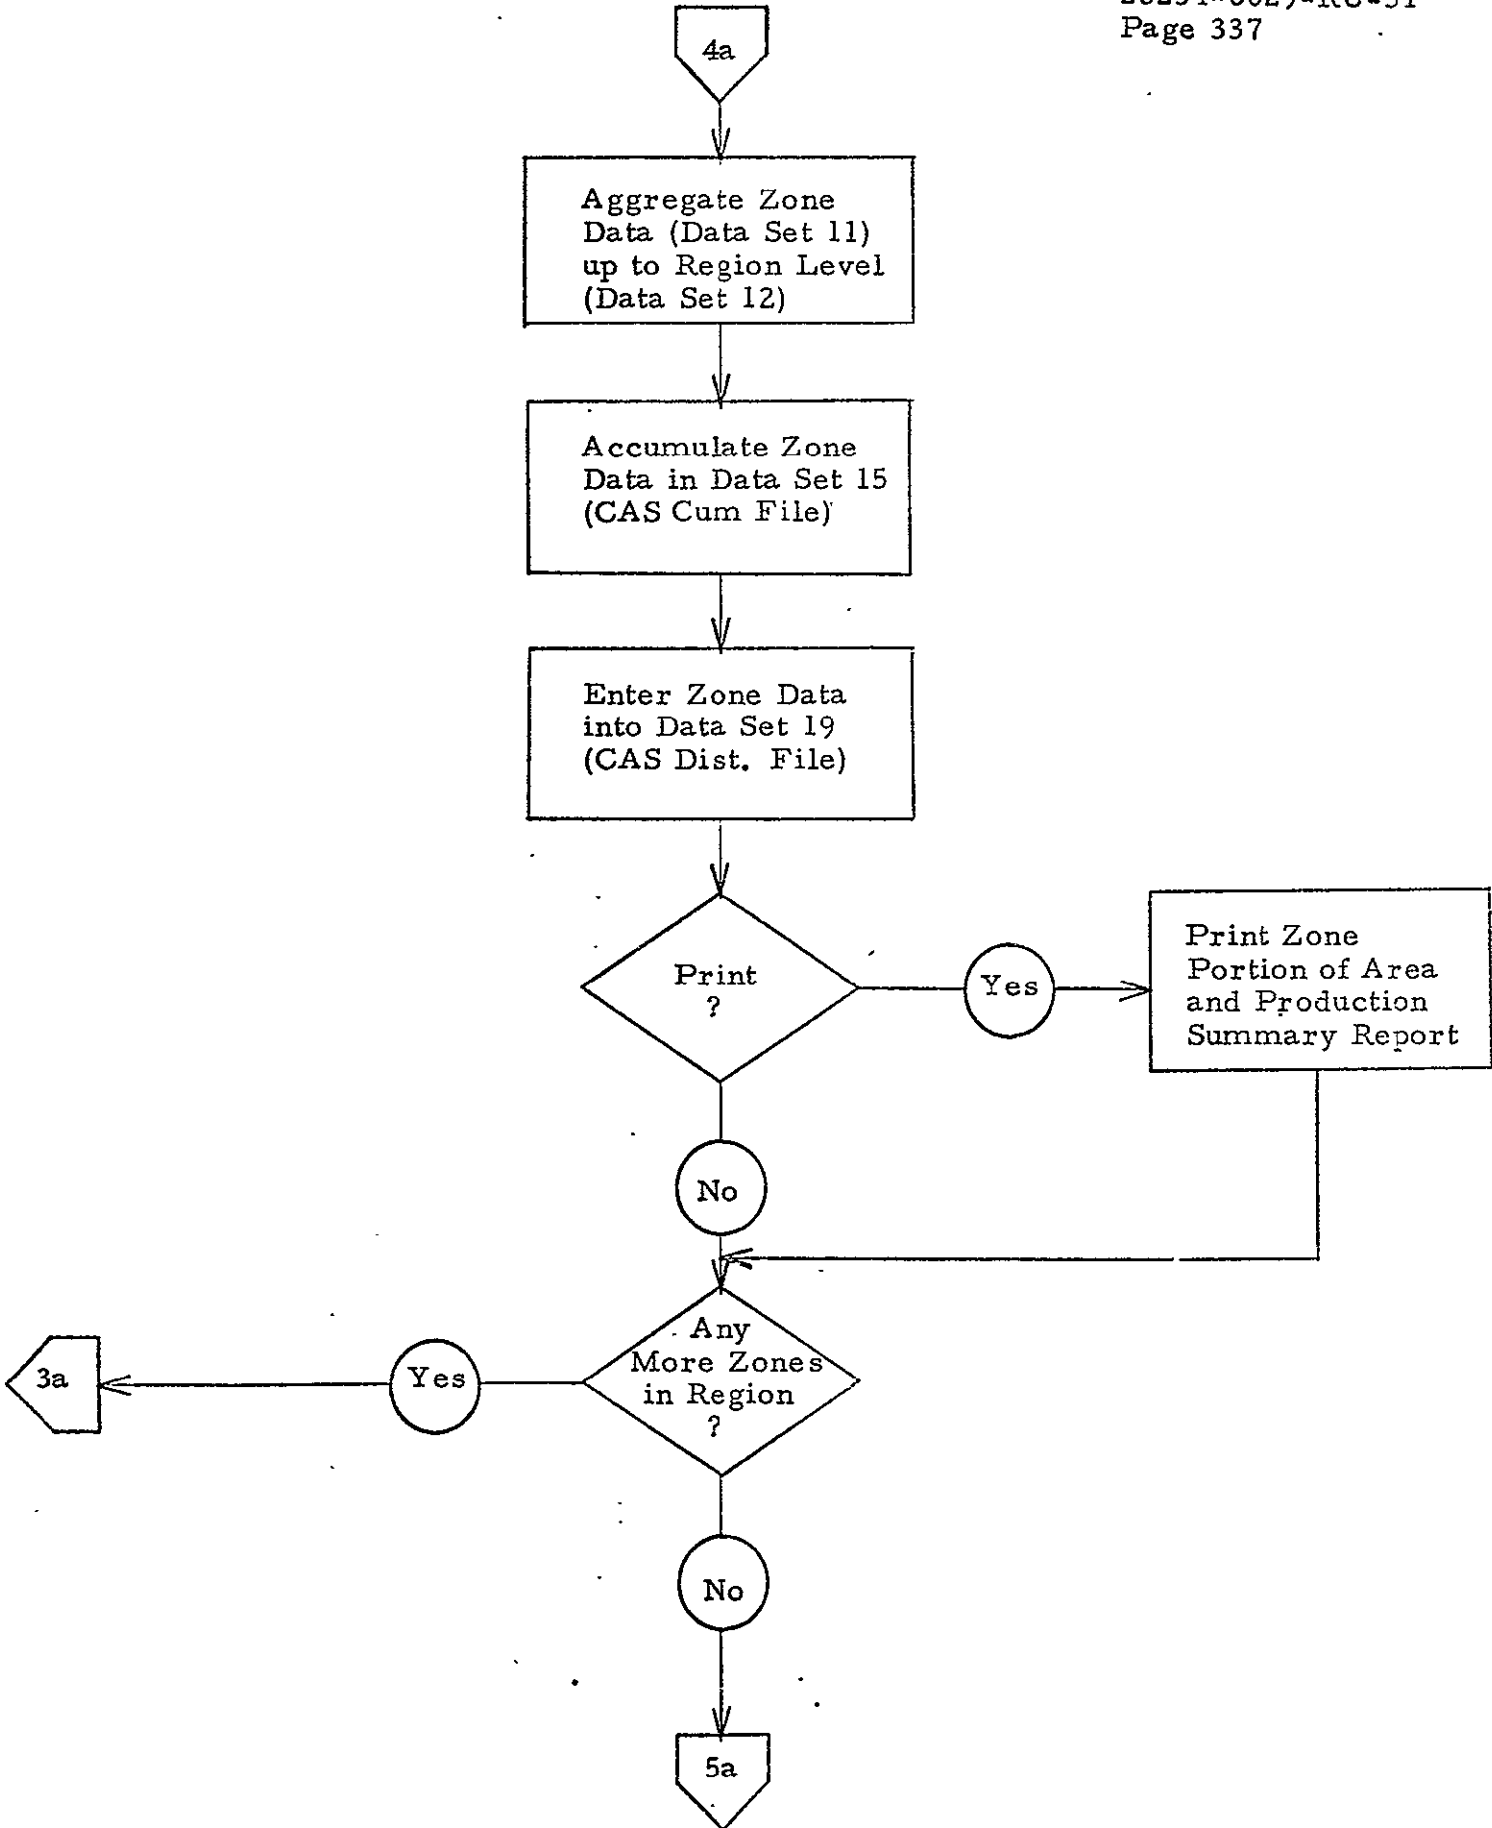



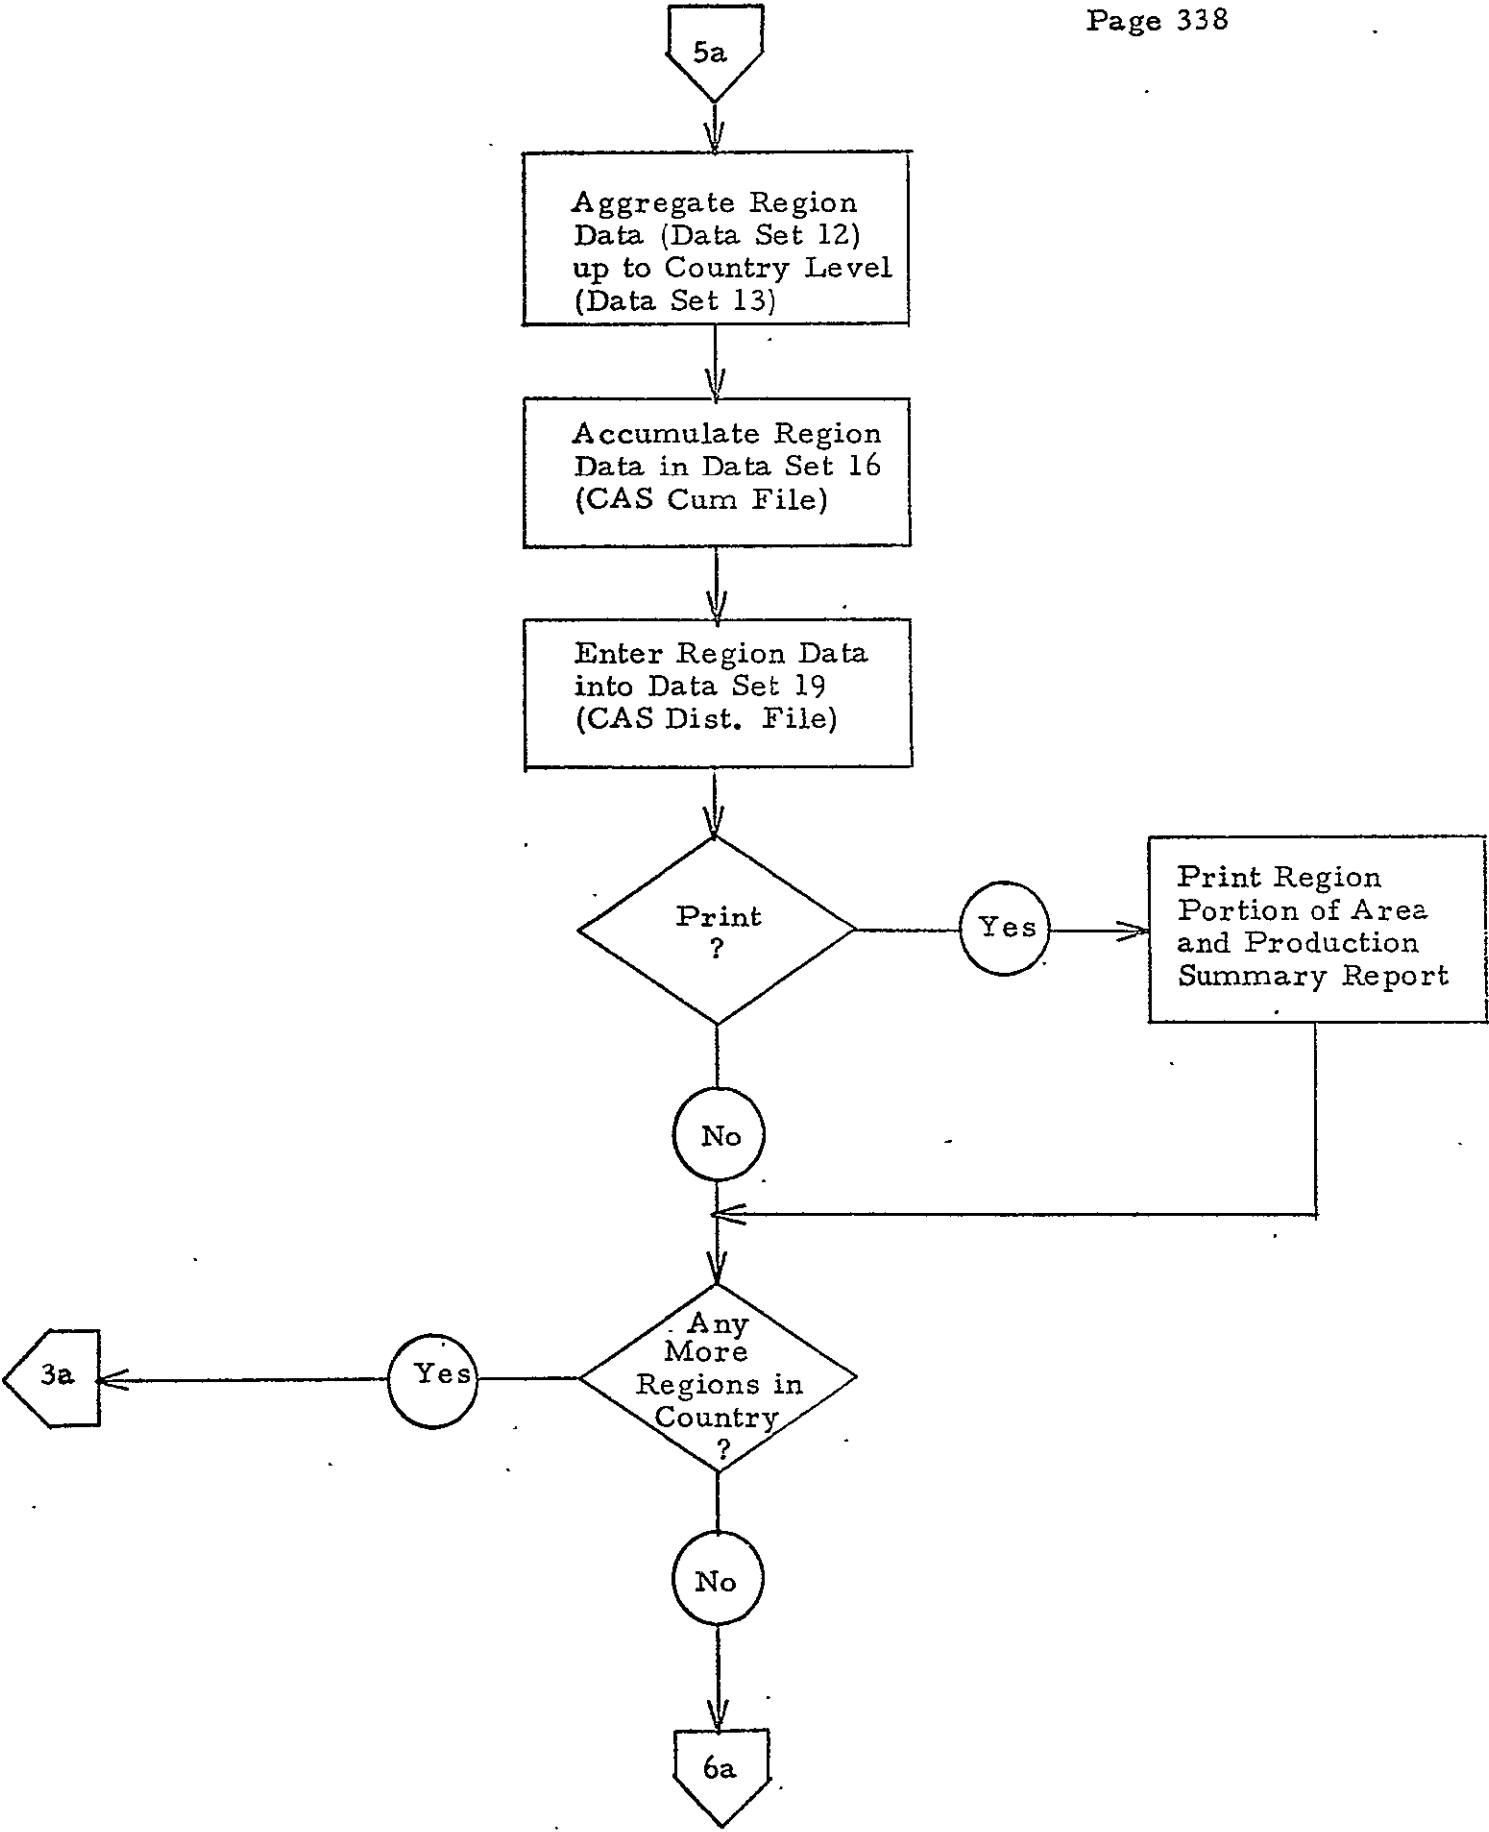

CAS3 Flow Diagram (Sheet 3 of 4)

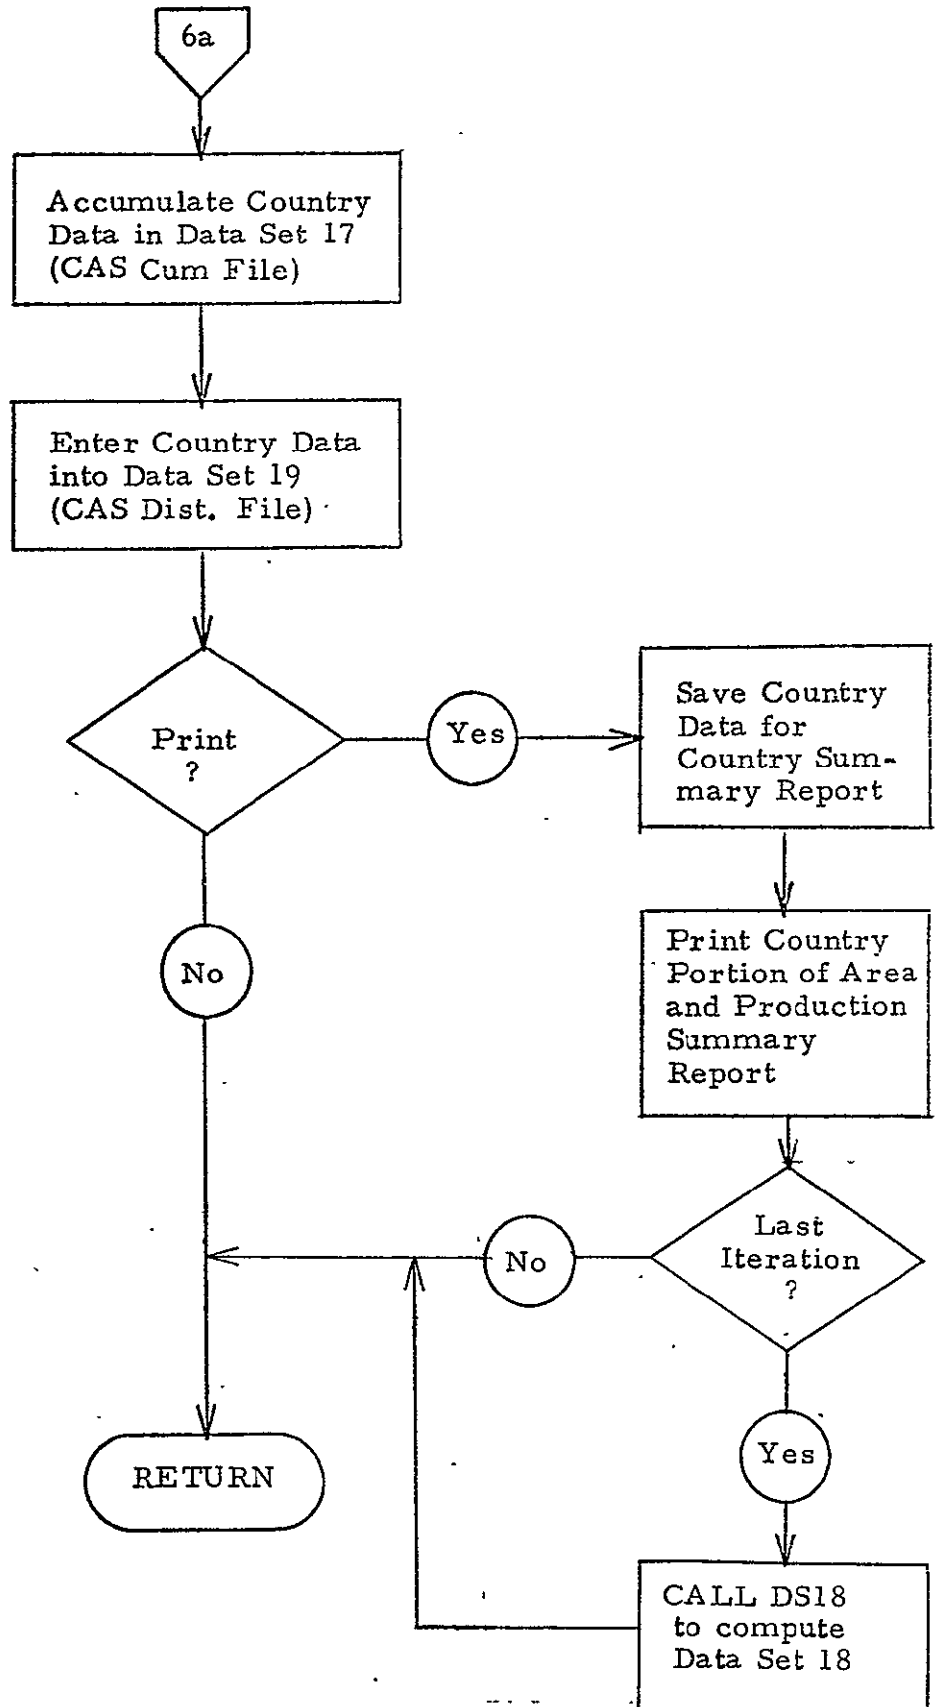

Subroutine GETYS

Purpose:

Subroutine GETYS reads strata yield data from the YES output file (YES) and obtains the proper value of estimated yield for the current bio-window or prediction date.

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Source</u>
PPFLG	CASFLG		CAS
IPD	CASFLG		CAS
PPDATE	CASFLG		CAS
NSTRAT	CASFLG		CASINL, DS456
NRYES	CASFLG		CASINL
NSTART	CNTRL		LEM
ENDFIL	CONST		Block Data
STRATA	DSET4	YESOUT	YES
EVYRS	DSET4	YESOUT	YES
ZONE	DSET7	YESOUT	YES
REGION	DSET8	YESOUT	YES
YS	DSET10	YESOUT	YES
ESTYS	DSET10	YESOUT	YES
YESOUT	FILES		Block Data
IREG2	SSHDTA	SUBHST	CASPP
IZONE2	SSHDTA	SUBHST	CASPP
ISTRA2	SSHDTA	SUBHST	CASPP
NT	STATS		LEM
YSTR	YESDTA	YESOUT	YES
IZPRDD	YESDTA	YESOUT	YES
YSCI	YESDTA	YESOUT	YES
YSYCI	YESDTA	YESOUT	YES
YCOUN	-	YESOUT	YES

Output:

<u>Quantity</u>	<u>Common Block</u>	<u>Used By</u>
NRYES	CASFLG	WRAPUP
STRATA	DSET4	CASPP, DS456
EVYRS	DSET4	DS456
ZONE	DSET7	CASPP, DS7
REGION	DSET8	CASPP
YS	DSET10	DS456
ESTYS	DSET10	DS456

Linkage:

CALL GETYS

Subroutines Used:

ERRMES

Local Variables:

I - Index in DO loop  
II - I-6  
YCOUN - Country ID read from YESOUT file

Processing:

1. Advance NRYES by 1 and read one data record from YESOUT file.
2. Check for end-of-data indicator (country ID = 4H ZZZZ). If end-of-data read, call ERRMES to write error message and abort run.
3. If first iteration of current run and if not first strata in country, compare region, zone and strata ID's from YESOUT and SUBHST files. If any pair does not agree, call ERRMES to write error message and abort run.
4. If PPFLG = 0 (bio-window), then find last non-zero yield date from the YESOUT file for the current strata. Save the corresponding value of estimated yield in ESTYS and save the corresponding value of yield variance in EVYRS. Then return.

5. If PPFLG  $\neq$  0 (prediction date), then find the last non-zero yield date which is less than or equal to the given prediction date. Save the corresponding estimated yield in ESTYS and save the corresponding yield variance in EVYRS. If the given prediction date is less than all yield dates for this strata, then a flag is set so CAS will skip this strata.
6. Return.

## Subroutine GROUP

Purpose:

Subroutine GROUP reads segment data from the CAMS output file (CAMSF), selects the estimated proportion wheat for the proper bio-window for each segment, and aggregates the segment data up to the substrata level.

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>File</u>	<u>Source</u>
WPRIOR	CASCM		CASIN
PPFLG	CASFLG		CAS
IBW	CASFLG		CAS
PPDATE	CASFLG		CAS
NRCAMS	CASFLG		CASINL
MIK	DSET1		DS123
EPWK	DSET1		DS123
EPW2K	DSET1		DS123
SMPKPI	DSET1		DS123
SUMPK2	DSET1		DS123
SUMPK	DSET1		DS123
CAMSF	FILES		Block Data
IDSEGT	SEGDTA	CAMSF	CAMS
ISEG	SEGDTA	CAMSF	CAMS
TPWKI	SEGDTA	CAMSF	CAMS
ZACDAY	SEGDTA	CAMSF	CAMS
EPWKI	SEGDTA	CAMSF	CAMS
ERRPWI	SEGDTA	CAMSF	CAMS
IREG2	SSHDTA		CASPP
IZONE2	SSHDTA		CASPP
ISTRA2	SSHDTA		CASPP
ISUBS2	SSHDTA		CASPP
NSEG	SSHDTA		CASPP
HISTPW	SSHDTA		CASPP

Output:


<u>Quantity</u>	<u>Common Block</u>	
M1K	DSET1	} Values share same location; one or the other is computed.
M2K	DSET1	
EPWK	DSET1	
EPW2K	DSET1	
SMPKPI	DSET1	
SUMPK2	DSET1	
SUMPK	DSET1	

Linkage:

CALL GROUP

Local Variables:

- I - Index in DO loop
- N - Index in segment DO loop
- ESTPWI - Specific value of estimated proportion wheat (fraction)

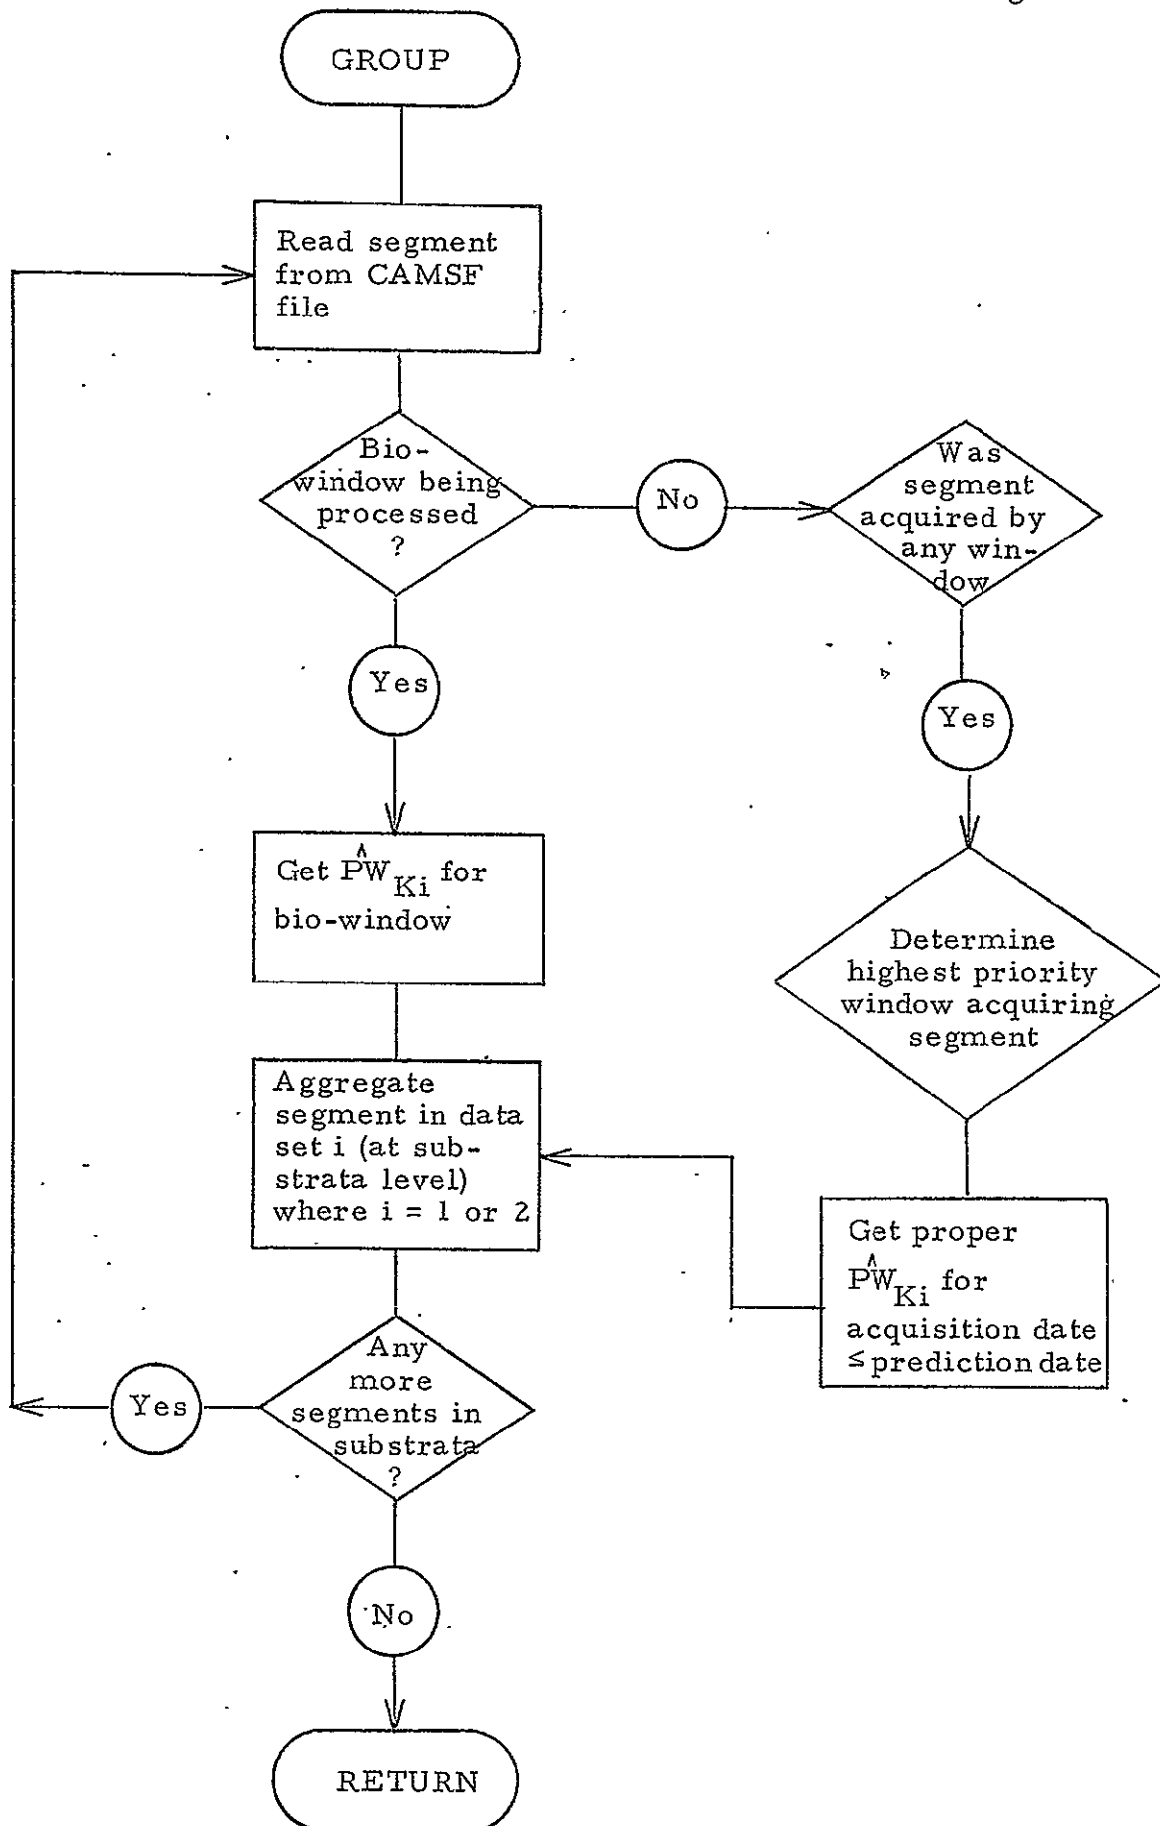



Subroutine SUMREP

Purpose:

Subroutine SUMREP prints the Country Summary Report, a two page printed report which specifies the mean values of the estimated wheat area, yield, and production, coefficients of variance, and confidence levels at the country level for each bio-window and prediction date.

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
OUTP	FILES	Block Data
CUNTRY	LEMCM	INPUT
MXLINE	PAGECM	Block Data
NT	STA TS	LEM
AREACF	CASCM	CASIN
YCF	CASCM	CASIN
PRDCF	CASCM	CASIN
APRUTS	CASCM	CASIN
PPRUTS	CASCM	CASIN
YPRUTS	CASCM	CASIN
AUNITS	CASCM	CASIN
BWIND	CASCM	CASIN
IPRD	CASCM	CASIN
NPDATE	CASCM	CASIN
HWAC	DSET13	CAS2
TWAC	DSET13	CAS2
TPRODC	DSET13	CAS2
TYC	DSET13	CAS2
CSUMR	SUMDTA	CASOUT

Output:

- 1) Printed output

CUNTRY	CSUMR
NT	HWAC
APRUTS	TWAC
YPRUTS	TYC
PPRUTS	TPRODC
IPRD	

- 2) Output to common

<u>Quantity</u>	<u>Common Block</u>	<u>Used By</u>
NLINE	PAGECM	PAGER

Linkage:

CALL SUMREP

Subroutines Used:

EJECT  
PAGER

Local Variables:

I - Index in DO loop, e. g., bio-window number  
 INDX = AUNITS + 1

Processing:

1. Call EJECT to eject page and print page headers.
2. Print labels for Country Summary Report.
3. Print country ID and Monte Carlo iteration number.
4. Print output labels (including units labels for first page only).
5. Print country summary data for each bio-window and each prediction point.

First Page

Bio-window or prediction	Est. WA	CV Anal. WA (Pct True)	CV Area Est. (Pct True)	CV Area Error (Pct True)
	Est. Yield	Std. Dev. Pct Error		
	Est. Prod.	CV Anal. Prod (Pct True)	CV Prod. Est. (Pct True)	CV Prod. Error (Pct True)

Second Page

Bio-window or prediction date	CL Area True/Error	CL Area Est/Est	CL Area True/Est	CL Area True/WC
	CL Prod. True/Error	CL Prod. Est/Est	CL Prod. True/Est	CL Area True/WC

6. At the bottom of the first page print

Historical wheat area

True wheat area

True yield

True production

Note: Steps 1-5 are performed for Page 1 and Page 2 of the Country Summary Report.

Subroutine TSUB

Purpose:

Subroutine TSUB computes the quantity T, which is the second term of the PPS area variance equation.

Input:

<u>Quantity</u>	<u>Common Block</u>	<u>Source</u>
XM2JS	DSET4	DS123
HWAS2	DSET4	DS123
HWA2K	CASCUM	DS123
WAKNEY	CASCUM	DS123
T	DSET4	DS456

Output:

<u>Quantity</u>	<u>Common Block</u>	<u>Used By</u>
T (updated value)	DSET4	DS456

Linkage:

CALL TSUB

Subroutines Used:

None.

Local Variables:

$$CON = \frac{M_{2j}}{WA_{2S}}$$

M2J =  $M_{2j}$  (integer)

PIK = Array of  $\pi_K$

K = Substrata index

$$\text{SUM2} = \sum_{\alpha=1}^{S2} \pi_{\alpha}^2$$

$$\text{SUM3} = \sum_{\alpha=1}^{S2} \pi_{\alpha}^3$$

$$\text{CON1} = \frac{M_{2j} - 1}{M_{2j}}$$

$$\text{CON2} = \frac{M_{2j} - 1}{M_{2j}^2}$$

$$\text{CON3} = 2 \left( \frac{M_{2j} - 1}{M_{2j}^3} \right)$$

$$\text{CON3S} = \left( \frac{M_{2j} - 1}{M_{2j}^3} \right) \left( \sum_{\alpha=1}^{S2} \pi_{\alpha}^2 \right)$$

$$\text{CON4S} = 3 \left( \frac{M_{2j} - 1}{M_{2j}^4} \right) \left( \sum_{\alpha=1}^{S2} \pi_{\alpha}^2 \right)$$

$$\text{CON4S3} = 2 \left( \frac{M_{2j} - 1}{M_{2j}^4} \right) \left( \sum_{\alpha=1}^{S2} \pi_{\alpha}^3 \right)$$

$$\text{CON5S2} = 3 \left( \frac{M_{2j} - 1}{M_{2j}^5} \right) \left( \sum_{\alpha=1}^{S2} \pi_{\alpha}^2 \right)^2$$

$$M2JM1 = M_{2j} - 1$$

$$\text{WAKPIK} = \frac{WA'_K}{\pi_K}$$

$$\text{PIK2} = \pi_K^2$$

$$\text{PIK3} = \pi_K^3$$

$$KPI = K + 1$$

$$PIKPKP = \pi_K \pi_{K'}$$

$$TERM2 = \pi_K^2 \pi_{K'} + \pi_K \pi_{K'}^2$$

$$PIKPP = \pi_{K''}$$

Processing:

1. Compute

$$PIK(K) = \pi_K = XM2JS \left[ \frac{HWA2K(K)}{HWA52} \right] = M_{2j} \left[ \frac{\tilde{W}A_{2K}}{\tilde{W}A_{2S}} \right]$$

for each group II substrata in the stratum.

2. Compute  $SUM2 = \sum_{\alpha=1}^{S2} \pi_{\alpha}^2$  and  $SUM3 = \sum_{\alpha=1}^{S2} \pi_{\alpha}^3$
3. Compute coefficients CON1, CON2, CON3, CON3S, CON4S, CON4S3, CON5S2
4. Compute for each pair of distinct group II substrata

$$K, KP = K' \neq K$$

the following

- a)  $PIKPKP = PIK(K) * PIK(KP)$   
 $= \pi_K * \pi_{K'}$

- b)  $TERM2 = \pi_K^2 \pi_{K'} + \pi_K \pi_{K'}^2$

- c)  $PIKPP = \pi_{K''}$

$$= CON1 * PIKPKP + CON2 * TERM2$$

$$- CON3S * PIKPKP$$

$$+ CON3 * [PIK(K)^3 PIK(KP) + PIK(K) * PIK(KP)^3 + PIK(K)^2 * PIK(KP)^2]$$

$$- CON4S * TERM2 + CON5S2 * PIKPKP$$

$$- CON4S3 * PIKPKP$$

5. Compute

$$T = \sum_{K=1}^{S2-1} \sum_{K'=K+1}^{S2} (\pi_K \pi_{K'} - \pi_{K''}) \left( \frac{WA'_K}{\pi_K} - \frac{WA'_{K'}}{\pi_{K'}} \right)$$

where

$WA'_K$  and  $WA'_{K'}$  are the non-epoch wheat areas for substrata  $K$  and  $K'$ .

## SUBROUTINE CLASSN

### Purpose:

This routine controls the computation of the class number for each substrata in SUBHST file as defined by STARTR-ENDZ user inputs. The SUBHST file is read a zone at a time for the first prediction point and a new temporary file ISUBH2 is generated containing all necessary SUBHST data. For subsequent prediction points the ISUBH2 file is read instead of SUBHST. For all prediction points a strata table is formed and then this routine controls the computation of the class number. It then updates the ISUBH2 file with the class numbers for the appropriate prediction point.

### Input:

CASFLG COMMON:  
H, NRSSH, LDS1, IPP, NCAMSK  
SSHDTA COMMON:  
All data except CLASS  
CONST COMMON:  
ENDFIL  
LEMCM COMMON:  
ENDR, ENDZ  
IXSUBH COMMON:  
LIXSSH, IXSUBH  
FILES COMMON:  
LSUBH, ISUBH2, CAMSF, OUTP  
DSET1 COMMON:  
MIK = M2K  
ARGLST COMMON:  
NFATAL  
CLSTAB COMMON:  
IXPT, IBPT, IEPT



Output:

CLSTAB COMMON: ISUB1, NACQ  
ISTRAT, ISBSTR, NSCNT, IGROUP, IDAT1, IDAT2  
SSHDTA COMMON:  
CLASS, MXK, VMULTK  
CASFLG COMMON:  
NRCAMS

Linkage:

CALL CLASSN

Subroutines Used:

CALL GROUP  
CALL SEGTAB  
CALL DETCLS  
CALL ASSCLS (IOPT)

IOPT = 1 - Means all substrata in a zone are class 0

IOPT = 2 - Means all substrata in a zone are class 1

IOPT = 0 - Means that class numbers are to be assigned via  
computation

Subroutine RANACF is used to read/write file ISUBH2 as follows:

CALL RANACF (ISUBH2, 0, 0, 0, IXSUBH, LIXSSH, 0)

- Open file

CALL RANACF (ISUBH2, ISUB, SSHDTA, LSUBH2, IXSUBH, LIXSSH, n)

n = 1 - Read file

n = 2 - Write file

Local Variable Description:

ISUB - Count on number of records written/read on ISUBH2 file

IFIRST - First time flag, = 0 - not first time  
≠ 0 - first time

MAXSCT - Maximum substrata that can be handled in a zone, ≅ 300


IBUF(39) - Array for temporary location of SUBHST or ISUBH2 when  
in read mode


NORD - Don't read flag = 0 - read; ≠ 0 - don't read


Processing:


See flowchart for details.

1. If NACQ is < 2, then calls to SEGTAB and DETCLS are not made and call ASSCLS(0) is made. Means not enough acquired segments.
2. If NACQ is < 2.\*H, then same as above with a call ASSCLS(1). Means only one class = 1 can be assigned. Not enough X's to split.
3. The CAMS file must be repositioned back to where it was upon entry to this routine. Subroutine GROUP controls the reading of CAMS.

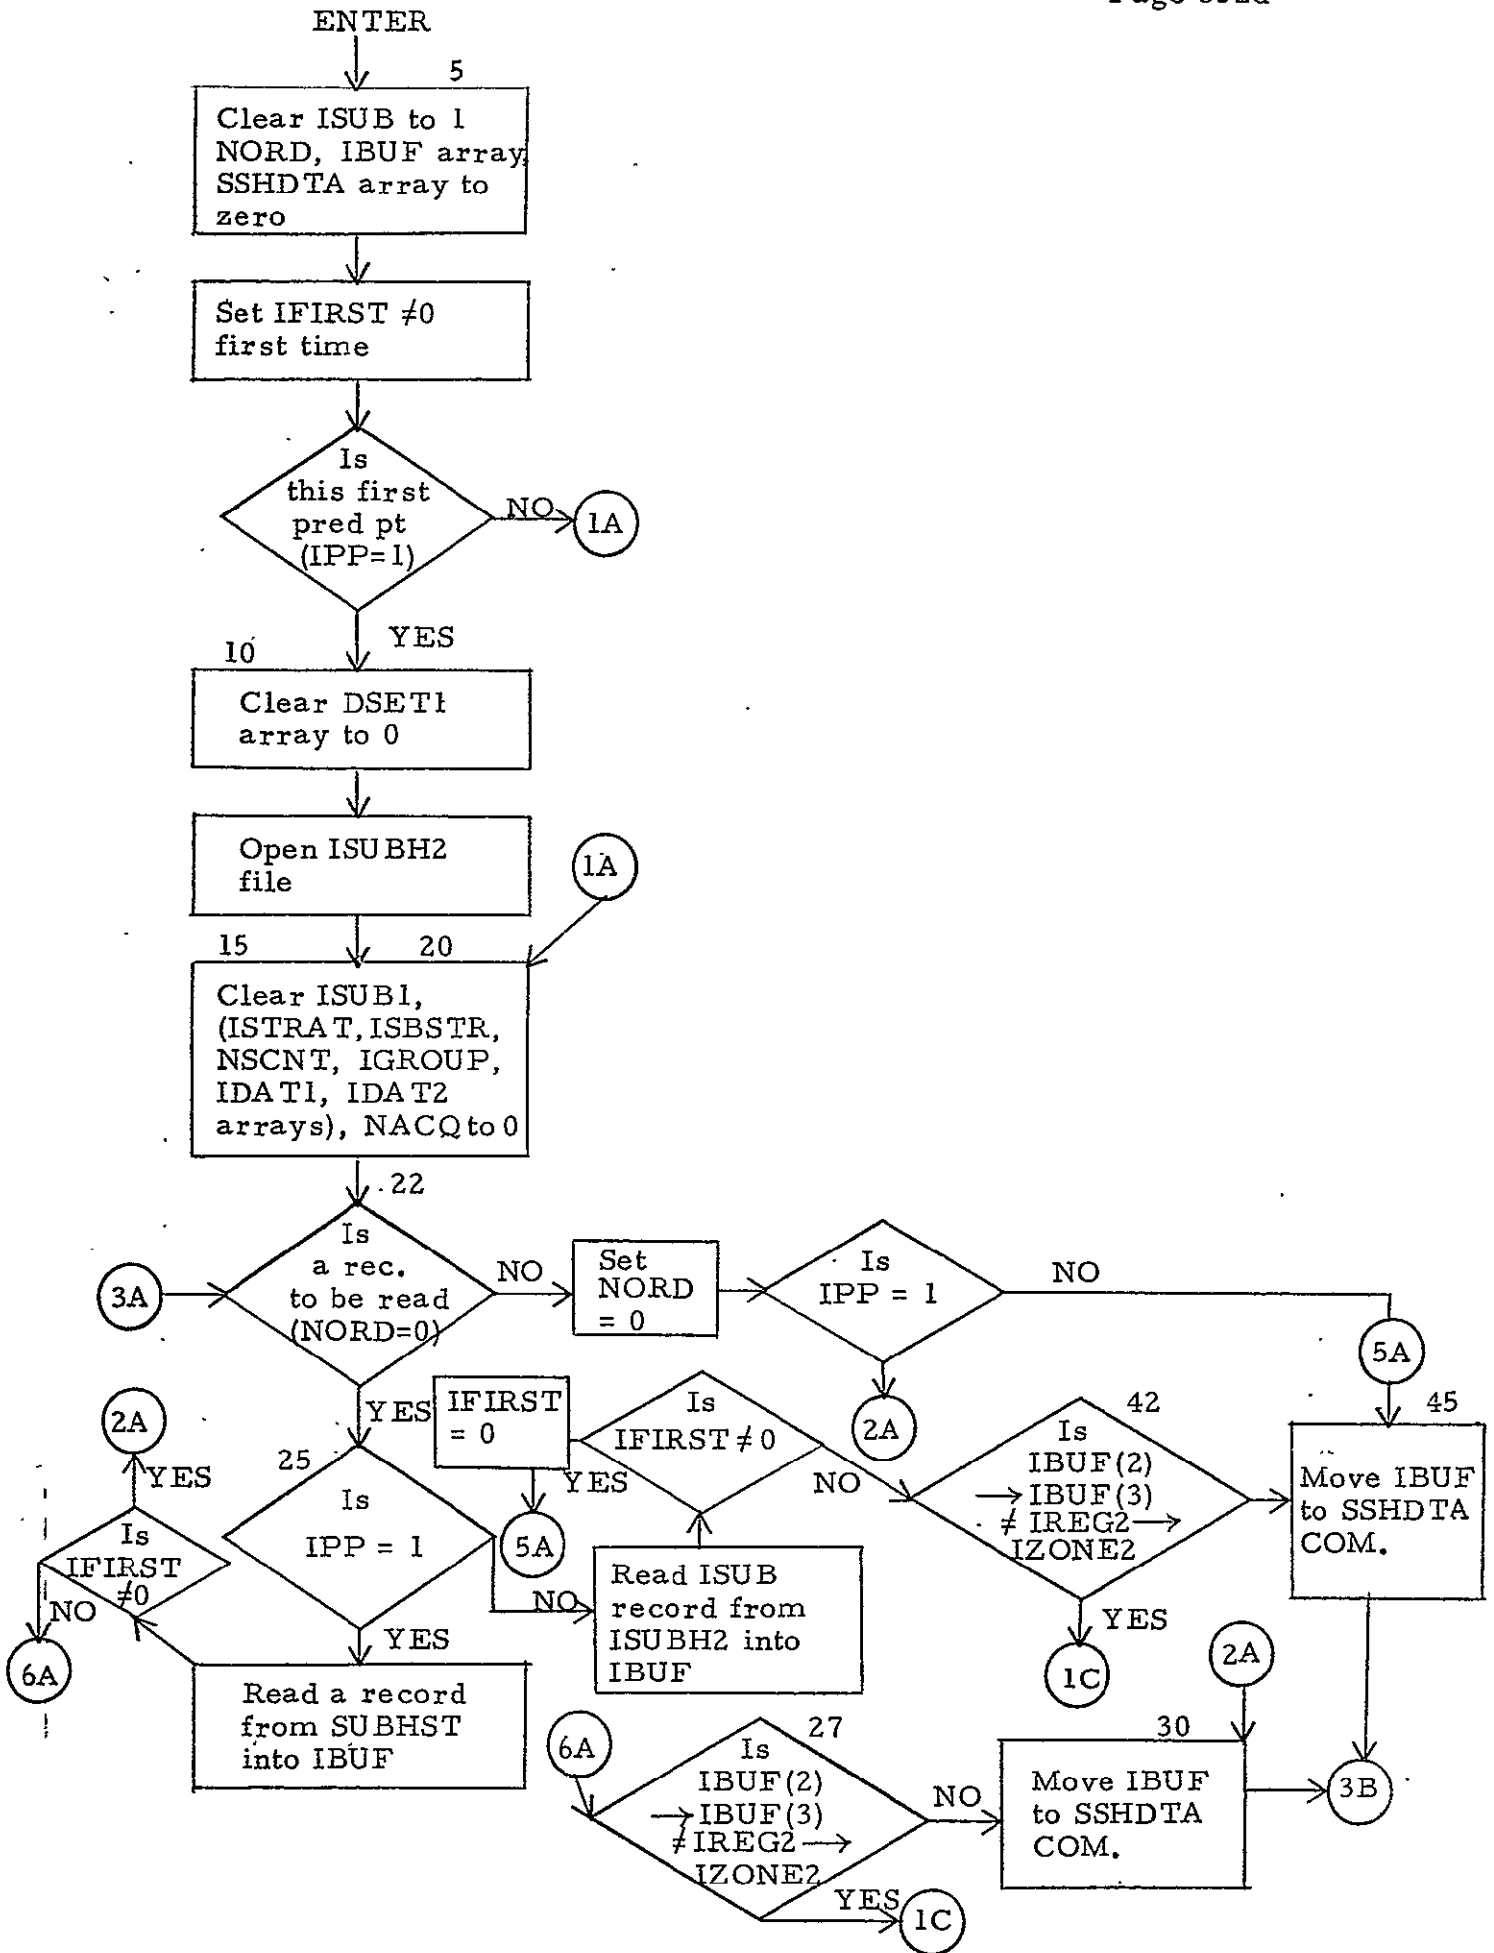

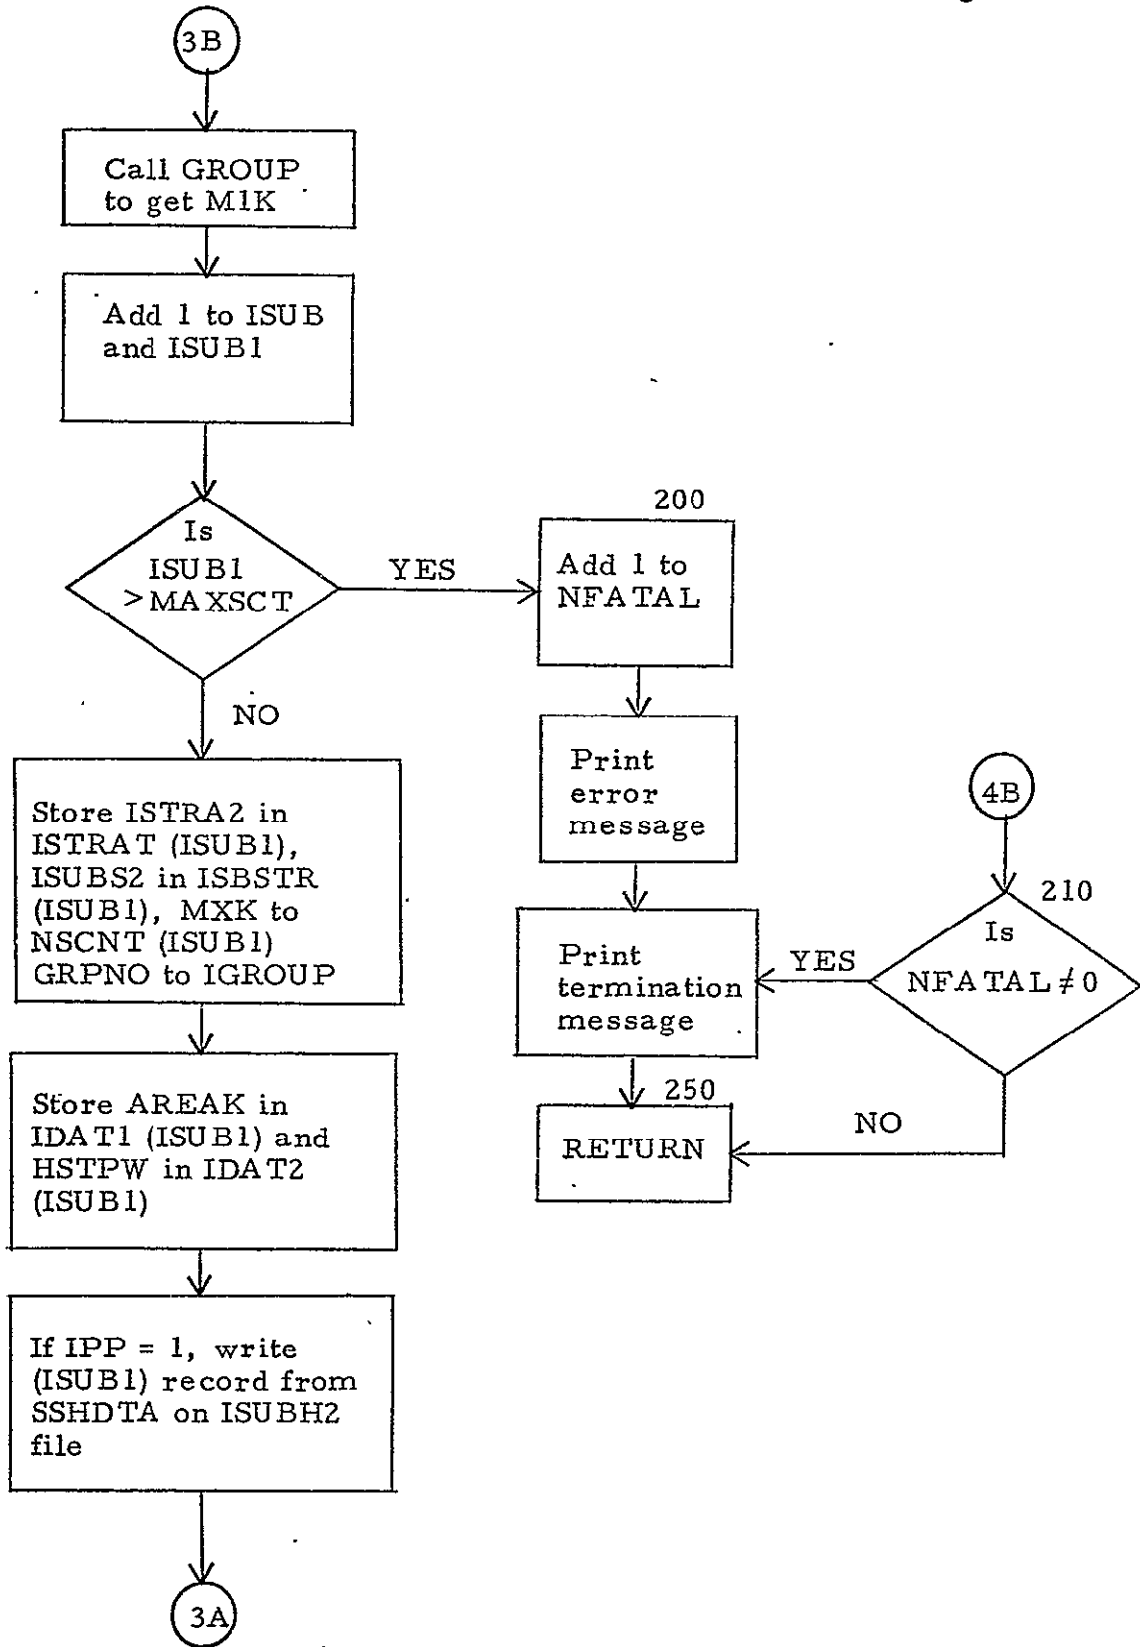

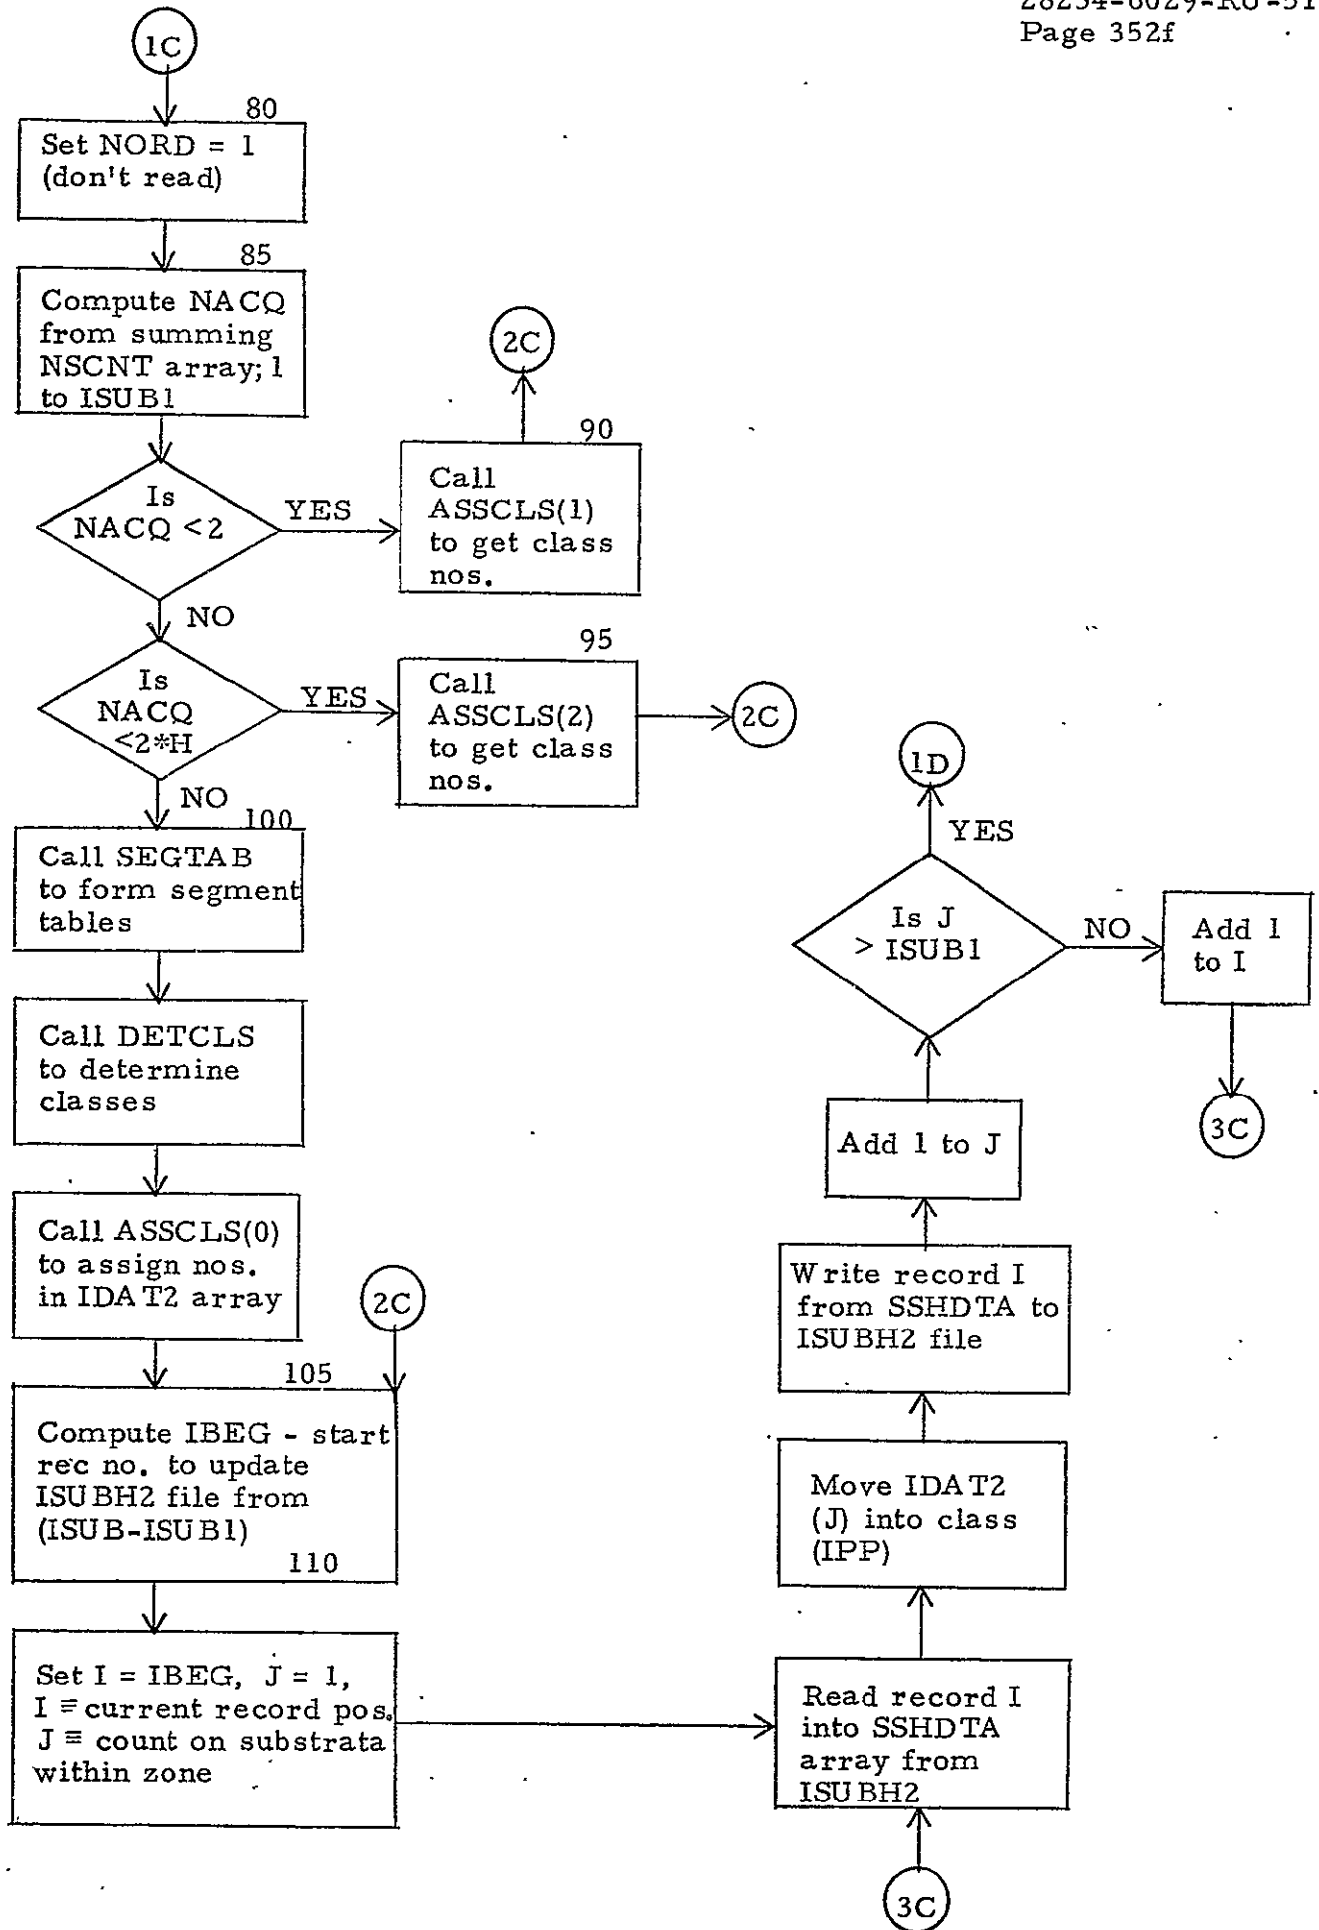

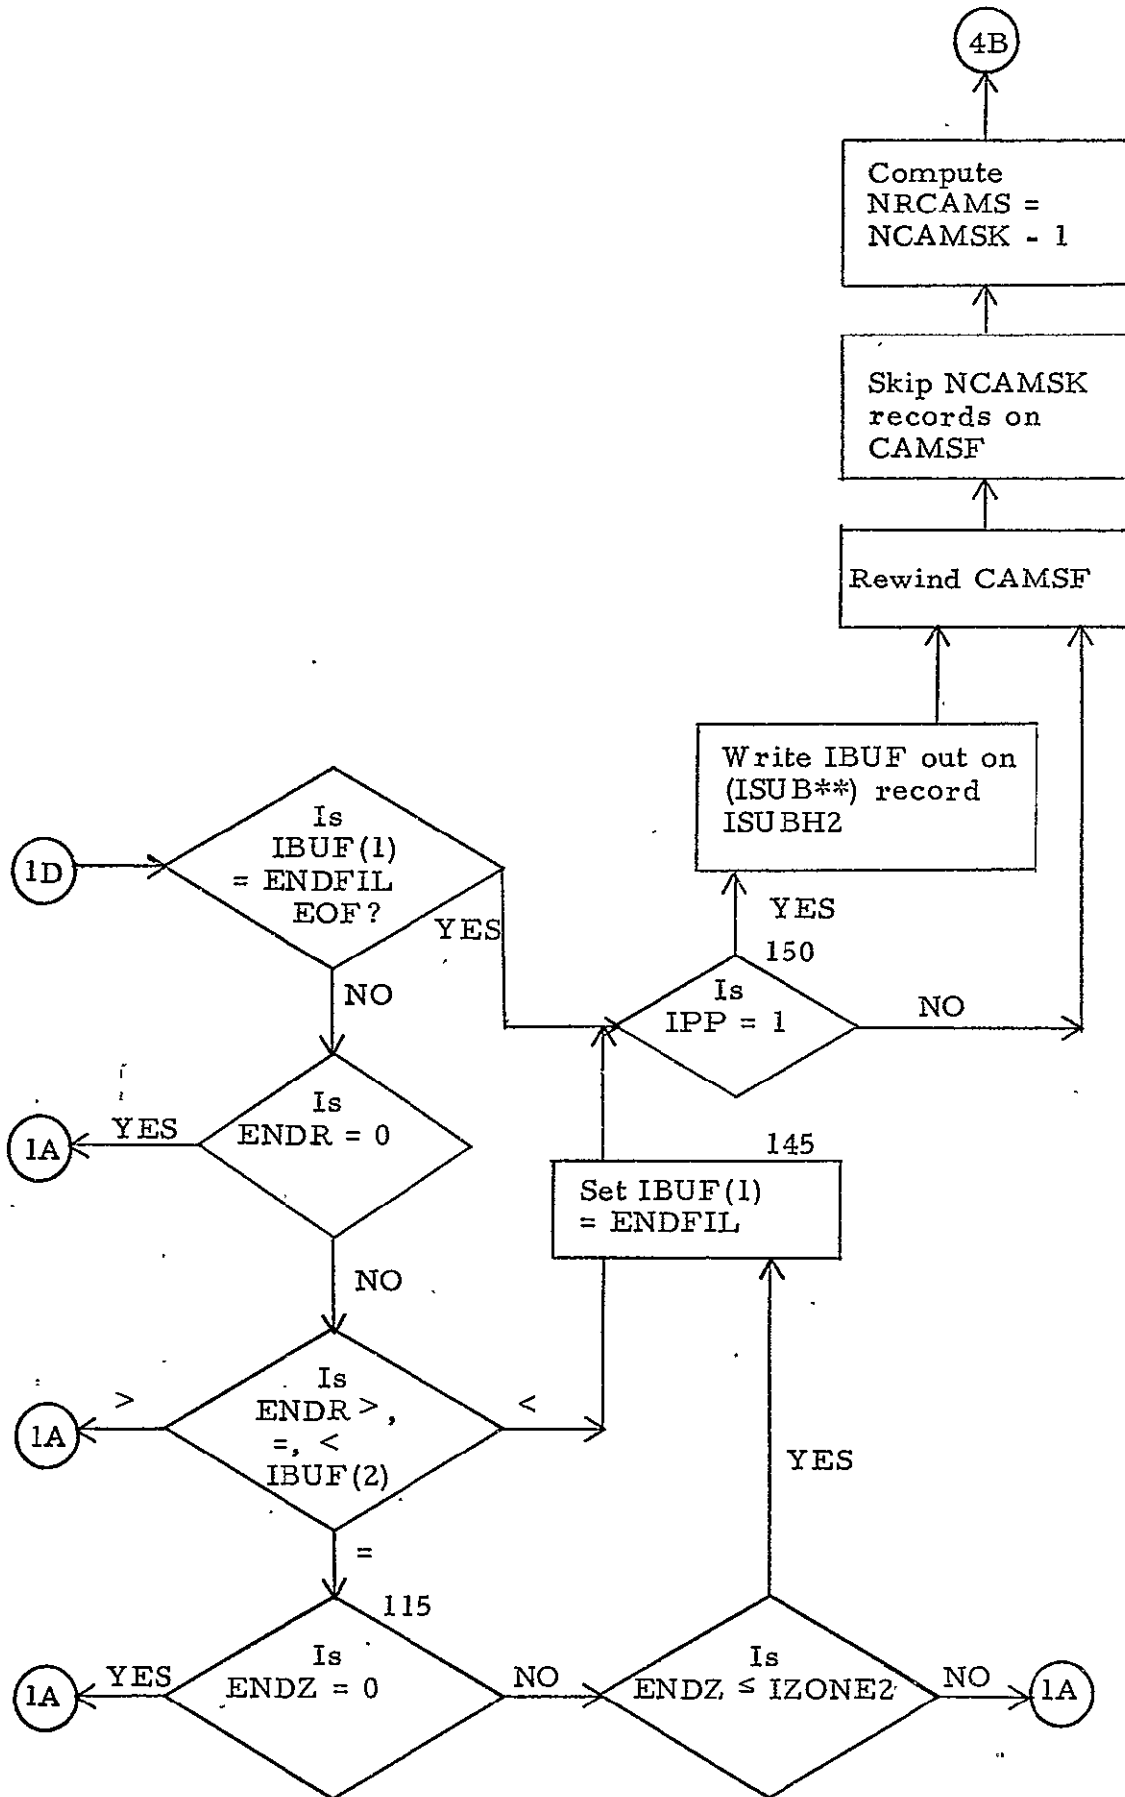

## SUBROUTINE SEGTAB

### Purpose:

Given a set of data for one zone in a strata table set, this routine computes a normalized array of standard deviations,  $X_i$ , sorts them in ascending order, computes the gaps between the sorted  $X$ 's and ranks them. This data is output in the segment tables.

### Input:

CLSTAB COMMON:  
NSCNT, IDAT1, IDAT2, ISUB1

### Output:

CLSTAB COMMON:  
IDAT1, XORD, IXPT, IRANK

### Linkage:

CALL SEGTAB

### Subroutines Used:

CALL SORTAG (IRANK, 1, IPT, IXPT)

### Local Variable Description:

IPT - Number of items in segment arrays  
= sum of all NSCNT's in zone

GAP(300) - Table of gap values between sorted  $X_i$  for each substrata  
in a zone  $\equiv$  GAP

SUM -  $\sum_{I=1}^{IPT} T(I)$

ICON -  $10^{20}$

XMIN - Current minimum value in gap array


XMINS - Saved minimum value from gap array

IRK - Current rank value (1-N)


IMPT - Subscript in GAP of current smallest value

### Processing:

See flowchart.

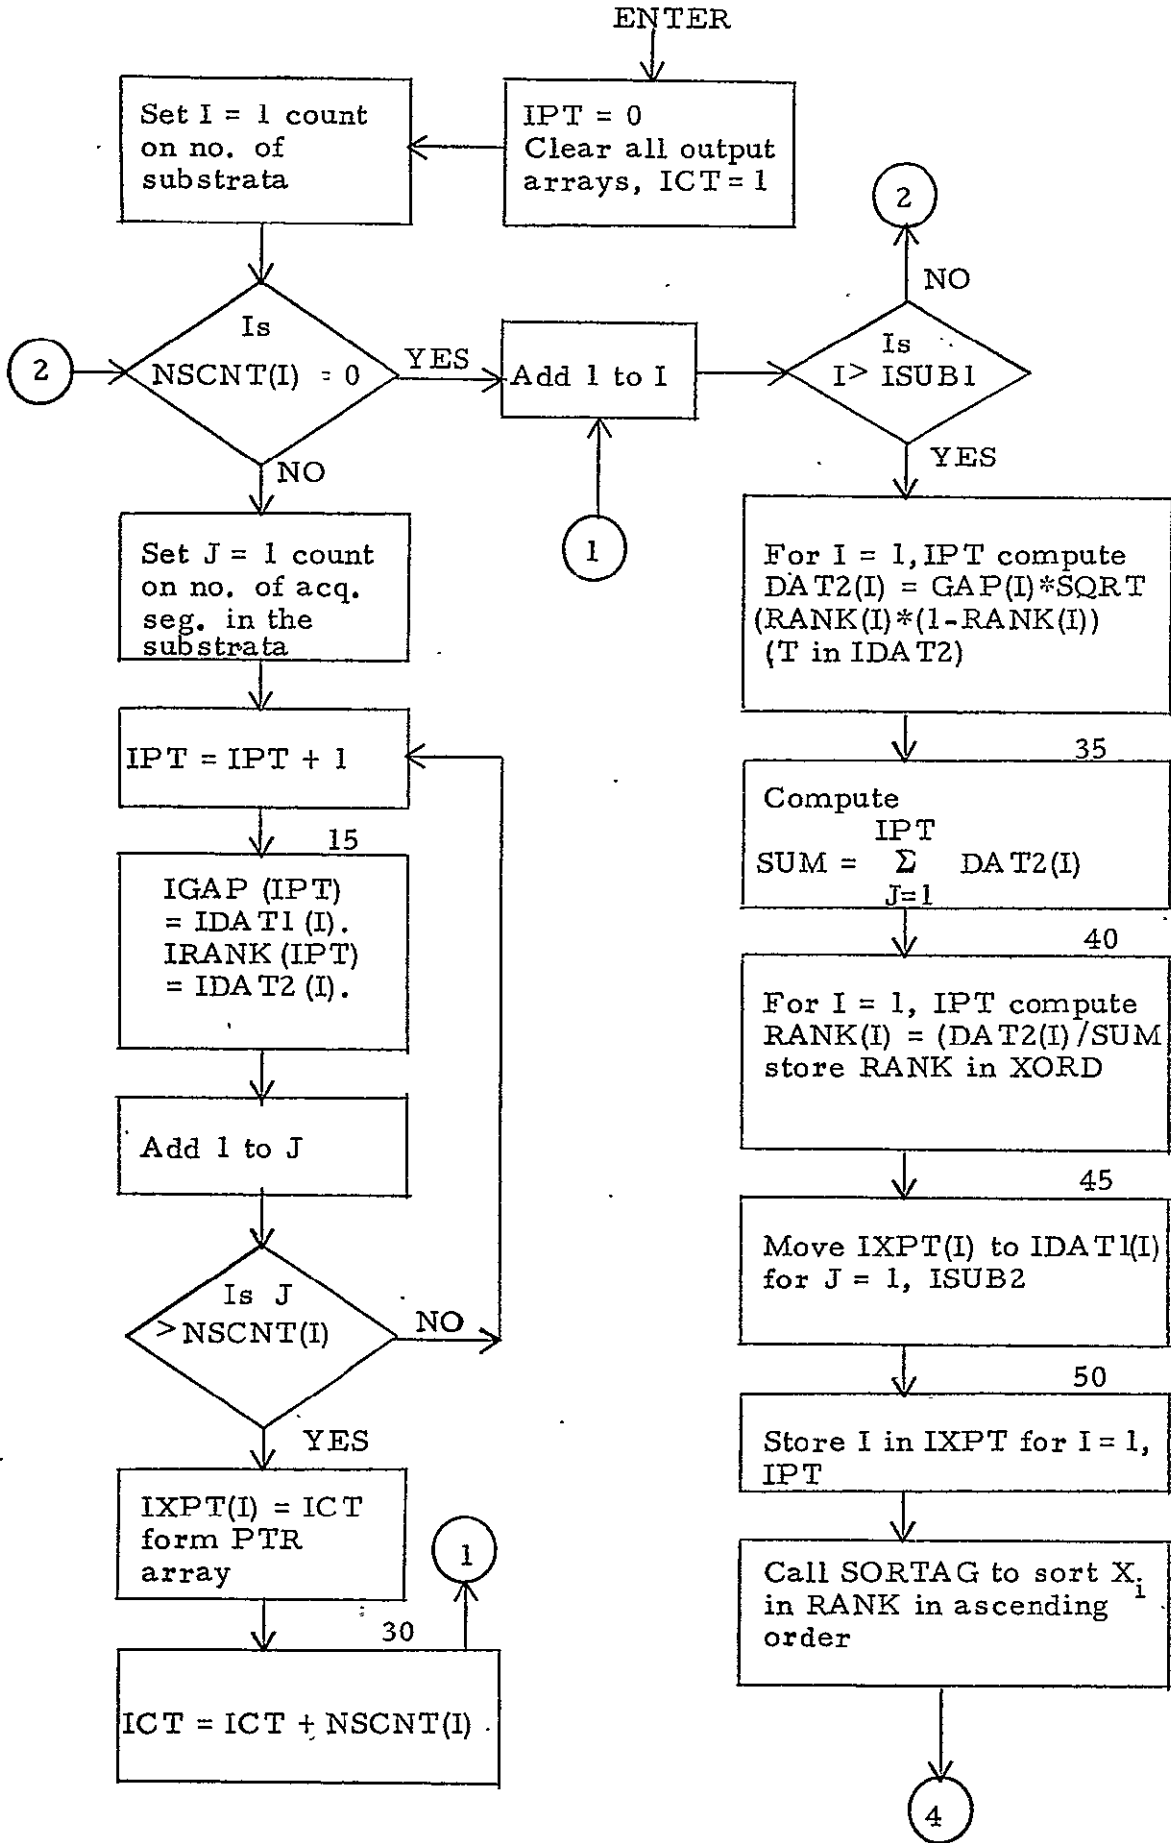



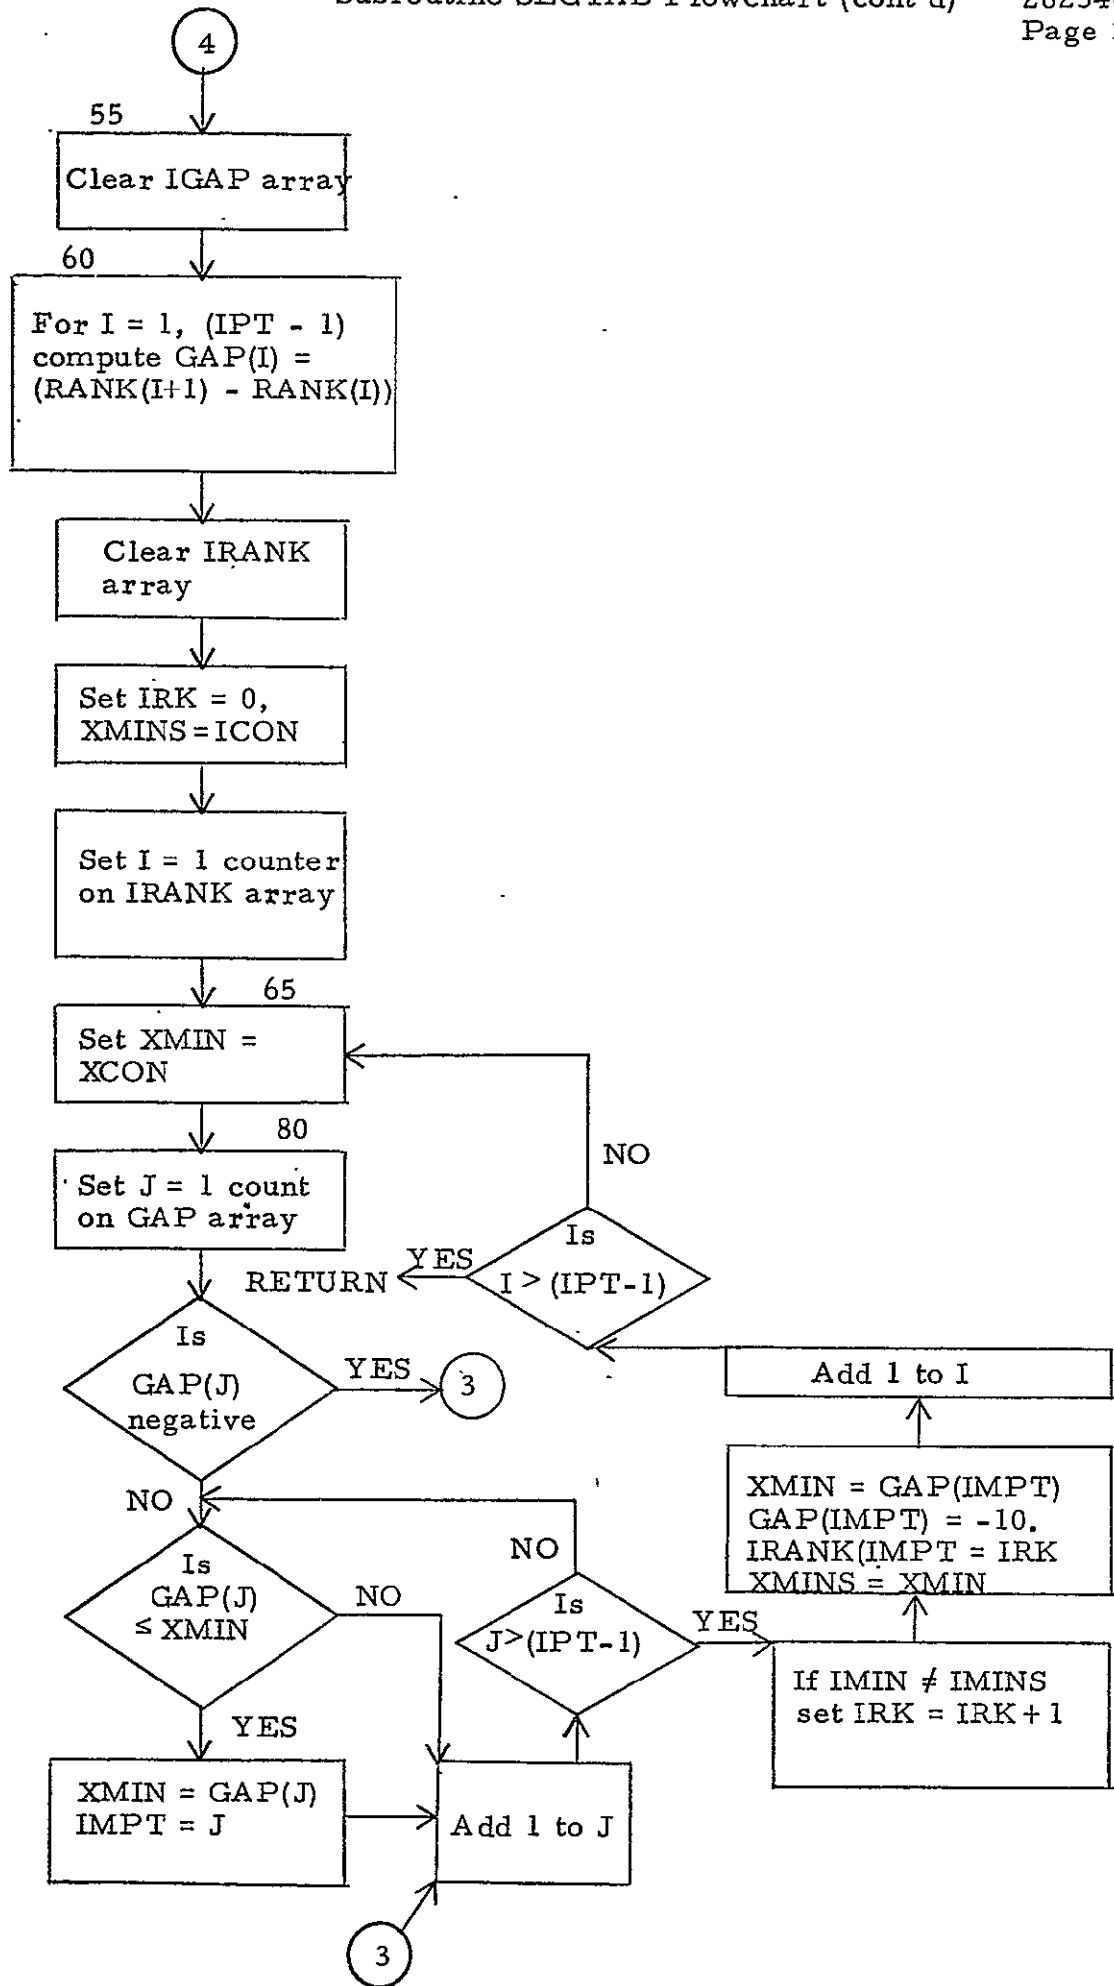

## SUBROUTINE DETCLS

### Purpose:

This routine determines how the array XORD is to be broken down into classes. It produces the count of classes and the beginning and ending subscript in XORD for each class.

### Input:

CLSTAB COMMON:

XORD, IXPT, MAXCLS, IRANK, NACQ, IXPT

CASFLG COMMON:

H = IH

### Output:

CLSTAB COMMON:

IBPT, IEPT and ICLNT

### Linkage:

CALL DETCLS

### Subroutines Used:

CALL SORTAG (IDT, 1, ICLNT, IDUM)

### Local Variable Description:

CC - Constant = .25 minimum allowed gap within a class of X's

K - Counter on number of rank entries

I - Counter within rank table

ID(10) - Table of class breakpoints in XORD

IDUM(10) - Pointer into ID


LB - Low boundary to search for class break


IUB - Upper boundary to search for class break

J - Count on class breaks

### Processing:

See flowchart.

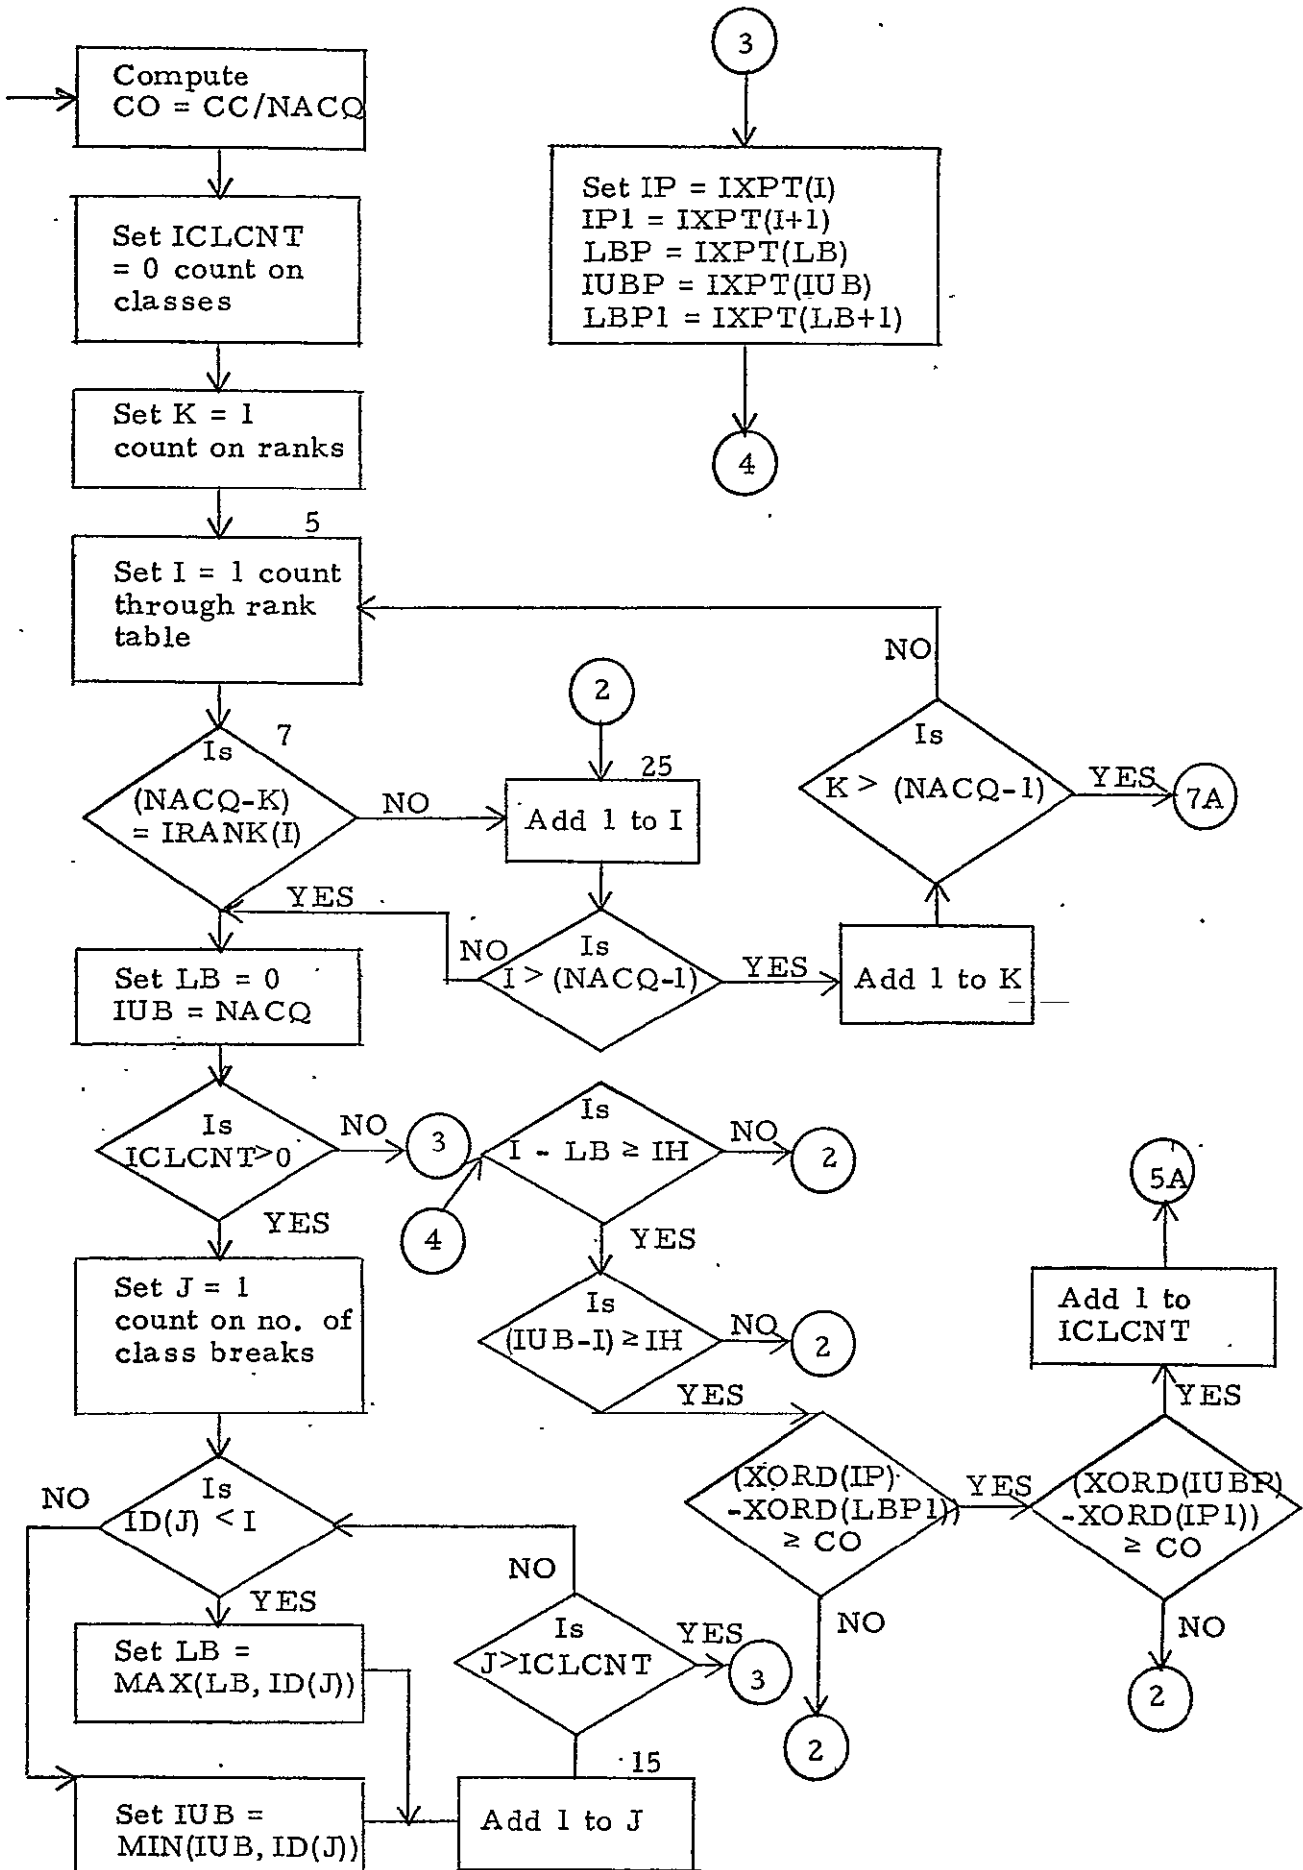

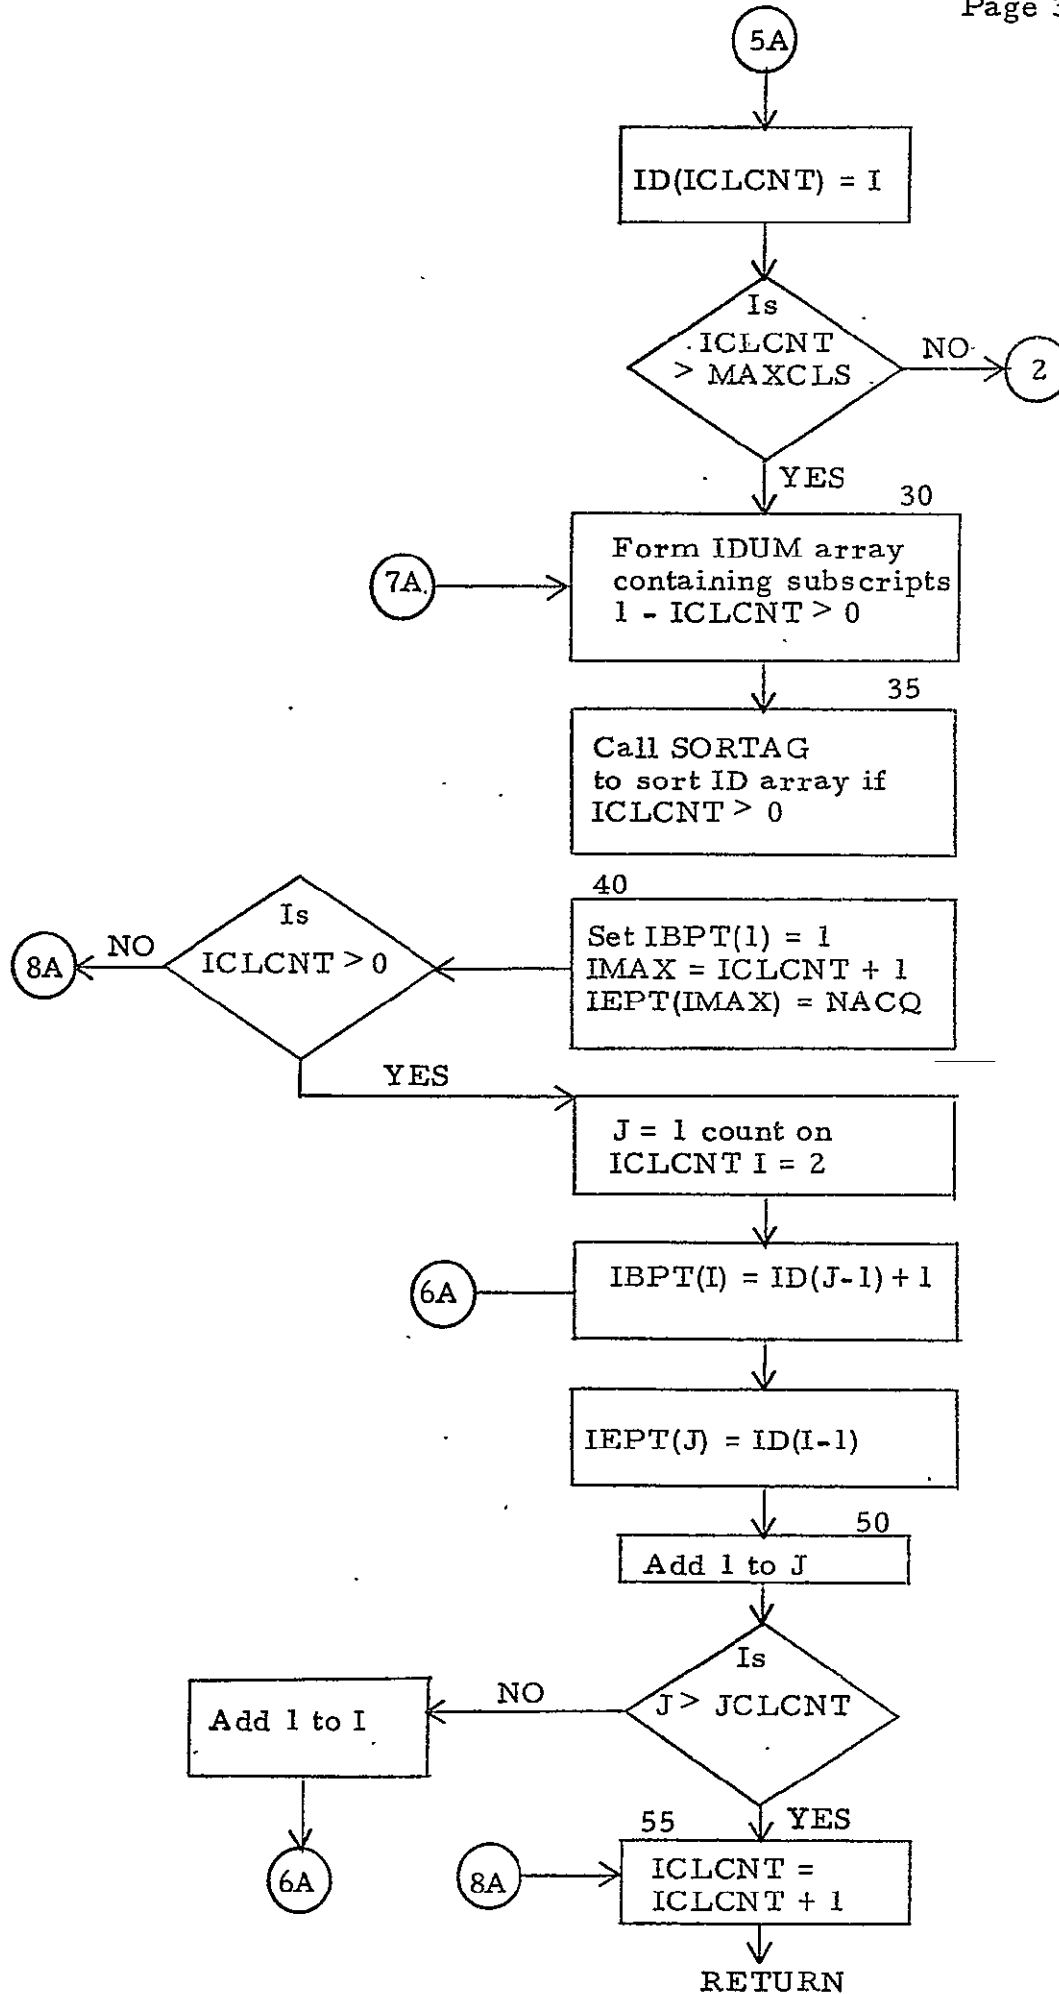

## SUBROUTINE ASSCLS

### Purpose:

To assign class numbers to all substrata defined by ISTRAT and ISUBST in the strata tables.

### Input:

CLSTAB COMMON:

ISTRAT, ISUBST, NSCNT, IGROUP, IDAT1, IXPT, IBPT, IEPT,  
ICLCNT, NACQ, ISUB1

### Output:

CLSTAB COMMON:

IDAT2

### Linkage:

CALL ASSCLS (IOPT)

IOPT is input as follows:

- IOPT = 0 - Compute class numbers using the algorithm
- IOPT = 1 - Set all class numbers to 0
- IOPT = 2 - Set all class numbers to 1

### Subroutines Used:

None.

### Local Variable Description:

ISTART, IEND - Group of substrata with = strata ID

ISTRSV - Saved strata to see if new strata occurs

ICT(10) - Count of substrata for each class

IFLAG - = 0 - No substrata within strata has segm.  
          ≠ 0 - At least 1


IFLAG1 - = 0 - not done, ≠ 0 - last entry in IGROUP passed


IJCL - Class number with most substrata

IMAX - Largest substrata count

### Processing:

See flowchart.

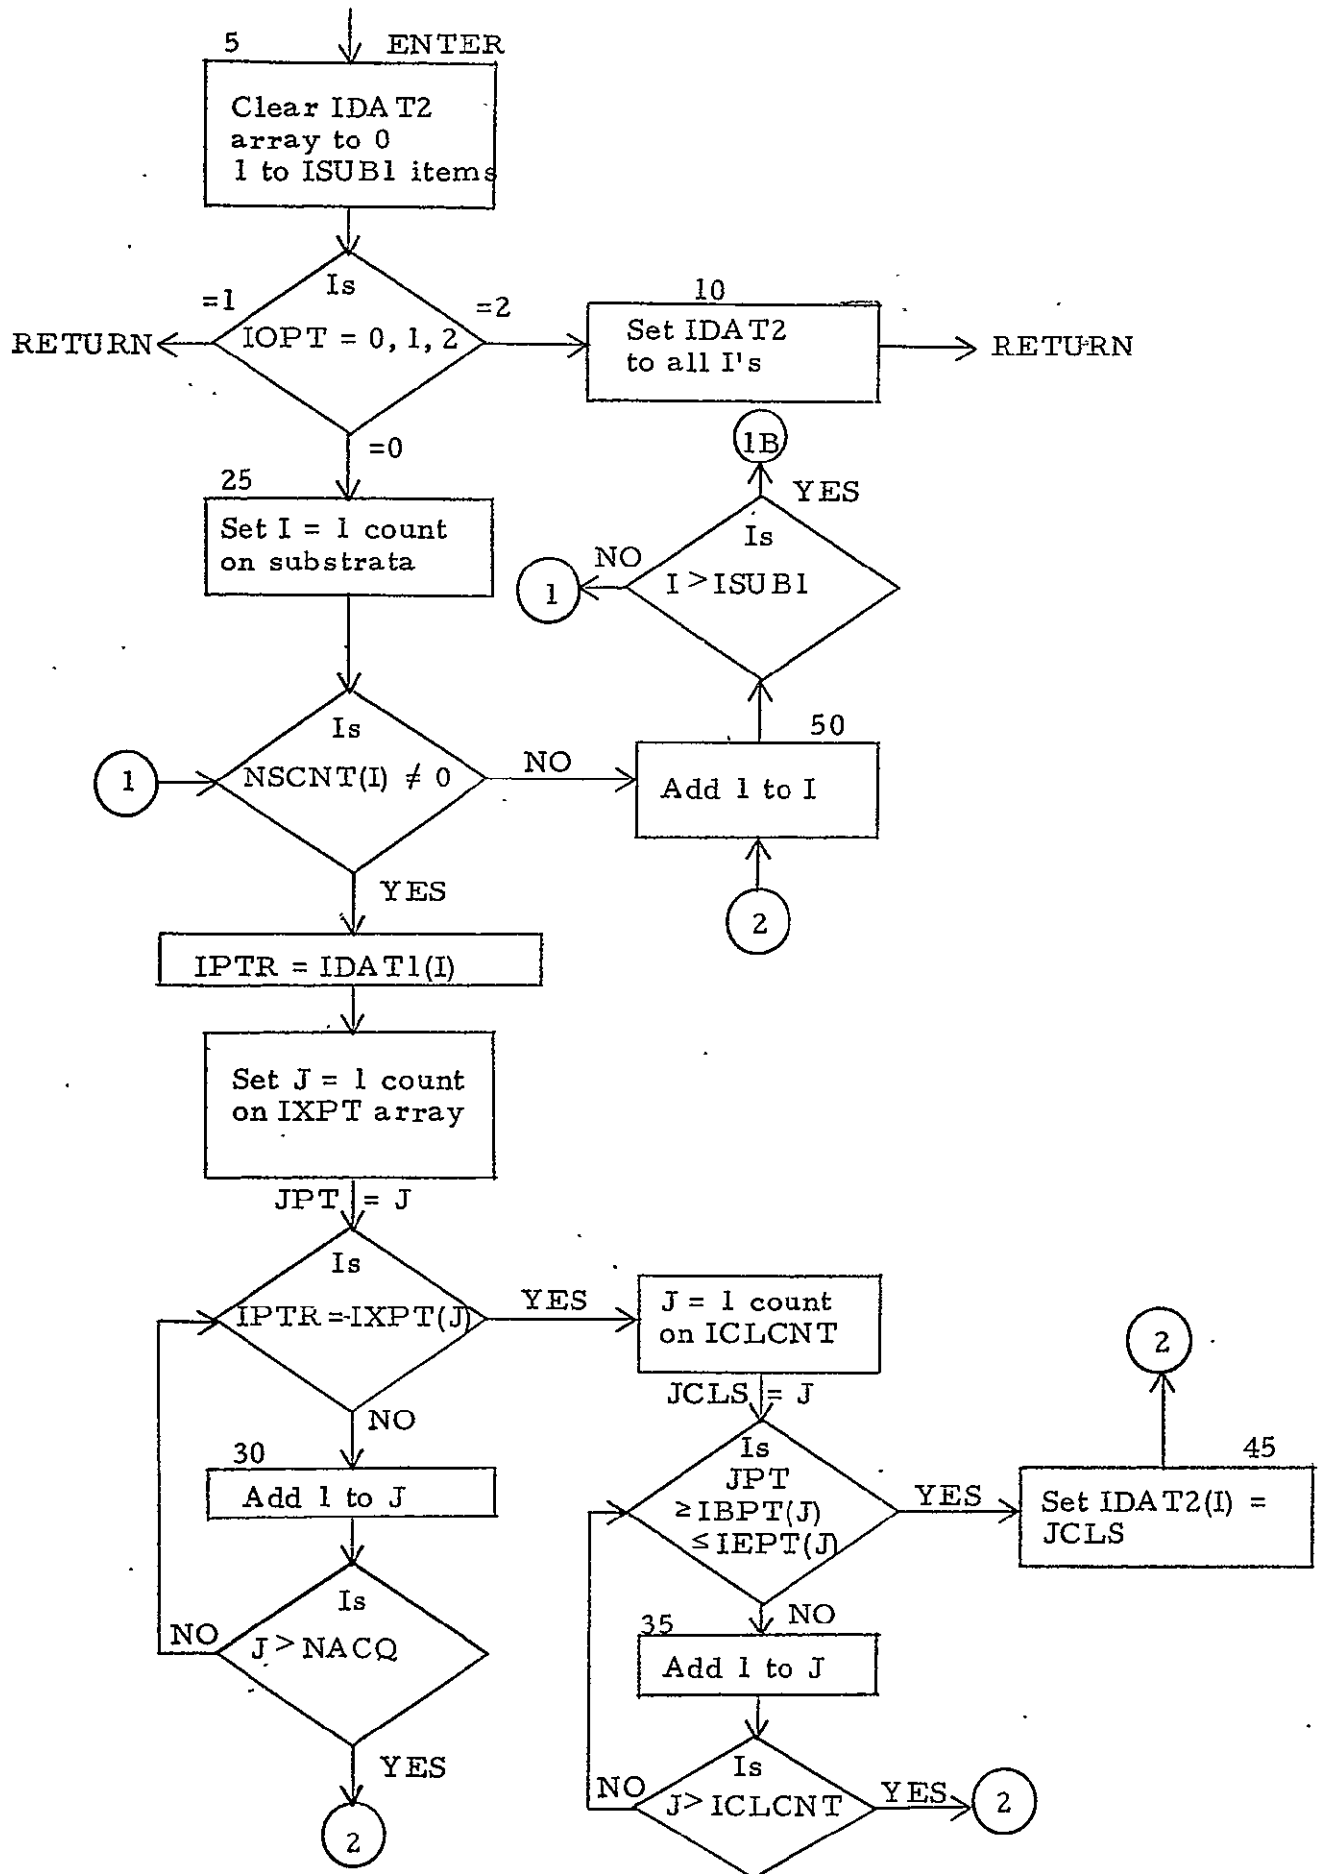

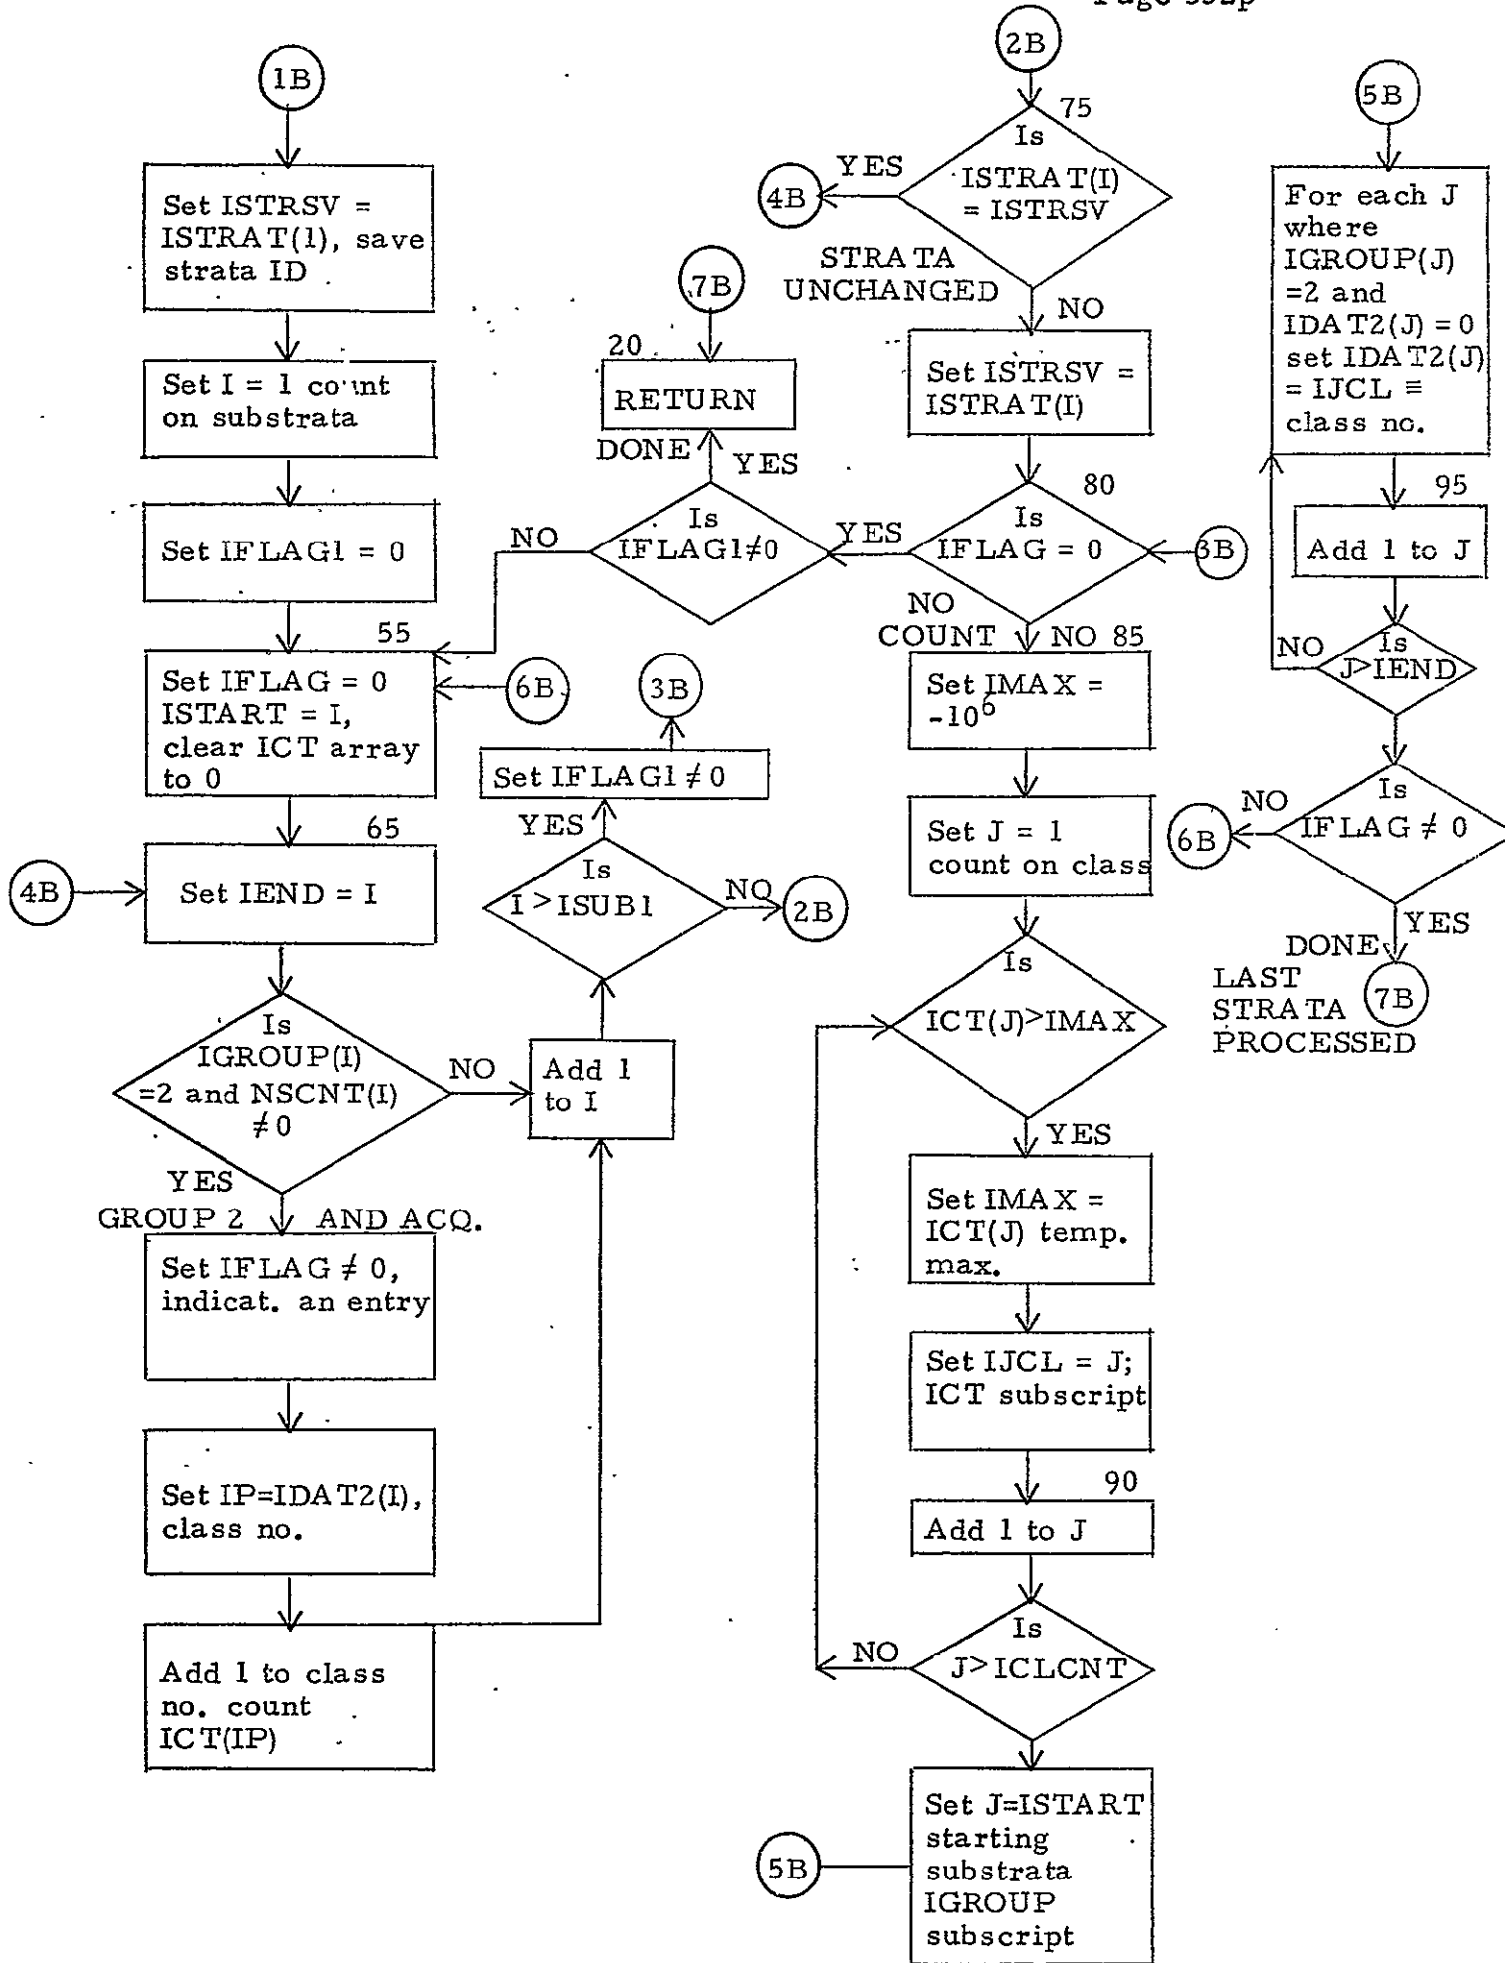

.YES SUBROUTINE DESCRIPTIONS



SUBROUTINE YES

Purpose:

Given the true yield for each strata, and also an error estimation of the bias and standard deviation of error, YES generates an estimated yield at from 1 to 6 estimation points in a simulation season, for the strata. An option allows the estimated yields to be the same as the true yields, bypassing the error simulation. A printed report is also optional.

Input:

1. YES is passed these quantities by LEM through COMMON (see LEM COMMON block descriptions for complete description of format):
  - a. COMMON /LEMCM/

TITLE	Used by PAGER and EJECT
ICASE	Case no. of output file
STARTR	} Start and ending regions and zones to process
ENDR	
STARTZ	
ENDZ	
IYES	=0, 1 do error simulation for estimation yields =3 bypass error simulation
  - b. COMMON /CNTRL/

PRINTF	=0 no printed report =1 print report
SEED	SEED(5) is used in generating a random number for error simulation
  - c. COMMON /FILES/

YESOUT	} I/O device no's and no. of words in one record for YES input and output files
LYESO	
YESERR	
LYESER	
OUTP	Used in writing printed report
  - d. COMMON /STATS/

ITER	Iteration no. for report
------	--------------------------

2. YES has one input file, YESERR, generated by the SEE program. Each record is read into a COMMON block. See Section 2.4 of the Users Manual for a description of the input file, and Programmers Manual for a detailed description of the COMMON block.

a. COMMON /YESIN/

COUN	Country	
IREG	Region	
IZONE	Zone	
ISTRAT	Strata	
YTRUE	True yield	
IZULU(6)	} The Zulu date, bias, and standard deviation of error for each of up to six prediction points	
BIAS(6)		
SD(6)		

Output:

1. YES passes these quantities back to the calling program LEM through COMMON (see COMMON block descriptions, for complete description of format):

a. COMMON /CNTRL/

SEED	SEED(5) contains the seed for the random no. after the last use of it
------	---

b. COMMON /STATS/

NREC	NREC(5) contains the no. of records processed from the YES input file (excluding header, records skipped, trailer)
NYESR	Contains the no. of records written onto the YES output file (excluding header and trailer)

2. YES produces one output file, YESOUT, for use by the program CAMS. Each record is written from the COMMON block. See Section 2.4 of the Users Manual for a description of the output file, and Programmers Manual for a detailed description of the COMMON block.

a. COMMON /YESOUT/

CID	Country
IREGID	Region
IZONID	Zone
ISTRID	Strata
YSTR	True yield
IZPRDD(6)	Zulu prediction date
YSCI(6)	Estimated yield
VSYCI(6)	Standard deviation of yield error

3. YES produces a printed report, on option. See YES Problem Description, Figure 2.

Linkage:

CALL YES YES is called by the LEM program.

Subroutines Used:

CALL BETAD (SEED(5), 0, 0, RN, 1, IER) to get a random number RN from a normal distribution

CALL PAGER (NO) to print line on report

CALL EJECT (NO) to start new page on report

CALL FZULU (IZULU(J), IOUT) to convert Zulu date

CALL ERRMES (3HYES, 3HYES, 1, 1) to process error message

Local Variable Description:

IFILL	0 fill for header and trailer records
YNAME(2)	Output file name 3HYES
RN	Random number
IER	Error flag from BETAD (always 0)
ITEMP	No. of 0 fill words to put in record
IEND	Flag for end zone =0 haven't reached end zone yet =1 found end zone
INEW	Count of no. of strata per report page = 3 max.
ER	Used to compute % error; =0 unless true yield = 0, then = $10^{-6}$

Processing:

See flow diagram for a flowchart of YES. The two equations used are:

a.  $YSCI = YSTR + BIAS(J) + RN * SD(J)$


- where
- YSCI = yield estimate for J<sup>th</sup> prediction point
  - BIAS(J) = bias error for J<sup>th</sup> prediction point for strata
  - YSTR = true yield of strata
  - RN = random number from a normal distribution
  - SD(J) = standard deviation of error at J<sup>th</sup> point
  - J = integer, range 1-6

Special case:

If  $YSCI < 0$ ,  $YSCI = 0.0$


b.  $PERCNT = ((ABS(YSCI - YSTR)) * 100) / (YSTR + ER)$

- where
- PERCNT = percent of error, always positive
  - YSCI = yield estimate
  - YSTR = true yield
  - ER = 0.0 unless  $YSTR = 0$ , then  $ER = 10^{-6}$  to take care of this special case

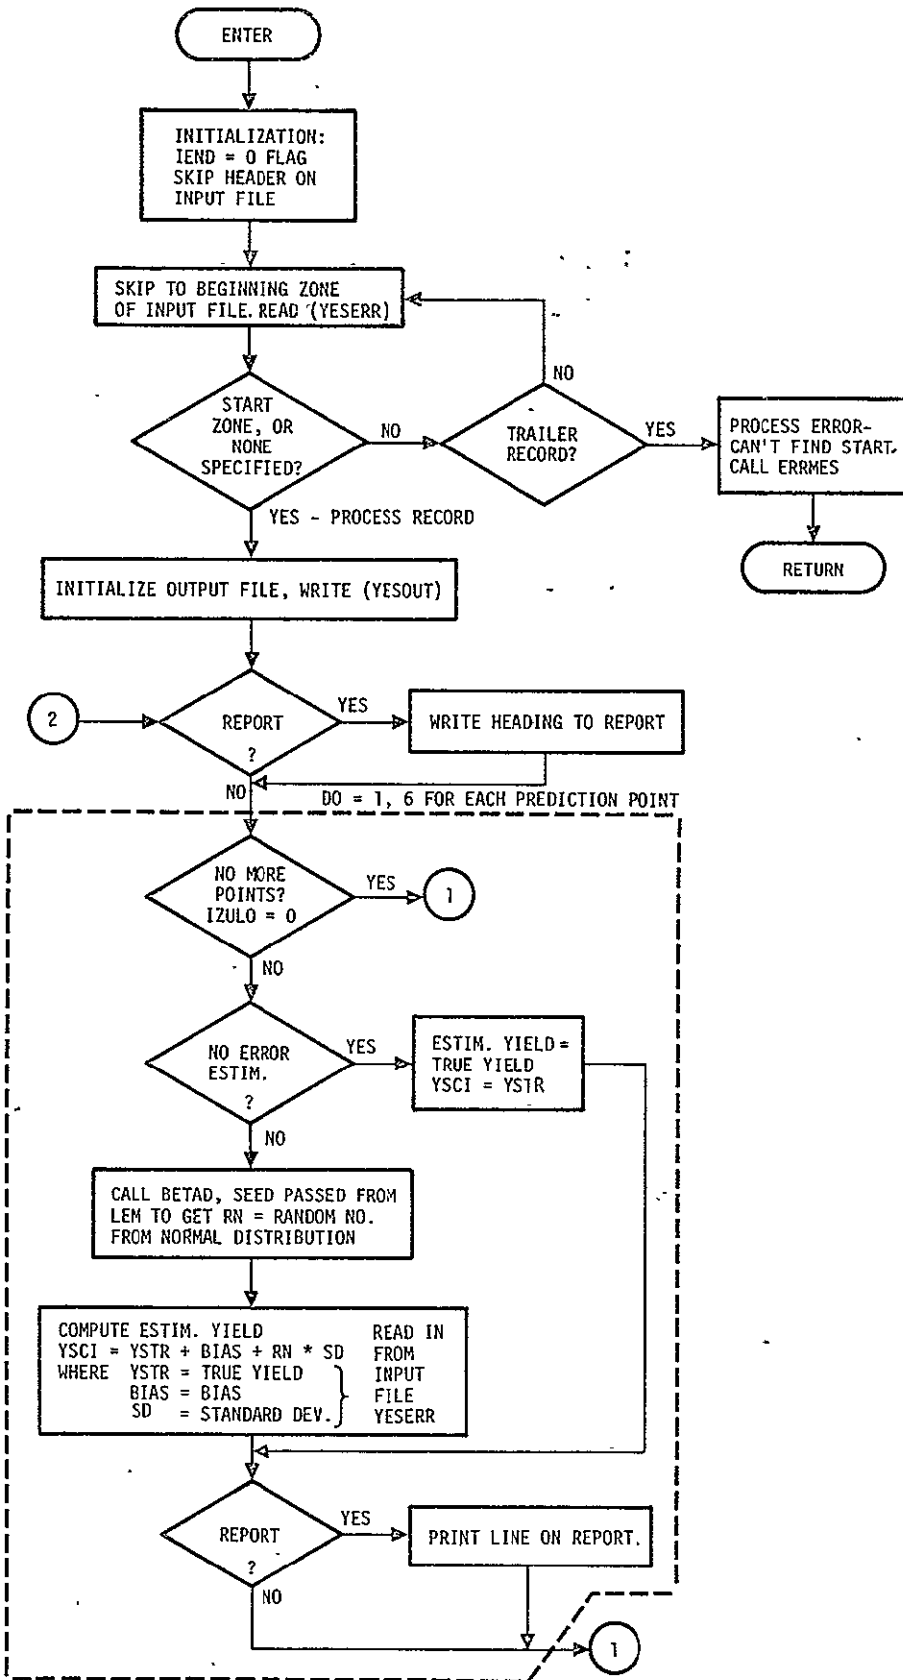

ORIGINAL PAGE IS  
OF POOR QUALITY

YES FLOW DIAGRAM (CONT'D)

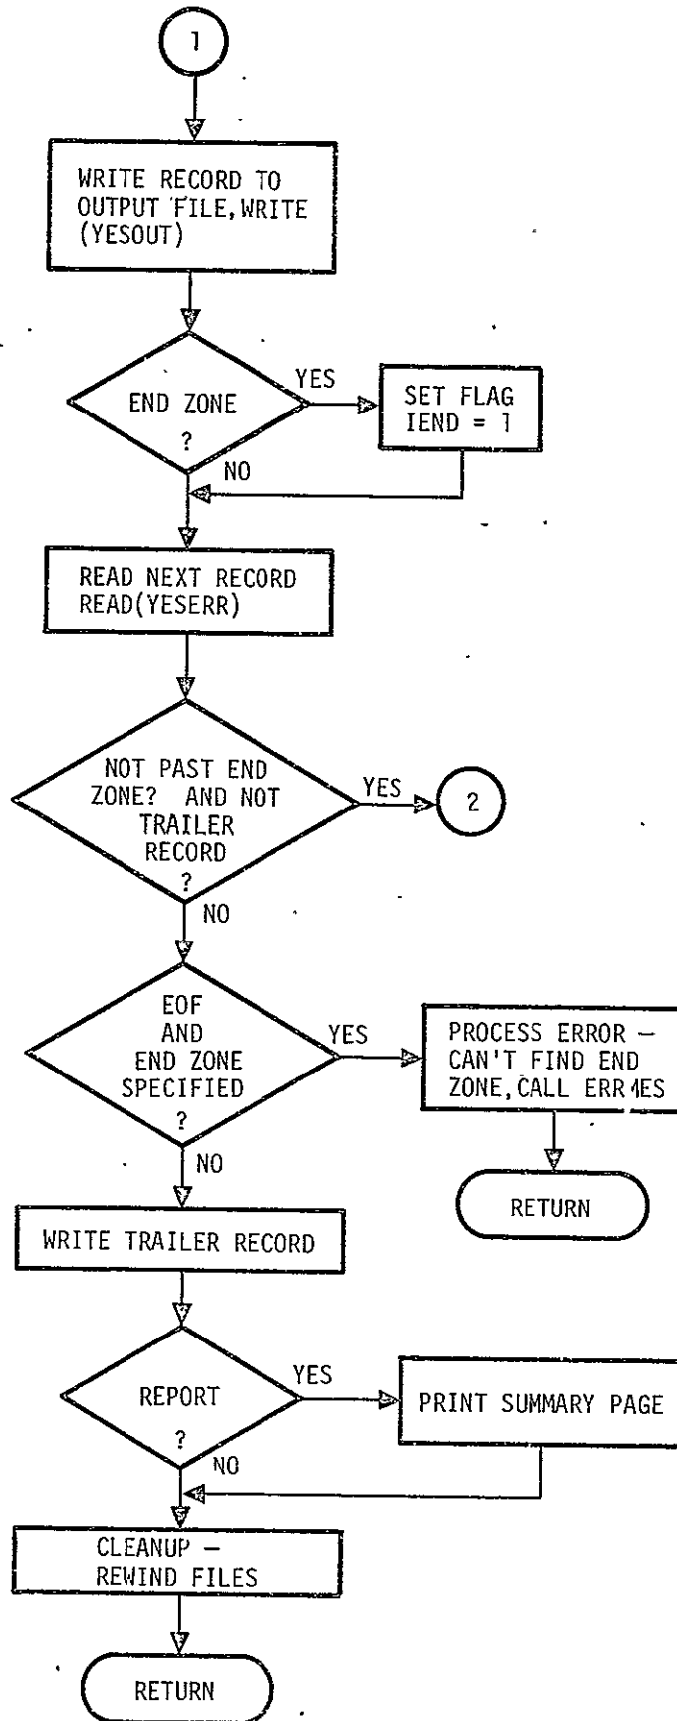

ORIGINAL PAGE IS  
OF POOR QUALITY

PART V  
SUBROUTINE LISTINGS

```

000001      SUBROUTINE ALGAMA(X,GAMMA,IER)
000002      CALCULATES THE GAMMA FUNCTION
000003      C
000004      C   X      INPUT
000005      C   GAMMA  OUTPUT
000006      C   IER   ERROR FLAG = 50 IF X NOT IN RANGE 0. TO 88.
000007      C
000008      DIMENSION B(14),C(6)
000009      DOUBLE PRECISION D,C,F,G,HLNPI,Y,Z
000010      DATA B/-3.03019081028D-4,2.798328899383D-5,-1.2141734870632D-4,
000011      *3.7536505226307D-4,-8.3756468513517D-4,2.00109185022554D-3,
000012      *2.03646252037282D-3,1.11497143357789D-2,-2.6618659495506D-4,
000013      *7.42489154194447D-2,8.15769261241555D-2,4.1184033016678D-1,
000014      *4.22784354102335D-1,9.999999999999D-1/
000015      DATA C/-1.91752691752697D-3,8.41750841750842D-4,-5.95238095238095D-1
000016      *4,7.93650793650794D-4,-2.77777777777777D-3,8.53533333333333D-2/
000017      DATA HLNPI/.918938553204673/
000018      GAMMA=0.
000019      IFK=60
000020      IF (X .LE. 0.0 .OR. X .GT. 88.0) RETURN
000021      IFK=0
000022      Y=X
000023      IF(Y.GE.10.) GO TO 60
000024      Z=DMOD(Y,1.0)
000025      IF(7.NE.0.0) GO TO 20
000026      Z=1.0
000027      G=2.0
000028      GO TO 27
000029      20      G=B(1)
000030      DO 26 J=2,14
000031      26      G=G+Z+B(J)
000032      27      IF(Y<3.0) ZR,45,38
000033      28      IF(Y.GT.2.0) GO TO 45
000034      G=G/Y
000035      IF(Y.LE.1.0) G=G/(Y+1.0)
000036      GO TO 45
000037      38      F=1.0
000038      K=DMINT(Y-Z+.5)-2
000039      DO 40 J=1,K
000040      Y=Y-1.0
000041      40      F=F*Y
000042      G=G#F
000043      45      GAMMA=DLOG(G)
000044      RETURN
000045      60      Z=Y+Y
000046      G=C(1)
000047      DO 65 J=2,6
000048      65      G=G/Z+C(J)
000049      G=((G/Y+HLNPI)+((Y-.5)*DLOG(Y)-Y))
000050      GAMMA=G
000051      RETURN
000052      END

```

ORIGINAL PAGE IS  
 OF POOR QUALITY



```

000001      SUBROUTINE APHDR
000002      C      FILE DEFINITIONS AND RECORD LENGTHS
000003      COMMON /FILES /
000004      1  SEGID ,LSEGRD,CROPW ,LCROPW,SUBHST,LSUBH ,ACOUTS,LACO
000005      2  ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO
000006      3  ,SIGEXT,LSIGEX,YESERR,LYESER,SEGIRU,LSECTR,CASDIS,LCASD
000007      4  ,TNP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS
000008      INTEGER SEGID ,CROPW ,SUBHST,ACOUTS,CAMSF ,CAMERR,CASF ,YESOUT
000009      1  ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF
000010      C
000011      C      PAGE EJECT CONTROL PARAMETERS FOR LEM
000012      COMMON /PAGECM/
000013      1  NPAGE ,NLINE ,MXLINE,NSTTL ,SUBTTL(10)
000014      C
000015      C      LEM CONTROL CARD INPUT DATA
000016      COMMON /LEMCM /
000017      1  TITLE(10) ,ICASE ,COUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ
000018      2  ,FNDR ,ENDZ ,ISTG ,ICAMS ,YES ,IACQ ,ICLASS,ISEXT ,ISCL
000019      3  ,ICASE2 ,ICASE3 ,IPRCAM,IPRYES,IPRCAS,ICSEFC,ICSECM,ICSEFSH,ICSECE
000020      4  ,ICSEFM,ICSECF,ICSEAC,RSEED1 ,RSEED2 ,RSEED3 ,RSEED4 ,RSEED5 ,RSFED6
000021      5  ,RSFED7 ,ICSEST,ILSECO,ICSEYS,ICSECO,ICSECD
000022      DIMENSION RSEED(7)
000023      DOUBLE PRECISION RSEED ,RSEED1 ,RSEED2 ,RSEED3 ,RSEED4 ,RSEED5
000024      1  ,RSFED6 ,RSFED7
000025      EQUIVALENCE ( RSEED,RSFED1 )
000026      INTEGER RSTART,STARTR,STARTZ,ENDR ,FNDR
000027      C
000028      C      FLAGS AND COUNTERS FOR CAS SIMULATOR
000029      COMMON /CASFLG/
000030      1  H ,PPFLG ,NBW ,IBW ,WINDOW,IPD ,IPP ,PPDATE,NREGS
000031      2  ,MZTOT ,NSTRAT,NYFSSK,NSSHSK,NCAMSK,NRYES ,NRSSH ,NRCAMS
000032      3  ,ENDC ,EMDRLG,ENDZON,IRSTR ,IRZONE,IRREG
000033      4  ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13
000034      5  ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCON,LRREG ,LRZONE,LRSTR
000035      INTEGER PPFLG , WINDOW , PDATE
000036      C
000037      C      STATISTICAL INFORMATION FOR LEM
000038      COMMON /STATS /
000039      1  ITER ,NSECTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR
000040      EQUIVALENCE ( IT,ITER )
000041      C
000042      C      CAS CONTROL CARD INPUT DATA AND CONSTANTS
000043      COMMON /CASCM /
000044      1  ARFACF,YCF ,PROCF ,APRUTS(4,2) ,PPRUTS(5,2) ,YPRUTS(3,2)
000045      2  ,ARFAPS,S2MAX ,NHISTY,HH ,TOPT ,AUNITS,DISTFF ,BWIND(4)
000046      3  ,WPRIOR(4) ,APREP ,IPRD(3,14) ,NPDATE,PRDATE(14)
000047      INTEGER HH, TOPT , AUNITS,DISTFF ,BWIND ,WPRIOR,APREP,PRDATE
000048      C
000049      CALL IJECT(14)
000050      WRITE (OUTP,1000)
000051      1000 FORMAT(/25X,72H A R E A   A N D   P R O D U C T I O N   S U M M
000052      1A R Y   R E P O R T //)
000053      IF(PPFLG.EQ.0) WRITE(OUTP,2000) COUNTRY,INH,NT
000054      2000 FORMAT(2A,7HCOUNTRY,2X,A6,7X,9HWINDOW,5X,11,15X,9HITERATION,
000055      1 1X,13/)
000056      IF(PPFLG.EQ.1) WRITE(OUTP,3000) COUNTRY,
000057      1  IPPD(2,IPD),IPRD(3,IPD),IPRD(1,IPD),NT
000058      3000 FORMAT(2X,7HCOUNTRY,2X,A6,7X,15HPREDICTION DATE ,2X,

```

000059	1 2(I2,1H/),I2,5X,9HITERATION ,1X,I3/)	APHDR
000060	WRITL(OUTP,4000)	APHDR
000061	4000 FORMAT(15X,1H*,26X,8HA R E A ,25X,1H*,6X,10HY I E L D ,5X,	APHDR
000062	1 1H*,6X,20HP R O D U C T I O N )	APHDR
000063	INDX=AUMITS+1	APHDR
000064	WRITL(OUTP,5000) (APRUTS(I,INDX),I=1,4),	APHDR
000065	1 (YPRUTS(I,INDX),I=1,3), (PPRUTS(I,INDX),I=1,5)	APHDR
000066	5000 FORMAT(15X,1H*,20X,4A6,15X,1H*,2X,3A6,1X,1H*,3X,5A6/15X,1H*,59X,	APHDR
000067	1 1H*,21X,1H*)	APHDR
000068	WRITL(OUTP,6000)	APHDR
000069	6000 FORMAT(2X,1HR,3X,1HZ,8X,1H*,23X,6HNO. IN,10X,3HNO.,3X,	APHDR
000070	1 7HCV ARCA,2X,2HCV,3X,1H*,14X,8HST DEV *,18X,6HCV PRD,3X,2HCV)	APHDR
000071	WRITL(OUTP,7000)	APHDR
000072	7000 FORMAT(2X,1HE,3X,1HO,8X,1H*,2X,,4HTRUF,5X,4HEST.,7X,	APHDR
000073	1 9HSHSTPATA,5X, 8HSEMENTS,2X,4HEST.,3X,5HEPROR,1X,1H*,1X,	APHDR
000074	1 4HTRUF,3X,4HEST.,4X,6HPCT. *,2X,4HTRUF,5X,4HEST.,4X,4HEST.,3X,	APHDR
000075	1 5HEPROR)	APHDR
000076	WRITL(OUTP,8000)	APHDR
000077	8000 FORMAT(2X,1HG,3X,1HN,1X,8HSTKATA *,3X,2HWA,7X,2HWA,10X,5HGROUP,	APHDR
000078	1 7X,8HGF GROUP,2X,4HPCT.,3X,4HPCT.,2X,1H*,2(5HYIELD,2X),	APHDR
000079	1 6H ERROR,2H *,2X,4HPPUD,5X,4HPRUD,4X,2(4HPCT.,3X))	APHDR
000080	WRITL(OUTP,9000)	APHDR
000081	9000 FORMAT(6X,1HE,8X,1H*,21X,1H1,4X,1H2,4X,1H3,5X,1H1,4X,1H2,3X,4HTRUF	APHDR
000082	1 ,3X,4HTRUF,2X,1H*,21X,1H*,19X,2(4HTRUF,3X)/)	APHDR
000083	RETURN	APHDR
000084	END	APHDR

ORIGINAL PAGE IS  
OF POOR QUALITY

	FUR,IS ASSCLS	
	SUBROUTINE ASSCLS(IOPT)	ASSCLS
C	ASSIGNS CLASS NUMBERS TO ALL SUBSTRATA IN THE STRATA TABLES	ASSCLS
C	TABLES NECESSARY TO DETERMINE CLASS SETS WITHIN A ZONE	CLSTAB
	COMMON /CLSTAB/	CLSTAB
	1      ISTRAT(300),ISBSTR(300),NSCNT(300),IGROUP(300),IDAT1(300),	MOD1
	2      IDAT2(300),XORD(300),IXPT(300),IRANK(300),IBPT(10),IEPT(10),	MOD1
	3      MAXCLS,ICLCNT,ISUB1,NACQ	CLSTAB
	DIMENSION DAT1(300),DAT2(300),RANK(300)	MOD1
	EQUIVALENCE (IDAT1(1),DAT1(1)),(IDAT2(1),DAT2(1)),(IRANK(1),	CLSTAB
	IRANK(1))	CLSTAR
	DIMENSION ICT(10)	ASSCLS
	DATA IDAT/-1000000/	ASSCLS
	DO 5 I=1,ISUB1	ASSCLS
	IDAT2(I) = 0	ASSCLS
	5 CONTINUE	ASSCLS
	IF(IOPT - 1)25,20,10	ASSCLS
10	DO 15 I=1,ISUB1	ASSCLS
	IDAT2(I) = 1	ASSCLS
15	CONTINUE	ASSCLS
20	RETURN	ASSCLS
25	DO 50 I=1,ISUB1	ASSCLS
	IF(NSCNT(I) .EQ. 0)GO TO 50	ASSCLS
	IPTR = IDAT1(I)	ASSCLS
	DO 30 J=1,NACQ	ASSCLS
	JPT = J	ASSCLS
	IF(IPTR .EQ. IXPT(J))GO TO 35	ASSCLS
30	CONTINUE	ASSCLS
	GO TO 50	ASSCLS
35	DO 40 J=1,ICLCNT	ASSCLS
	JCLS = J	ASSCLS
	IF(JPT .GE. IBPT(J) .AND. JPT .LE. IEPT(J))GO TO 45	ASSCLS
40	CONTINUE	ASSCLS
	GO TO 50	ASSCLS
45	IDAT2(I) = JCLS	ASSCLS
50	CONTINUE	ASSCLS
C	ASSIGN CLASS NUMBERS TO GROUP 2 SUBSTRATA WITH NO SEGMENTS	ASSCLS
	ISTRSV = ISTRAT(1)	ASSCLS
	I = 1	ASSCLS
	IFLAG1 = 0	ASSCLS
55	IFLAG = 0	ASSCLS

I	START = I	ASSCLS
D	O 60 J=1,ICLCNT	ASSCLS
I	CT(J) = 0	ASSCLS
60	CONTINUE	ASSCLS
65	IEND = I	ASSCLS
	IF(IGROUP(I) .NE. 2 .OR. NSCNT(I) .EQ. 0)GO TO 70	ASSCLS
	IFLAG = 1	ASSCLS
	IP = IDAT2(I)	ASSCLS
	ICT(IP) = ICT(IP) + 1	ASSCLS
70	I = I + 1	ASSCLS
	IF(I .LE. ISUB1)GO TO 75	ASSCLS
	IFLAG1 = 1	ASSCLS
	GO TO 80	ASSCLS
75	IF(ISTRAT(I) .EQ. ISTRSV)GO TO 65	ASSCLS
	ISTRSV = ISTRAT(I)	ASSCLS
80	IF(IFLAG .NE. 0)GO TO 85	ASSCLS
	IF(IFLAG1 .NE. 0)GO TO 20	ASSCLS
	GO TO 55	ASSCLS
85	IMAX = IDAT	ASSCLS
	DO 90 J=1,ICLCNT	ASSCLS
	IF(ICT(J).LE. IMAX)GO TO 90	ASSCLS
	IMAX = ICT(J)	ASSCLS
	IJCL = J	ASSCLS
90	CONTINUE	ASSCLS
	DO 95 J=ISTART,IEND	ASSCLS
	IF(IGROUP(J) .EQ. 2 .AND. IDAT2(J) .EQ. 0)IDAT2(J) = IJCL	ASSCLS
95	CONTINUE	ASSCLS
	IF(IFLAG1 .NE. 0)GO TO 20	ASSCLS
	GO TO 55	ASSCLS
	END	ASSCLS

```

000001      SUBROUTINE BETAD(SEED,XBAR,SIGMA,XI,IOP,T,IER)
000002      DOUBLE PRECISION SEED
000003      INTEGER FLAG
000004      REAL K
000005      DATA P/88./
000006      DATA K/2./
000007      DATA FP/.00005/
000008      DATA SG /1.F-8 /
000009      50 CONTINUE
000010      FLAG=0
000011      I=0
000012      XAVG=XBAR
000013      XI=0.0
000014      IFR=0
000015      C
000016      C CHOOSE UNIFORM RANDOM NUMBER
000017      CALL RDM1A(SEED,P)
000018      C
000019      C COMPUTE T,CHK,RN, = NORMAL DISTRIB. PARAMETERS
000020      T=SQRT(ALOG(1.0/(P*P)))
000021      IF(P.GT.0.5)T=SQRT(ALOG(1.0/((1.0-P)*(1.0-P))))
000022      CHK=T-(2.30753+.27061*T)/(1.0+0.99229*T+.04481*T*T)
000023      RN=CHK
000024      IF(P.LT.0.5) RN=-RN
000025      C
000026      C IF NORMAL DISTRIB. OPTION, JUMP OUT
000027      IF(TOP1.LQ.0) GO TO 70
000028      XI=RN
000029      RETURN
000030      70 CONTINUE
000031      C
000032      C CHECK FOR END CASES
000033      IF(XBAR.LT.0. .OR.XBAR.GT.1.) IFR=1
000034      IF(SIGMA.LT.0.0) IER=2
000035      IF (XBAR.GT.0.0.AND.XBAR.LT.1.0.AND.SIGMA.GT.0.0) GO TO 10
000036      XI=XBAR
000037      IF(XBAR.LT.0.) XI=0.0
000038      IF(XBAR.GT.1.) XI=1.
000039      RETURN
000040      C
000041      C SWITCH IF AVERAGE ABOVE HALF
000042      10 CONTINUE
000043      IF (XBAR.LE.0.5) GO TO 20
000044      FLAG=1
000045      XAVG=1.0-XBAR
000046      C
000047      C COMPUTE UPPER LIMIT ON SIGMA
000048      20 CONTINUE
000049      SIGMAL=XAVG*SQRT((1.0-XAVG)/(XAVG+FP))
000050      SIG=SIGMA
000051      IF(SIGMA.LE.SIGMAL) GO TO 30
000052      SIG=SIGMAL
000053      IFR=2
000054      C
000055      C COMPUTE THE METHOD THRESHOLD
000056      30 CONTINUE
000057      SIGT=XAVG*SQRT((1.0-XAVG)/(XAVG+K))
000058      C

```

```

000059 C COMPUTE BETA PARAMETERS A AND B
000060 XSQ=XAVG*XAVG
000061 SIGSQ=SIG*SIG
000062 A=(XSQ-XAVG*(XSQ+SIGSQ))/SIGSQ
000063 B=((1.0-XAVG)/XAVG)*A
000064 IF(SIG.GT.SIGT) GO TO 40
000065 C
000066 C APPROXIMATION METHOD
000067 C
000068 C
000069 C COMPUTE BETA APPROXIMATION PARAMETERS
000070 YP=-RN
000071 H=2.0/(1.0/(2.0*A-1.0)+1.0/(2.0*B-1.0))
000072 Y=(YP*YP-3.0)/6.0
000073 W=(YP*SQRT(H+Y))/
000074 1 H = (1.0/(2.0*B-1.0)-1.0/(2.0*A-1.0))*(Y+5.0/6.0-2.0/(3.0*H))
000075 C
000076 C COMPUTE XI
000077 IF(AUS(ALOG(B)+P.*W).GT.87.0) GO TO 50
000078 XI=A/(A+B*EXP(2.0*W))
000079 GO TO 60
000080 C
000081 C ITERATIVE METHOD
000082 C
000083 C RECOMPUTE A AND B IF OVER LIMIT
000084 40 CONTINUE
000085 CHK=A+B
000086 IF(CHK.LT.R) GO TO 80
000087 BP=(B/C)*K+(R-1.)
000088 A=(BP/B)*A
000089 B=BP
000090 80 CONTINUE
000091 I=0
000092 PHI=1.
000093 PIU=0.
000094 XHI=1.
000095 XIU=0.
000096 XI=XAVG
000097 120 I=I+1
000098 IF(I.GT.35) GO TO 100
000099 CALL BETAI(XI,A,B,PO,IER)
000100 IF(IER.GT.0) GO TO 100
000101 DIFF=ABS(PO-P)
000102 DIFF1=AMINI(ABS(XI-XLO),ABS(XI-XHI))
000103 IF(DIFF.LE.EP.OR.(DIFF1.LE.SG)) GO TO 60
000104 C
000105 C CHECK IF DONE, WITHIN TOLERANCE
000106 IF(PO.LE.P) GO TO 105
000107 XHI=XI
000108 PHI=PO
000109 GO TO 106
000110 105 CONTINUE
000111 XIU=XI
000112 PIU=PO
000113 106 CONTINUE
000114 XI=(XHI+XIU)/2.
000115 GO TO 120
000116 C ERROR RETURN
000117 100 CONTINUE
000118 IIR=5

```

```
000119      XI=0.0
000120      RETURN
000121      60 CONTINUE
000122      IF (FLAG.EQ.1) XI=1.0 - XI
000123      RETURN
000124      END
```

FOR, IS BLKDTA		BLKDTA
BLOCK DATA		BLKDTA
C    BLOCK DATA ROUTINE FOR THE LEM PROGRAM		BLKDTA
C		BLKDTA
C    COMMON BLOCK DEFINITIONS		BLKDTA
C    ARGUMENT LIST FOR ERROR PROCESSING		ARGLST
COMMON /ARGLST/		ARGLST
1    NERKS ,NFATAL,NPFRRS,NARG ,ARG(10)		ARGLST
DIMENSION IARG(10)		ARGLST
EQUIVALENCE ( IARG,ARG )		ARGLST
C		ARGLST
C    CAS CONTROL CARD INPUT DATA AND CONSTANTS		CASCM
COMMON /CASCM /		CASCM
1    AKEACF,YCF ,PRDCF ,APRUTS(4,2) ,PPRUTS(5,2) ,YPRUTS(3,2)		CASCM
2    ,AREAPS,S2MAX ,NHISTY,HH ,TOPT ,AUNITS,DISTFF,BWIND(4)		CASCM
3    ,WPRIOR(4) ,APREP ,IPRD(3,14) ,NPDAT,PRDATE(14)		CASCM
INTEGER HH, TOPT, AUNITS,DISTFF,BWIND,WPRIOR,APREP,PRDATE		CASCM
C		CASCM
C    FLAGS AND COUNTERS FOR CAS SIMULATOR		CASFLG
COMMON /CASFLG/		CASFLG
1    H ,PPFLG ,NBW ,IBW ,WINDOW,IPD ,IPP ,PPDATE,NREGS		CASFLG
2    ,NZTOT ,NSTRAT,NYESSK,NSSHSK,NCAMSK,NRYES ,NRSSH ,NRCAMS		CASFLG
3    ,ENDC ,ENDREG,ENDZON,IRSTR ,IRZONE,IRREG		CASFLG
4    ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13		CASFLG
5    ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCOUN,LRREG ,LRZONE,LRSTR		CASFLG
INTEGER PPFLG , WINDOW , PPDATE		CASFLG
C		CASFLG
C    CONSTANT QUANTITIES FOR LEM PROGRAM		CONST
COMMON /CONST /		CONST
1    NTRMX ,MAXR ,MAXZ ,IMXSEG,ENDFIL,ITSFG		CONST
C		CONST
C    FILE DEFINITIONS AND RECORD LENGTHS		FILES
COMMON /FILES /		FILES
1    SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ		FILES
2    ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESQ		FILES
3    ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD		FILES
4    ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS		FILES
INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT		FILES
1    ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF		FILES
C		FILES
C    INDEX RECORD FOR CAS CUMULATIVE FILE (CASF)		IXCASF



```

COMMON /IXCASF/
1 IXCASF(1),LIXCAS
C
C INDEX RECORD FOR CAS DISTRIBUTION FILE
COMMON /IXDISF/
1 IXDISF(1),LIXDIS
C
C NOTE... 506 ONLY ALLOWS UP TO 8 PREDICTION POINTS INCLUDING
C BIOWINDOWS ( 506 = 1 + 1 + 8*63, INDEX + HEADER + 8 PRED. PTS.)
C
COMMON/FILES1/
1 ISUBH2,LSUBH2,MXCLSS
C INDEX RECORD FOR INTERMEDIATE SUBSTRATA HISTORICAL DATA FILE
COMMON /IXSUBH/
1 LIXSSH,IXSUBH(1)
C
C PAGE EJECT CONTROL PARAMETERS FOR LEM
COMMON /PAGECM/
1 NPAGE ,NLINE ,MXLINE,NSTTL ,SUBTTL(10)
C
C STATISTICAL INFORMATION FOR LEM
COMMON /STATS /
1 ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR
EQUIVALENCE ( NT,ITER )
C
C *****
C
DATA NERRS ,NFATAL,NPERRS,NARG
1 / 0 , 0 , 0 , 0 /
C
DATA APRUTS / 6H(TEN T,6HHOUSAN,6HD ACRE,2HS)
1 ,6H(THOUS,6HAND HE,6HCTARES,1H) /
DATA PPRUTS / 6H(HUNDR;6HED THD,6HUSAND ,6HBUSHEL,2HS)
1 ,6H(THOUS,6HAND ME,6HTRIC T,6HONS) ,1H /
DATA YPRUTS / 6H (BUSSH,6HELS/AC,3HRE)
1 ,6H(QUINT,6HALS/HE,6HCTARE) /
C
DATA AREAPS / 10289.712 /
C
DATA ENDFIL,NTRMX ,MAXR ,MAXZ ,IMXSEG

```

```

IXCASF
IXCASF
IXDISF
IXDISF
IXDISF
IXDISF
FILES1
FILES1
IXSUBH
IXSUBH
MOD1
IXSUBH
PAGECM
PAGECM
PAGECM
PAGECM
STATS
STATS
STATS
STATS
STATS
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA
BLKDTA

```

	1	/	4HZZZZ	,	100	,	999	,	999	,	150	/	BLKDTA
C			DATA		MXCLSS		/	10		/			JULY76
													JULY76
C			DATA		SEGID	,	LSEGID	,	CROPW	,	LCROPW	,	BLKDTA
	1	/			1	,	17	,	2	,	33	,	BLKDTA
					3	,	168	,	12	,	107	/	BLKDTA
			DATA		CAMSF	,	LCAMSF	,	CAMERR	,	LCAMER	,	BLKDTA
	1	/			7	,	19	,	8	,	50	,	BLKDTA
					14	,	504	,	10	,	23	/	BLKDTA
			DATA		SIGEXT	,	LSIGEX	,	YESERR	,	LYESER	,	BLKDTA
	1	/			9	,	59	,	11	,	23	,	BLKDTA
					13	,	16	,	4	,	303	/	BLKDTA
			DATA		INP	,	OUTP	,	TACQ	,	LTACQ	,	BLKDTA
	1	/			5	,	6	,	16	,	129	,	JULY76
					15	,	81	/					JULY76
			DATA		ISUBH2	,	LSUBH2						JULY76
	1	/			17	,	39	/					JULY76
C													BLKDTA
			DATA		MXLINE		/	40		/			BLKDTA
C													BLKDTA
			DATA		ITER	,	NSEGTR	,	NCAMSR	,	NYESR	,	BLKDTA
	1	/			0	,	0	,	0	,	0	,	BLKDTA
					0	,	0	,	0	,	0	/	BLKDTA
C													BLKDTA
			DATA		LIXCAS	,	LIXDIS						BLKDTA
	1	/			388	,	506	/					BLKDTA
C													BLKDTA
													BLKDTA
													BLKDTA
C			DATA		LIXSSH		/	3200		/			JULY76
													JULY76
C													JULY76
													JULY76
C													JULY76
			DATA		LDS1	,	LDS4	,	LDS7	,	LDS8	,	JULY76
	1	/			12	,	24	,	81	,	10	,	JULY76
					9	,	20	,	19	,	19	/	JULY76
			DATA		LDS13	,	LDS14	,	LDS15	,	LDS16	,	BLKDTA
	1	/			25	,	22	,	22	,	22	,	BLKDTA
					28	/							BLKDTA
C													BLKDTA
			END										BLKDTA

```

000001      SUBROUTINE CAMERS(INO)                                CAMERS
000002      C      FILE DEFINITIONS AND RECORD LENGTHS          FILFS
000003      COMMON /FILES /                                        FILFS
000004      1  SLEGID ,LSEGID,CROPN ,LCROPN,SUBHST,LSUBH ,ACQUIS,LACO  FILFS
000005      2  ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESU  FILFS
000006      3  ,SIGEXT,LSIGEX,LYSERK,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD  FILFS
000007      4  ,INP ,OUIP ,TACU ,LTACU ,CASDSF,LCASDS             FILFS
000008      INTEGER SEGID ,CROPN ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YFSOUT  FILFS
000009      1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUIP ,TACU ,CASDSF      FILFS
000010      C
000011      C      ARGUMENT LIST FOR ERROR PROCESSING            ARGST
000012      COMMON /ARGST/                                        ARGST
000013      1  NERRS ,NFATAL,NPEHRS,NARG ,ARG(10)                 ARGST
000014      DIMENSION IARG(10)                                    ARGST
000015      EQUIVALENCE ( IARG,ARG )                               ARGST
000016      C
000017      GO TO (10,20,30,40,50,60,70),INO                     CAMERS
000018      10 CONTINUE                                           CAMERS
000019      WRITE(OUIP,1000)IARG(1),IARG(2)                       CAMERS
000020      RETURN                                                CAMERS
000021      20 CONTINUE                                           CAMERS
000022      WRITE(OUIP,2000)IARG(1),IARG(2)                       CAMERS
000023      RETURN                                                CAMERS
000024      30 CONTINUE                                           CAMERS
000025      WRITE(OUIP,3000)IARG(1),IARG(2)                       CAMERS
000026      RETURN                                                CAMERS
000027      40 CONTINUE                                           CAMERS
000028      WRITE(OUIP,4000)IARG(1),IARG(2)                       CAMERS
000029      RETURN                                                CAMERS
000030      50 CONTINUE                                           CAMERS
000031      WRITE(OUIP,5000)IARG(1), ARG(2)                       CAMERS
000032      RETURN                                                CAMERS
000033      60 CONTINUE                                           CAMERS
000034      WRITE(OUIP,6000)IARG(1),IARG(2), ARG(3)              CAMERS
000035      RETURN                                                CAMERS
000036      70 CONTINUE                                           CAMERS
000037      WRITE(OUIP,7000)IARG(1),IARG(2),IARG(3)              CAMERS
000038      RETURN                                                CAMERS
000039      1000 FORMAT(2X,5H,CAMS ,12,20H MODEL NOT,1 OR 2 = ,I1) CAMERS
000040      2000 FORMAT(2X,5H,CAMS ,12,30H ITMAX NOT BETWEEN 0 AND 99 = ,I2) CAMERS
000041      3000 FORMAT(2X,5H,CAMS ,12,29H IWINO NOT BETWEEN 0 AND 4 = ,I1) CAMERS
000042      4000 FORMAT(2X,29H,BAD CAMS ID,OR SEQUENCE NO. = ,A4,1X,I2) CAMERS
000043      5000 FORMAT(2X,5H,CAMS ,12,36H CROP CALENDAR COEFF. OUT OF RANGE = , CAMERS
000044      1  F7.5)                                               CAMERS
000045      6000 FORMAT(2X,5H,CAMS ,12,35H BAD MULTI-TEMPORAL MATRIX VALUE M(,I1, CAMERS
000046      1  4H) = ,F5.4)                                       CAMERS
000047      7000 FORMAT(2X,5H,CAMS ,12, CAMERS
000048      1  40H BAD MULTI-TEMPORAL MATRIX VALUE IGROUP( ,I2,44) = ,I1) CAMERS
000049      END                                                    CAMERS

```

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000001 SUBROUTINE CAMER2(INO) CAMER2
000002 C CAMER2
000003 C THIS SUBROUTINE CONTAINS THE PROCSSING ERROR MESSAGES FOR THE CAMER2
000004 C CAMS MODULE CAMER2
000005 C CAMER2
000006 C FILE DEFINITIONS AND RECORD LENGTHS FILES
000007 COMMON /FILES/ FILES
000008 1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ FILES
000009 2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYES0 FILES
000010 3 ,SIGEXT,LSIGEX,YESEPR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD FILES
000011 4 ,INP ,OUIP ,TACQ ,LTACQ ,CASDSF,LCASDS FILES
000012 INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT FILES
000013 1 ,SIGEXT,YESEPR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF FILES
000014 C FILES
000015 C ARGUMENT LIST FOR ERROR PROCESSING ARGIST
000016 COMMON /ARGLIST/ ARGIST
000017 1 NERRS ,NFATAL,NPERRS,NARG ,ARG(10) ARGIST
000018 DIMENSION IARG(10) ARGIST
000019 EQUIVALENCE ( IARG,ARG ) ARGIST
000020 C ARGIST
000021 GO TO (10,20,30,40),INO ARGIST
000022 10 CONTINUE CAMER2
000023 WRITE(OUTP,1000) CAMER2
000024 RETURN CAMER2
000025 20 CONTINUE CAMER2
000026 WRITE(OUTP,2000) CAMER2
000027 RETURN CAMER2
000028 30 CONTINUE CAMER2
000029 WRITE(OUTP,3000)IARG(1) CAMER2
000030 RETURN CAMER2
000031 40 CONTINUE CAMER2
000032 WRITE(OUTP,4000)IARG(1) CAMER2
000033 RETURN CAMER2
000034 1000 FORMAT(2X, CAMER2
000035 160HCAMS INPUT TAPE SEGTRU - BEGINNING REGION AND ZONE NOT FOUND )CAMER2
000036 2000 FORMAT(2X, CAMER2
000037 1 57HCAMS INPUT TAPE SEGTRU - ENDING REGION AND ZONE NOT FOUND )CAMER2
000038 3000 FORMAT(2X, CAMER2
000039 1 16HCAMS INPUT TAPE ,A6,17H - MISSING RECORD ) CAMER2
000040 4000 FORMAT(2X,33H0ETA DISTRIBUTION ERROR - FLAG = ,I1) CAMER2
000041 END CAMER2

```

```

000001 SUBROUTINE CAMS
000002 C
000003 C THIS SUBROUTINE IS THE DRIVER FOR THE CAMS MODULE, WHICH CALCULATES
000004 C THE ESTIMATED PROPORTION OF WHEAT.
000005 C
000006 COMMON/TRAINS/ COUN7,IREG7,IZONE7,ISTRA7,ISUB7,ISEG7,
000007 1 ITHIN(4,25),ITTOT,TM(3,4,25),TBR(3,4,25),TVV(3,4,25),
000008 1 TPTRU,IZULU(4),TFEST(4),TFERR(4),TFRTOT(3),TM(3),TV(3),TB(3)
000009 INTEGER IZULU
000010 DIMENSION ITRAIN(129)
000011 EQUIVALENCE(ITRAIN,COUN7)
000012 C STATISTICAL INFORMATION FOR LEM
000013 COMMON /STATS /
000014 1 TFER ,NSEGTR,NCAMSL,NYESR ,NREC(7),NCASCR,NCASDR
000015 EQUIVALENCE ( N1,ITER )
000016 C
000017 COMMON/ERROR/TITL(4),IOATE,PESTIM,TOT,ALUCAL,FRTOT(3)
000018 1 ,FRBTAS(3),ERRAND(3),CLTOT(3),CLRIAS(3),CLRAND(3),DELTA,
000019 1 CROPD, 7(3,2),MULT(3),TID,TRAINA,TRAIND
000020 DIMENSION IFRS(40)
000021 EQUIVALENCE(TITL,IFRS)
000022 REAL MULTI
000023 INTEGER TID,CROPD
000024 C CAMS CONTROL CARD INPUT DATA
000025 COMMON/CAMSCM/ IHOVEL,IMUTTI,ISIGFX,ISKIP,ITMAX,IREP,IWIND,
000026 1 IGROUP(3,2,15),MS(3,2,3),G(3,2,2),H(3,2,2)
000027 REAL MS
000028 C
000029 C LEM CONTROL CARD INPUT DATA
000030 COMMON /LEMCM /
000031 1 TITL(10) ,ICASF ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ
000032 2 ,FNDD ,ENDZ ,ISTG ,ICAMS ,IYES ,IACO ,ICLASS,ISEX1 ,ISCC
000033 3 ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSECE
000034 4 ,ICSEYM,ICSESF,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6
000035 5 ,RSEED7,ICSEST,ICSECU,ICSEYS,ICSECU,ICSECD
000036 DIMENSION RSEED(7)
000037 DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5
000038 1 ,RSEED6,RSEED7
000039 EQUIVALENCE ( RSEED,RSEED1 )
000040 INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ
000041 C
000042 C PAGE EJECT CONTROL PARAMETERS FOR LEM
000043 COMMON /PAGECM/
000044 1 NPAGE ,NLINE ,MXLINE,NSTL ,SUBTTL(10)
000045 C
000046 C CONTROL PARAMETERS FOR LEM PROGRAM
000047 COMMON /CNTRL /
000048 1 PRINTF,RSTART,SEED(7)
000049 INTEGER PRINTF
000050 DOUBLE PRECISION SEED
000051 C
000052 C FILE DEFINITIONS AND RECORD LENGTHS
000053 COMMON /FILES /
000054 1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACO
000055 2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESU
000056 3 ,SIGFX,LSIGFX,YESERR,LYESR,SEGIPU,LSEGIT,CASDIS,LCASD
000057 4 ,TIP ,OUTP ,IACO ,ITACH ,CASUSE,LCASUS
000058 INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT FILES

```



000119		IZONE4=0	*NEW
000120		ISTRAN=0	*NEW
000121		ISUB4=0	*NEW
000122		ISIG4=0	*NEW
000123		COUN5=4H	*NEW
000124		IREG5=0	*NEW
000125		IZONE3=0	*NEW
000126		ISTRAN3=0	*NEW
000127		ISUB3=0	*NEW
000128		COUN3=4H	*NEW
000129		IREG3=0	*NEW
000130		IZONE5=0	*NEW
000131	C		CAMS
000132	C	INITIALIZATION	CAMS
000133	C	SFT FILE FLAGS	CAMS
000134		ISEG=0	CAMS
000135		ICROPW=0	CAMS
000136		IF(IACQ.EQ.0.AND.(ICAMS.EQ.3.OR.ICLASS.FQ.2.OR.ISCC.EQ.2))	CAMS
000137		1 ICROPW=1	CAMS
000138		ISIG=0	CAMS
000139		IF(IACQ.EQ.1.OR.ICAMS.EQ.3.OR.ISEXT.EQ.2) ISIG=1	CAMS
000140		CALL INITI(ISEG,IACQ,IACQ,ICROPW,ISIG,HEAD,ITSFG)	CAMS
000141	C		CAMS
000142	C	CHECK FOR ERROR	CAMS
000143		IF(NFATC.GT.0)RETURN	CAMS
000144		IF(IACQ.EQ.0) GO TO 1000	CAMS
000145	C		CAMS
000146	C	SPECIAL CASE - NO ACQUIS. FILE	CAMS
000147		10 CONTINUE	CAMS
000148	C	ZERO OUT ERROR PARAMETERS	CAMS
000149		DO 12 I=7,40	CAMS
000150		IFRS(I)=0	CAMS
000151		12 CONTINUE	CAMS
000152		11 CONTINUE	CAMS
000153		CALL INPT(0,1,1,0,1,0,IDONE,IEND)	CAMS
000154		IF(IDONE.GT.0) GO TO 4000	CAMS
000155	C		CAMS
000156	C	SET UP OUTPUT FILE RECORD	CAMS
000157		COUN6=COUN4	CAMS
000158		IREG6=IREG4	CAMS
000159		IZONE6=IZONE4	CAMS
000160		ISTRAN6=ISTRAN4	CAMS
000161		ISUB6=ISUB4	CAMS
000162		ISEG6=ISEG4	CAMS
000163		PIRUF=PT(VHF)	CAMS
000164		SEASON=ISPW+1	CAMS
000165		DO 30 WINDOW=1,4	CAMS
000166		IWINU(WINDOW)=START(SEASON,WINDOW)	CAMS
000167		PST(WINDOW)=PIRUF	CAMS
000168		PERR(WINDOW)=0.	CAMS
000169		30 CONTINUE	CAMS
000170	C		CAMS
000171	C	IF REPORT, DO REPORT	CAMS
000172		IF(PRINTF.LE.0) GO TO 40	CAMS
000173		DO 60 WINDOW=1,4	CAMS
000174		DO 52 I=1,4	CAMS
000175		TITL(I)=WFAD(I,WINDOW)	CAMS
000176		52 CONTINUE	CAMS
000177		IDATE=IWINU(WINDOW)	CAMS
000178		PST(I)=PIRUF	CAMS

ORIGINAL PAGE IS  
OF POOR QUALITY







```

000299 C CAMS
000300 C IF REPORT, PRINT REPORT CAMS
000301 IF(PRINTF.LE.0) GO TO 900 CAMS
000302 IF(IACQNO.GT.1) GO TO 810 CAMS
000303 DO 820 I=1,4 CAMS
000304 III(I)=HEAD(I,WINDOW) CAMS
000305 820 CONTINUE CAMS
000306 810 CONTINUE CAMS
000307 IDATE=IWIN(WINDOW,IACQNO) CAMS
000308 PFSTI=PLS CAMS
000309 IOT=PLS-PT(WHF) CAMS
000310 IFIRST=IFIRST+1 CAMS
000311 CALL REPORT(I,IFIRST,IREP) CAMS
000312 C CAMS
000313 C STORE VALUES IN OUTPUT RECORD CAMS
000314 900 CONTINUE CAMS
000315 IF(IACQNO.GT.1) GO TO 200 CAMS
000316 IIZULU(WINDOW)=IWIN(WINDOW,IACQNO) CAMS
000317 TPESI(WINDOW)=PES CAMS
000318 TPERK(WINDOW)=PES-PT(WHF) CAMS
000319 GO TO 200 CAMS
000320 101 CONTINUE CAMS
000321 C CAMS
000322 C SAVE ON SCRATCH DA FILE TACQ CAMS
000323 COUN7=COUN4 CAMS
000324 IREG7=IREG4 CAMS
000325 IZONE7=IZONE4 CAMS
000326 ISTRA7=ISTRA4 CAMS
000327 ISUB7=ISUB4 CAMS
000328 ISEG7=ISEG4 CAMS
000329 IPTRUE=PT(WHE) CAMS
000330 IF(IISFG.GT.0) GO TO 915 CAMS
000331 WRITE(CAMS)COUN7,IREG7,IZONE7,ISTRA7,ISUB7,ISEG7,IPTRUE, CAMS
000332 1 (IIZULU(I),TPESI(I),TPERR(I),I=1,4) CAMS
000333 NCAISR=NCAISR+1 CAMS
000334 GO TO 1000 CAMS
000335 915 CONTINUE CAMS
000336 DO 910 I=1,4 CAMS
000337 DO 920 J=1,25 CAMS
000338 ITWIN(I,J)=IWIN(I,J) CAMS
000339 920 CONTINUE CAMS
000340 910 CONTINUE CAMS
000341 ITOT=ITOTAL CAMS
000342 CALL TSAVE(ISEG7,2,IBAD) CAMS
000343 IF(NFAIAL.GT.0) NFIUR, CAMS
000344 GO TO 1000 CAMS
000345 1900 CONTINUE CAMS
000346 IF(IOUTF.CE.2) RETURN CAMS
000347 IF(IISFG.FU.0) GO TO 4000 CAMS
000348 C*****CAMS
000349 C CAMS
000350 C PASS 2 - ORDINARY SEGMENTS CAMS
000351 2000 CONTINUE CAMS
000352 C CAMS
000353 C FINISH LAST WRITE TO SCRATCH FILE TACQ CAMS
000354 CALL TSAVE(0,3,IBAD) CAMS
000355 C CAMS
000356 C REINITIALIZE FILES CAMS
000357 CALL INITI(ISFG,IACQ,IACQ,ICROPX,ISIG,HFAD,IISFG) CAMS
000358 IALCNO=1 CAMS

```

```

000359 C
000360 2010 CONTINUE CAMS
000361 CALL INPT(ISEG,IACO,IACQ,1,ISIG,2,IDONE,IEND) CAMS
000362 IF(IDONE.GT.0) GO TO 4000 CAMS
000363 IFIRST=0 CAMS
000364 SFASUN=ISPW+1 CAMS
000365 DO 2005 I=1,4 CAMS
000366 IWIND(I)=0 CAMS
000367 2005 CONTINUE CAMS
000368 C CAMS
000369 C ZERO OUT CAMSF RECORD CAMS
000370 DO 2070 WINDOW=1,4 CAMS
000371 I7UL(WINDOW)=0. CAMS
000372 PEST(WINDOW)=0. CAMS
000373 PFRR(WINDOW)=0. CAMS
000374 2070 CONTINUE CAMS
000375 WINDOW=0 CAMS
000376 2100 CONTINUE CAMS
000377 WINDOW=WINDOW+1 CAMS
000378 IF(WINDOW.GT.4) GO TO 2101 CAMS
000379 IF(IWIN(WINDOW,1).EQ.0) GO TO 2101 CAMS
000380 IWIHD(WINDOW)=1 CAMS
000381 C CAMS
000382 C ZERO OUT ERROR VALUES CAMS
000383 DO 2110 I=7,40 CAMS
000384 IERS(I)=0 CAMS
000385 2110 CONTINUE CAMS
000386 DO 2120 I=1,4 CAMS
000387 IERS(I)=4H CAMS
000388 2120 CONTINUE CAMS
000389 C CAMS
000390 C CORRELATE WITH TRAINING SEGMENT CAMS
000391 CALL CORRFL(ITMAX,IWIN(WINDOW,1),WINDOW,IUSE) CAMS
000392 IF(IUSE.GT.6.AND.ISKIP.E.0) GO TO 2101 CAMS
000393 IF(IUSE.GT.6.AND.ISKIP.GE.1) GO TO 3000 CAMS
000394 DO 2200 TYPE=1,3 CAMS
000395 XI(TYPE)=0. CAMS
000396 2200 CONTINUE CAMS
000397 C CAMS
000398 C CALCULATE SIGNATURE EXTENSION ERROR CAMS
000399 IF(ISEXT.FR.2.OR.ICAMS.EQ.3) GO TO 2400 CAMS
000400 DO 2500 TYPE=1,MODEL CAMS
000401 CALL SIGXT(SEED(3),TYPE,WINDOW,IUSE,XI(TYPE)) CAMS
000402 2500 CONTINUE CAMS
000403 GO TO 2600 CAMS
000404 C CAMS
000405 C SET BYPASS VALUES FOR SIGNATURE EXTENSION CAMS
000406 2400 CONTINUE CAMS
000407 DO 2300 TYPE=1,MODEL CAMS
000408 XI(TYPE)=PW(TYPE,WINDOW)*(1.+TERTOT(TYPE)) CAMS
000409 2300 CONTINUE CAMS
000410 C CAMS
000411 C COMPUTE PIST CAMS
000412 2600 CONTINUE CAMS
000413 P(WHE)=100. CAMS
000414 P(MIX)=0. CAMS
000415 P(OTI)=0. CAMS
000416 IF(INOPTL.EQ.2) GO TO 2610 CAMS
000417 P(WHE)=PT(WHE)-PT(MIX)+PW(MIX,IWIND) CAMS
000418 P(MIX)=PI(MIX) CAMS

```

```

000419 P(OTH)=100.-P(MIX)-P(WHF) CAMS
000420 2610 CONTINUE CAMS
000421 PFS=P(WHL)*XI(WHL)+P(MIX)*XI(MIX)+P(OTH)*XI(OTH) CAMS
000422 2750 CONTINUE CAMS
000423 C CAMS
000424 C IF REPORT, GENERATE REPORT CAMS
000425 IF(PRINTF.LF.0) GO TO 2700 CAMS
000426 DO 2800 I=1,4 CAMS
000427 TITL(I)=HFAD(I,WINDOW) CAMS
000428 2800 CONTINUE CAMS
000429 LDATE=IWIN(WINDOW,I) CAMS
000430 PESTM=PFS CAMS
000431 TOT=PFS-PT(WHF) CAMS
000432 IF(IMODFL.EQ.2) P(OTH)=0. CAMS
000433 IF(IUSE.GT.6) GO TO 2850 CAMS
000434 A1=(1.+TEPTOT(WHL))*PW(WHF,WINDOW) CAMS
000435 A2=(1.+TEPTOT(MIX))*PW(MIX,WINDOW) CAMS
000436 A3=(1.+TEPTOT(OTH))*PW(OTH,WINDOW) CAMS
000437 A1=AMIN1(A1,1.) CAMS
000438 A2=AMIN1(A2,1.) CAMS
000439 A3=AMIN1(A3,1.) CAMS
000440 A1=AMAX1(A1,0.) CAMS
000441 A2=AMAX1(A2,0.) CAMS
000442 A3=AMAX1(A3,0.) CAMS
000443 ALLOCAL = P(WHL)*A1 +P(MIX)*A2 +P(OTH)*A3 CAMS
000444 TID=IPRIOR(IUSE) CAMS
000445 ZFR01=0. CAMS
000446 ZFR02=0. CAMS
000447 IF(ALLOCAL.EQ.0.)ZFR01=.000005 CAMS
000448 IF(PES.GT.0.) ZFR02=.000005 CAMS
000449 TRAINA=((PES+ZFR02)/(ALLOCAL+ZFR01))*100. CAMS
000450 TRATND=(PFS-ALLOCAL)/(ALLOCAL+ZFR01)*100. CAMS
000451 GO TO 2860 CAMS
000452 2850 CONTINUE CAMS
000453 ALLOCAL =PESTM CAMS
000454 Z(1,1)=DELLA CAMS
000455 Z(2,1)=FLOAT(CROPD) CAMS
000456 Z(1,2)=MULT(1) CAMS
000457 Z(2,2)=MULT(2) CAMS
000458 Z(3,2)=MULT(3) CAMS
000459 TID=99999999 CAMS
000460 TRAINA=0. CAMS
000461 TRATND=0. CAMS
000462 2860 CONTINUE CAMS
000463 IFIRST=IFIRST+1 CAMS
000464 CALL REPORT(2,IFIRST,IRFP) CAMS
000465 C CAMS
000466 C STORE VALUES IN OUTPUT RECORD CAMS
000467 2700 CONTINUE CAMS
000468 IZULU(WINDOW)=IWIN(WINDOW,I) CAMS
000469 PEST(WINDOW)=PFS CAMS
000470 PFRR(WINDOW)=PFS-P(WHL) CAMS
000471 GO TO 2100 CAMS
000472 2101 CONTINUE CAMS
000473 C CAMS
000474 C WRITE TO OUTPUT FILE CAMS
000475 LOUN6=(OUN4 CAMS
000476 IREG6=IREG4 CAMS
000477 IZUNL6=IZUNF4 CAMS
000478 ISTR6=ISTR4 CAMS

```

ORIGINAL PAGE IS  
OF POOR QUALITY

000479	ISUB6=ISUB4	CAMS
000480	ISEG6=ISEG4	CAMS
000481	PTRUE=PT(WHF)	CAMS
000482	WRITE(CAMSF)COUN6,IREG6,IZONE6,ISTRA6,ISUB6,ISEG6,	CAMS
000483	) PTRUE,(I7UIU(I),PEST(I),PERR(I),I=1,4)	CAMS
000484	NCAMSP=NCAMSR+1	CAMS
000485	GO TO 2010	CAMS
000486		CAMS
000487	C    DONE PROCESSING	CAMS
000488	4000 CONTINUE	CAMS
000489	IF(NFATAL.GT.0) RETURN	CAMS
000490	ITOT=ICAMSF-1	CAMS
000491	WRITE(CAMSF) ZZZZ,(IFILL,I=1,ITOT)	CAMS
000492	REWIND CAMSF	CAMS
000493	REWIND SEGTRU	CAMS
000494	IF(IACQ.LE.0) REWIND ACQUIS	CAMS
000495	IF(IACQ.LE.0) REWIND CAMERR	CAMS
000496	IF(ICROPW.LE.0) REWIND CROPW	CAMS
000497	IF(ISTG.LE.0) REWIND SIGEXT	CAMS
000498	IF(IACQ .LE. 0)CALL TSAVE(0,-1,IBAD)	CAMS
000499	RETURN	CAMS
000500	END	CAMS



```

000059      1 2X,4HIREP,2X,5HIWIND)                                CAMSIN
000060      WRITE(OUTP,1300) IMODFL,IMULTI,ISIGFX,ISKIP,ITMAX,IREP,IWIND, CAMSIN
000061      1 ICAMS,ISEQ1                                           CAMSIN
000062      1300 FORMAT(5X,I1,7X,I1,7X,I1,6X,I1,6X,I2,2X,2(4X,I1),5X,A4,I2) CAMSIN
000063      WRITE(OUTP,1100)                                         CAMSIN
000064      C                                                         CAMSIN
000065      C CHECK ID AND SEQ. NO.                                  CAMSIN
000066      IF(ICAMS.(0.4HCAMS.AND,ISEQ1.EQ.1) GO TO 1           CAMSIN
000067      NARG=2                                                  CAMSIN
000068      IARG(1)=ICAMS                                           CAMSIN
000069      IARG(2)=ISEQ1                                           CAMSIN
000070      CALL FRRMES(4HCAMS,6HCAMSIN,4,1)                       CAMSIN
000071      GO TO 2                                                CAMSIN
000072      1 CONTINUE                                              CAMSIN
000073      IF(IWIND.EQ.0) IWIND=4                                  CAMSIN
000074      IARG(1)=ISEQ1                                           CAMSIN
000075      IARG(2)=IMODEL                                          CAMSIN
000076      C                                                         CAMSIN
000077      C CHECK CONTROL VALUES                                CAMSIN
000078      IF(IMODFL.NE.1.AND,IMODFL.NE.2) CALL FRRMES(4HCAMS,6HCAMSIN,1,1) CAMSIN
000079      IF(IMULTI.NE.0.AND,IMULTI.NE.1) IMULTI=1              CAMSIN
000080      IF(ISIGFX.NE.0.AND,ISIGFX.NE.1) ISIGFX=1             CAMSIN
000081      IF(ISKIP.NE.0.AND,ISKIP.NE.1) ISKIP=1                CAMSIN
000082      IF(IREP.NE.0.AND,IREP.NE.1) IREP=1                   CAMSIN
000083      NARG=2                                                  CAMSIN
000084      IARG(1)=ITMAX                                           CAMSIN
000085      IF(ITMAX.IE.0) CALL ERRMES(4HCAMS,6HCAMSIN,2,1)      CAMSIN
000086      IARG(2)=IWIND                                          CAMSIN
000087      IF(IWIND.IE.1.OR,IWIND.GT.4) CALL EPRMES(4HCAMS,6HCAMSIN,3,1) CAMSIN
000088      C*****                                                    CAMSIN
000089      C                                                         CAMSIN
000090      C READ IN AND CHECK MULTI-TEMPORAL SAMPLING MATRIX    CAMSIN
000091      2 CONTINUE                                              CAMSIN
000092      IFLAG=0                                                 CAMSIN
000093      INEXT=1                                                  CAMSIN
000094      CALL PAGEL(9)                                           CAMSIN
000095      WRITE(OUTP,2200) (I,I=5,15)                             CAMSIN
000096      2200 FORMAT(3X,6HIGROUP,11(1H(+,I2,1H),1X),3X,2HM2,5X,2HM3) CAMSIN
000097      DO 20 I=1,2                                           CAMSIN
000098      DO 21 J=1,4                                           CAMSIN
000099      INLXT=INEXT+1                                          CAMSIN
000100      READ(INP,2000) (CHK(J,I,K),K=5,15),                    CAMSIN
000101      1 (CHK(J,I,K),K=2,3),ICAMS,ISEQ(J,I)                 CAMSIN
000102      2000 FORMAT(11I1,2X,2F4.3,55X,A4,I2)                  CAMSIN
000103      IF(ICAMS.EQ.4HCAMS.AND,ISEQ(J,I).EQ.INEXT) GO TO 22  CAMSIN
000104      IFLAG=1                                                 CAMSIN
000105      IARG(1)=ICAMS                                           CAMSIN
000106      IARG(2)=ISEQ(J,I)                                       CAMSIN
000107      CALL FRRMES(4HCAMS,6HCAMSIN,4,1)                       CAMSIN
000108      22 CONTINUE                                              CAMSIN
000109      C                                                         CAMSIN
000110      C ECHO OUT                                              CAMSIN
000111      WRITE(OUTP,2100) (CHK(J,I,K),K=5,15),                 CAMSIN
000112      1 (CHK(J,I,K),K=2,3),ICAMS,ISEQ(J,I)                 CAMSIN
000113      2100 FORMAT(11X,10(I1,4X),I1,5X,2(F5.3,2X),A4,I2)    CAMSIN
000114      21 CONTINUE                                             CAMSIN
000115      20 CONTINUE                                             CAMSIN
000116      C                                                         CAMSIN
000117      C MOVE INTO ARRAY                                       CAMSIN
000118      NARG=3                                                  CAMSIN

```

```

000119      ITOT=3                                CAMSIN
000120      IWHFK=0                                CAMSIN
000121      IF (IMODFL.EQ.2) ITOT=1              CAMSIN
000122      IF (IMODFL.EQ.2) IWHFK=3            CAMSIN
000123      IF (IFLAG.EQ.1 .OR. IMULTI.EQ.1) GO TO 40 CAMSIN
000124      DO 30 I=1,2                             CAMSIN
000125      DO 31 J=1,ITOT                          CAMSIN
000126      L=J+IWHFK                              CAMSIN
000127      IGROUP(J,I,1)=1                       CAMSIN
000128      IGROUP(J,I,2)=1                       CAMSIN
000129      IGROUP(J,I,3)=1                       CAMSIN
000130      IGROUP(J,I,4)=1                       CAMSIN
000131      DO 32 K=5,15                          CAMSIN
000132      IARG(1)=ISEQ(L,I)                    CAMSIN
000133      IARG(2)=K                              CAMSIN
000134      IARG(3)=ICHK(L,I,K)                  CAMSIN
000135      IF (ICHK(L,I,K).LT.1 .OR. ICHK(L,I,K).GT.3) CALL ERRMES(4HCAMS, CAMSIN
000136      1 6HCAMSIN,7,1)
000137      IGROUP(J,I,K)=ICHK(L,I,K)            CAMSIN
000138      32 CONTINUE                            CAMSIN
000139      MS(J,I,1)=1.                            CAMSIN
000140      DO 33 K=2,3                             CAMSIN
000141      IARG(2)=K                              CAMSIN
000142      ARG(3)=CHKM(L,I,K)                    CAMSIN
000143      IF (CHKM(L,I,K).LE.0.0 .OR. CHKM(L,I,K).GE.CHKM(L,I,K-1)) CAMSIN
000144      1 CALL ERRMES(4HCAMS,6HCAMSIN,6,1)
000145      MS(J,I,K)=CHKM(L,I,K)                  CAMSIN
000146      33 CONTINUE                            CAMSIN
000147      31 CONTINUE                            CAMSIN
000148      50 CONTINUE                            CAMSIN
000149      C*****                                CAMSIN
000150      C                                          CAMSIN
000151      C  READ IN AND CHECK CRUP CALENDAR      CAMSIN
000152      40 CONTINUE                            CAMSIN
000153      CALL IAGER(6)                            CAMSIN
000154      WRITE(OUTP,1100)                        CAMSIN
000155      WRITE(OUTP,4000)                        CAMSIN
000156      4000 FORMAT(4X,5(2HG1,6X,2HG2,6X,2HH1,6X,2HH2,6X)) CAMSIN
000157      DO 41 I=1,2                             CAMSIN
000158      INEXT=INEXT+1                          CAMSIN
000159      READ(INP,4040) (CHKG(I,I,J),J=1,2), (CHKH(I,I,J),J=1,2), CAMSIN
000160      1 (CHKG(2,I,J),J=1,2), (CHKH(2,I,J),J=1,2), CAMSIN
000161      1 (CHKG(3,I,J),J=1,2), (CHKH(3,I,J),J=1,2) CAMSIN
000162      1 ,ICAMS,ISEQ(I,1)                    CAMSIN
000163      4040 FORMAT(2(F6.3,F6.2,F6.3,F6.2,1X),2(F6.3,F6.2),A4,I2) CAMSIN
000164      IF (ICAMS.FE.4HCAMS.AND,ISEQ(I,1).EQ.INEXT) GO TO 42 CAMSIN
000165      IFLAG=2                                  CAMSIN
000166      NARG=2                                  CAMSIN
000167      IARG(1)=ICAMS                            CAMSIN
000168      IARG(2)=ISEQ(I,1)                      CAMSIN
000169      CALL ERRMES( 4HCAMS,6HCAMSIN,4,1)      CAMSIN
000170      42 CONTINUE                            CAMSIN
000171      WRITE(OUTP,4100) (CHKC(I,I,J),J=1,2), (CHKH(1,I,J),J=1,2), CAMSIN
000172      1 (CHKG(2,I,J),J=1,2), (CHKH(2,I,J),J=1,2), CAMSIN
000173      1 (CHKG(3,I,J),J=1,2), (CHKH(3,I,J),J=1,2) CAMSIN
000174      1 ,ICAMS,ISEQ(I,1)                    CAMSIN
000175      4100 FORMAT(2X,5(F6.3,2X,F6.2,2X,F6.3,2X,F6.2,2X),2X,A4,I2) CAMSIN
000176      INEXT=INEXT+1                          CAMSIN
000177      READ(INP,4200) (CHKG(4,I,J),J=1,2), (CHKH(4,I,J),J=1,2), ICAMS, ISEQ CAMSIN
000178      4200 FORMAT(2(F6.3,F6.2),50X,A4,I2)     CAMSIN

```



000179	IF(ICAMS.F0.4HCAMS.AND.ISEQ1.E0.INEXT) GO TO 43	CAMSIN
000180	IFLAG=2	CAMSIN
000181	IARG(1)=ICAMS	CAMSIN
000182	IARG(2)=ISEQ1	CAMSIN
000183	CALL FRRMFS (4HCAMS,6HCAMSIN,4,1)	CAMSIN
000184	43 CONTINUE	CAMSIN
000185	WRITE(001P,4500)	CAMSIN
000186	1 (CHKG(4,1,J),J=1,2),(CHKH(4,1,J),J=1,2),ICAMS,ISEQ1	CAMSIN
000187	4300 FORMAT(2X,2(F6,3,2X,F6,2,2X),66X,A4,I2)	CAMSIN
000188	41 CONTINUE	CAMSIN
000189		CAMSIN
000190	C MOVE INTO ARRAY	CAMSIN
000191	IF(IFLAG.EQ.2.) GO TO 50	CAMSIN
000192	NARG=2	CAMSIN
000193	DO 51 I=1,2	CAMSIN
000194	DO 52 J=1,ITOT	CAMSIN
000195	L=J+I*HFR	CAMSIN
000196	IARG(1)=ISEQ(I,1) + IWHFR/4	CAMSIN
000197	ARG(2)=CHKG(L,I,1)	CAMSIN
000198	IF (ABS(CHKG(L,I,1)).GF.10.0 ) CALL FRRMFS(4HCAMS,6HCAMSIN,5,1)	CAMSIN
000199	ARG(2)=CHKH(L,I,1)	CAMSIN
000200	IF (ABS(CHKH(L,I,1)).GF.10.0 ) CALL FRRMFS(4HCAMS,6HCAMSIN,5,1)	CAMSIN
000201	ARG(2)=CHKG(L,I,2)	CAMSIN
000202	IF (ABS(CHKG(L,I,2)).GF.100.0) CALL FRRMFS(4HCAMS,6HCAMSIN,5,1)	CAMSIN
000203	ARG(2)=CHKH(L,I,2)	CAMSIN
000204	IF (ABS(CHKH(L,I,2)).GF.100.0) CALL FRRMFS(4HCAMS,6HCAMSIN,5,1)	CAMSIN
000205	G(J,I,1)=CHKG(L,I,1)	CAMSIN
000206	G(J,I,2)=CHKG(L,I,2)	CAMSIN
000207	H(J,I,1)=CHKH(L,I,1)	CAMSIN
000208	H(J,I,2)=CHKH(L,I,2)	CAMSIN
000209	52 CONTINUE	CAMSIN
000210	51 CONTINUE	CAMSIN
000211	50 CONTINUE	CAMSIN
000212	RETURN	CAMSIN
000213	END	CAMSIN

ORIGINAL PAGE IS  
OF POOR QUALITY

000179	IF(ICAMS.FU.4HCAMS.AND.ISEQ1.EQ.INEXT) GO TO 43	CAMSIN
000180	IFLAG=2	CAMSIN
000181	IARG(1)=ICAMS	CAMSIN
000182	IARG(2)=ISEQ1	CAMSIN
000183	CALL ERRMES (4HCAMS,6HCAMSIN,4,1)	CAMSIN
000184	43 CONTINUE	CAMSIN
000185	WRITE(OUTP,4300)	CAMSIN
000186	1 (CHKG(4,I,J),J=1,2),(CHKH(4,I,J),J=1,2),ICAMS,ISEQ1	CAMSIN
000187	4300 FORMAT(2X,2(F6,3,2X,F6.2,2X),66X,A4,I2)	CAMSIN
000188	41 CONTINUE	CAMSIN
000189	C	CAMSIN
000190	C: MOVE INTO ARRAY	CAMSIN
000191	IF(IFLAG.FU.2) GO TO 50	CAMSIN
000192	NARG=2	CAMSIN
000193	DO 51 I=1,2	CAMSIN
000194	DO 52 J=1,ITOT	CAMSIN
000195	L=J+I*WHFR	CAMSIN
000196	IARG(1)=ISEQ(I,1) + I*WHFR/4	CAMSIN
000197	ARG(2)=CHKG(L,I,1)	CAMSIN
000198	IF(AUS(CCHK(L,I,1)).GF.10.0) CALL ERRMES(4HCAMS,6HCAMSIN,5,1)	CAMSIN
000199	ARG(2)=CHKH(L,I,1)	CAMSIN
000200	IF(AUS(CCHK(L,I,1)).GF.10.0) CALL ERRMES(4HCAMS,6HCAMSIN,5,1)	CAMSIN
000201	ARG(2)=CHKG(L,I,2)	CAMSIN
000202	IF(AUS(CCHK(L,I,2)).GF.100.0) CALL ERRMES(4HCAMS,6HCAMSIN,5,1)	CAMSIN
000203	ARG(2)=CHKH(L,I,2)	CAMSIN
000204	IF(AUS(CCHK(L,I,2)).GF.100.0) CALL ERRMES(4HCAMS,6HCAMSIN,5,1)	CAMSIN
000205	G(J,I,1)=CHKG(L,I,1)	CAMSIN
000206	G(J,I,2)=CHKG(L,I,2)	CAMSIN
000207	H(J,I,1)=CHKH(L,I,1)	CAMSIN
000208	H(J,I,2)=CHKH(L,I,2)	CAMSIN
000209	52 CONTINUE	CAMSIN
000210	51 CONTINUE	CAMSIN
000211	50 CONTINUE	CAMSIN
000212	RETURN	CAMSIN
000213	END	CAMSIN

	FOR, IS CAS	
	SUBROUTINE CAS	CAS
C	MAIN DRIVER FOR CAS SIMULATOR	CAS
C		CAS
C	ARGUMENT LIST FOR ERROR PROCESSING	ARGLST
	COMMON /ARGLST/	ARGLST
	1 NERRS ,NFATAL, NPERRS, NARG ,ARG(10)	ARGLST
	DIMENSION IARG(10)	ARGLST
	EQUIVALENCE ( IARG,ARG )	ARGLST
C		ARGLST
C	CAS CONTROL CARD INPUT DATA AND CONSTANTS	CASCM
	COMMON /CASCM /	CASCM
	1 AREACF, YCF ,PRDCF ,APRUTS(4,2) ,PPRUTS(5,2) ,YPRUTS(3,2)	CASCM
	2 ,AKEAPS, S2MAX ,NHISTY, HH ,TOPT ,AUNITS, DISTFF, BWIND(4)	CASCM
	3 ,WPRIOR(4) ,APREP ,IPRD(3,14) ,NPDATE, PRDATE(14)	CASCM
	INTEGER HH, TOPT, AUNITS, DISTFF, BWIND, WPRIOR, APREP, PRDATE	CASCM
C		CASCM
C	FLAGS AND COUNTERS FOR CAS SIMULATOR	CASFLG
	COMMON /CASFLG/	CASFLG
	1 H ,PPFLG ,NBW ,IBW ,WINDOW, IPD ,IPP ,PPDATE, NREGS	CASFLG
	2 ,NZTOT ,NSTRAT, NYESSK, NSSHSK, NCAMSK, NRYES ,NRSSH ,NRCAMS	CASFLG
	3 ,ENDC ,ENDREG, ENDZON, IRSTR ,IRZONE, IRREG	CASFLG
	4 ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13	CASFLG
	5 ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCOUN, LRREG ,LRZONE, LRSTR	CASFLG
	INTEGER PPFLG , WINDOW , PPDATE	CASFLG
C		CASFLG
C	CONTROL PARAMETERS FOR LEM PROGRAM	CNTRL
	COMMON /CNTRL /	CNTRL
	1 PRINTF, NSTART, SEED(7)	CNTRL
	INTEGER PRINTF	CNTRL
	DOUBLE PRECISION SEED	CNTRL
C		CNTRL
C	CAS DATA SETS 1, 2, AND 3	DSET1
	COMMON /DSET1 /	DSET1
	1 ISUBST, TWAK ,HWAK ,EWAK ,M1K ,CT1K ,ANALVK, EPWK ,EPW2K	JULY76
	2 ,SMPKPI, SUMP2, SUMP3 ,KSUB ,NCLASS	JULY76
	REAL M1K , M2K	JULY76
	DIMENSION DSET1(14), DSET2(14), DSET3(6)	JULY76
	EQUIVALENCE ( DSET1, DSET2, DSET3, ISUBST )	DSET1
	1 , ( M2K, M1K ), ( CT2K, CT3K, CT1K )	DSET1
C		DSET1

C	CAS DATA SETS 4, 5, AND 6 (AT STRATA LEVEL)	DSET4
	COMMON /DSET4 /	DSET4
	1 STRATA,TWAS1 ,HWAS1 ,EWAS1 ,XM1JS ,XCT1S ,ANVS1	JULY76
	2 ,TWAS2 ,HWAS2 ,EWAS2 ,XM2JS ,XCT2S ,ANVS2 ,T	JULY76
	3 ,TWAS3,HWAS3,XCT3S	
	4 ,XYS ,XESTYS,EVYRS ,P2IDPK,V1V2S ,VARS ,ANVARS	JULY76
	5 ,FILL4(57)	
	INTEGER STRATA	JULY76
	DIMENSION DSET4(24), DSET5(7), DSET6(3)	JULY76
	EQUIVALENCE ( DSET4,STRATA ), ( DSET5,TWAS2 ), ( DSET6,TWAS3 )	DSET4
C		DSET4
C	CAS DATA SET 7 (AT ZONE LEVEL)	DSET7
	COMMON /DSET7 /	DSET7
	1 ZONE ,HWAZ2 ,EZ ,M1K2KZ,ANALVZ,NSTRAZ,HWAZ1 ,EWAZ1 ,HWAZ3	JULY76
	2 ,ESTVZ ,HWAZ12	JULY76
	3 ,M1K2CL(10) ,EPWCL(10) ,EPW2CL(10) ,PKPICL(10)	JULY76
	4 ,PK2CL(10) ,PKCL(10) ,SSQ(10)	JULY76
	INTEGER ZONE	JULY76
	REAL M1K2KZ, M1K2CL	JULY76
	DIMENSION DSET7(81)	JULY76
	EQUIVALENCE ( DSET7,ZONE )	DSET7
C		DSET7
C	CAS DATA SET 8 (AT REGION LEVEL)	DSET8
	COMMON /DSET8 /	DSET8
	1 REGION,HWAR2 ,ER ,M1K2KR,ANALVR,NZONES,HWAR1 ,EWAR1 ,ESTVR	JULY76
	2 ,M1M2ZR,FILL8(71)	JULY76
	INTEGER REGION	JULY76
	REAL M1K2KR	JULY76
	DIMENSION DSET8(10)	JULY76
	EQUIVALENCE ( DSET8,REGION )	DSET8
C		DSET8
C	CAS DATA SET 9 (AT COUNTRY LEVEL)	DSET9
	COMMON /DSET9 /	DSET9
	1 CUUNTR,HWAC2 ,EC ,M1K2KC,ANALVC,M1M2ZC,HWAC1 ,EWAC1 ,ESTVC	JULY76
	INTEGER COUNTR	JULY76
	REAL M1K2KC	JULY76
	DIMENSION DSET9(9)	JULY76
	EQUIVALENCE ( DSET9,COUNTR )	DSET9
C		DSET9
C	CAS DATA SET 10 (STRATA DATA -- FINAL PASS)	JULY76
	COMMON /DSET10/	JULY76

```

1  HWAS ,TWAS ,EWAS ,AERRS ,AVARS ,TPRODS,EPRODS,PRERRS,PRVARS JULY76
2  ,YS ,ESTYS ,YERRS ,M1JS ,M2JS ,CT1S ,CT2S ,CT3S ,ANAVS JULY76
3  ,ANPRVS,ES JULY76
   REAL M1JS , M2JS JULY76
   DIMENSION DSET10(20) JULY76
   EQUIVALENCE ( DSET10,HWAS ) JULY76
C DSET10
C CAS DATA SET 11 (ZONE DATA -- FINAL PASS) JULY76
COMMON /DSET11/ DSET11
1  HWAZ ,TWAZ ,EWAZ ,AERRZ ,AVARZ ,TPRODZ,EPRODZ,PRERRZ,PRVARZ DSET11
2  ,TYZ ,EYZ ,YERRZ ,M1Z ,M2Z ,CT1Z ,CT2Z ,CT3Z ,ANAVZ DSET11
3  ,ANPKVZ DSET11
   REAL M1Z , M2Z DSET11
   DIMENSION DSET11(19) DSET11
   EQUIVALENCE ( DSET11,HWAZ ) DSET11
C DSET11
C CAS DATA SET 12 (REGION DATA -- FINAL PASS) JULY76
COMMON /DSET12/ DSET12
1  HWAR ,TWAR ,EWAR ,AERRR ,AVARR ,TPRODR,EPRODR,PRERRR,PRVARR DSET12
2  ,TYR ,EYR ,YERRR ,M1R ,M2R ,CT1R ,CT2R ,CT3R ,ANAVR DSET12
3  ,ANPRVR DSET12
   REAL M1R , M2R DSET12
   DIMENSION DSET12(19) DSET12
   EQUIVALENCE ( DSET12,HWAR ) DSET12
C DSET12
C CAS DATA SET 13 (COUNTRY DATA -- FINAL PASS) JULY76
COMMON /DSET13/ DSET13
1  HWAC ,TWAC ,EWAC ,AERRC ,AVARC ,TPRODC,EPRODC,PRERRC,PRVARC DSET13
2  ,TYC ,EYC ,YERRC ,M1C ,M2C ,CT1C ,CT2C ,CT3C ,ANAVC DSET13
3  ,ANPRVC,CLEWA ,CLEPRD,CLATEC,CLPTEC,CLATWC,CLPTWC DSET13
   REAL M1C , M2C DSET13
   DIMENSION DSET13(25) DSET13
   EQUIVALENCE ( DSET13,HWAC ) DSET13
C DSET13
C INDEX RECORD FOR CAS INTERMEDIATE DATA SET FILE (CASDSF) IXCDSF
COMMON /IXCDSF/ IXCDSF
1  IXCDSF(1),LIXCDS
C LIXCDS
C LEM CONTROL CARD INPUT DATA LEMCM
COMMON /LEMCM / LEMCM
1  TITLE(10) ,ICASE ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ LEMCM

```

2	,ENDR ,ENDZ ,ISTG ,ICAMS ,IYES ,IACQ ,ICLASS,ISEXT ,ISCC	LEMCM
3	,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSECE	LEMCM
4	,ICSEYM,ICSESE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6	LEMCM
5	,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD	LEMCM
	DIMENSION RSEED(7)	LEMCM
	DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5	LEMCM
1	,RSEED6,RSEED7	LEMCM
	EQUIVALENCE ( RSEED,RSEED1 )	LEMCM
	INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ	LEMCM
C		LEMCM
C	SEGMENT DATA FROM CAMS OUTPUT FILE (CAMSF)	SEGDTA
	COMMON /SEGDTA/	SEGDTA
1	IDSEGT(5) ,ISEG ,TPWKI ,ZACDAY(4) ,EPWKI(4)	SEGDTA
2	,EKRPWI(4) ,ESTPWI	SEGDTA
	INTEGER ZACDAY	SEGDTA
C		SEGDTA
C	SUBSTRATA HISTORICAL DATA FROM SUBHST FILE	SSHDTA
	COMMON /SSHDTA/	SSHDTA
1	COUN2 ,IREG2 ,IZONE2,ISTRA2,ISUBS2,NSEG ,IDSEG ,GRPNO ,HISTPW	SSHDTA
2	,AKEAK ,PWK ,NAGR ,NA ,DELTPW,DELTPM,CV1 ,CV2 ,CV3	SSHDTA
3	,CV4 ,VMULTK,CLASS(18),MXK,RDSSH	JULY76
	INTEGER GRPNO , CLASS , RDSSH	JULY76
	DIMENSION SSHDTA(39)	JULY76
	EQUIVALENCE ( SSHDTA, COUN2 )	SSHDTA
C		SSHDTA
C	STATISTICAL INFORMATION FOR LEM	STATS
	COMMON /STATS /	STATS
1	ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR	STATS
	EQUIVALENCE ( NT,ITER )	STATS
C		STATS
C	SUMMARY DATA FOR REPORTS	SUMDTA
	COMMON /SUMDTA/	SUMDTA
1	CVAEPT,CVEPTA,SDPER ,CVPEPT,CVEPTP,CSUMR(18,18)	SUMDTA
C		SUMDTA
C	YIELD DATA FROM YESOUT FILE	YESDTA
	COMMON /YESDTA/	YESDTA
1	YSTR ,IZPRDD(6) ,YSCI(6) ,VSYCI(6)	YESDTA
2	,RDYES ,NYESPP	YESDTA
	INTEGER RDYES	YESDTA
C		YESDTA
C		CAS

C	PERFORM PROGRAM INITIALIZATION TASKS	CAS
	CALL CASINT	CAS
	IF ( NFATAL .NE. 0 ) GO TO 900	CAS
C		CAS
C	BIOWINDOW LOOP	CAS
	IBW= 0	CAS
210	IBW= IBW + 1	CAS
	IF ( BWIND(IBW) .EQ. 0 ) GO TO 250	CAS
C	PROCESS NEXT BIOWINDOW	CAS
	CALL CASPP	CAS
	IF ( NFATAL .NE. 0 ) GO TO 900	CAS
250	IF ( IBW .LT. 4 ) GO TO 210	CAS
C		CAS
C	PREDICTION DATE LOOP	CAS
300	PPFLG= 1	CAS
	IPD= 0	CAS
310	IPD= IPD + 1	CAS
	PPDATE= PRDATE(IPD)	CAS
	IF ( PPDATE .EQ. 0 ) GO TO 400	CAS
C	PROCESS NEXT PREDICTION POINT	CAS
	CALL CASPP	CAS
	IF ( NFATAL .NE. 0 ) GO TO 900	CAS
	IF ( IPD .LT. NPDATE ) GO TO 310	CAS
C		CAS
C	WHEN PRINTF .NE. 0, PRINT COUNTRY SUMMARY REPORT	CAS
400	IF ( PRINTF .NE. 0 ) CALL SUMREP	CAS
900	RETURN	CAS
	END	CAS

```

000001          BLOCK DATA CASBLD                                CASBLD
000002          C                                                CASBLD
000003          C          FLAGS AND COUNTERS FOR CAS SIMULATOR  CASFLG
000004          COMMON /CASFLG/                                       CASFLG
000005          1  H          ,PPFLG ,NBW ,IBW ,WINDOW,IPD ,IPP ,PPDATE,NREGS CASFLG
000006          2  ,NZTOT ,NSTRTAT,NYFSSK,NSSHHSK,NCAMSK,NRYES ,NRKSSH ,NRCAMS  CASFLG
000007          3  ,FNDG ,ENDREG,FNDZON,IRSTR ,IRZONE,IRREG  CASFLG
000008          4  ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13  CASFLG
000009          5  ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCONN,LRREG ,LRZONE,LRSTR  CASFLG
000010          INTEGER PPFLG , WINDOW , PPDATE  CASFLG
000011          C                                                CASFLG
000012          C          .INDEX RECORD FOR CAS INTERMEDIATE DATA SET FILE (CASDSF)
000013          COMMON /IXCDSF/                                       IXCDSF
000014          1  IXCDSF( 1) ,LIXCDS  IXCDSF
000015          C                                                IXCDSF
000016          C                                                CASBLD
000017          DATA LIXCDS / 388 /  CASBLD
000018          C                                                CASBLD
000019          END  CASBLD

```





```

000059      4000 FORMAT(2X,37HILLEGAL WINDOW SPECIFIED IN WPRIOR = ,          CASFR1
000060      1 3(I1,2H, ) ; I1 /2X,30H(EACH WINDOW MUST BE 1-4 OR 0) )          CASFR1
000061      5000 FORMAT(2X,30HALL ENTRIES IN WPRIOR ARE ZERO )                  CASFR1
000062      6000 FORMAT(2X,24HILLEGAL PREDICTION DATE ,2(I2,1H/),I2,11H SPECIFIED. CASFR1
000063      1 /2X,7HYEAR = ,I2,26HJUST BE .GE. 64, MONTH =                    CASFR1
000064      1 I2,21H MUST BE 1-12, DAY = ,I2,14H MUST BE 1-31. )              CASFR1
000065      7000 FORMAT(2X,                                          CASFR1
000066      1 53HPREDICTION DATES NOT IN ASCENDING ORDER OR DUPLICATES )      CASFR1
000067      END                                                                CASFR1

```

```

FUR, IS CASER2
  SUBROUTINE CASER2 (ICODE)
C      PRINTS PROCESSING ERROR MESSAGES FOR CAS SIMULATOR
C
C      ARGUMENT LIST FOR ERROR PROCESSING
COMMON /ARGLST/
1  NERKS ,NFATAL ,NPERRS ,NARG  ,ARG(10)
  DIMENSION IARG(10)
  EQUIVALENCE ( IARG,ARG )
C
C      FLAGS AND COUNTERS FOR CAS SIMULATOR
COMMON /CASFLG/
1  H      ,PPFLG ,NBW   ,IBW   ,WINDOW,IPD   ,IPP   ,PPDATE,NREGS
2  ,NZZOT ,NSTRAT,NYESK ,NSSHSK,NCAMSK,NRYES ,NRSSH ,NRCAMS
3  ,ENDC  ,ENDREG,ENDZON,IRSTR ,IRZONE,IRREG
4  ,LDS1  ,LDS4  ,LDS7  ,LDS8  ,LDS9  ,LDS10 ,LDS11 ,LDS12 ,LDS13
5  ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCOUN,LRREG ,LRZONE,LRSTR
  INTEGER  PPFLG , WINDOW , PPDATE
C
COMMON /DSET4 / STRATA
COMMON /DSET7 / ZONE
COMMON /DSET8 / REGION
  INTEGER STRATA, ZONE, REGION
C
C      FILE DEFINITIONS AND RECORD LENGTHS
COMMON /FILES /
1  SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ
2  ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF  ,LCASF ,YESOUT,LYESQ
3  ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD
4  ,INP   ,OUTP  ,TACQ  ,LTACQ ,CASDSF,LCASDS
  INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF  ,YESOUT
1  ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP  ,TACQ  ,CASDSF
C
C      LEM CONTROL CARD INPUT DATA
COMMON /LEMCM /
1  TITLE(10)  ,ICASE ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ
2  ,ENDK  ,ENDZ  ,ISTG  ,ICAMS ,IYES  ,IACQ  ,ICLASS,ISEXT ,ISCC
3  ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSECE
4  ,ICSEYM,ICSESE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6
5  ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD
  DIMENSION RSEED(7)

```

```

CASER2
CASER2
CASER2
ARGLST
ARGLST
ARGLST
ARGLST
ARGLST
ARGLST
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASER2
CASER2
CASER2
CASER2
FILES
FILES
FILES
FILES
FILES
FILES
FILES
LEMCM
LEMCM
LEMCM
LEMCM
LEMCM
LEMCM

```

```

DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5      LEMCM
1 ,RSEED6,RSEED7      LEMCM
EQUIVALENCE ( RSEED,RSEED1 )      LEMCM
INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ      LEMCM
C      LEMCM
C      SUBSTRATA HISTORICAL DATA FROM SUBHST FILE      SSHDTA
COMMON /SSHDTA/      SSHDTA
1 COUN2 ,IREG2 ,IZONE2,ISTRA2,ISUBS2,NSEG ,IDSEG ,GRPNO ,HISTPW      SSHDTA
2 ,AREAK ,PWK ,NAGR ,NA ,DELTPW,DELTPM,CV1 ,CV2 ,CV3      SSHDTA
3 ,CV4 ,VMULTK,CLASS(18),MXK,RDSSH      JULY76
INTEGER GRPNO , CLASS , RDSSH      JULY76
DIMENSION SSHDTA(39)      JULY76
EQUIVALENCE ( SSHDTA, COUN2 )      SSHDTA
C      SSHDTA
C      SEGMENT DATA FROM CAMS OUTPUT FILE (CAMSF)      SEGDTA
COMMON /SEGDTA/      SEGDTA
1 IDSEGT(5) ,ISEG ,TPWKI ,ZACDAY(4) ,EPWKI(4)      SEGDTA
2 ,ERRPWI(4) ,ESTPWI      SEGDTA
INTEGER ZACDAY      SEGDTA
C      SEGDTA
C      DATA MXMES / 19 /      CASER2
C      JULY76
C      CASER2
IMES= ICODE      CASER2
IF ( IMES .LT. 1 .OR. IMES .GT. MXMES ) GO TO 800      CASER2
C      CASER2
GO TO (10,20,30,40,50,60,70,80,90,100,110,120,130,140,150,160,170      CASER2
1 ,180,190) , IMES      JULY76
C      CASER2
10 WRITE (OUTP,1) IARG(1),ARG(2)      CASER2
1 FORMAT (38HODIVISION BY ZERO NOT ALLOWED. EQN. (,I3,4H), ,A6,      CASER2
1 5H = 0.)      CASER2
GO TO 900      CASER2
C      CASER2
20 WRITE (OUTP,2)      CASER2
2 FORMAT (105HOF NT = 1, VARIANCE ERRORS AND CONFIDENCE LEVELS CANN      CASER2
1OT BE COMPUTED AND WILL BE ARBITRARILY SET TO ZERO.)      CASER2
GO TO 900      CASER2
C      CASER2
30 IARG(2)= STARTR      CASER2

```

	GO TO 45	CASER2
40	IARG(2)= STARTZ	CASER2
45	WRITE (OUTP,4) ARG(1),IARG(2),ARG(3)	CASER2
4	FORMAT (10HSTARTING ,A6,I5,15H NOT FOUND ON A6,6H FILE.)	CASER2
	GO TO 900	CASER2
C		CASER2
50	IARG(2)= ENDR	CASER2
	GO TO 65	CASER2
60	IARG(2)= ENDZ	CASER2
65	WRITE (OUTP,6) ARG(1),IARG(2),ARG(3)	CASER2
6	FORMAT (8HOENDING ,A6,I5,15H NOT FOUND ON ,A6,6H FILE. )	CASER2
	GO TO 900	CASER2
C		CASER2
C		CASER2
70	WRITE (OUTP,7) REGION, ZONE, STRATA, NRYES	CASER2
7	FORMAT (49HZERO PREDICTION DATES ON YESOUT FILE FOR REGION ,I4	CASER2
1	,7H, ZONE ,I4,9H, STRATA ,I4,15H (DATA RECORD ,I4,1H))	CASER2
	GO TO 900	CASER2
C		CASER2
80	WRITE (OUTP,8) GRPNO,IREG2,IZONE2,ISTR2,ISUBS2,NRSSH	CASER2
8	FORMAT (22HILLEGAL GROUP NUMBER ,I3,30H FROM SUBHST FILE FOR REG	CASER2
	ION ,I4,7H, ZONE ,I4,10H, STRATUM ,I4,13H, SUBSTRATUM ,I4	CASER2
	2 /15H (DATA RECORD ,I4,1H))	CASER2
	GO TO 900	CASER2
C		CASER2
90	WRITE (OUTP,9) NAGR,NA,GRPNO	CASER2
9	FORMAT (8HONAGR = ,I4,10H OR NA = ,I4,42H FROM FILE SUBHST ARE	CASER2
	1ZERU. GROUP NUMBER ,I3,17H IS CHANGED TO 3. )	CASER2
	GO TO 900	CASER2
C		CASER2
100	WRITE (OUTP,910)NRYES,REGION,ZONE,STRATA,NRSSH,IREG2,IZONE2,ISTR2	CASER2
910	FORMAT (47HINCONSISTENCY BETWEEN YESOUT AND SUBHST FILES.//	CASER2
1	8X,30HRECORD REGION ZONE STRATA/8H YESOUT ,I5,3I8/	CASER2
2	8H SUBHST ,I5,3I8)	CASER2
	GO TO 900	CASER2
C		CASER2
110	WRITE (OUTP,11) NRSSH,IREG2,IZONE2,ISTR2,ISUBS2,NRCAMS,IDSEGT(2)	CASER2
	,IDSEGT(3),IDSEGT(4),IDSEGT(5)	CASER2
11	FORMAT (46HINCONSISTENCY BETWEEN SUBHST AND CAMSF FILES.//	CASER2
1	8X,41HRECORD REGION ZONE STRATA SUBSTRATA	CASER2
2	/8H SUBHST ,I5,3I8,I10/8H CAMSF ,I5,3I8,I10)	CASER2

	GO TO 900	CASER2
C		CASER2
120	WRITE (OUTP,12) IARG(1)	CASER2
12	FORMAT (61HOERROR RETURN FROM BETA DISTRIBUTION SUBROUTINE. ERROR	CASER2
	1FLAG = I3)	CASER2
	GO TO 900	CASER2
C		CASER2
130	WRITE (OUTP,13) ISUBS2,ISTRA2,IZONE2,IREG2,NRSSH	CASER2
13	FORMAT (26HONO SEGMENTS IN SUBSTRATA ,I4,9H, STRATA ,I4,7H, ZONE	CASER2
	1 I4,9H, REGION I4,17H (SUBHST RECORD ,I4,1H))	CASER2
	GO TO 900	CASER2
C		CASER2
140	WRITE (OUTP,14)	CASER2
14	FORMAT (52HOZERO OR NEGATIVE DIVISOR IN COMPUTING TAU2S, SIGM2S/	CASER2
	1 14H(EQS. 93D-93F) )	CASER2
	GO TO 900	CASER2
C		CASER2
150	WRITE (OUTP,15) HISTPW,ISUBS2,ISTRA2,IZONE2,IREG2	CASER2
15	FORMAT (22HOWARNING... HIST PW =F6.2,16H FOR SUBSTRATA ,I4	CASER2
	1 ,9H, STRATA ,I4,7H, ZONE ,I4,9H, REGION ,I4/	CASER2
	2 24H GROUP NO. CHANGED TO 3.)	CASER2
	GO TO 900	CASER2
C		CASER2
160	WRITE (OUTP,16) IPD,PPDATE,STRATA,ZONE,REGION,NRYES	CASER2
16	FORMAT (24HOINPUT PREDICTION DATE (,I2,4H) = I4/	CASER2
	1 54H .LT. ALL PREDICTION DATES ON YESOUT FILE FOR STRATA ,I4,	CASER2
	2 7H, ZONE ,I4,9H, REGION ,I4,10H (RECORD ,I4,1H))	CASER2
	GO TO 900	CASER2
170	WRITE (OUTP,17)	CASER2
17	FORMAT (58HOTOO MANY MONTE CARLO ITERATIONS FOR CAS DISTRIBUTION	CASER2
	1FILE )	CASER2
	GO TO 900	CASER2
C		CASER2
180	WRITE (OUTP,18) ARG(1),IARG(2),ARG(3),ARG(4)	CASER2
18	FORMAT (2HO ,A6,9H IN EQ. ,I4,3H = ,E13.6,15H REF. VALUE = ,	CASER2
	1 E13.6)	CASER2
	GO TO 900	CASER2
C		CASER2
190	WRITE (OUTP,19) IARG(1),ZONE,REGION,IARG(2)	JULY76
19	FORMAT (40HOLESS THAN 2 ACQUIRED SEGMENTS IN CLASS I3,9H OF ZONE	JULY76
	1 I4,8H REGION,I4,24H. NO. OF ACQ. SEGMENTS=I3)	JULY76

```
      GO TO 900
C
C
800  WRITE (OUTP,801)  IMES
801  FORMAT (59H0 SUBROUTINE CASER2 CALLED WITH ILLEGAL ERROR MESSAGE
1CODE ,I4)
900  RETURN
      END
```

```
JULY76
JULY76
CASER2
CASER2
CASER2
CASER2
CASER2
CASER2
```

```

000001          SUBROUTINE CASIN                                CASIN
000002          C          CASIN
000003          C          THIS SUBROUTINE READS IN AND CHECKS THE CAS CONTROL CARDS  CASIN
000004          C          CASIN
000005          C          ARGUMENT LIST FOR ERROR PROCESSING      ARGLIST
000006          COMMON /ARGLSI/                                     ARGLIST
000007          1  NERRS ,NFATAL,NPERRS,NARG ,ARG(10)              ARGLIST
000008          DIMENSION IARG(10)                                  ARGIST
000009          EQUIVALENCE ( IARG,APG )                            ARGIST
000010          C          ARGLIST
000011          C          CAS CONTROL CARD INPUT DATA AND CONSTANTS  CASCM
000012          COMMON /CASCM /                                     CASCM
000013          1  AKFACF,YCF ,PROCF ,APRUTS(4,2) ,PPRUTS(5,2) ,YPRUTS(3,2)  CASCM
000014          2  ,ARFAPS,SPMAX ,NHISTY,HH ,TOPT ,AUNITS,DISTFF,BWIND(4)  CASCM
000015          3  ,WPRIOR(4) ,APREP ,IPRD(3,14) ,NPDATE,PRDATE(14)     CASCM
000016          INTEGER HH, TOPT, AUNITS,DISTFF,BWIND,WPRIOR,APREP,PRDATE  CASCM
000017          C          CASCM
000018          C          DATA BLOCK FOR CAS CUMULATIVE FILE        CASCM
000019          C          CAS DATA SETS 14, 15, 16, AND 17          CASCM
000020          COMMON /CASCMH/                                     CASCM
000021          1  CASCMH(52),  BUFR(504)                             CASCM
000022          DIMENSION ICASC(52), DSET14(22), DSET15(22), DSET16(22)  CASCM
000023          1  ,DSET17(28)                                       CASCM
000024          EQUIVALENCE ( ICASC,CASCMH )                         CASCM
000025          EQUIVALENCE ( DSET14,DSET15,DSET16,DSET17,CASCMH(5) )  CASCM
000026          1  , ( SCAFERS,SUALRZ,SCAFRR,SUALRC,CASCMH(24) )      CASCM
000027          2  , ( SOPERKS,SOPERZ,SOPERR,SOPERC,CASCMH(25) )      CASCM
000028          3  , ( SUIYRS,SUIYRZ,SUIYRR,SUIYRC,CASCMH(26) )      CASCM
000029          C          CASCM
000030          C          DATA BLOCK FOR CAS DISTRIBUTION FILE (DATA SET 19)  CASDSB
000031          DIMENSION CASDSB(303)                                CASDSB
000032          EQUIVALENCE ( CASDSB,BUFR )                          CASDSB
000033          DIMENSION ICASD(303), HWA2K(60), WAKNEY(60), PIK(60)  CASDSB
000034          EQUIVALENCE ( ICASD,HWA2K,CASDSB ), ( WAKNEY,CASDSB(61) )  CASDSB
000035          1  , ( PIK,CASDSB(121) )                              CASDSB
000036          C          CASDSB
000037          C          FILE DEFINITIONS AND RECORD LENGTHS        FILES
000038          COMMON /FILES /                                     FILES
000039          1  ,SEID ,LSEID,CROPW ,LCROPW,SUBHST,LSUBH ,ACOUTS,LACQ  FILES
000040          2  ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YLSOUT,LYESU  FILES
000041          3  ,SIGEXI,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD  FILES
000042          4  ,JMP ,OUIP ,TACQ ,LTACQ ,CASDSF,LCASD           FILES
000043          INTEGER SEID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YFSOUT  FILES
000044          1  ,SIGEXT,YESERR,SEGTRU,CASDIS,OUIP ,TACQ ,CASDSF  FILES
000045          C          FILES
000046          C          DATA BLOCK FOR CAS DISTRIBUTION FILE        IXDISF
000047          COMMON /IXDISF/                                     IXDISF
000048          1  IXDISF( 1),LIXDIS                                 IXDISF
000049          C          NOTE... 506 ONLY ALLOWS UP TO 8 PREDICTION POINTS INCLUDING  IXDISF
000050          C          WIDTH IN DIMS ( 506 = 1 + 1 + 8*63, INDEX + HEADER + 8 PRED. PIS.) IXDISF
000051          C          IXDISF
000052          C          LEN CONTROL CARD INPUT DATA              LFMCM
000053          COMMON /LFMCM /                                     LFMCM
000054          1  TITL(10) ,ICASF ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ  LFMCM
000055          2  ,FNCP ,END7 ,ISIG ,ICAMS ,IYFS ,IACQ ,ICLASS,ISIXT ,ISCC  LFMCM
000056          3  ,ICASP ,ICASS ,IPRCAM,IPRYES,IPRCAS,ICSEFC,ICSECH,ICSEFH,ICSECF  LFMCM
000057          4  ,ICSEYH,ICSESE ,ICSEAC,RSEED1,RSELD2,RSEFD3,RSELD4,RSELD5,RSELD6  LFMCM
000058          5  ,RSEFD7,ICSEST ,ICSECO,ICSEYS,ICSECU,ICSECU  LFMCM

```



```

000059 DIMENSION RSEED(7) LFMCH
000060 DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5 LFMCH
000061 1 ,RSEED6,RSEED7 LFMCH
000062 EQUIVALENCE ( RSEED,RSEED1 ) LFMCH
000063 INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ LFMCH
000064 C LFMCH
000065 C PAGE EJECT CONTROL PARAMETERS FOR LEM PAGECM
000066 COMMON /PAGECM/ PAGFCM
000067 1 NPAGE ,NLINE ,MXLINE,NSTTL ,SUBTTL(10) PAGFCM
000068 C PAGECM
000069 C STATISTICAL INFORMATION FOR LEM STATS
000070 COMMON /STATS / STATS
000071 1 ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASOR STATS
000072 EQUIVALENCE ( NI,ITER ) STATS
000073 C STATS
000074 C CASTN
000075 C READ IN FIRST CONTROL CARD CASTN
000076 READ(INP,1000) NHISTY,HH,TOPT,AUNITS,DISTFF,BWIND,WPRIOR,APREP, CASTN
000077 1 IARG(1),IARG(2) CASTN
000078 1000 FORMAT(14I5,32X,A4,I2) CASTN
000079 NSTTL=0 CASTN
000080 C CASTN
000081 C ECHO OUT FIRST CONTROL CARD CASTN
000082 CALL FJFCT(12) CASTN
000083 WRITE(OUTP,2000) CASTN
000084 2000 FORMAT(2X) CASTN
000085 WRITE(OUTP,2000) CASTN
000086 WRITE(OUTP,3000) CASTN
000087 3000 FORMAT(15X,48HC A S INPUT CONTROL CARDS ) CASTN
000088 WRITE(OUTP,2000) CASTN
000089 WRITE(OUTP,2000) CASTN
000090 WRITE(OUTP,4000) (I,I=1,4),(I,I=1,4) CASTN
000091 4000 FORMAT(3X,6NHISTY,5X,2HHH,2X,4HTOPT,2X,6HAUNITS,2X,6HDISTFF,2X, CASTN
000092 1 5HWPRIOR,4(1H(,I1,5H) ),6HWPRIOR,4(1H(,I1,5H) ),5HAPREP) CASTN
000093 WRITE(OUTP,5000)NHISTY,HH,TOPT,AUNITS,DISTFF,BWIND,WPRIOR,APREP, CASTN
000094 1 IARG(1),IARG(2) CASTN
000095 5000 FORMAT(4X,13,4X,13,2X,13,4X,13,5X,13,8X,4(13,2X),6X,4(13,2X),1X, CASTN
000096 1 I3,3X,A4,I2) CASTN
000097 IF(IARG(1).EQ.3HCLAS.AND.IARG(2).EQ.1) GO TO 10 CASTN
000098 CALL ERRMES(3HCAS,5HCASIN,1,1) CASTN
000099 GO TO 200 CASTN
000100 C CASTN
000101 C CHECK FOR ERRORS CASTN
000102 10 CONTINUE CASTN
000103 IF(NHISTY.LT.1.OR.NHISTY.GT.20) CALL ERRMES(3HCAS,5HCASIN,2,1) CASTN
000104 IF(HH.LT.3.OR.HH.GT.99) CALL ERRMES(3HCAS,5HCASIN,3,0) CASTN
000105 IF(TOPT.NE.0) TOPT=1 CASTN
000106 IF(AUNITS.NE.0) AUNITS=1 CASTN
000107 IF(DISTFF.NE.0) DISTFF=1 CASTN
000108 IF(APREP.NE.0) APREP=1 CASTN
000109 NBW=0 CASTN
000110 DO 20 I=1,4 CASTN
000111 IF(BWIND(I).NE.0) BWIND(I)=1 CASTN
000112 IF(WPRIOR(I).LT.0.OR.WPRIOR(I).GT.4) CASTN
000113 1 CALL ERRMES(3HCAS,5HCASIN,4,1) CASTN
000114 IF(WPRIOR(I).NE.0) NBW=NBW+1 CASTN
000115 20 CONTINUE CASTN
000116 IF(NBW.NE.0) CALL ERRMES(3HCAS,5HCASIN,5,1) CASTN
000117 C CASTN
000118 C***** CASTN

```

ORIGINAL PAGE IS  
 OF POOR QUALITY

```

000119 C READ IN CONTROL CARDS 2 AND 3 CASIN
000120 200 CONTINUE CASIN
000121 READ(INP,6000) (( IPRD(I,J),I=1,3),J=1,7),IARG(1),IARG(2) CASIN
000122 6000 FORMAT(7(3I2,1X),25X,A4,I2) CASIN
000123 WRITE(QUIP,2000) CASIN
000124 WRITE(QUIT,7000)(I,I=1,7) CASIN
000125 7000 FORMAT(5X,7(5HIPRD(I,2,4H) )) CASIN
000126 WRITE(QUIT,8000) (( IPRD(I,J),I=1,3),J=1,7),IARG(1),IARG(2) CASIN
000127 8000 FORMAT(5X,7(12,1H/,12,1H/,12,3X),3X,A4,I2) CASIN
000128 IF(IARG(1).EQ.3HCAS.AND.IARG(2).EQ.2) GO TO 210 CASIN
000129 CALL ERRMES(3HCAS,5HCASIN,1,1) CASIN
000130 210 CONTINUE CASIN
000131 READ(INP,6000) (( IPRD(I,J),I=1,3),J=8,14),IARG(1),IARG(2) CASIN
000132 WRITE(QUIT,2000) CASIN
000133 WRITE(QUIT,7000) (I,I=8,14) CASIN
000134 WRITE(QUIT,8000) (( IPRD(I,J),I=1,3),J=8,14),IARG(1),IARG(2) CASIN
000135 IF(IARG(1).EQ.3HCAS.AND.IARG(2).EQ.3) GO TO 310 CASIN
000136 CALL ERRMES(3HCAS,5HCASIN,1,1) CASIN
000137 GO TO 900 CASIN
000138 310 CONTINUE CASIN
000139 NPDATE=0 CASIN
000140 DO 320 I=1,14 CASIN
000141 IF(IPRD(I,I).EQ.0.AND.IPRD(2,I).EQ.0) GO TO 330 CASIN
000142 NPDATE=NPDATE+1 CASIN
000143 IF(IPRD(I,I).GE.60 CASIN
000144 1 .AND.(IPRD(2,I).GE.1.AND.IPRD(2,I).LE.12) CASIN
000145 1 .AND.(IPRD(3,I).GE.1.AND.IPRD(3,I).LE.31)) GO TO 325 CASIN
000146 IARG(1)=IPRD(1,I) CASIN
000147 IARG(2)=IPRD(2,I) CASIN
000148 IARG(3)=IPRD(3,I) CASIN
000149 CALL ERRMES(3HCAS,5HCASIN,6,1) CASIN
000150 GO TO 320 CASIN
000151 325 CONTINUE CASIN
000152 CALL LFPA (FLOAT(IPRD(3,I)),IPRD(2,I),IPRD(1,I),0.,DAYS) CASIN
000153 PRDATE(I)=IFIX(DAYS) CASIN
000154 320 CONTINUE CASIN
000155 330 CONTINUE CASIN
000156 IF(NPDATE.LE.1) GO TO 340 CASIN
000157 ITEMP=NPDATE-1 CASIN
000158 DO 350 I=1,ITEMP CASIN
000159 IF(PRDATE(I).GE.PRDATE(I+1)) CALL ERRMES(3HCAS,5HCASIN,7,1) CASIN
000160 350 CONTINUE CASIN
000161 340 CONTINUE CASIN
000162 SPMAX= 0.25*AREAFS*AREAFS CASIN
000163 AREACT=.001 CASIN
000164 YCF=1.0 CASIN
000165 PRDCF= 1.0E-4 CASIN
000166 IF(AUNITS.EQ.1) GO TO 400 CASIN
000167 AREACT=.0002471044 CASIN
000168 YCF=1.4869664 CASIN
000169 PRDCF=3.6743544E-5 CASIN
000170 C CASIN
000171 400 IF ( DISTFF .EQ. 0 ) GO TO 900 CASIN
000172 C CASIN
000173 C OPEN GAS DISTRIBUTION FILE. CASIN
000174 DEFINE FILE 4(506,303,U,IDUM) CASIN
000175 IF ( RSTART .EQ. 0 ) GO TO 900 CASIN
000176 C RESTART RUN. READ AND CHECK HEADER RECORD. CASIN
000177 CALL RANACF (CASDIS,1,CASDSB,LCASD,IXDISF,LIXDIS,1) CASIN
000178 NT= ICASD(4) CASIN

```

\*NEW  
\*\*=1

000179		ARG(6)= 6HCASDIS.	CASIN
000180		ARG(3)= CASDSB(1)	CASIN
000181	C	SHIFT FILENAME 4 CHARACTERS (24 BITS) TO THE LEFT	CASIN
000182	C	BY MULTIPLYING BY 2**24	CASIN
000183		IARG(#)= ICASD(1)*16777216	CASIN
000184		IF ( CASDSB(1) .NE. 6HCASDIS ) CALL ERRMES (3HLEM,5HCASIN,19,1)	CASIN
000185		IARG(1)= ICASD(2)	CASIN
000186		ARG(2)= CASDSB(3)	CASIN
000187		IF ( IARG(1) .NE. ICSCD .OR. CASDSB(3) .NE. CUNTRY )	CASIN
000188	1	CALL ERRMES (3HLEM,5HCASIN,18,1)	CASIN
000189		IF ( NT .NE. RSTART ) CALL ERRMES (3HLEM,5HCASIN,21,1)	CASIN
000190	C		CASIN
000191	900	RETURN	CASIN
000192		END	CASIN

```

FOR, IS CASINL
  SUBROUTINE CASINL
C     PERFORMS INITIALIZATION TASKS FOR EACH PREDICTION POINT
C
C     CAS CONTROL CARD INPUT DATA AND CONSTANTS
C     COMMON /CASC M /
1     AREACF, YCF , PRDCF , APRUTS(4,2) , PPRUTS(5,2) , YPRUTS(3,2)
2     , AREAPS, S2MAX , NHISTY, HH , TOPT ; AUNITS, DISTFF, BWIND(4)
3     , WPRIOR(4) , APREP , IPKD(3,14) , NPDATE, PRDATE(14)
    INTEGER HH, TOPT, AUNITS, DISTFF, BWIND, WPRIOR, APREP, PRDATE
C
C     FLAGS AND COUNTERS FOR CAS SIMULATOR
C     COMMON /CASFLG/
1     H , PPFLG , NBW , IBW , WINDOW, IPD , IPP , PPDATE, NREGS
2     , NZTOT , NSTRAT, NYESSK, NSSHSK, NCAMSK, NRYES , NRSSH , NRCAMS
3     , ENDC , ENDREG, ENDZON, IRSTR , IRZONE, IRREG
4     , LDS1 , LDS4 , LDS7 , LDS8 , LDS9 , LDS10 , LDS11 , LDS12 , LDS13
5     , LDS14 , LDS15 , LDS16 , LDS17 , LRCOUN, LRREG , LRZONE, LRSTR
    INTEGER PPFLG , WINDOW , PPDATE
C
C     CONTROL PARAMETERS FOR LEM PROGRAM
C     COMMON /CNTRL /
1     PRINTF, NSTART, SEED(7)
    INTEGER PRINTF
    DOUBLE PRECISION SEED
C
C     FILE DEFINITIONS AND RECORD LENGTHS
C     COMMON /FILES /
1     SEGID , LSEGID, CROPW , LCROPW, SUBHST, LSUBH , ACQUIS, LACQ
2     , CAMSF , LCAMSF, CAMERR, LCAMER, CASF , LCASF , YESOUT, LYESO
3     , SIGEXT, LSIGEX, YESERR, LYESER, SEGTRU, LSEGTR, CASDIS, LCASD
4     , INP , OUTP , TACQ , LTACQ , CASDSF, LCASDS
    INTEGER SEGID , CROPW , SUBHST, ACQUIS, CAMSF , CAMERR, CASF , YESOUT
1     , SIGEXT, YESERR, SEGTRU, CASDIS, OUTP , TACQ , CASDSF
C
C     PAGE EJECT CONTROL PARAMETERS FOR LEM
C     COMMON /PAGECM/
1     NPAGE , NLINE , MXLINE, NSTTL , SUBTTL(10)
C
C     SUBSTRATA HISTORICAL DATA FROM SUBHST FILE
C     COMMON /SSHDTA/

```

```

CASINL
CASINL
CASINL
CASC M
CASC M
CASC M
CASC M
CASC M
CASC M
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CNTRL
CNTRL
CNTRL
CNTRL
FILES
FILES
FILES
FILES
FILES
FILES
FILES
PAGECM
PAGECM
PAGECM
PAGECM
SSHDTA
SSHDTA

```

	1	COUN2 , IREG2 , IZONE2 , ISTRAT2 , ISUBS2 , NSEG , IDSEG , GRPNO , HISTPW	SSHDTA
	2	, AREAK , PWK , NAGR , NA , DELTPW , DELTPM , CV1 , CV2 , CV3	SSHDTA
	3	, CV4 , VMULTK , CLASS(18) , MXK , RDSSH	JULY76
		INTEGER GRPNO , CLASS , RDSSH	JULY76
		DIMENSION SSHDTA(39)	JULY76
		EQUIVALENCE ( SSHDTA , COUN2 )	SSHDTA
C			SSHDTA
C		STATISTICAL INFORMATION FOR LEM	STATS
		COMMON /STATS /	STATS
	1	ITER , NSEGTR , NCAMSR , NYESR , NREC(7) , NCASCR , NCASDR	STATS
		EQUIVALENCE ( NT , ITER )	STATS
C			STATS
C		INITIALIZE FLAGS AND COUNTERS	CASINL
		RDSSH = 0	CASINL
		NREGS = 0	CASINL
		NZTOT = 0	CASINL
		NSTRAT = 0	CASINL
		NRYES = NYESSK - 1	CASINL
		NRCAMS = NCAMSK - 1	CASINL
C		INITIALIZE REGION , ZONE , AND STRATA POINTERS FOR CAS	CASINL
C		INTERMEDIATE FILE . ( REGION RECORDS ARE 3-12 , ZONE RECORDS ARE	CASINL
C		13-62 , STRATA RECORDS ARE 63-387 )	CASINL
		IRREG = 2	CASINL
		IRZONE = 12	CASINL
		IRSTK = 62	CASINL
C			CASINL
C		INITIALLY POSITION FILES YESOUT , SUBHST , CAMSF AT STARTING	CASINL
C		REGION AND ZONE .	CASINL
		REWIND YESOUT	CASINL
		REWIND CAMSF	CASINL
		DU 210 I=1 , NYESSK	CASINL
		READ ( YESOUT )	CASINL
210		CONTINUE	CASINL
C			JULY76
		IF ( NT .GT. NSTART .OR. IPP .GT. 1 ) GO TO 225	JULY76
		REWIND SUBHST	JULY76
		DU 220 I=1 , NSSHSK	CASINL
		READ ( SUBHST )	CASINL
220		CONTINUE	CASINL
		NRSSH = NSSHSK - 1	JULY76

```
C
225 DU 230 I=1,NCAMSK
    READ ( CAMSF)
230 CONTINUE
C
900 RETURN
    END
```

```
JULY76
JULY76
CASINL
CASINL
CASINL
CASINL
CASINL
CASINL
```

```

FOR, IS CASINT
  SUBROUTINE CASINT
C     PERFORMS MISCELLANEOUS INITIALIZATION TASKS FOR THE CAS
C     SIMULATOR
C     1. SETTING COUNTERS AND FLAGS
C     2. OPENING RANDOM ACCESS FILE (CAS INTERMEDIATE FILE)
C     3. DETERMINING HOW MANY RECORDS TO SKIP ON THE YESOUT,
C     SUBHST, AND CAMSF FILES TO PROPERLY POSITION THOSE FILES
C     AT THE STARTING REGION AND ZONE (STARTR AND STARTZ)
C
C     ARGUMENT LIST FOR ERROR PROCESSING
COMMON /ARGLST/
1  NERRS ,NFATAL ,NPERRS ,NARG  ,ARG(10)
  DIMENSION IARG(10)
  EQUIVALENCE ( IARG,ARG )
C
C     CAS CONTROL CARD INPUT DATA AND CONSTANTS
COMMON /CASCN /
1  AREACF ,YCF  ,PRDCF ,APRUTS(4,2) ,PPRUTS(5,2) ,YPRUTS(3,2)
2  ,AKEAPS ,S2MAX ,NHISTY ,HH  ,TOPT  ,AUNITS ,DISTFF ,BWIND(4)
3  ,WPRIOR(4)  ,APREP ,IPRD(3,14) ,NPDATE ,PRDATE(14)
  INTEGER  HH, TOPT, AUNITS ,DISTFF ,BWIND ,WPRIOR ,APREP ,PRDATE
C
C     DATA BLOCK FOR CAS CUMULATIVE FILE
C     CAS DATA SETS 14, 15, 16, AND 17
COMMON /CASCUM/
1  CASCUM(32),  BUFFR(504)
  DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22)
1  ,DSET17(28)
  EQUIVALENCE ( ICASC,CASCUM )
  EQUIVALENCE ( DSET14,DSET15,DSET16,DSET17,CASCUM(5) )
1  , ( SQAERS,SQAERZ,SQAERR,SQAERC,CASCUM(24) )
2  , ( SQPERS,SQPERZ,SQPERR,SQPERC,CASCUM(25) )
3  , ( SQYERS,SQYERZ,SQYERR,SQYERC,CASCUM(26) )
C
C     FLAGS AND COUNTERS FOR CAS SIMULATOR
COMMON /CASFLG/
1  H      ,PPFLG ,NBW  ,IBW  ,WINDOW ,IPD  ,IPP  ,PPDATE ,NREGS
2  ,NZTOT ,NSTRAT ,NYESSK ,NSSHSK ,NCAMSK ,NRYES ,NRSSH ,NRCAMS
3  ,ENDC  ,ENDREG ,ENDZON ,IRSTR ,IRZONE ,IRREG
4  ,LDS1  ,LDS4  ,LDS7  ,LDS8  ,LDS9  ,LDS10 ,LDS11 ,LDS12 ,LDS13

```

	5 ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCOUN,LRREG ,LRZONE,LRSTR	CASFLG
	INTEGER PPFLG , WINDOW , PDATE	CASFLG
C		CASFLG
C	CONTROL PARAMETERS FOR LEM PROGRAM	CNTRL
	COMMON /CNTRL /	CNTRL
	1 PRINTF,NSTART,SEED(7)	CNTRL
	INTEGER PRINTF	CNTRL
	DOUBLE PRECISION SEED	CNTRL
C		CNTRL
C	CUNSTANT QUANTITIES FOR LEM PROGRAM	CONST
	COMMON /CONST /	CONST
	1 NTRMX ,MAXR ,MAXZ ,IMXSEG,ENDFIL,ITSFG	CONST
C		CONST
C	FILE DEFINITIONS AND RECORD LENGTHS	FILES
	COMMON /FILES /	FILES
	1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ	FILES
	2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO	FILES
	3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD	FILES
	4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS	FILES
	INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT	FILES
	1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF	FILES
C		FILES
C	INDEX RECORD FOR CAS INTERMEDIATE DATA SET FILE (CASDSF)	IXCDSF
	COMMON /IXCDSF/	IXCDSF
	1 IXCDSF(1),LIXCDS	
C		IXCDSF
C	LEM CONTROL CARD INPUT DATA	LEMCM
	COMMON /LEMCM /	LEMCM
	1 TITLE(10) ,ICASE ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ	LEMCM
	2 ,ENDR ,ENDZ ,ISTG ,ICAMS ,IYES ,IACQ ,ICLASS,ISEXT ,ISCC	LEMCM
	3 ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSECE	LEMCM
	4 ,ICSEYM,ICSESE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6	LEMCM
	5 ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD	LEMCM
	DIMENSION RSEED(7)	LEMCM
	DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5	LEMCM
	1 ,RSEED6,RSEED7	LEMCM
	EQUIVALENCE ( RSEED,RSEED1 )	LEMCM
	INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ	LEMCM
C		LEMCM
C	PAGE EJECT CONTROL PARAMETERS FOR LEM	PAGECM
	COMMON /PAGECM/	PAGECM



1	NPAGE ,NLINE ,MXLINE,NSFTL ,SUBTTL(10)	PAGECM
C		PAGECM
C	STATISTICAL INFORMATION FOR LEM	STATS
	COMMON /STATS /	STATS
1	ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR,	STATS
	EQUIVALENCE ( NT,ITER )	STATS
C		STATS
C	YIELD DATA FROM YFSOUT FILE	YESDTA
	COMMON /YESDTA/	YESDTA
1	YSTR ,IZPRDD(6) ,YSCI(6) ,VSYCI(6)	YESDTA
2	,RDYES ,NYESPP	YESDTA
	INTEGER RDYES	YESDTA
C		YESDTA
C	DEBUGGING PRINT FLAG	CASINT
	COMMON /DEBUGF/ DEBUGF	CASINT
C		CASINT
	DATA DEBUGF / 0.0 /	CASINT
C		CASINT
	INTEGER REGION, ZONE, STRATA	CASINT
C		CASINT
C	LOCAL VARIABLES	CASINT
C	COUN = COUNTRY ID	CASINT
C	REGION = REGION ID	CASINT
C	ZONE = ZONE ID	CASINT
C	STRATA = STRATUM ID	CASINT
C	ICODE = ERROR MESSAGE CODE FOR ERRMES	CASINT
C	FILL = TEMPORARY CELL USED TO FILL OUT LIST IN READ STMT.	CASINT
C	I = DO LOOP INDEX	CASINT
C		CASINT
C		CASINT
C	INITIALIZE FLAGS AND COUNTERS	CASINT
	PPFLG= 0	CASINT
	IPP = 0	CASINT
	NSTTL= 0	CASINT
C		CASINT
C	CLEAR BUFFER REGION FOR CAS CUMULATIVE FILE	CASINT
	DO 110 I=1,LCASF	CASINT
	BUFFR(I)= 0.0	CASINT
110	CONTINUE	CASINT
C		CASINT
C	OPEN CAS INTERMEDIATE FILE (RANDOM ACCESS FILE) -- CASPSF	CASINT

C		CASINT
C	PERFORM THE FOLLOWING CHECKS ONLY ON THE FIRST ITERATION	CASINT
	IF ( NT .GT. NSTART ) GO TO 900	CASINT
C		CASINT
	H= HH	CASINT
C		CASINT
C	SKIP OVER THE HEADER RECORD OF THE YESOUT, SUBHST, AND CAMSF	CASINT
C	FILES.	CASINT
	REWIND YESOUT	CASINT
	REWIND SUBHST	CASINT
	REWIND CAMSF	CASINT
	READ (YESOUT)	CASINT
	READ (SUBHST)	CASINT
	READ (CAMSF)	CASINT
	NYESSK= 1	CASINT
	NSSHK= 1	CASINT
	NCAMSK= 1	CASINT
	IF ( STARTR .EQ. 0 ) GO TO 900	JULY76
C	COUNT THE NO. OF RECORDS TO SKIP ON YESOUT	CASINT
	ARG(3)= 6HYESOUT	CASINT
210	READ (YESOUT) COUN,REGION,ZONE,STRATA,YSTR	CASINT
	1 , ( 1ZPRDD(I),YSCI(I),VSYCI(I),I=1,6 )	CASINT
C		CASINT
	IF ( COUN .EQ. ENDFIL ) GO TO 800	CASINT
C		CASINT
	IF ( REGION - STARTR ) 250,240,800	CASINT
C	REGION = STARTING REGION	CASINT
240	IF ( ZONE - STARTZ ) 250,300,820	CASINT
250	NYESSK= NYESSK + 1	CASINT
	GO TO 210	CASINT
C		CASINT
C	COUNT NUMBER OF RECORDS TO SKIP ON SUBHST FILE	CASINT
300	ARG(3)= 6HSUBHST	CASINT
310	READ (SUBHST) COUN,REGION,ZONE, ( FILL,I=4,LSUBH )	CASINT
	IF ( COUN .EQ. ENDFIL ) GO TO 800	CASINT
	IF ( REGION - STARTR ) 350,340,800	CASINT
C	REGION = STARTING REGION	CASINT
340	IF ( ZONE - STARTZ ) 350,400,820	CASINT
350	NSSHK= NSSHK + 1	CASINT
	GO TO 310	CASINT
C		CASINT

C	COUNT NUMBER OF RECORDS TO SKP ON CAMSF	CASINT
400	ARG(3)= 5HCAMSF	CASINT
410	READ (CAMSF) COUN,REGION,ZONE, ( FILL,I=4,LCAMSF )	CASINT
	IF ( COUN .EQ. ENDFIL ) GO TO 800	CASINT
	IF ( REGION - STARTR ) 450,440,800	CASINT
C	REGION = STARTING REGION	CASINT
440	IF ( ZONE - STARTZ ) 450,900,820	CASINT
450	NCAMSK= NCAMSK + 1	CASINT
	GO TO 410	CASINT
C		CASINT
C	ERRDR. STARTING REGION NOT FOUND ON FILE	CASINT
800	ICODE= 3	CASINT
	ARG(1)= 6HREGION	CASINT
	GO TU 830	CASINT
C		CASINT
C	ERROR. STARTING ZONE NOT FOUND ON FILE	CASINT
820	ICODE= 4	CASINT
	ARG(1)= 6HZONE	CASINT
830	CALL ERRMES (3HCAS,6HCASINT,ICODE,1)	CASINT
C		CASINT
900	RETURN	CASINT
	END	CASINT

```

FOR,IS CASOUT
SUBROUTINE CASOUT(ILEVEL)
C THIS SUBROUTINE PRINTS THE AREA AND PRODUCTION REPORT AND SAVES DATA CASOUT
C FOR THE COUNTRY REPORT CASOUT
C ARGUMENT LIST FOR ERROR PROCESSING ARGLST
COMMON /ARGLST/ ARGLST
1 NEKKS ,NFATAL,NPFRRS,NARG ,ARG(10) ARGLST
DIMENSION IARG(10) ARGLST
EQUIVALENCE ( IARG,ARG ) ARGLST
C ARGLST
C FILE DEFINITIONS AND RECORD LENGTHS FILES
COMMON /FILES / FILES
1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ FILES
2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO FILES
3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD FILES
4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS FILES
INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT FILES
1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF FILES
C FILES
C SUMMARY DATA FOR REPORTS SUMDTA
COMMON /SUMDTA/ SUMDTA
1 CVAEPT,CVEPTA,SDPER ,CVPEPT,CVEPTP,CSUMR(18,18) SUMDTA
C SUMDTA
C CAS CONTROL CARD INPUT DATA AND CONSTANTS CASCM
COMMON /CASCM / CASCM
1 AREACF,YCF ,PRDCF ,APRUTS(4,2) ,PPRUTS(5,2) ,YPRUTS(3,2) CASCM
2 ,AKEAPS,S2MAX ,NHISTY,HH ,TOPT ,AUNITS,DISTFF,BWIND(4) CASCM
3 ,WPRIOR(4) ,APREP ,IPRD(3,14) ,NPDATE,PRDATE(14) CASCM
INTEGER HH, TOPT, AUNITS,DISTFF,BWIND,WPRIOR,APREP,PRDATE CASCM
C CASCM
C DATA BLOCK FOR CAS CUMULATIVE FILE CASCUM
C CAS DATA SETS 14, 15, 16, AND 17 CASCUM
COMMON /CASCUM/ CASCUM
1 CASCUM(32), BUFR(504) CASCUM
DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22) CASCUM
1 ,DSET17(28) CASCUM
EQUIVALENCE ( ICASC,CASCUM ) CASCUM
EQUIVALENCE ( DSET14,DSET15,DSET16,DSET17,CASCUM(5) ) CASCUM
1 , ( SQAERS,SQAERZ,SQAERR,SQAERC,CASCUM(24) ) CASCUM
2 , ( SQPERS,SQPERZ,SQPERR,SQPERC,CASCUM(25) ) CASCUM
3 , ( SQYERS,SQYERZ,SQYERR,SQYERC,CASCUM(26) ) CASCUM

```

C			CASCUM
C	FLAGS AND COUNTERS FOR CAS SIMULATOR		CASFLG
	COMMON /CASFLG/		CASFLG
	1    H        ,PPFLG ,NBW      ,IBW      ,WINDOW,IPD      ,IPP      ,PPDATE,NREGS.		CASFLG
	2    ,NZTOT  ,NSTRAT,NYESSK,NSSHSK,NCAMSK,NRYES  ,NRSSH  ,NRCAMS		CASFLG
	3    ,ENDC   ,ENDREG,ENDZON,IRSTR  ,IRZONE,IRREG		CASFLG
	4    ,LDS1   ,LDS4   ,LDS7   ,LDS8   ,LDS9   ,LDS10  ,LDS11  ,LDS12  ,LDS13		CASFLG
	5    ,LDS14  ,LDS15  ,LDS16  ,LDS17  ,LRCON,LRREG  ,LRZONE,LRSTR		CASFLG
	INTEGER  PPFLG  ,  WINDOW  ,  PPDATE		CASFLG
C			CASFLG
C	LEM CONTROL CARD INPUT DATA		LEMCM
	COMMON /LEMCM /		LEMCM
	1    TITLE(10)      ,ICASE  ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ		LEMCM
	2    ,ENDR   ,ENDZ   ,ISTG   ,ICAMS  ,IYES   ,IACQ   ,ICLASS,ISEX  ,ISCC		LEMCM
	3    ,ICAS2  ,ICAS3  ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSECE		LEMCM
	4    ,ICSEYM,ICSESE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6		LEMCM
	5    ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD		LEMCM
	DIMENSION  RSEED(7)		LEMCM
	DOUBLE PRECISION  RSEED  ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5		LEMCM
	1    ,RSEED6,RSEED7		LEMCM
	EQUIVALENCE ( RSEED,RSEED1 )		LEMCM
	INTEGER  RSTART,STARTR,STARTZ,ENDR  ,ENDZ		LEMCM
C			LEMCM
C	PAGE EJECT CONTROL PARAMETERS FOR LEM		PAGECM
	COMMON /PAGECM/		PAGECM
	1    NPAGE  ,NLINE  ,MXLINE,NSITL  ,SUBTTL(10)		PAGECM
C			PAGECM
C	STATISTICAL INFORMATION FOR LEM		STATS
	COMMON /STATS /		STATS
	1    ITER  ,NSEGTR,NCAMSR,NYESR  ,NREC(7),NCASCR,NCASDR		STATS
	EQUIVALENCE ( NT,ITER )		STATS
C			STATS
C	CAS DATA SET 7 (AT ZONE LEVEL)		DSET7
	COMMON /DSET7 /		DSET7
	1    ZONE   ,HWAZ2  ,EZ      ,M1K2KZ,ANALVZ,NSTRAZ,HWAZ1  ,EWAZ1  ,HWAZ3		JULY76
	2    ,ESTVZ  ,HWAZ12		JULY76
	3    ,M1K2CL(10)  ,EPWCL(10)      ,EPW2CL(10)      ,PKPICL(10)		JULY76
	4    ,PK2CL(10)  ,PKCL(10)      ,SSQ(10)		JULY76
	INTEGER  ZONE		JULY76
	REAL  M1K2KZ,  M1K2CL		JULY76
	DIMENSION  DSET7(81)		JULY76

	EQUIVALENCE ( DSET7,ZONE )	DSET7
C		DSET7
C		CASOUT
	EQUIVALENCE (CASCUM(1),IREG),(CASCUM(2),IZONE),(CASCUM(3),ISTRA),	CASOUT
1	(CASCUM(5),HWA), (CASCUM(6),TWA), (CASCUM(7),EWA),	CASOUT
1	(CASCUM(8),AERR), (CASCUM(9),AVAR), (CASCUM(10),TPROD),	CASOUT
1	(CASCUM(11),EPROD), (CASCUM(12),PRERR), (CASCUM(13),PRVAR),	CASOUT
1	(CASCUM(14),TY), (CASCUM(15),EY), (CASCUM(16),YERR),	CASOUT
1	(CASCUM(22),ANAV),	CASOUT
1	(CASCUM(23),ANPRV), (CASCUM(24),SQAER), (CASCUM(25),SQPER),	CASOUT
1	(CASCUM(26),SQYER), (CASCUM(27),CLEWA), (CASCUM(28),CLEPRD),	CASOUT
1	(CASCUM(29),CLATEC), (CASCUM(30),CLPTEC), (CASCUM(31),CLATWC),	CASOUT
1	(CASCUM(32),CLPTWC)	CASOUT
	INTEGER M1J,M2J,CT1,CT2,CT3	CASOUT
C		CASOUT
C		CASOUT
C	CONVERT UNITS AND GET MEAN ( CASCUM)	CASOUT
	FNT=FLOAT(NT)	CASOUT
	HWA =HWA*AREACF/FNT	CASOUT
	TWA =TWA*AREACF/FNT	CASOUT
	EWA =EWA*AREACF/FNT	CASOUT
	AERR =AERR*AREACF/FNT	CASOUT
	AVAR =AVAR*AREACF*AREACF/FNT	CASOUT
	TPROD =TPROD*PRDCF/FNT	CASOUT
	EPROD =EPROD*PRDCF/FNT	CASOUT
	PRERR =PRERR*PRDCF/FNT	CASOUT
	PRVAR =PRVAR*PRDCF*PRDCF/FNT	CASOUT
	TY =TY*YCF/FNT	CASOUT
	EY =EY*YCF/FNT	CASOUT
	YERR =YERR*YCF/FNT	CASOUT
	M1J = CASCUM(17)/FNT	CASOUT
	M2J = CASCUM(18)/FNT	CASOUT
	CT1 = CASCUM(19)/FNT	CASOUT
	CT2 = CASCUM(20)/FNT	CASOUT
	CT3 = CASCUM(21)/FNT	CASOUT
	ANAV =ANAV*AREACF*AREACF/FNT	CASOUT
	ANPRV =ANPRV*PRDCF*PRDCF/FNT	CASOUT
	SQAER =SQAER*AREACF*AREACF	CASOUT
	SQPER =SQPER*PRDCF*PRDCF	CASOUT
	SQYER =SQYER*YCF*YCF	CASOUT
C		CASOUT

C	COMPUTE VALUES FOR COUNTRY (CASCUM)	CASOUT
	IF(ILEVEL.NE.0) GO TO 10	CASOUT
	CLEWA =CLEWA/FNT	CASOUT
	CLEPRD =CLEPRD/FNT	CASOUT
	CLATEC =CLATEC/FNT	CASOUT
	CLPTEC=CLPTEC/FNT	CASOUT
	CLATWC =CLATWC/FNT	CASOUT
	CLPTWC =CLPTWC/FNT	CASOUT
C		CASOUT
C	COMPUTE OTHER VALUES (SUMDTA )	CASOUT
	10 CONTINUE	CASOUT
	CVAEPT= SQRT(AVAR)/TWA*100.0	CASOUT
	CVPEPT= SQRT(PRVAR)/TPROD*100.0	CASOUT
	CVEPTA=0.	CASOUT
	SDPER=0.	CASOUT
	CVEPTP=0.	CASOUT
	IF(NT.EQ.1) GO TO 20	CASOUT
	ARG(1)= ( SQAER - AERR*AERR*FNT )/(FNT-1.0)	CASOUT
	IF ( ARG(1) .GT. 0.0 ) CVEPTA = ( SQRT(ARG(1))/TWA )*100.0	CASOUT
	ARG(1)= ( SOYER - YERR*YERR*FNT )/(FNT-1.0)	CASOUT
	IF ( ARG(1) .GT. 0.0 ) SDPER = SQRT( ARG(1) )	CASOUT
	ARG(1)= ( SOPER - PRERR*PRERR*FNT )/(FNT-1.0)	CASOUT
	IF ( ARG(1) .GT. 0.0 ) CVEPTP = SQRT( ARG(1) )/TPROD *100.0	CASOUT
	20 CONTINUE	CASOUT
C		CASOUT
C	*****	CASOUT
C	PRINT LINE ON AREA REPORT	CASOUT
	IF(APREP.EQ.0) GO TO 30	CASOUT
C		CASOUT
C	NEW PAGE	CASOUT
	IF(ILEVEL .NE.1) GO TO 50	CASOUT
	IF ( ENDREG .NE. 0 ) GO TO 25	CASOUT
	ICLK= NSTRAZ +9 +MLINE	CASOUT
	IF( ICHK.LT.MXLINE) GO TO 50	CASOUT
25	CALL APHDR	CASOUT
C		CASOUT
C	STRATA LINE	CASOUT
	50 CONTINUE	CASOUT
	IF(ILEVEL.LE.0) GO TO 60	CASOUT
	CALL PAGER(1)	CASOUT
	WRITE (OUTP,1000) IREG,IZONE,ISTRA,	CASOUT

1	TWA,EWA,CT1,CT2,CT3,M1J,M2J,CVAEPT,CVEPTA, TY,EY,	CASOUT
1	SDPER,TPROD,EPROD,CVPEPT,CVEPTP	CASOUT
1000	FURMAT (1X,2(I3,1X),I4,2X,2(F8.1,1X),3(1X,I4),2X,	CASOUT
1	2(I4,1X),1X,2(F6.1,1X),1X,3(F6.2,1X),1X,2(F8.1,1X),2(F6.1,1X))	CASOUT
	GO TO 30	CASOUT
C		CASOUT
C	ZONE LINE	CASOUT
60	CONTINUE	CASOUT
	IF(ILEVEL.NE.-2) GO TO 70	CASOUT
	CALL PAGER(6)	CASOUT
	WRITE (OUTP,3000)	CASOUT
	WRITE(OUTP,2000)	CASOUT
2000	FURMAT(1X,20(6H*****))	CASOUT
	WRITE(OUTP,3000)	CASOUT
3000	FORMAT(2X)	CASOUT
	WRITE(OUTP,4000)	CASOUT
4000	FURMAT(1X,3HREG,2X,4HZONE)	CASOUT
	WRITE (OUTP,5000) IREG,IZONE,	CASOUT
1	TWA,EWA,CT1,CT2,CT3,M1J,M2J,CVAEPT,CVEPTA, TY,EY,	CASOUT
1	SDPER,TPROD,EPROD,CVPEPT,CVEPTP	CASOUT
5000	FURMAT (1X,2(I3,1X),6X, 2(F8.1,1X),3(1X,I4),2X,	CASOUT
1	2(I4,1X),1X,2(F6.1,1X),1X,3(F6.2,1X),1X,2(F8.1,1X),2(F6.1,1X))	CASOUT
	WRITE(OUTP,3000)	CASOUT
	WRITE(OUTP,2000)	CASOUT
	WRITE(OUTP,2000)	CASOUT
	WRITE(OUTP,3000)	CASOUT
	GO TO 30	CASOUT
C		CASOUT
C	REGION LEVEL	CASOUT
70	CONTINUE	CASOUT
	IF(ILEVEL.NE.-1) GO TO 80	CASOUT
	CALL PAGER(4)	CASOUT
	WRITE (OUTP,6000) IREG,	CASOUT
1	TWA,EWA,CT1,CT2,CT3,M1J,M2J,CVAEPT,CVEPTA, TY,EY,	CASOUT
1	SDPER,TPROD,EPROD,CVPEPT,CVEPTP	CASOUT
6000	FURMAT (1X,6HREGION,3X,I3,2X,2(F8.1,1X),3(1X,I4),2X,	CASOUT
1	2(I4,1X),1X,2(F6.1,1X),1X,3(F6.2,1X),1X,2(F8.1,1X),2(F6.1,1X))	CASOUT
	GO TO 30	CASOUT
C		CASOUT
C	COUNTRY LEVEL	CASOUT
80	CONTINUE	CASOUT





```

FUR,IS CASPP
  SUBROUTINE CASPP
C      PERFORMS THE FIRST PASS CAS COMPUTATIONS GENERATING DATA SETS
C      1-9. CASPP ALSO CALLS CAS3 TO GENERATE DATA SETS 10-19.
C
C      ARGUMENT LIST FOR ERROR PROCESSING
C      COMMON /ARGLST/
1      NERRS ,NFATAL, NPERRS, NARG ,ARG( 10)
      DIMENSION IARG(10)
      EQUIVALENC ( IARG,ARG )
C
C      FLAGS AND COUNTERS FOR CAS SIMULATOR
C      COMMON /CASFLG/
1      H      ,PPFLG ,NBW      ,IBW      ,WINDOW,IPD      ,IPP      ,PPDATE,NREGS
2      ,NZZTOT ,NSTRAT,NYESSK,NSSHHSK,NCAMSK,NRYES ,NRSSH ,NRCAMS
3      ,ENDC   ,ENDREG,ENDZON,IRSTR  ,IRZONE,IRREG
4      ,LDS1   ,LDS4   ,LDS7   ,LDS8   ,LDS9   ,LDS10  ,LDS11  ,LDS12  ,LDS13
5      ,LDS14  ,LDS15  ,LDS16  ,LDS17  ,LRCON,LRREG  ,LRZONE,LRSTR
      INTEGER PPFLG , WINDOW , PPDATE
C
C      CONTROL PARAMETERS FOR LEM PROGRAM
C      COMMON /CNTRL /
1      PRINTF,NSTART,SEFD(7)
      INTEGER PRINTF
      DOUBLE PRECISION SEED
C
C      CONSTANT QUANTITIES FOR LEM PROGRAM
C      COMMON /CONST /
1      NTRMX ,MAXR   ,MAXZ   ,IMXSEG,ENDFIL,ITSFG
C
C      CAS DATA SETS 1,2, AND 3
C      COMMON /DSET1 /
1      ISUBST,TWAK  ,HWAK  ,FWAK  ,M1K   ,CT1K  ,ANALVK,EPWK  ,EPW2K
2      ,SMPKPI,SUMPK2,SUMPK ,KSUB  ,NCLASS
      REAL M1K , M2K
      DIMENSION DSET1(14), DSET2(14), DSET3(6)
      EQUIVALENCE ( DSFT1,DSET2,DSET3,ISUBST )
1      , ( M2K,M1K ), ( CT2K,CT3K,CT1K )
C
C      CAS DATA SETS 4, 5, AND 6 (AT STRATA LEVEL)
C      COMMON /DSET4 /

```

```

CASPP
CASPP
CASPP
CASPP
ARGLST
ARGLST
ARGLST
ARGLST
ARGLST
ARGLST
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CNTRL
CNTRL
CNTRL
CNTRL
CNTRL
CONST
CONST
CONST
CONST
DSET1
DSET1
JULY76
JULY76
JULY76
JULY76
DSET1
DSET1
DSET1
DSET4
DSET4

```

	1 . STRATA,TWAS1 ,HWAS1 ,EWAS1 ,XM1JS ,XCT1S ,ANVS1	JULY76
	2 ,TWAS2 ,HWAS2 ,EWAS2 ,XM2JS ,XCT2S ,ANVS2 ,T	JULY76
	3 ,TWAS3,HWAS3,XCT3S	
	4 ,XYS ,XESTYS,EVYRS',P2IDPK,V1V2S ,VARS ,ANVARS	JULY76
	5 ,FILL4(57) ,	
	INTEGER STRATA	JULY76
	DIMENSION DSET4(24), DSET5(7), DSET6(3)	JULY76
	EQUIVALENCE ( DSET4,STRATA ), ( DSET5,TWAS2 ), ( DSET6,TWAS3 )	DSET4
C		DSET4
C	CAS DATA SET 7 (AT ZONE LEVEL)	DSET7
	COMMON /DSET7 /	DSET7
	1 ZONE ,HWAZ2 ,EZ ,M1K2KZ,ANALVZ,NSTRAZ,HWAZ1 ,EWAZ1 ,HWAZ3	JULY76
	2 ,ESTVZ ,HWAZ12	JULY76
	3 ,M1K2CL(10) ,EPWCL(10) ,EPW2CL(10) ,PKPICL(10)	JULY76
	4 ,PK2CL(10) ,PKCL(10) ,SSQ(10)	JULY76
	INTEGER ZONE	JULY76
	REAL M1K2KZ, M1K2CL	JULY76
	DIMENSION DSET7(81)	JULY76
	EQUIVALENCE ( DSET7,ZONE )	DSET7
C		DSET7
C	CAS DATA SET 8 (AT REGION LEVEL)	DSET8
	COMMON /DSET8 /	DSET8
	1 REGION,HWAR2 ,ER ,M1K2KR,ANALVR,NZONES,HWAR1 ,EWAR1 ,ESTVR	JULY76
	2 ,M1M2ZR,FILL8(71)	JULY76
	INTEGER REGION	JULY76
	REAL M1K2KR	JULY76
	DIMENSION DSET8(10)	JULY76
	EQUIVALENCE ( DSET8,REGION )	DSET8
C		DSET8
C	CAS DATA SET 9 (AT COUNTRY LEVEL)	DSET9
	COMMON /DSET9 /	DSET9
	1 COUNTR,HWAC2 ,EC ,M1K2KC,ANALVC,M1M2ZC,HWAC1 ,EWAC1 ,ESTVC	JULY76
	INTEGER COUNTR	JULY76
	REAL M1K2KC	JULY76
	DIMENSION DSET9(9)	JULY76
	EQUIVALENCE ( DSET9,COUNTR )	DSET9
C		DSET9
C	CAS DATA SET 11 (ZONE DATA -- FINAL PASS)	JULY76
	COMMON /DSET11/	DSET11
	1 HWAZ ,TWAZ ,EWAZ ,AERRZ ,AVARZ ,TPRODZ,EPRODZ,PRERRZ,PRVARZ	DSET11
	2 ,TYZ ,EYZ ,YERRZ ,M1Z ,M2Z ,CT1Z ,CT2Z ,CT3Z ,ANAVZ	DSET11

	3 ,ANPRVZ	DSET11
	REAL M1Z , M2Z	DSET11
	DIMENSION DSET11(19)	DSET11
	EQUIVALENCE ( DSET11,HWAZ )	DSET11
C		DSET11
C	CAS DATA SET 12 (REGION DATA -- FINAL PASS)	JULY76
	COMMON /DSET12/	DSET12
	1 HWAR ,TWAR ,EWAR ,AERRR ,AVARR ,TPRODR,EPRODR,PRERRR,PRVARR	DSET12
	2 ,TYR ,EYR ,YERRR ,M1R ,M2R ,CT1R ,CT2R ,CT3R ,ANAVR	DSET12
	3 ,ANPRVR	DSET12
	REAL M1R , M2R	DSET12
	DIMENSION DSET12(19)	DSET12
	EQUIVALENCE ( DSET12,HWAR )	DSET12
C		DSET12
C	CAS DATA SET 13 (COUNTRY DATA -- FINAL PASS)	JULY76
	COMMON /DSET13/	DSET13
	1 HWAC ,TWAC ,EWAC ,AERRC ,AVARC ,TPRODC,EPRODC,PRERRC,PRVARC	DSET13
	2 ,TYC ,EYC ,YERRC ,M1C ,M2C ,CT1C ,CT2C ,CT3C ,ANAVC	DSET13
	3 ,ANPRVC,CLEWA ,CLEPRD,CLATEC,CLPTEC,CLATWC,CLPTWC	DSET13
	REAL M1C , M2C	DSET13
	DIMENSION DSET13(25)	DSET13
	EQUIVALENCE ( DSET13,HWAC )	DSET13
C		DSET13
C	FILE DEFINITIONS AND RECORD LENGTHS	FILES
	COMMON /FILES /	FILES
	1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ	FILES
	2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESQ	FILES
	3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD	FILES
	4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS	FILES
	INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT	FILES
	1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF	FILES
C		FILES
C	INDEX RECORD FOR CAS INTERMEDIATE DATA SET FILE (CASDSF)	IXCDSF
	COMMON /IXCDSF/	IXCDSF
	1 IXCDSF(1),LIXCDS	
C		IXCDSF
C	INDEX RECORD FOR INTERMEDIATE SUBSTRATA HISTORICAL DATA FILE	IXSUBH
	COMMON /IXSUBH/	IXSUBH
	1 LIXSSH,IXSUBH(1)	MOD1
C		IXSUBH
	COMMON/FILES1/	FJLES1

	1 ISUBH2,LSUBH2,MXCLSS	FILES1
C	LEM CONTROL CARD INPUT DATA	LEMCM
	COMMON /LEMCM /	LEMCM
	1 TITLE(10) ,ICASE ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ	LEMCM
	2 ,ENDR ,ENDZ ,ISTG ,ICAMS ,IYES ,IACQ ,ICLASS,ISFXT ,ISCC	LEMCM
	3 ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSECE	LEMCM
	4 ,ICSEYM,ICSESE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6	LEMCM
	5 ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD	LEMCM
	DIMENSION RSEED(7)	LEMCM
	DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5	LEMCM
	1 ,RSEED6,RSEED7	LEMCM
	EQUIVALENCE ( RSEED,RSEED1 )	LEMCM
	INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ	LEMCM
C		LEMCM
C	SUBSTRATA HISTORICAL DATA FROM SUBHST FILE	SSHDTA
	COMMON /SSHDTA/	SSHDTA
	1 CUUN2 ,IREG2 ,IZONE2,ISTRA2,ISUBS2,NSEG ,IDSEG ,GRPNO ,HISTPW	SSHDTA
	2 ,AREAK ,PWK ,NAGR ,NA ,DELTPW,DELTPM,CV1 ,CV2 ,CV3	SSHDTA
	3 ,CV4 ,VMULTK,CLASS(18),MXK,RDSSH	JULY76
	INTEGER GRPNO , CLASS , RDSSH	JULY76
	DIMENSION SSHDTA(39)	JULY76
	EQUIVALENCE ( SSHDTA, COUN2 )	SSHDTA
C		SSHDTA
C	STATISTICAL INFORMATION FOR LEM	STATS
	COMMON /STATS /	STATS
	1 ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR	STATS
	EQUIVALENCE ( NT,ITER )	STATS
C		STATS
C	DEBUGGING PRINT FLAG	CASPP
	COMMON /DEBUGF/ DEBUGF	CASPP
C		CASPP
C	YIELD DATA FROM YESOUT FILE	YESDTA
	COMMON /YESDTA/	YESDTA
	1 YSTR ,IZPRDD(6) ,YSCI(6) ,VSYCI(6)	YESDTA
	2 ,RDYES ,NYESPP	YESDTA
	INTEGER RDYES	YESDTA
C		YESDTA
C		CASPP
C	INITIALLY POSITION FILES YESOUT, SUBHST, AND CAMSF AS SPECIFIED	CASPP
C	BY STARTR AND STARTZ. ALSO INITIALIZE FLAGS AND COUNTERS.	CASPP
C	IPP= IPP + 1	CASPP

CALL CASINI	CASPP
C ON THE FIRST ITERATION CALL CLASSN FOR EACH PREDICTION POINT	JULY76
C TO DETERMINE THE CLASS NUMBER FOR EACH SUBSTRATA	JULY76
IF ( NT .EQ. NSTART ) CALL CLASSN	JULY76
NRSSH = 0	JULY76
C	CASPP
C INITIALIZE DATA SET 9 (COUNTRY LEVEL)	CASPP
DO 110 I=2,LDS9	CASPP
DSET9(I)= 0.0	CASPP
110 CONTINUE	CASPP
ENDC= 0	CASPP
TWAC= 0.0	CASPP
C	CASPP
C INITIALIZE DATA SET 8 (REGION LEVEL)	CASPP
120 DO 130 I=1,LDS8	CASPP
DSET8(I)= 0.0	CASPP
130 CONTINUE	CASPP
ENDREG= 0	CASPP
TWAR= 0.0	CASPP
C	CASPP
C INITIALIZE DATA SET 7 (ZONE LEVEL)	CASPP
140 DO 150 I=1,LDS7	CASPP
DSET7(I)= 0.0	CASPP
150 CONTINUE	CASPP
ENDZUN= 0	CASPP
TWAZ= 0.0	CASPP
C	CASPP
C INITIALIZE DATA SETS 4,5, AND 6 (STRATA LEVEL)	CASPP
160 DO 170 I=1,LDS4	CASPP
DSET4(I)= 0.0	CASPP
170 CONTINUE	CASPP
KSUB= 0	CASPP
C	CASPP
C READ STRATA YIELD DATA FROM YESOUT AND SELECT THE PROPER VALUE	CASPP
C OF ESTIMATED YIELD FOR THE CURRENT BIOWINDOW OR PREDICTION DATE	CASPP
CALL GETYS	CASPP
IF ( NFATAL .NE. 0 ) GO TO 990	CASPP
IF ( YSTR .LT. 0.0 ) GO TO 550	CASPP
C	CASPP
C SHOULD WE READ SUBHST THIS TIME OR IS SUBSTRATA DATA ALREADY	CASPP
C READ IN AND WAITING FOR PROCESSING	CASPP

	IF ( RDSSH .EQ. 0 ) GO TO 210	CASPP
C	SUBSTRATA DATA ALREADY READ IN. SET RDSSH FLAG TO READ SUBHST	CASPP
C	NEXT TIME.	CASPP
	RDSSH= 0	CASPP
	GO TO 250	CASPP
C		CASPP
C	READ NEXT SUBSTRATA RECORD FROM ISUBH2 FILE	JULY76
210	NRSSH= NRSSH + 1	JULY76
	CALL KANACF (ISUBH2,NRSSH,SSHDTA,LSUBH2,IXSUBH,LIXSSH,1)	JULY76
	NCLASS= CLASS(IPP)	JULY76
C		CASPP
C		CASPP
C	TEMPORARY DEBUGGING PRINTOUT	CASPP
C		CASPP
C		CASPP
C	TEST FOR END OF COUNTRY ON ISUBH2 FILE	JULY76
	IF ( COUN2 .EQ. ENDFIL ) GO TO 400	CASPP
C	CHECK FOR NEW REGION, ZONE, OR SUBSTRATA	CASPP
	IF ( IREG2 .NE. REGION ) GO TO 430	CASPP
	IF ( IZONE2 .NE. ZONE ) GO TO 440	CASPP
	IF ( ISTRA2 .NE. STRATA ) GO TO 450	CASPP
C		CASPP
C	SKIP OVER GRPNO, NAGR, NA, AND HISTPW CHECKS IF NOT FIRST	CASPP
C	ITERATION FOR THIS RUN.	CASPP
250	IF ( NT .NE. NSTART ) GO TO 290	CASPP
	IF ( GRPNO .GT. 0 .AND. GRPNO .LT. 4 ) GO TO 260	CASPP
C	ILLEGAL GROUP NUMBER (MUST BE 1,2, OR 3)	CASPP
	CALL ERRMES (3HCAS,5HCASPP,8,1)	CASPP
	GO TO 990	CASPP
C		CASPP
260	IF ( NAGR .EQ. 0 ) GO TO 270	CASPP
	IF ( NA .NE. 0 ) GO TO 280	CASPP
C		CASPP
C	NAGR= 0 OR NA= 0. PRINT WARNING AND SET GROUP NO. = 3	CASPP
270	CALL ERRMES (3HCAS,5HCASPP,9,0)	CASPP
	GRPNO= 3	CASPP
C		CASPP
280	IF ( GRPNO .EQ. 3 ) GO TO 290	CASPP
	IF ( HISTPW .GT. 0.0 ) GO TO 290	CASPP
C	ERROR. HISTPW .LE. 0.0 AND GRPNO = 1 OR 2	CASPP

CALL ERMES (3HCAS,5HCASPP,15,0)	CASPP
GRPNO= 3	CASPP
C	CASPP
C GENERATE DATA SETS 1,2, AND 3 AT THE SUBSTRATA LEVEL.	CASPP
290 CALL DS123	CASPP
IF ( NFATAL .NE. 0 ) GO TO 990	CASPP
C	CASPP
GO TO 210	CASPP
C	CASPP
C END OF DATA ON SUBHST (COUNTRY = 4HZZZZ)	CASPP
C SET END OF COUNTRY FLAG	CASPP
400 ENDC = 1	JULY76
C SET END OF REGION FLAG	CASPP
430 ENDREG= 1	CASPP
C SET END OF ZONE FLAG	CASPP
440 ENDZON= 1.	CASPP
C END OF STRATA. SET RDSSH TO SKIP READING SUBHST NEXT TIME	CASPP
450 RDSSH= 1	CASPP
C	CASPP
C FINISH PROCESSING DATA SETS 4, 5, AND 6.	CASPP
CALL DS456	CASPP
IF ( NFATAL .NE. 0 ) GO TO 990	CASPP
C	CASPP
550 IF ( ENDZON .EQ. 0 ) GO TO 160	CASPP
C	CASPP
C END OF ZONE	CASPP
C FINISH PROCESSING DATA SET 7 (ZONE LEVEL)	CASPP
CALL DS7	CASPP
IF ( NFATAL .NE. 0 ) GO TO 990	CASPP
C	CASPP
IF ( ENDREG .EQ. 0 ) GO TO 140	CASPP
C	CASPP
C END OF REGION	CASPP
C GENERATE REST OF DATA SET 8 (EQ. 77 -- REGION LEVEL)	CASPP
IF ( HWARI .NE. 0.0 ) ER= EWARI/HWARI	CASPP
C	CASPP
C WRITE DATA SET 8 ONTO INTERMEDIATE FILE	CASPP
IRREG = IRREG + 1	CASPP
NREGS = NREGS + 1	CASPP
CALL RANACF (CASDSF,IRREG,DSET8,LCASDS,IXCDSF,LIXCDS,2)	CASPP
C	CASPP



C	AGGREGATE REGION DATA SET 8 UP TO DATA SET 9 (COUNTRY LEVEL)	CASPP
C	EQNS. 80-86,88,89	CASPP
	TWAC= TWAC + TWAR	CASPP
	DU 820 I=2,5	JULY76
	DSET9(I)= DSET9(I) + DSET8(I)	CASPP
820	CONTINUE	CASPP
	M1M2ZC= M1M2ZC + M1M2ZR	CASPP
	HWAC1 = HWAC1 + HWAR1	CASPP
	EWAC1 = EWAC1 + EWAR1	CASPP
	IF ( ENDC .EQ. 0 ) GO TO 120	CASPP
C		CASPP
C	END OF COUNTRY	CASPP
C	GENERATE REST OF DATA SET 9 (EQ. 87 -- COUNTRY LEVEL)	CASPP
	IF ( HWAC1 .NE. 0.0) EC= EWAC1/HWAC1	CASPP
C		CASPP
C		JULY76
C	COMPUTE ESTIMATED GROUP 1,2 VARIANCE OF ALL STRATA WITH	JULY76
C	ACQUIRED SEGMENTS	JULY76
	CALL CAS2	JULY76
C		JULY76
C	GENERATE DATA SET 10-19 ON FINAL PASS FOR EACH PREDICTION POINT	JULY76
	CALL CAS3	JULY76
990	RETURN	CASPP
	END	CASPP

FUR,IS CAS2

```
      SUBROUTINE CAS2
C      COMPUTES THE AREA VARIANCE AND ANALYTIC AREA VARIANCE OF
C      ALL STRATA WITH ACQUIRED SEGMENTS AND ACCUMULATES QUANTITIES
C      AT THE ZONE, REGION, AND COUNTRY LEVELS WHICH WILL BE USED
C      TO COMPUTE THE VARIANCE OF STRATA WITHOUT ACQUIRED SEGMENTS
C      AND ALSO THE AREA VARIANCES AT THE ZONE, REGION, AND
C      COUNTRY LEVELS.
C
C      ARGUMENT LIST FOR ERROR PROCESSING
COMMON /ARGLST/
1  NERRS ,NFATAL,NPERRS,NARG  ,ARG(10)
  DIMENSION IARG(10)
  EQUIVALENCE ( IARG,ARG )
C
C      CAS CONTROL CARD INPUT DATA AND CONSTANTS
COMMON /CASC/
1  AREACF,YCF  ,PRDCF ,APRUTS(4,2)  ,PPRUTS(5,2)  ,YPRUTS(3,2)
2  ,AKEAPS,S2MAX ,NHISTY,HH  ,TOPT  ,AUNITS,DISTFF,BWIND(4)
3  ,WPRIOR(4)  ,APREP ,IPRD(3,14)  ,NPDATE,PRDATE(14)
  INTEGER  HH, TOPT, AUNITS,DISTFF,BWIND,WPRIOR,APREP,PRDATE
C
C      DATA BLOCK FOR CAS CUMULATIVE FILE
C      CAS DATA SETS 14, 15, 16, AND 17
COMMON /CASCUM/
1  CASCUM(32),  BUFR(504)
  DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22)
1  ,DSET17(28)
  EQUIVALENCE ( ICASC,CASCUM )
  EQUIVALENCE ( DSET14,DSET15,DSET16,DSET17,CASCUM(5) )
1  , ( SOAERS,SQAERZ,SQAERR,SQAERC,CASCUM(24) )
2  , ( SQPERS,SQPERZ,SQPERR,SQPERC,CASCUM(25) )
3  , ( SOYERS,SQYERZ,SQYERR,SQYERC,CASCUM(26) )
C
C      FLAGS AND COUNTERS FOR CAS SIMULATOR
COMMON /CASFLG/
1  H  ,PPFLG ,NBW  ,IBW  ,WINDOW,IPD  ,IPP  ,PPDATE,NREGS
2  ,NZTOT ,NSTRAT,NYES$K,NSSH$K,NCAM$K,NRYES ,NRSSH ,NRCAMS
3  ,ENDC  ,ENDREG,FNDZON,IRSTR ,IRZONE,IRREG
4  ,LDS1  ,LDS4  ,LDS7  ,LDS8  ,LDS9  ,LDS10 ,LDS11 ,LDS12 ,LDS13
5  ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCOUN,LRREG ,LRZONE,LRSTR
```

CAS2  
JULY76  
JULY76  
JULY76  
JULY76  
JULY76  
JULY76  
CAS2  
ARGLST  
ARGLST  
ARGLST  
ARGLST  
ARGLST  
CASC/  
CASC/  
CASC/  
CASC/  
CASC/  
CASC/  
CASC/  
CASC/  
CASC/  
CASC/  
CASC/

	INTEGER PPFLG , WINDOW , PDATE	CASFLG
C		CASFLG
C	CONTROL PARAMETERS FOR LEM PROGRAM	CNTRL
	COMMON /CNTRL /	CNTRL
	1 PRINTF,NSTART,SEED(7)	CNTRL
	INTEGER PRINTF	CNTRL
	DOUBLE PRECISION SEED	CNTRL
C		CNTRL
C	CONSTANT QUANTITIES FOR LEM PROGRAM	CONST
	COMMON /CONST /	CONST
	1 NTRMX ,MAXR ,MAXZ ,IMXSEG,ENDFIL,ITSFG	CONST
C		CONST
	COMMON/FILES1/	FILES1
	1 ISUBH2,LSUBH2,MXCLSS	FILES1
C	CAS DATA SETS 1,2, AND 3	DSET1
	COMMON /DSET1 /	DSET1
	1 ISUBST,TWAK ,HWAK ,EWAK ,MIK ,CT1K ,ANALVK,EPWK ,EPW2K	JULY76
	2 ,SMPKPI,SUMPK2,SUMPK ,KSUB ,NCLASS	JULY76
	REAL MIK , M2K	JULY76
	DIMENSION DSET1(14), DSET2(14), DSET3(6)	JULY76
	EQUIVALENCF ( DSET1,DSET2,DSET3,ISUBST )	DSET1
	1 , ( M2K,M1K ), ( CT2K,CT3K,CT1K )	DSET1
C		DSET1
C	CAS DATA SETS 4, 5, AND 6 (AT STRATA LEVEL)	DSET4
	COMMON /DSET4 /	DSET4
	1 STRATA,TWAS1 ,HWAS1 ,EWAS1 ,XM1JS ,XCT1S ,ANVS1	JULY76
	2 ,TWAS2 ,HWAS2 ,EWAS2 ,XM2JS ,XCT2S ,ANVS2 ,T	JULY76
	3 ,TWAS3,HWAS3,XCT3S	
	4 ,XYS ,XESTYS,EVYRS ,P2IDPK,V1V2S ,VARS ,ANVARS	JULY76
	5 ,FILL4(57)	
	INTEGER STRATA	JULY76
	DIMENSION DSET4(24), DSET5(7), DSET6(3)	JULY76
	EQUIVALENCE ( DSET4,STRATA ), ( DSET5,TWAS2 ), ( DSET6,TWAS3 )	DSET4
C		DSET4
C	CAS DATA SET 7 (AT ZONE LEVEL)	DSET7
	COMMON /DSET7 /	DSET7
	1 ZONE ,HWAZ2 ,EZ ,M1K2KZ,ANALVZ,NSTRAZ,HWAZ1 ,EWAZ1 ,HWAZ3	JULY76
	2 ,ESTVZ ,HWAZ12	JULY76
	3 ,M1K2CL(10) ,EPWCL(10) ,EPW2CL(10) ,PKPICL(10)	JULY76
	4 ,PK2CL(10) ,PKCL(10) ,SSQ(10)	JULY76
	INTEGER ZONE	JULY76

	REAL M1K2KZ, M1K2CL	JULY76
	DIMENSION DSET7(81)	JULY76
	EQUIVALENCÉ ( DSET7,ZONÉ )	DSET7
C		DSET7
C	CAS DATA SET 8 (AT REGION LEVEL)	DSET8
	COMMON /DSET8 /	DSET8
	1 REGION,HWAR2 ,ER ,M1K2KR,ANALVR,NZONES,HWAR1 ;EWAR1 ,ESTVR	JULY76
	2 ,M1M2ZR,FILL8(71)	JULY76
	INTEGER REGION	JULY76
	REAL M1K2KR	JULY76
	DIMENSION DSET8(10)	JULY76
	EQUIVALENCE ( DSET8,REGION )	DSET8
C		DSET8
C	CAS DATA SET 9 (AT COUNTRY LEVEL)	DSET9
	CUMMUN /DSET9 /	DSET9
	1 COUNTR,HWAC2 ,EC ,M1K2KC,ANALVC,M1M2ZC,HWAC1 ,EWAC1 ,ESTVC	JULY76
	INTEGER COUNTR	JULY76
	REAL M1K2KC	JULY76
	DIMENSION DSET9(9)	JULY76
	EQUIVALENCE ( DSET9,COUNTR )	DSET9
C		DSET9
C	CAS DATA SET 11 (ZONE DATA -- FINAL PASS)	JULY76
	COMMON /DSET11/	DSET11
	1 HWAZ ,TWAZ ,EWAZ ,AERRZ ,AVARZ ,TPRODZ,EPRODZ,PRERRZ,PRVARZ	DSET11
	2 ,TYZ ,EYZ ,YERRZ ,M1Z ,M2Z ,CT1Z ,CT2Z ,CT3Z ,ANAVZ	DSET11
	3 ,ANPRVZ	DSET11
	REAL M1Z , M2Z	DSET11
	DIMENSION DSET11(19)	DSET11
	EQUIVALENCE ( DSET11,HWAZ )	DSET11
C		DSET11
C	CAS DATA SET 12 (REGION DATA -- FINAL PASS)	JULY76
	COMMON /DSET12/	DSET12
	1 HWAR ,TWAR ,EWAR ,AERRR ,AVARR ,TPRODR,EPRODR,PRERRR,PRVARR	DSET12
	2 ,TYR ,EYR ,YERRR ,M1R ,M2R ,CT1R ,CT2R ,CT3R ,ANAVR	DSET12
	3 ,ANPRVR	DSET12
	REAL M1R , M2R	DSET12
	DIMENSION DSET12(19)	DSET12
	EQUIVALENCE ( DSET12,HWAR )	DSET12
C		DSET12
C	CAS DATA SET 13 (COUNTRY DATA -- FINAL PASS)	JULY76
	COMMON /DSET13/	DSET13

```

1  HWAC ,TWAC ,EWAC ,AERRC ,AVARC ,TPRODC,EPRODC,PRERRC,PRVARC DSET13
2  ,TYC ,EYC ,YERRC ,M1C ,M2C ,CT1C ,CT2C ,CT3C ,ANAVC DSET13
3  ,ANPRVC,CLEWA ,CLEPRD,CLATEC,CLPTEC,CLATWC,CLPTWC DSET13
   REAL M1C , M2C DSET13
   DIMENSION DSET13(25) DSET13
   EQUIVALENCE ( DSET13,HWAC ) DSET13

```

C.

C

```

      FILE DEFINITIONS AND RECORD LENGTHS
COMMON /FILES /
1  SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ FILES
2  ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO FILES
3  ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD FILES
4  ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS FILES
   INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT FILES
1  ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF FILES

```

C

C

```

      INDEX RECORD FOR CAS CUMULATIVE FILE (CASF)
COMMON /IXCASF/
1  IXCASF(1),LIXCAS IXCASF

```

C

C

```

      INDEX RECORD FOR CAS INTERMEDIATE DATA SET FILE (CASDSF)
COMMON /IXCDSF/
1  IXCDSF(1),LIXCDS IXCDSF

```

C

C

```

      INDEX RECORD FOR INTERMEDIATE SUBSTRATA HISTORICAL DATA FILE
COMMON /IXSUBH/
1  LIXSSH,IXSUBH(1) IXSUBH

```

C

C

```

      LEM CONTROL CARD INPUT DATA
COMMON /LEMCM /
1  TITLE(10) ,ICASE ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ LEMCM
2  ,ENDR ,ENDZ ,ISTG ,ICAMS ,IYES ,IACQ ,ICLASS,ISEXT ,ISCC LEMCM
3  ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSECE LEMCM
4  ,ICSEYM,ICSESE,ICSFAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6 LEMCM
5  ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD LEMCM
   DIMENSION RSEED(7) LEMCM
   DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5 LEMCM
1  ,RSEED6,RSEED7 LEMCM
   EQUIVALENCE ( RSEED,RSEED1 ) LEMCM
   INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ LEMCM

```

C

C	PAGE EJECT CONTROL PARAMETERS FOR LEM	PAGECM
	COMMON /PAGECM/	PAGECM
1	NPAGE ,NLINE ,MXLINE,NSTTL ,SUBTTL(10)	PAGECM
C		PAGECM
C	STATISTICAL INFORMATION FOR LEM	STATS
	COMMON /STATS /	STATS
1	ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR	STATS
	EQUIVALENCE ( NT,ITER )	STATS
C		STATS
C	SUBSTRATA HISTORICAL DATA FROM SUBHST FILE	SSHDTA
	COMMON /SSHDTA/	SSHDTA
1	COUN2 ,IREG2 ,IZONE2,ISTRA2,ISUBS2,NSEG ,IDSEG ,GRPNO ,HISTPW	SSHDTA
2	,AREAK ,PWK ,NAGR ,NA ,DELTPW,DELTPM,CV1 ,CV2 ,CV3	SSHDTA
3	,CV4 ,VMULTK,CLASS(18),MXK,RDSSH	JULY76
	INTEGER GRPNO , CLASS , RDSSH	JULY76
	DIMENSION SSHDTA(39)	JULY76
	EQUIVALENCE ( SSHDTA, COUN2 )	SSHDTA
C		SSHDTA
C	DEBUGGING PRINT FLAG	CAS2
	COMMON /DEBUGF/ DEBUGF	CAS2
C		CAS2
C		CAS2
C	LOCAL VARIABLES	CAS2
C	I DO LOOP INDEX	CAS2
C	IREG REGION INDEX (1,2,...,NREG)	CAS2
C	IZONE ZONE INDEX (1,2,...,NZONES)	CAS2
C		CAS2
C		CAS2
	IF ( M1K2KC .NE. 0.0 ) GO TO 110	CAS2
C		CAS2
	CALL PAGER (3)	CAS2
	WRITE (OUTP,1)	CAS2
1	FORMAT (/28H NO ACQUISITIONS IN COUNTRY)	CAS2
	IF ( PPFLG .NE. 0 ) GO TO 105	CAS2
	WRITE (OUTP,2) IBW	CAS2
2	FORMAT (16H FOR BIOWINDOW ,I2)	CAS2
	GO TO 990	CAS2
105	WRITE (OUTP,3) IPRD(2,IPD),IPRD(3,IPD),IPRD(1,IPD)	CAS2
3	FORMAT (22H FOR PREDICTION DATE ,I2,1H/I2,1H/I2)	CAS2
	GO TO 990	CAS2
C		CAS2

C	INITIALIZE REGION, ZONE, AND STRATA POINTERS FOR CAS	CAS2
C	INTERMEDIATE FILE. ( REGION RECORDS ARE 3-12, ZONE RECORDS ARE	CAS2
C	13-62, STRATA RECORDS ARE 63-387 )	CAS2
110	IRREG= 2	CAS2
	IRZONE= 12	CAS2
	IRSTR = 62	CAS2
	IREG= 0	CAS2
	NRSSH = 0	JULY76
C		JULY76
C	REGION LOOP	JULY76
140	IREG = IREG + 1	JULY76
	IZONE= 0	CAS2
C		CAS2
C	READ DATA SET 8 (REGION LEVEL) FROM CAS INTERMEDIATE FILE	CAS2
	IRREG= IRREG + 1	CAS2
	CALL KANACF (CASDSF,IRREG,DSET8,LCASDS,IXCDSF,LIXCDS,1)	CAS2
C		CAS2
C	ZONE LOOP	JULY76
180	IZONE = IZONE + 1	CAS2
C		CAS2
C	READ DATA SET 7 (ZONE LEVEL) FROM CAS INTERMEDIATE FILE	CAS2
	IRZONE= IRZONE + 1	CAS2
	CALL KANACF (CASDSF,IRZONE,DSET7,LCASDS,IXCDSF,LIXCDS,1)	CAS2
C		CAS2
	ISTRAZ = 0	JULY76
C		JULY76
C	STRATA LOOP	JULY76
200	ISTRAZ = ISTRAZ + 1	JULY76
C	READ DATA SETS 4,5, AND 6 FROM CAS INTERMEDIATE FILE	JULY76
	IRSTR = IRSTR + 1	JULY76
	CALL KANACF (CASDSF,IRSTR,DSET4,LCASDS,IXCDSF,LIXCDS,1)	JULY76
C		JULY76
	V1V2S = 0.0	JULY76
	NSUB = XCT1S + XCT2S + XCT3S + 0.01	JULY76
	ISUB = 0	JULY76
C		JULY76
C	SUBSTRATA LOOP	JULY76
C	READ SUBSTRATA DATA FROM ISUBH2 FILE	JULY76
220	ISUB = ISUB + 1	JULY76
	NRSSH = NRSSH + 1	JULY76
	CALL KANACF (ISUBH2,NRSSH,SSHDTA,LSUBH2,IXSUBH,LIXSSH,1)	JULY76

C		JULY76
	NCLASS= CLASS(IPP)	JULY76
C		JULY76
C		JULY76
C		JULY76
C		JULY76
C	IF CLASS NUMBER IS ZERO OR IF NO ACQUIRED SEGMENTS IN STRATA,	JULY76
C	SKIP THIS SUBSTRATUM.	JULY76
C	IF ( NCLASS .EQ. 0 ) GO TO 250	JULY76
C	IF ( M1K2KZ .LT. 2.0 ) GO TO 250	JULY76
C	IF ( XM1JS + XM2JS .EQ. 0.0 ) GO TO 250	JULY76
C		JULY76
C	IF ( GRPNO - 2 ) 240,230,250	JULY76
C	GROUP 2 SUBSTRATA. FINISH COMPUTING GROUP 2 VARIANCE MULTIPLIER	JULY76
230	IF ( XM2JS .EQ. 0.0 ) GO TO 250	JULY76
	VMULTK = VMULTK*HWAS2/XM2JS	JULY76
C	GROUP 1 OR GROUP 2 SUBSTRATA	JULY76
240	V1V2S = V1V2S + VMULTK*SSQ(NCLASS)	JULY76
C	TEST FOR END OF STRATUM	JULY76
250	IF ( ISUB .LT. NSUB ) GO TO 220	JULY76
C		JULY76
C	IF NO ACQUIRED SEGMENTS IN STRATUM OR IF LESS THAN 2 SEGMENTS	JULY76
C	IN ZONE, SKIP VARIANCE CALCULATIONS FOR STRATUM.	JULY76
C	(COMPUTED LATER IN SUBROUTINE DS10)	JULY76
C	IF ( M1K2KZ .LT. 2.0 ) GO TO 260	JULY76
C	IF ( XM1JS + XM2JS .EQ. 0.0 ) GO TO 260	JULY76
C	COMPUTE AREA VARIANCE FOR STRATA WITH ACQUIRED SEGMENTS.	JULY76
	V1V2S = V1V2S + T	JULY76
	ANVS2 = ANVS2 + T	JULY76
	TAU2S = ( 1.0 + HWAS3/(HWAS1 + HWAS2) )**2	JULY76
	VAR5 = TAU2S*V1V2S	JULY76
	ANVAR5= TAU2S*(ANVS1 + ANVS2)	JULY76
C		JULY76
C	WRITE STRATA RECORD BACK ONTO CASDSF	JULY76
	CALL KANACF (CASDSF,IRSTR,DSET4,LCASDS,IXCDSF,LIXCDS,2)	JULY76
	ESTVZ = ESTVZ + V1V2S	JULY76
	ANALVZ= ANALVZ + ANVS1 + ANVS2	JULY76
	GO TO 265	JULY76
C		JULY76
C	COMPUTE TOTAL WHEAT AREA FOR STRATA WITHOUT SEGMENTS	JULY76
C	OR FOR STRATA IN A ZONE WITH LESS THAN 2 ACQUIRED SEGMENTS.	JULY76



260	HWAZ3 = HWAZ3 + HWAS1 + HWAS2 + HWAS3	JULY76
C		JULY76
	265 CONTINUE	JULY76
C		JULY76
C		JULY76
C	TEST FOR END OF ZONE	JULY76
270	IF ( ISTRAZ .LT. NSTRAZ ) GO TO 200	JULY76
C		JULY76
C		JULY76
C		JULY76
276	CONTINUE	JULY76
C		JULY76
C		JULY76
C	WRITE DATA SET 7 BACK ONTO CAS INTERMEDIATE FILE (CASDSF)	JULY76
	CALL RANACF (CASDSF,IRZONE,DSET7,LCASDS,IXCDSF,LIXCDS,2)	JULY76
C		JULY76
	IF ( M1K2KZ .LT. 2.0 ) GO TO 280	JULY76
	ESTVR = ESTVR + ESTVZ	JULY76
	ANALVR = ANALVR + ANALVZ	JULY76
C	TEST FOR END OF REGION	JULY76
280	IF ( IZONE .LT. NZONES ) GO TO 180	JULY76
C		JULY76
C		JULY76
C		JULY76
C		JULY76
	IF ( M1M2ZR .EQ. 0 ) GO TO 290	JULY76
C	WRITE DATA SET 8 BACK ONTO CASDSF	JULY76
	CALL RANACF (CASDSF,IRREG,DSET8,LCASDS,IXCDSF,LIXCDS,2)	JULY76
	ESTVC = ESTVC + ESTVR	JULY76
	ANALVC = ANALVC + ANALVR	JULY76
C		JULY76
C	TEST FOR END OF COUNTRY	JULY76
290	IF ( IREG .LT. NREGS ) GO TO 140	JULY76
C		JULY76
C		JULY76
C		CAS2
990	RETURN	CAS2
C		CAS2
C		CAS2
	END	CAS2



	1 PRINTF,NSTART,SEED(7)	CNTRL
	INTEGER PRINTF	CNTRL
	DOUBLE PRECISION SEED	CNTRL
C		CNTRL
C	CAS DATA SET 7 (AT ZONE LEVEL)	DSET7
	COMMON /DSET7 /	DSET7
	1 ZONE ,HWAZ2 ,EZ ,M1K2KZ,ANALVZ,NSTRAZ,HWAZ1 ,EWAZ1 ,HWAZ3	JULY76
	2 ,ESTVZ ,HWAZ12	JULY76
	3 ,M1K2CL(10) ,EPWCL(10) ,EPW2CL(10) ,PKPICL(10)	JULY76
	4 ,PK2CL(10) ,PKCL(10) ,SSQ(10)	JULY76
	INTEGER ZONE	JULY76
	REAL M1K2KZ, M1K2CL	JULY76
	DIMENSION DSET7(81)	JULY76
	EQUIVALENCE ( DSET7,ZONE )	DSET7
C		DSET7
C	CAS DATA SET 8 (AT REGION LEVEL)	DSET8
	COMMON /DSET8 /	DSET8
	1 REGION,HWAR2 ,ER ,M1K2KR,ANALVR,NZONES,HWAR1 ,EWAR1 ,ESTVR	JULY76
	2 ,M1M2ZR,FILL8(71)	JULY76
	INTEGER REGION	JULY76
	REAL M1K2KR	JULY76
	DIMENSION DSET8(10)	JULY76
	EQUIVALENCE ( DSET8,REGION )	DSET8
C		DSET8
C	CAS DATA SET 9 (AT COUNTRY LEVEL)	DSET9
	COMMON /DSET9 /	DSET9
	1 COUNTR,HWAC2 ,EC ,M1K2KC,ANALVC,M1M2ZC,HWAC1 ,EWAC1 ,ESTVC	JULY76
	INTEGER COUNTR	JULY76
	REAL M1K2KC	JULY76
	DIMENSION DSET9(9)	JULY76
	EQUIVALENCE ( DSET9,COUNTR )	DSET9
C		DSET9
C	CAS DATA SET 11 (ZONE DATA -- FINAL PASS)	JULY76
	COMMON /DSET11/	DSET11
	1 HWAZ ,TWAZ ,EWAZ ,AERRZ ,AVARZ ,TPRODZ,EPRODZ,PRERRZ,PRVARZ	DSET11
	2 ,TYZ ,EYZ ,YERRZ ,M1Z ,M2Z ,CT1Z ,CT2Z ,CT3Z ,ANAVZ	DSET11
	3 ,ANPRVZ	DSET11
	REAL M1Z , M2Z	DSET11
	DIMENSION DSET11(19)	DSET11
	EQUIVALENCE ( DSET11,HWAZ )	DSET11
C		DSET11

C	CAS DATA SET 12 (REGION DATA -- FINAL PASS)	JULY76
	COMMON /DSET12/	DSET12
	1 HWAR ,TWAR ,EWAR ,AERRR ,AVARR ,TPRODR,EPRODR,PRERRR,PRVARR	DSET12
	2 ,TYR ,EYR ,YERRR ,M1R ,M2R ,CT1R ,CT2R ,CT3R ,ANAVR	DSET12
	3 ,ANPRVR	DSET12
	REAL M1R , M2R	DSET12
	DIMENSION DSET12(19)	DSET12
	EQUIVALENCE ( DSET12,HWAR )	DSET12
C		DSET12
C	CAS DATA SET 13 (COUNTRY DATA -- FINAL PASS)	JULY76
	COMMON /DSET13/	DSET13
	1 HWAC ,TWAC ,EWAC ,AERRC ,AVARC ,TPRODC,EPRODC,PRERRC,PRVARC	DSET13
	2 ,TYC ,EYC ,YERRC ,M1C ,M2C ,CT1C ,CT2C ,CT3C ,ANAVC	DSET13
	3 ,ANPRVC,CLEWA ,CLEPRD,CLATEC,CLPTEC,CLATWC,CLPTWC	DSET13
	REAL M1C , M2C	DSET13
	DIMENSION DSET13(25)	DSET13
	EQUIVALENCE ( DSET13,HWAC )	DSET13
C		DSET13
C	FILE DEFINITIONS AND RECORD LENGTHS	FILES
	COMMON /FILES /	FILES
	1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ	FILES
	2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO	FILES
	3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD	FILES
	4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS	FILES
	INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT	FILES
	1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF	FILES
C		FILES
C	INDEX RECORD FOR CAS CUMULATIVE FILE (CASF)	IXCASF
	COMMON /IXCASF/	IXCASF
	1 IXCASF(1),LIXCAS	
C		IXCASF
C	INDEX RECORD FOR CAS INTERMEDIATE DATA SET FILE (CASDSF)	IXCDSF
	COMMON /IXCDSF/	IXCDSF
	1 IXCDSF(1),LIXCDS	
C		IXCDSF
C	LEM CONTROL CARD INPUT DATA	LEMCM
	COMMON /LEMCM /	LEMCM
	1 TITLE(10) ,ICASE ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ	LEMCM
	2 ,ENDR ,ENDZ ,ISTG ,ICAMS ,IYES ,IACQ ,ICLASS,ISEXT ,ISCC	LEMCM
	3 ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSECE	LEMCM
	4 ,ICSEYM,ICSESE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6	LEMCM

```

5 ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD          LEMCM
  DIMENSION RSEED(7)          LEMCM
  DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5  LEMCM
1 ,RSEED6,RSEED7          LEMCM
  EQUIVALENCE ( RSEED,RSEED1 )          LEMCM
  INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ          LEMCM
C          LEMCM
C          PAGE EJECT CONTROL PARAMETERS FOR LEM          PAGECM
  COMMON /PAGECM/          PAGECM
1  NPAGE ,NLINE ,MXLINE,NSITL ,SUBTTL(10)          PAGECM
C          PAGECM
C          STATISTICAL INFORMATION FOR LEM          STATS
  COMMON /STATS /          STATS
1  ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR          STATS
  EQUIVALENCE ( NT,ITER )          STATS
C          STATS
C          DEBUGGING PRINT FLAG          CAS3
  COMMON /DEBUGF/ DEBUGF          CAS3
C          CAS3
C          CAS3
C          LOCAL VARIABLES          CAS3
C          I DO LOOP INDEX          CAS3
C          IREG REGION INDEX (1,2,....,NREG)          CAS3
C          IZONE ZONE INDEX (1,2,....,NZONES)          CAS3
C          CAS3
C          CAS3
C          IF ( M1K2KC .EQ. 0.0 ) GO TO 990          JULY76
C          CAS3
C          INITIALIZE REGION, ZONE, AND STRATA POINTERS FOR CAS          CAS3
C          INTERMEDIATE FILE. ( REGION RECORDS ARE 3-12, ZONE RECORDS ARE          CAS3
C          13-62, STRATA RECORDS ARE 63-387 )          CAS3
110 IRREG= 2          CAS3
  IRZONE= 12          CAS3
  IRSTR = 62          CAS3
  IREG= 0          CAS3
C          CAS3
C          INITIALIZE DATA SET 13 (COUNTRY LEVEL)          CAS3
  DO 130 I=1,LD13          CAS3
  DSET13(I)= 0.0          CAS3
130 CONTINUE          CAS3
C          CAS3

```

C	INITIALIZE DATA SET 12 (REGION LEVEL)	CAS3
140	IREG= IREG + 1	CAS3
	DU 150 I=1,LDS12	CAS3
	DSET12(I)= 0.0	CAS3
150	CONTINUE	CAS3
	IZONE= 0	CAS3
	ENDREG= 0	CAS3
C	SET NLINE TO CAUSE PAGE EJECT BEFORE PRINTING NEXT REGION	CAS3
C	ON AREA AND PRODUCTION SUMMARY REPORT	CAS3
	NLINE= MXLINE + 1	CAS3
C		CAS3
C	READ DATA SET 8 (REGION LEVEL) FROM CAS INTERMEDIATE FILE	CAS3
	IRREG= IRREG + 1	CAS3
	CALL RANACF (CASDSF,IRREG,DSET8,LCASDS,IXCDSF,LIXCDS,1)	CAS3
C		JULY76
	HWAR12= HWAR2	JULY76
C		JULY76
	IF ( M1M2ZR .NE. 0 ) GO TO 180	JULY76
C	M1M2ZR = 0. NO ZONE IN REGION HAS AT LEAST 2 ACQUIRED SEGMENTS	JULY76
C	USE ESTIMATED GROUP 1,2 VARIANCE AND HISTORICAL GROUP 1,2	JULY76
C	WHEAT AREA FROM COUNTRY LEVEL.	JULY76
	ESTVR = ESTVC	JULY76
	ANALVR = ANALVC	JULY76
	HWAR12 = HWAR2	JULY76
C		CAS3
C	INITIALIZE DATA SET 11 (ZONE LEVEL)	CAS3
180	IZONE = IZONE + 1	CAS3
	IF ( IZONE .EQ. NZONES ) ENDREG= 1	CAS3
	DU 190 I=1,LDS11	CAS3
	DSET11(I)= 0.0	CAS3
190	CONTINUE	CAS3
C		CAS3
C	READ DATA SET 7 (ZONE LEVEL) FROM CAS INTERMEDIATE FILE	CAS3
	IRZONE= IRZONE + 1	CAS3
	CALL RANACF (CASDSF,IRZONE,DSET7,LCASDS,IXCDSF,LIXCDS,1)	CAS3
C		JULY76
	HWAZ12= HWAZ2	JULY76
	IF ( M1K2KZ .GT. 1 ) GO TO 200	JULY76
C		JULY76
C	LESS THAN 2 ACQUIRED SEGMENTS IN ZONE. USE ESTIMATED GROUP 1,2	JULY76
C	VARIANCE AND HISTORICAL GROUP 1,2 WHEAT AREA FROM REGION OR	JULY76

C-16

```
C      COUNTRY LEVEL .                                JULY76
ESTVZ = ESTVR                                         JULY76
ANALVZ = ANALVR                                       JULY76
HWAZ12= HWAR12                                         JULY76
IF ( HWAR12 .EQ. 0.0 ) GO TO 200                       JULY76
WRATIO = ( HWAZ3/HWAR12 )**2                          JULY76
AVARZ = ESTVR*WRATIO                                   JULY76
ANAVZ = ANALVR*WRATIO                                  JULY76
C                                                     CAS3
C      COMPUTE DATA SET 10 FOR EACH STRATA IN THIS ZONE AND AGGREGATE CAS3
C      INTO DATA SET 11 AT THE ZONE LEVEL.           CAS3
200 CALL DS10                                          JULY76
IF ( NFATAL .NE. 0 ) GO TO 990                         CAS3
C                                                     CAS3
C      GENERATE REST OF DATA SET 11 (ZONE LEVEL)    CAS3
C      EQS. 109, 113, 115 - 117                      CAS3
AFRRZ = EWAZ - TWAZ                                    CAS3
PRRRZ= EPRDZ - TPRDZ                                  CAS3
IF ( TWAZ .NE. 0.0 ) TYZ= TPRDZ/TWAZ                  CAS3
IF ( EWAZ .NE. 0.0 ) EYZ= EPRDZ/EWAZ                  CAS3
IF ( TYZ .NE. 0.0 ) YERRZ= ( EYZ - TYZ )/TYZ *100.0  CAS3
C                                                     CAS3
C                                                     CAS3
C      TEMPORARY DEBUGGING PRINTOUT                   CAS3
C                                                     CAS3
C                                                     CAS3
C      AGGREGATE ZONE DATA SET 11 UP TO DATA SET 12 (REGION LEVEL) CAS3
C      EQS. 125 - 127, 129 - 131, 133, 137 - 143    CAS3
DO 440 I=1,7                                          CAS3
DSET12(I)= DSET12(I) + DSET11(I)                     CAS3
440 DSET12(I+12)= DSET12(I+12) + DSET11(I+12)        CAS3
PRVARR= PRVARR + PRVARZ                              CAS3
C                                                     CAS3
C      ON FIRST ITERATION AND FIRST PREDICTION POINT, SKIP READING CAS3
C      CAS CUMULATIVE FILE.                          CAS3
IF ( NT .EQ. 1 .AND. IPP .EQ. 1 ) GO TO 450         CAS3
C                                                     CAS3
C      READ DATA SET 15 (ZONE DATA) FROM CAS CUMULATIVE FILE CAS3
C      NOTE ... EQUIVALENCE ( DSET15,CASCUM(5) )    CAS3
CALL RWCASF (IRZONE,CASCUM,1)                        CAS3
C                                                     CAS3
```

C	ACCUMULATE ZONE DATA IN DATA SET 15 (CAS CUMULATIVE FILE)	CAS3
	IF ( NT .GT. 1 ) GO TO 470	CAS3
C	FIRST ITERATION. CLEAR DATA SET 15 BEFORE ACCUMULATING	CAS3
450	ICASC(1)= REGION	CAS3
	ICASC(2)= ZONE	CAS3
	CASCUM(3)= 0.0	CAS3
	ICASC(4)= NSTRAZ	CAS3
	DU 460 I=1,LDS15	CAS3
	DSET15(I)= 0.0	CAS3
460	CONTINUE	CAS3
470	DU 480 I=1,19	CAS3
	DSET15(I)= DSET15(I) + DSET11(I)	CAS3
480	CONTINUE	CAS3
C	EQS. 173 - 175	CAS3
	SQAERZ= SQAERZ + AERRZ**2	CAS3
	SUPERZ= SUPERZ + PRERRZ**2	CAS3
	SQYERZ= SQYERZ + YERRZ**2	CAS3
C		CAS3
C		CAS3
C	TEMPORARY DEBUGGING PRINTOUT	CAS3
C		CAS3
C		CAS3
C	WRITE DATA SET 15 (ZONE DATA) BACK ONTO CAS CUMULATIVE FILE	CAS3
	CALL RWCASF (IRZONE,CASCUM,2)	CAS3
C		CAS3
C	UPDATE ZONE DATA ON CAS DISTRIBUTION FILE	CAS3
	IF ( DISTFF .NE. 0 ) CALL RWDISF (2,DSET11)	CAS3
C		CAS3
C	PRINT AREA AND PRODUCTION SUMMARY REPORT DATA FOR THIS ZONE	CAS3
	IF ( PRINTF .NE. 0 .AND. APREP .NE. 0 ) CALL CASOUT (-2)	CAS3
C	TEST FOR END OF REGION	CAS3
	IF ( IZONE .LT. NZONES ) GO TO 180	CAS3
C		CAS3
C	GENERATE REST OF DATA SET 12 (REGION LEVEL)	CAS3
C	EQS. 128, 132, 134 - 136	CAS3
	AERRR= EWAR - TWAR	CAS3
	PRERRR= EPRODR - TPRODR	CAS3
	IF ( TWAR .NE. 0.0 ) TYR= TPRODR/TWAR	CAS3
	IF ( EWAR .NE. 0.0 ) EYR= EPRODR/EWAR	CAS3
	IF ( TYR .NE. 0.0 ) YERRR= ( EYR - TYR )/TYR *100.0	CAS3
C		CAS3



C		CAS3
C	TEMPORARY DEBUGGING PRINTOUT	CAS3
C		CAS3
C	AGGREGATE REGION DATA SET 12 UP TO DATA SET 13 (COUNTRY LEVEL)	CAS3
C	EQS. 144 - 146, 148 - 150, 152, 156 - 162	CAS3
	DO 540 I=1,7	CAS3
	DSET13(I)= DSET13(I) + DSET12(I)	CAS3
540	DSET13(I+12)= DSET13(I+12) + DSET12(I+12)	CAS3
	PRVARC= PRVARC + PRVARR	CAS3
C		CAS3
C	ON FIRST ITERATION AND FIRST PREDICTION POINT, SKIP READING	CAS3
C	CAS CUMULATIVE FILE.	CAS3
C	IF ( NT .EQ. 1 .AND. IPP .EQ. 1 ) GO TO 550	CAS3
C		CAS3
C	READ DATA SET 16 (REGION DATA) FROM CAS CUMULATIVE FILE	CAS3
C	NOTE ... EQUIVALENCE ( DSET16,CASCUM(5) )	CAS3
C	CALL RWCASF (IRREG,CASCUM,1)	CAS3
C		CAS3
C	ACCUMULATE REGION DATA IN DATA SET 16 (CAS CUMULATIVE FILE)	CAS3
C	IF ( NT .GT. 1 ) GO TO 570	CAS3
C	FIRST ITERATION. CLEAR DATA SET 16 BEFORE ACCUMULATING	CAS3
550	ICASC(1)= REGION	CAS3
	ICASC(2)= 0	CAS3
	ICASC(3)= 0	CAS3
	ICASC(4)= 0	CAS3
	DO 560 I=1,LDS16	CAS3
	DSET16(I)= 0.0	CAS3
560	CONTINUE	CAS3
C		CAS3
570	DO 580 I=1,19	CAS3
	DSET16(I)= DSET16(I) + DSET12(I)	CAS3
580	CONTINUE	CAS3
C	EQS. 176 - 178	CAS3
	SQAERR= SQAERR + AERRR**2	CAS3
	SQPERK= SQPFRR + PRERRR**2	CAS3
	SQYERR= SQYERR + YERRR**2	CAS3
C		CAS3
C		CAS3
C	TEMPORARY DEBUGGING PRINTOUT	CAS3
C		CAS3
C		CAS3

```

C      WRITE DATA SET 16 (REGION DATA) BACK ONTO CAS CUMULATIVE FILE   CAS3
CALL RWCASF (IRREG,CASCUM,2)                                           CAS3
C                                                                           CAS3
C      UPDATE REGION DATA ON CAS DISTRIBUTION FILE                       CAS3
IF ( DISTFF .NE. 0 ) CALL RWDISF (1,DSET12)                             CAS3
C                                                                           CAS3
C      PRINT AREA AND PRODUCTION SUMMARY REPORT DATA FOR THIS REGION   CAS3
IF ( PRINTF .NE. 0 .AND. APREP .NE. 0 ) CALL CASOUT (-1)               CAS3
C      TEST FOR END OF COUNTRY                                           CAS3
IF ( IREG .LT. NREGS ) GO TO 140                                        CAS3
C                                                                           CAS3
C      GENERATE REST OF DATA SET 13 (COUNTRY LEVEL)                     CAS3
EQS. 147, 151, 153 - 155                                             CAS3
AERRC= EWAC - TWAC                                                    CAS3
PRERRC= EPRODC - TPRODC                                              CAS3
IF ( TWAC .NE. 0.0 ) TYC= TPRODC/TWAC                                  CAS3
IF ( EWAC .NE. 0.0 ) EYC= EPRODC/EWAC                                  CAS3
IF ( TYC .NE. 0.0 ) YERRC= ( EYC - TYC )/TYC *100.0                 CAS3
C                                                                           CAS3
C      COMPUTE CONFIDENCE LEVELS                                          CAS3
CALL CONFL                                                            CAS3
C                                                                           CAS3
C                                                                           CAS3
C      TEMPORARY DEBUGGING PRINTOUT .                                     CAS3
C                                                                           CAS3
C                                                                           CAS3
C      ON FIRST ITERATION AND FIRST PREDICTION POINT, SKIP READING     CAS3
CAS CUMULATIVE FILE.                                                 CAS3
IF ( NT .EQ. 1 .AND. IPP .EQ. 1 ) GO TO 650                           CAS3
C                                                                           CAS3
C      READ DATA SET 17 (COUNTRY DATA) FROM CAS CUMULATIVE FILE     CAS3
NOTE ... EQUIVALENCE ( DSET17,CASCUM(5) )                             CAS3
CALL RWCASF (2,DSET17,1)                                             CAS3
C                                                                           CAS3
C      ACCUMULATE COUNTRY DATA IN DATA SET 17 (CAS CUMULATIVE FILE)  CAS3
IF ( NT .GT. 1 ) GO TO 670                                           CAS3
C      FIRST ITERATION. CLEAR DATA SET 17 BEFORE ACCUMULATING        CAS3
650 DO 660 I=1, LDS17                                                 CAS3
DSET17(I)= 0.0                                                       CAS3
660 CONTINUE                                                         CAS3
C                                                                           CAS3

```

670	DU 680 I=1,19	CAS3
	DSET17(I)= DSET17(I) + DSET13(I)	CAS3
680	CUNTINUE	CAS3
C	EOS. 179 - 181	CAS3
	SQAERC= SQAERC + AFERRC**2	CAS3
	SQPERC= SQPERC + PRERRC**2	CAS3
	SQYERC= SQYERC + YERRC**2	CAS3
C	ACCUMULATE CONFIDENCE LEVELS ALSO.	CAS3
	DU 690 I=20,25	CAS3
	DSET17(I+3)= DSET17(I+3) + DSET13(I)	CAS3
690	CUNTINUE	CAS3
C		CAS3
C		CAS3
C	TEMPORARY DEBUGGING PRINTOUT	CAS3
C		CAS3
C		CAS3
C		CAS3
C	WRITE DATA SET 17 (COUNTRY DATA) BACK ONTO CAS CUMULATIVE FILE	CAS3
	CALL RWCASF (2,DSET17,2)	CAS3
C		CAS3
C	UPDATE COUNTRY DATA ON CAS DISTRIBUTION FILE	CAS3
	IF ( DISTFF .NE. 0 ) CALL RWDISF (0,DSET13)	CAS3
C		CAS3
C	COMPUTE MEAN VALUES AND PRINT AREA AND PRODUCTION SUMMARY REPORT	CAS3
	IF ( PRINTF .NE. 0 ) CALL CASOUT (0)	CAS3
C		CAS3
C	CLOSE CAS INTERMEDIATE FILE	CAS3
C		CAS3
C	ON THE FINAL ITERATION (UNLESS NTRIAL = 1), COMPUTE	CAS3
	CLWA AND CLPRD IN DATA SET 18.	CAS3
	IF ( NT .EQ. NTRIAL .AND. NT .GT. 1 ) CALL DS18	CAS3
C		CAS3
990	RETURN	CAS3
C		CAS3
C		CAS3
	END	CAS3

```

000001      SUBROUTINE CLASS(SEED?,TYPE,WINDOW,M,BCC,SIGCC,XI)      CLASS
000002      C      CLASS
000003      C      THIS SUBROUTINE CALCULATES THE INPUT CLASSIFICATION ERROR FOR      CLASS
000004      C      TRAINING SEGMENTS, AND THE TOTAL CLASSIFICATION ERROR.      CLASS
000005      C      CLASS
000006      COMMON/CAMERR/ COUN2,IRFG?,IZONE2,ISTRA2,ISUB2,ISFG?,      LANFRR
000007      1 PW(3,4),BERR(3,4),SIGERR(3,4)      CAMERR
000008      COMMON/TRAINS/ COUN7,IRLG?,IZONE7,ISTRA7,ISUB7,ISER?,      IPAINS
000009      1 IWIN(4,25),ITTOT,TMM(3,4,25),TUR(3,4,25),TVV(3,4,25),      IPAINS
000010      1 TPTIME,IZULU(4),TPEST(4),TPERR(4),TERTOT(3),TM(3),TV(3),TB(3)      TRAINS
000011      INTEGER IZULU      IPAINS
000012      DIMENSION ITRAIN(129)      IPAINS
000013      EQUIVALENCE(ITRAIN,COUN7)      IPAINS
000014      C      CONTROL PARAMETERS FOR LEM PROGRAM      CNTRL
000015      COMMON /CNTRL /      CNTRL
000016      1 PRINTF,INSTART,SEED(?)      CNTRL
000017      INTEGER PRINTF      CNTRL
000018      DOUBLE PRECISION SEED      CNTRL
000019      C      CNTRL
000020      C      CAMS CONTROL CARD INPUT DATA      CNTRL
000021      COMMON/CAMSCM/ IMODFL,IMULTI,ISIGFX,ISKIP,ITMAX,IREP,IWIND,      CAMSCM
000022      1 IGROUP(3,2,15),MS(3,2,3),G(3,2,2),H(3,2,2)      CAMSCM
000023      REAL MS      CAMSCM
000024      C      CAMSCM
000025      COMMON/ERROR/TITL(4),IDATE,PESTIM,TOT,ALOCAL,FRTOT(3)      ERROR
000026      1 ,ERRBIAS(3),ERRAND(3),CLTOT(3),CLBIAS(3),CLRAND(3),DELTA,      ERROR
000027      1 CROPD, Z(3,2),MULT(3),TID,TRAINA,TRAIND      ERROR
000028      DIMENSION IERS(40)      ERROR
000029      EQUIVALENCE(TITL,IERS)      ERROR
000030      REAL MULT      ERROR
000031      INTEGER TID,CROPD      ERROR
000032      C      ARGUMENT LIST FOR ERROR PROCSSING      ARGST
000033      COMMON /ARGLS1/      ARGST
000034      1 NERPS ,NFATAL,NPERRS,NARG ,ARG(10)      ARGST
000035      DIMENSION IARG(10)      ARGST
000036      EQUIVALENCE ( IARG,ARG )      ARGST
000037      C      ARGST
000038      INTEGER TYPE, WINDOW      CLASS
000039      REAL M      CLASS
000040      DOUBLE PRECISION SEED?      CLASS
000041      C      CLASS
000042      C      ADD INPUT CLASSIFICATION ERROR TO CROP CALENDAR ERROR      CLASS
000043      B=BFRR(TYPE,WINDOW)+BCC      CLASS
000044      SIG=SQRT(SIGERR(TYPE,WINDOW)*SIGERR(TYPE,WINDOW)+SIGCC*SIGCC)      CLASS
000045      C      CLASS
000046      C      COMPUTE XBAR AND SIGMA, THEN XI      CLASS
000047      XBAR=PW(TYPE,WINDOW)*(1.+M*B)      CLASS
000048      SIGMA=PW(TYPE,WINDOW)*M*SIG      CLASS
000049      CALL IETAD (SEED?,XBAR,SIGMA,XI,0,IFR)      CLASS
000050      NARG=1      CLASS
000051      IARG(1)=IFR      CLASS
000052      IF(TIP,GT.0) CALL ERRMES(4HCAMS,5HCLASS,4,0)      CLASS
000053      IF(TIP,GE.5) XI=XBAR      CLASS
000054      C      CLASS
000055      C      ERROR REPORT      CLASS
000056      10 CONTINUE      CLASS
000057      IF(PKINTF.LF,0,OR,IREP.IE,0)RETURN      CLASS
000058      IV(TYPE)=0.      CLASS

```

```

000059      IF(SIGMA.FW.0.) GO TO 12
000060      TV(TYPE)=(XI-XBAR)/(PW(TYPE,WINDOW)*M)
000061 12 CONTINUE
000062      CLHTAS(TYPE)=B
000063      CLKAND(TYPE)=TV(TYPE)
000064      CLIOI(TYPE)=B+TV(TYPE)
000065      ERIOI(TYPE)=M*(B+TV(TYPE))
000066      ERUIAS(TYPE)=M+B
000067      ERRAND(TYPE)=M+TV(TYPE)
000068      RETURN
000069      END

```

```

CLASS
CLASS
CLASS
CLASS
CLASS
CLASS
CLASS
CLASS
CLASS
CLASS
CLASS

```

ORIGINAL PAGE IS  
OF POOR QUALITY

```

FOR,IS CLASSN
SUBROUTINE CLASSN
C THIS ROUTINE CONTROLS THE COMPUTATION OF CLASS NUMBERS AND THE *****
C GENERATION OF ISUBH2 FILE FROM THE SUBHST FILE. *****
COMMON/FILES1/
1ISUBH2,LSUBH2,MXCLSS
FILES1
FILES1
C FLAGS AND COUNTERS FOR CAS SIMULATOR
CASFLG
CASFLG
COMMON /CASFLG/
1 H ,PPFLG ,NBW ,IBW ,WINDOW,IPD ,IPP ,PPDATE,NREGS
CASFLG
2 ,NZTOT ,NSTRAT,NYESSK,NSSH$K,NCAMSK,NRYES ,NRSSH ,NRCAMS
CASFLG
3 ,ENDC ,ENDREG,ENDZON,IRSTR ,IRZONE,IRREG
CASFLG
4 ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13
CASFLG
5 ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCON,LRREG ,LRZONE,LRSTR
CASFLG
INTEGER PPFLG , WINDOW , PPDATE
CASFLG
C
CASFLG
C CONSTANT QUANTITIES FOR LEM PROGRAM
CONST
COMMON /CONST /
CONST
1 NTRMX ,MAXR ,MAXZ ,IMXSEG,ENDFIL,ITSFG
CONST
C
CONST
C LEM CONTROL CARD INPUT DATA
LEMCM
COMMON /LEMCM /
LEMCM
1 TITLE(10) ,ICASE ,CUNTRY,NTRIAL ,RSTART,IPRINT,STARTR,STARTZ
LEMCM
2 ,ENDR ,ENDZ ,ISTG ,ICAMS ,IYES ,IACQ ,ICLASS,ISEXT ,ISCC
LEMCM
3 ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSEGE
LEMCM
4 ,ICSEYM,ICSESE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6
LEMCM
5 ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD
LEMCM
DIMENSION RSEED(7)
LEMCM
DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5
LEMCM
1 ,RSEED6,RSEED7
LEMCM
EQUIVALENCE ( RSEED,RSEED1 )
LEMCM
INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ
LEMCM
LEMCM
C
LEMCM
C INDEX RECORD FOR INTERMEDIATE SUBSTRATA HISTORICAL DATA FILE
IXSUBH
COMMON /IXSUBH/
IXSUBH
1 LIXSSH,IXSUBH(1)
MOD1
C
IXSUBH
C FILE DEFINITIONS AND RECORD LENGTHS
FILES
COMMON /FILES /
FILES
1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ
FILES
2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO
FILES
3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD
FILES

```

```

4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS          FILES
INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT  FILES
1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF          FILES
C
C      CAS DATA SETS 1,2, AND 3
COMMON /DSET1 /
1  ISUBST,TWAK ,HWAK ,EWAK ,MIK ,CT1K ,ANALVK,EPWK ,EPW2K    JULY76
2  ,SMPKPI,SUMPK2,SUMPK ,KSIUB ,NCLASS                     JULY76
REAL MIK , M2K                                             JULY76
DIMENSION DSET1(14), DSET2(14), DSET3(6)                 JULY76
EQUIVALENCE ( DSET1,DSET2,DSET3,ISUBST )                DSET1
1  , ( M2K,MIK ), ( CT2K,CT3K,CT1K )                     DSET1
C
C      ARGUMENT LIST FOR ERROR PROCESSING
COMMON /ARGLST/
1  NERRS ,NFATAL,NPEKRS,NARG ,ARG(10)                     ARGLST
DIMENSION IARG(10)                                       ARGLST
EQUIVALENCE ( IARG,ARG )                                  ARGLST
C
C      TABLES NECESSARY TO DETERMINE CLASS SETS WITHIN A ZONE
COMMON /CLSTAB/
1  ISTRAT(300),ISBSTR(300),NSCNT(300),IGROUP(300),IDAT1(300), MOD1
2  IDAT2(300),XORD(300),IXPT(300),IRANK(300),IBPT(10),IEPT(10),MOD1
3  MAXCLS,ICLCNT,ISUB1,NACQ                               CLSTAB
DIMENSION DAT1(300),DAT2(300),RANK(300)                 MOD1
EQUIVALENCE ( IDAT1(1),DAT1(1) ),( IDAT2(1),DAT2(1) ),( IRANK(1),
IRANK(1) )                                               CLSTAB
C
C      SUBSTRATA HISTORICAL DATA FROM SUBHST .FILE
COMMON /SSHDTA/
1  COUN2 ,IREG2 ,IZONE2,ISTRA2,ISUBS2,NSEG ,IDSEG ,GRPNO ,HISTPW SSHDTA
2  ,AREAK ,PWK ,NAGR ,NA ,DELTPW,DELTPM,CV1 ,CV2 ,CV3     SSHDTA
3  ,CV4 ,VMULTK,CLASS(18),MXK,RDSSH                     JULY76
INTEGER GRPNO , CLASS , RDSSH                           JULY76
DIMENSION SSHDTA(39)                                     JULY76
EQUIVALENCE ( SSHDTA, COUN2 )                             SSHDTA
C
DIMENSION IBUF(39)                                       *****
DIMENSION BUF(39)                                         MOD1
EQUIVALENCE ( BUF(1),IBUF(1) )                           MOD1
DIMENSION IDUM(150)
DATA MAXSCT/300/,IRCT/19/                                MOD1

```







IF(BUF(1) .EQ. ENDFIL)GO TO 150	MOD1
IF(ENDR .EQ. 0)GO TO 15	*****
IF(IBUF(2) - ENDR)15,115,145	*****
115 IF(ENDZ .EQ. 0)GO TO 15	*****
IF(IBUF(3) .LE. ENDZ)GO TO 15	*****
145 BUF(1) = ENDFIL	MOD1
150 IF(IPP .NE. 1)GO TO 152	MOD1
CALL RANACF(ISUBH2,ISUB,IBUF,LSUBH2,IXSUBH,LIXSSH,2)	*****
152 REWIND CAMSF	MOD1
DU 155 I=1,NCAMSK	*****
READ(CAMSF)	*****
155 CONTINUE	*****
NRCAMS = NCAMSK - 1	*****
GO TO 210	*****
200 NFATAL = NFATAL + 1	*****
WRITE(OUTP,900)IREG2,IZONE2	*****
210 IF(NFATAL .EQ. 0)GO TO 250	*****
WRITE(OUTP,901)	*****
STOP	*****
250 RETURN	*****
900 FORMAT(1H0,48HEITHER TOO MANY SUBSTRATA OR SEGMENTS IN REGION-,I4,MOD1	MOD1
16H ZONE-,I4)	*****
901 FORMAT(1H ,43HFATAL ERRORS IN PASS 0 OF CAS. RUN ABORTED.)	*****
END	*****

```

000001          SUBROUTINE LONFL                                CONF1
000002          COMPUTES CONFIDENCE LEVELS IN DATA SET 13    CONF1
000003          C                                              CONF1
000004          C          ARGUMENT LIST FOR ERROR PROCESSING   CONF1
000005          COMMON /ARGLST/                                     ARG1,ST
000006          1  NERRS ,NFATAL,NPERRS,NARG ,ARG(10)             ARG1,ST
000007          DIMENSION IARG(10)                                 ARG1,ST
000008          EQUIVALENCE ( IARG,ARG )                          ARG1,ST
000009          C                                              ARG1,ST
000010          C          CAS DATA SET 15 (COUNTRY DATA -- SECOND PASS)
000011          COMMON /DSFT15/                                    DSFT15
000012          1  HWAC ,LWAC ,FWAC ,AFRRC ,AVARC ,TPRODC ,EPRODC ,PRRRC ,PRVARC DSFT15
000013          2  ,TYC ,EYC ,YERRC ,MIC ,M2C ,CT1C ,CT2C ,CT3C ,ANAVC   DSFT15
000014          3  ,ANPRVC ,CLEWA ,CLEPRD ,CLATEC ,CLPTEC ,CLATWC ,CLPTWC DSFT15
000015          REAL MIC ,M2C                                     DSFT15
000016          DIMENSION DSET15(25)                              DSFT15
000017          EQUIVALENCE ( DSFT15,HWAC )                      DSFT15
000018          C                                              DSFT15
000019          C          LOCAL VARIABLES                          DSFT15
000020          C          X      = ARGUMENT FOR P(X) FUNCTION    CONF1
000021          C          X1     = ARGUMENT FOR P(X) FUNCTION    CONF1
000022          C          X2     = ARGUMENT FOR P(X) FUNCTION    CONF1
000023          C          Y      = VARIANCE QUANTITY USED TO CALCULATE X, X1, OR X2
000024          C                                              CONF1
000025          C                                              CONF1
000026          C          COMPUTE CLEWA (EQ. 165)                 CONF1
000027          ARG(1)= 5*AVARC                                    CONF1
000028          IARG(2)= 165                                        CONF1
000029          Y= YSUB(AVARC,LWAC)                                CONF1
000030          X= 0.1*FWAC/Y                                       CONF1
000031          CLLWA= ( 2.0*PSUB(X) - 1.0 ) *100.0                CONF1
000032          C                                              CONF1
000033          C          COMPUTE CLATEC (EQ. 166)                 CONF1
000034          X1= ( LWAC - 0.9*TWAC ) /Y                          CONF1
000035          X2= ( LWAC - 1.1*TWAC ) /Y                          CONF1
000036          CLATEC= ( PSUB(X1) - PSUB(X2) ) *100.0             CONF1
000037          C                                              CONF1
000038          C          COMPUTE CLEPRD (EQ. 165)                 CONF1
000039          ARG(1)= 6*EPRODC                                    CONF1
000040          IARG(2)= 165                                        CONF1
000041          Y= YSUB(PRVARC,EPRODC)                              CONF1
000042          X= 0.1*EPRODC/Y                                       CONF1
000043          CLEPRD= ( 2.0*PSUB(X) - 1.0 ) *100.0                CONF1
000044          C                                              CONF1
000045          C          COMPUTE CLPTEC (EQ. 167)                 CONF1
000046          X1= ( EPRODC - 0.9*TPRODC ) /Y                      CONF1
000047          X2= ( EPRODC - 1.1*TPRODC ) /Y                      CONF1
000048          CLPTEC= ( PSUB(X1) - PSUB(X2) ) *100.0             CONF1
000049          C                                              CONF1
000050          C          COMPUTE CLATWC (EQ. 168)                 CONF1
000051          ARG(1)= 5*ANAVC                                     CONF1
000052          IARG(2)= 168                                        CONF1
000053          Y= YSUB(ANAVC,LWAC)                                  CONF1
000054          X1= ( LWAC - 0.9*TWAC ) /Y                          CONF1
000055          X2= ( LWAC - 1.1*TWAC ) /Y                          CONF1
000056          CLATWC= ( PSUB(X1) - PSUB(X2) ) *100.0            CONF1
000057          C                                              CONF1
000058          C          COMPUTE CLPTWC (EQ. 169)                 CONF1

```

```
000059 ARG(1)= 6HAMPRVC
000060 IARG(2)= 169
000061 Y= YSUB(ANPRVC,TPRODC)
000062 X1= ( FPRODC - 0.9*TPRODC )/Y
000063 X2= ( FPRODC - 1.1*TPRODC )/Y
000064 CIPTWC= ( PSUB(X1) - PSUB(X2) )*100.0
C
900 RETURN
END
```

```
CONFL
CONFL
CONFL
CONFL
CONFL
CONFL
CONFL
CONFL
```



000059  
000060  
000061  
000062  
000063  
000064  
000065

TERTOT(I)=TM(I)\*(TB(I)+TV(I))  
45 CONTINUE  
RETURN  
50 CONTINUE  
IUSE=IUSE+1  
GO TO 60  
END

CORREL  
CORREL  
CORREL  
CORREL  
CORREL  
CORREL  
CORREL

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000001      SUBROUTINE CROP(SEED4,TYPE,SEASON,WINDOW,IFIRST,BCC,SIGCC      CROP
000002      1 ,IISFG)      CROP
000003      C      CROP
000004      C THIS SUBROUTINE CALCULATES THE CROP CALENDAR ERROR FOR TRAINING      CROP
000005      C SEGMENTS.      CROP
000006      C      CROP
000007      C CAMS CONTROL CARD INPUT DATA      CAMSCM
000008      COMMON/CAMSCM/ ITHDFL,IMULTI,ISIGFX,ISKIP,ITHAX,IPEP,THIND,      CAMSCM
000009      1 ICRUP(3,2,15),MS(3,2,5),G(3,2,2),H(3,2,2)      CAMSCM
000010      REAL MS      CAMSCM
000011      C      CAMSCM
000012      COMMON/CROPW/COUN3,IRFG3,IZONF3,ISTR3,ISUB3,      CROPW
000013      1 START(2,4),END(2,4),SD(2),ERR(2,5)      CROPW
000014      INTEGER START,END,SD,FRR      CROPW
000015      COMMON/ERROR/IITL(4),IDATE,PESTIM,TOT,ALOCAL,FRTOT(3)      ERROR
000016      1 ,ERRIAS(3),ERRAND(3),CLTOT(3),CLBIAS(3),CLRAND(3),DELTA,      ERROR
000017      1 CRUPD, 7(3,2),MULT(3),IID,IRAINA,IRAIND      ERROR
000018      DIMENSION IFRS(40)      ERROR
000019      EQUIVALENCE(IITL,IERS)      ERROR
000020      REAL MULT      ERROR
000021      INTEGER IID,CROPD      ERROR
000022      DOUBLE PRECISION SEED4      CROP
000023      INTEGER TYPE,SEASON,WINDOW      CROP
000024      C      CROP
000025      C COMPUTE DELTA T      CROP
000026      IF(IFIRST.GT.1.OR.TYPE.GE.1) GO TO 10      CROP
000027      CALL BETAD(SEED4,0.,0.,RN,1,IFR)      CROP
000028      IISFG=IFIX(PN)*SD(SEASON)      CROP
000029      C      CROP
000030      C COMPUTE CROP CALENDAR ERROR      CROP
000031      10 CONTINUE      CROP
000032      CROPD=IISFG -FRR(SEASON,WINDOW)      CROP
000033      DELTA= FLOAT(CROPD) /FLOAT(END(SEASON,WINDOW)-      CROP
000034      1 START(SEASON,WINDOW) + 1)      CROP
000035      BCC=G(TYPE,SEASON,1)*DELTA+G(TYPE,SEASON,2)*DELTA*DELTA      CROP
000036      SIGCC=ABS(H(TYPE,SEASON,1)*DELTA+ H(TYPE,SEASON,2)*DELTA*DELTA)      CROP
000037      RETURN      CROP
000038      END      CROP

```

```

FOR,IS DETCLS
  SUBROUTINE DETCLS
C   THIS ROUTINE DETERMINS HOW MANY CLASSES THE X ARRAY XORD CONTAINS
C   AND ASSIGNS THE CLASS BOUNDARY POINTS WITHIN XORD.
C   TABLES NECESSARY TO DETERMINE CLASS SETS WITHIN A ZONE
COMMON /CLSTAB/
1   ISTRAT(300),ISRSTR(300),NSCNT(300),IGROUP(300),IDAT1(300),
2   IDAT2(300),XORD(300),IXPT(300),IRANK(300),IBPT(10),IEPT(10),
3   MAXCLS,ICLCNT,ISUB1,NACQ
DIMENSION DAT1(300),DAT2(300),RANK(300)
EQUIVALENCE (IDAT1(1),DAT1(1)),(IDAT2(1),DAT2(1)),(IRANK(1),
1RANK(1))
C   FLAGS AND COUNTERS FOR CAS SIMULATOR
COMMON /CASFLG/
1   H      ,PPFLG ,NBW   ,IBW   ,WINDOW,IPD   ,IPP   ,PPDATE,NREGS
2   ,NZTOT ,NSTRAT,NYESK,NSSHSK,NCAMSK,NRYES ,NRSSH ,NRCAMS
3   ,ENDG  ,ENDREG,ENDZON,IKSTR ,IRZONE,IRREG
4   ,LDS1  ,LDS4  ,LDS7  ,LDS8  ,LDS9  ,LDS10 ,LDS11 ,LDS12 ,LDS13
5   ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCOUN,LRREG ,LRZONE,LRSTR
INTEGER PPFLG , WINDOW , PPDATE
C
DIMENSION ID(10),IDUM(10)
C
C *****
DATA CC/.25/
C   THIS DATA IS A BUILT IN CONSTANT, IT CAN BE MODIFIED VIA COMPILATI
C *****
C
  IH = H
  DO 2 M=1,10
  IBPT(M) = 0
  IEPT(M) = 0
2 CONTINUE
  CU = CC/NACQ
  ICLCNT = 0
  K = 1
5 I = 1
7 IF((NACQ -K) .NE. IRANK(I))GO TO 25
  LB = 0
  IUB = NACQ
  IF(ICLCNT .LE. 0)GO TO 20

```

```

DETCLS
DETCLS
DETCLS
CLSTAB
CLSTAB
MOD1
MOD1
CLSTAR
MOD1
CLSTAB
CLSTAB
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
DETCLS
DETCLS
DETCLS
MOD1
DETCLS
DETCLS
DETCLS
MOD1
MOD1
MOD1
MOD1
DETCLS
DETCLS
DETCLS
DETCLS
DETCLS
DETCLS
DETCLS

```



DO 15 J=1,ICLCNT	DETCLS
IF(ID(J) .LT. I)GO TO 10	DETCLS
IUB = MINO(IUB,ID(J))	DETCLS
GO TO 15	DETCLS
10 LB = MAXO(LB,ID(J))	DETCLS
15 CONTINUE	DETCLS
20 IP = IXPT(I)	DETCLS
IP1 = IXPT(I+1)	DETCLS
IUBP = IXPT(IUB)	DETCLS
LBP1 = IXPT(LB + 1)	DETCLS
IF((1 - LB) .LT. IH)GO TO 25	DETCLS
IF((IUB - I) .LT. IH)GO TO 25	DETCLS
IF((XORD(IP) - XORD(LBP1)) .LT. CO)GO TO 25	MOD1
IF((XORD(IUBP) - XORD(IP1)) .LT. CO)GO TO 25	MOD1
ICLCNT = ICLCNT + 1	DETCLS
ID(ICLCNT) = I	DETCLS
IF(ICLCNT .GT. MAXCLS)GO TO 30	DETCLS
25 I.= I + 1	DETCLS
IF(I .LE. (NACQ-1))GO TO 7	DETCLS
K = K + 1	DETCLS
IF(K .LE. (NACQ-1))GO TO 5	DETCLS
30 IF(ICLCNT .EQ. 0)GO TO 40	DETCLS
DO 35 I=1,ICLCNT	DETCLS
IDUM(I) = I	DETCLS
35 CONTINUE	DETCLS
CALL SORTAG(ID,1,ICLCNT,IDUM)	DETCLS
40 IBPT(1) = 1	DETCLS
IMAX = ICLCNT + 1	DETCLS
IEPT(IMAX) = NACQ	DETCLS
IF(ICLCNT .EQ. 0)GO TO 55	DETCLS
I = 2	DETCLS
DO 50 J=1,ICLCNT	DETCLS
IBPT(I) = ID(I-1) + 1	DETCLS
IEPT(J) = ID(I-1)	DETCLS
I = I + 1	DETCLS
50 CONTINUE	DETCLS
55 ICLCNT = ICLCNT + 1	DETCLS
60 RETURN	DETCLS
END	DETCLS

	FOR, IS DS10	
	SUBROUTINE DS10	DS10
C	PROCESSÉS DATA SET 10 AT THE STRATA LEVEL	DS10
C		DS10
C	CAS CONTROL CARD INPUT DATA AND CONSTANTS	CASCM
	COMMON /CASCM /	CASCM
	1 AREACF, YCF , PRDCF , APRUTS(4,2) , PPRUTS(5,2) , YPRUTS(3,2)	CASCM
	2 , AKEAPS, S2MAX , NHISTY, HH , TOPT , AUNITS, DISTFF, BWIND(4)	CASCM
	3 , WPRIOR(4) , APREP , IPRD(3,14) , NPDATE, PRDATE(14)	CASCM
	INTEGER HH, TOPT, AUNITS, DISTFF, BWIND, WPRIOR, APREP, PRDATE	CASCM
C		CASCM
C	DATA BLOCK FOR CAS CUMULATIVE FILE	CASCUM
C	CAS DATA SETS 14, 15, 16, AND 17	CASCUM
	COMMON /CASCUM/	CASCUM
	1 CASCUM(32), BUFR(504)	CASCUM
	DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22)	CASCUM
	1 , DSET17(28)	CASCUM
	EQUIVALENCE ( ICASC, CASCUM )	CASCUM
	EQUIVALENCE ( DSET14, DSET15, DSET16, DSET17, CASCUM(5) )	CASCUM
	1 , ( SQAERS, SQAERZ, SQAERR, SQAERC, CASCUM(24) )	CASCUM
	2 , ( SQPERS, SQPERZ, SQPERK, SQPERC, CASCUM(25) )	CASCUM
	3 , ( SQYERS, SQYERZ, SQYERR, SQYERC, CASCUM(26) )	CASCUM
C		CASCUM
C	FLAGS AND COUNTERS FOR CAS SIMULATOR	CASFLG
	COMMON /CASFLG/	CASFLG
	1 H , PPFLG , NBW , IBW , WINDOW, IPD , IPP , PDATE, NREGS	CASFLG
	2 , NZTDT , NSTRAT, NYESSK, NSSHSK, NCAMSK, NRYES , NRSSH , NRCAMS	CASFLG
	3 , ENDC , ENDREG, ENDZDN, IRSTR , IRZONE, IRREG	CASFLG
	4 , LDS1 , LDS4 , LDS7 , LDS8 , LDS9 , LDS10 , LDS11 , LDS12 , LDS13	CASFLG
	5 , LDS14 , LDS15 , LDS16 , LDS17 , LRCOUN, LRREG , LRZONE, LRSTR	CASFLG
	INTEGER PPFLG , WINDOW , PDATE	CASFLG
C		CASFLG
C	CONTROL PARAMETERS FOR LEM PROGRAM	CNTRL
	COMMON /CNTRL /	CNTRL
	1 PRINTF, NSTART, SEED(7)	CNTRL
	INTEGER PRINTF	CNTRL
	DOUBLE PRECISION SEED	CNTRL
C		CNTRL
C	CAS DATA SETS 4, 5, AND 6 (AT STRATA LEVEL)	DSET4
	COMMON /DSET4 /	DSET4
	1 STRATA, TWAS1 , HWAS1 , EWAS1 , XM1JS , XCT1S , ANVS1	JULY76

	2 ,TWAS2 ,HWAS2 ,EWAS2 ,XM2JS ,XCT2S ,ANVS2 ,T	JULY76
	3 ,TWAS3 ,HWAS3 ,XCT3S	
	4 ,XYS ,XESTYS ,EVYRS ,P2IDPK ,V1V2S ,VARS ,ANVARS	JULY76
	5 ,FILL4(57)	
	INTEGER STRATA	JULY76
	DIMENSION DSET4(24), DSET5(7), DSET6(3)	JULY76
	EQUIVALENCE ( DSET4,STRATA ), ( DSET5,TWAS2 ), ( DSET6,TWAS3 )	DSET4
C		DSET4
C	CAS DATA SET 7 (AT ZONE LEVEL)	DSET7
	COMMON /DSET7 /	DSET7
	1 ZONE ,HWAZ2 ,EZ ,M1K2KZ ,ANALVZ ,NSTRAZ ,HWAZ1 ,EWAZ1 ,HWAZ3	JULY76
	2 ,ESTVZ ,HWAZ12	JULY76
	3 ,M1K2CL(10) ,EPWCL(10) ,EPW2CL(10) ,PKPICL(10)	JULY76
	4 ,PK2CL(10) ,PKCL(10) ,SSQ(10)	JULY76
	INTEGER ZONE	JULY76
	REAL M1K2KZ , M1K2CL	JULY76
	DIMENSION DSET7(81)	JULY76
	EQUIVALENCE ( DSET7,ZONE )	DSET7
C		DSET7
C	CAS DATA SET 8 (AT REGION LEVEL)	DSET8
	COMMON /DSET8 /	DSET8
	1 REGION ,HWR2 ,ER ,M1K2KR ,ANALVR ,NZONES ,HWR1 ,EWR1 ,ESTVR	JULY76
	2 ,M1M2ZR ,FILL8(71)	JULY76
	INTEGER REGION	JULY76
	REAL M1K2KR	JULY76
	DIMENSION DSET8(10)	JULY76
	EQUIVALENCE ( DSET8,REGION )	DSET8
C		DSET8
C	CAS DATA SET 9 (AT COUNTRY LEVEL)	DSET9
	COMMON /DSET9 /	DSET9
	1 COUNTR ,HWAC2 ,EC ,M1K2KC ,ANALVC ,M1M2ZC ,HWAC1 ,EWAC1 ,ESTVC	JULY76
	INTEGER COUNTR	JULY76
	REAL M1K2KC	JULY76
	DIMENSION DSET9(9)	JULY76
	EQUIVALENCE ( DSET9,COUNTR )	DSET9
C		DSET9
C	CAS DATA SET 10 (STRATA DATA -- FINAL PASS)	JULY76
	COMMON /DSET10/	JULY76
	1 HWAS ,TWAS ,EWAS ,AERRS ,AVARS ,TPRODS ,EPRODS ,PRERRS ,PRVARS	JULY76
	2 ,YS ,ESTYS ,YERRS ,M1JS ,M2JS ,CT1S ,CT2S ,CT3S ,ANAVS	JULY76
	3 ,ANPRVS ,ES	JULY76

	REAL M1JS , M2JS	JULY76
	DIMENSION DSET10(20)	JULY76
	EQUIVALENCE ( DSET10,HWAS )	JULY76
C		DSET10
C	CAS DATA SET 11 (ZONE DATA -- FINAL PASS)	JULY76
	COMMON /DSET11/	DSET11
	1 HWAZ ,TWAZ ,EWAZ ,AERRZ ,AVARZ ,TPRODZ,EPRODZ,PRERRZ,PRVARZ	DSET11
	2 ,TYZ ,EYZ ,YERRZ ,M1Z ,M2Z ,CT1Z ,CT2Z ,CT3Z ,ANAVZ	DSET11
	3 ,ANPRVZ	DSET11
	REAL M1Z , M2Z	DSET11
	DIMENSION DSET11(19)	DSET11
	EQUIVALENCE ( DSET11,HWAZ )	DSET11
C		DSET11
C	FILE DEFINITIONS AND RECORD LENGTHS	FILES
	COMMON /FILES/	FILES
	1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ	FILES
	2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO	FILES
	3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD	FILES
	4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS	FILES
	INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT	FILES
	1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF	FILES
C		FILES
C	INDEX RECORD FOR CAS CUMULATIVE FILE (CASF)	IXCASF
	COMMON /IXCASF/	IXCASF
	1 IXCASF(1),LIXCAS	
C		IXCASF
C	INDEX RECORD FOR CAS INTERMEDIATE DATA SET FILE (CASDSF)	IXCDSF
	COMMON /IXCDSF/	IXCDSF
	1 IXCDSF(1),LIXCDS	
C		IXCDSF
C	STATISTICAL INFORMATION FOR LEM	STATS
	COMMON /STATS/	STATS
	1 ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR	STATS
	EQUIVALENCE ( NT,ITER )	STATS
C		STATS
C	DEBUGGING PRINT FLAG	DS10
	COMMON /DEBUGF/ DEBUGF	DS10
C		DS10
C		DS10
C	LOCAL VARIABLES	DS10
C	D = INTERMEDIATE QUANTITY USED TO COMPUTE TAU2S	DS10

```

C          (D = 0 OR 1 DEPENDING UPON NO. OF ACQUIRED GROUP 1,2 DS10
C          SEGMENTS IN STRATA) DS10
C DENOM = DENOMINATOR OF RATIO USED TO COMPUTE TAU2S AND SIGM2S DS10
C F      = INTERMEDIATE QUANTITY USED TO COMPUTE ANAVS DS10
C        (= ANALV AT STRATA, ZONE, REGION, OR COUNTRY LEVEL) DS10
C FM     = NHISTY (IN FLOATING POINT) DS10
C HWAS12 = HWAS1 + HWAS2 DS10
C HWA12  = HWA1J + HWA2J (WHERE J = S, Z, R, OR C) DS10
C I      = DO LOOP INDEX DS10
C ISTRAZ = ZONE INDEX (1,2,....,NSTRAZ) DS10
C MYV12  = MYV1J + MYV2J (WHERE J = S, Z, R, OR C) DS10
C NU     = DO LOOP (YEAR) INDEX IN MULTI-YEAR VARIANCE LOOP DS10
C RATIO  = INTERMEDIATE QUANTITY USED TO COMPUTE TAU2S AND SIGM2S DS10
C RN1    = RANDOM NUMBER IN NUMERATORS OF RATIOS IN EXPRESSIONS DS10
C        FOR TAU2S AND SIGM2S DS10
C RN2    = RANDOM NUMBER IN DENOMINATORS OF RATIOS IN EXPRESSIONS DS10
C        FOR TAU2S AND SIGM2S DS10
C SKMV12 = SQRT. OF MULTI-YEAR VARIANCE FOR GROUP 1,2 SEGMENTS DS10
C        AT STRATA, ZONE, REGION, OR COUNTRY LEVELS DS10
C SKMYV3 = SQRT. OF MULTI-YEAR VARIANCE FOR GROUP 3 SEGMENTS DS10
C        AT STRATA, ZONE, REGION, OR COUNTRY LEVELS DS10
C SUM1   = SUM OF TERMS IN EXPRESSION FOR TAU2S BEFORE DIVIDING DS10
C        BY M. DS10
C SUM2   = FIRST SUM IN EXPRESSION FOR SIGM2S (SUM OF RATIO**2) DS10
C SUM3   = SECOND SUM IN EXPRESSION FOR SIGM2S (SUM OF RATIOS) DS10
C TERM1  = INTERMEDIATE QUANTITY USED TO COMPUTE PRVARS AND DS10
C        ANPRVS (=EVYRS + ESTYS**2) DS10
C TERM2  = INTERMEDIATE QUANTITY USED TO COMPUTE PRVARS DS10
C        (=EVYRS*EWAS**2) DS10
C DS10
C REAL MYV12 DS10
C DS10
C DS10
C COMPUTE INTERMEDIATE QUANTITY USED TO COMPUTE AVARZ LATER ON. JULY76
C CONZ = 1.0 JULY76
C IF ( HWAZ12 .NE. 0.0 ) CONZ= 1.0 + HWAZ3/HWAZ12 JULY76
C JULY76
C ISTRAZ= 0 DS10
C INITIALIZE DATA SET 10 (STRATA LEVEL) DS10
200 ISTRAZ= ISTRAZ + 1 DS10
DO 210 I=1,LDS10 DS10

```

	DSET10(I)= 0.0	DS10
210	CUNTINUE	DS10
C		DS10
C	READ DATA SETS 4,5, AND 6 FROM CAS INTERMEDIATE FILE	DS10
	IRSTR = IRSTR + 1	DS10
	CALL RANACF (CASDSF,IRSTR,DSET4,LCASDS,IXCDSF,LIXCDS,1)	DS10
C		DS10
C	GENERATE DATA SET 10 (STRATA LEVEL)	DS10
C		DS10
C	MUVE YS, ESTYS, M1JS, M2JS, CT1S, CT2S, AND CT3S	DS10
C	FROM DATA SETS 4,5,6 TO DATA SET 10	DS10
	YS = XYS	DS10
	ESTYS= XESTYS	DS10
	M1JS = XM1JS	DS10
	M2JS = XM2JS	DS10
	CT1S = XCT1S	DS10
	CT2S = XCT2S	DS10
	CT3S = XCT3S	DS10
	HWAS12= HWAS1 + HWAS2	DS10
	HWAS = HWAS12 + HWAS3	DS10
		JULY76
C		DS10
C	CUMPUTE ES (EQ. 90)	DS10
	IF( M1JS+M2JS .EQ. 0.0 .OR. HWAS12 .EQ. 0.0 ) GO TO 232	DS10
C	M1JS + M2JS .GE. 1 (AT LEAST ONE ACQUIRED SEGMENT IN STRATA)	DS10
	ES= ( EWAS1 + EWAS2 ) / HWAS12	DS10
	GO TO 240	DS10
C	M1JS + M2JS = 0. NO ACQUIRED SEGMENTS IN STRATA.	DS10
232	IF ( .M1K2KZ .EQ. 0.0 ) GO TO 234	DS10
C	SUM OF M1K + M2K .GE. 1. AT LEAST ONE ACQUIRED SEGMENT IN ZONE	DS10
	ES= EZ	DS10
	GO TO 240	DS10
C	M1K2KZ = 0. NO ACQUIRED SEGMENTS IN ZONE	DS10
234	IF ( M1K2KR .EQ. 0.0 ) GO TO 236	DS10
C	SUM OF M1K + M2K .GE. 1. AT LFAST ONE ACQUIRED SEGMENT IN REG.	DS10
	ES= ER	DS10
	GU TO 240	DS10
C	M1K2KR = 0. NO ACQUIRED SEGMENTS IN REGION	DS10
236	ES= EC	DS10
C		DS10
240	IF ( M1M2ZC .EQ. 0.) GO TO 320	DS10
C		DS10

	IF ( M1K2KZ .LT. 2.0 ) GO TO 250	JULY76
	IF ( M1JS + M2JS .GT. 0.0 ) GO TO 260	JULY76
C	COMPUTE AREA VARIANCE AND ANALYTIC AREA VARIANCE OF STRATA	JULY76
C	WITHOUT ANY ACQUIRED SEGMENTS ( OR STRATA IN A ZONE WITH LESS	JULY76
C	THAN 2 ACQUIRED SEGMENTS)	JULY76
C	(THE AREA VARIANCE OF STRATA WITH SEGMENTS HAS ALREADY BEEN	JULY76
C	COMPUTED IN SUBROUTINE CAS2)	JULY76
250	IF ( HWAZ12 .EQ. 0.0 ) GO TO 320	JULY76
	WRATIO = ( HWAS/HWAZ12 )**2	JULY76
	AVARS = WRATIO*ESTVZ	JULY76
	ANAVS = WRATIO*ANALVZ	JULY76
	GO TO 320	JULY76
C		JULY76
C	AT LEAST ONE ACQUIRED SEGMENT IN STRATA AND AT LEAST TWO	JULY76
C	IN ZONE,	JULY76
C	ADD CONTRIBUTION OF THIS STRATA TO ZONE AREA VARIANCE	JULY76
260	AVARS = VARS	JULY76
	ANAVS = ANVARS	JULY76
	VZMULT = ( CONZ + HWAS3/HWAS12 )**2	JULY76
	AVARZ = AVARZ + V1V2S*VZMULT	JULY76
	ANAVZ = ANAVZ + (ANVS1+ANVS2)*VZMULT	JULY76
C		DS10
C	COMPUTE HWAS, TWAS, ... , ANPRVS (EQS. 94-105)	DS10
320	HWAS= HWAS12 + HWAS3	DS10
	TWAS= TWAS1 + TWAS2 + TWAS3	DS10
	EWAS= EWAS1 + EWAS2 + ES*HWAS3	DS10
	AERRS= EWAS - TWAS	DS10
	TPRODS= YS*TWAS	DS10
	EPRODS= ESTYS*EWAS	DS10
	PREKRS= EPRODS - TPRODS	DS10
	TERM1 = ESTYS*ESTYS - EVYRS	JULY76
	TERM2 = EWAS*EWAS*EVYRS	DS10
	PRVARZ= AVARS*TERM1 + TERM2	DS10
	IF ( YS .GT. 0.0 ) YERRS= ( ESTYS - YS )/YS *100.0	DS10
	ANPRVS= ANAVS*TERM1 + TERM2	DS10
C		DS10
C		DS10
C	TEMPORARY DEBUGGING PRINTOUT	DS10
C		DS10
C		DS10
C	AGGREGATE STRATA DATA SET 10 UP TO DATA SET 11 (ZONE LEVEL)	DS10

C	EQS. 106 - 108, 110 - 112, 114, 118 - 124	DS10
	DU 340 I=1,4	JULY76
	DSET11(I)= DSET11(I) + DSET10(I)	JULY76
	DSET11(I+5)= DSET11(I+5) + DSET10(I+5)	JULY76
340	DSET11(I+12)= DSET11(I+12) + DSET10(I+12)	JULY76
	CT3Z = CT3Z + CT3S	JULY76
	ANPRVZ= ANPRVZ + ANPRVS	JULY76
C		DS10
C	ON FIRST ITERATION AND FIRST PREDICTION POINT, SKIP READING	DS10
C	CAS CUMULATIVE FILE.	DS10
	IF ( NT .EQ. 1 .AND. IPP .EQ. 1 ) GO TO 350	DS10
C		DS10
C	READ DATA SET 15 (STRATA DATA) FROM CAS CUMULATIVE FILE	DS10
C	NOTE ... EQUIVALENCE ( DSET14,CASCUM(5) )	DS10
	CALL RWCASF (IRSTR,CASCUM,1)	DS10
C		DS10
C	ACCUMULATE STRATA DATA IN DATA SET 14 (CAS CUMULATIVE FILE)	DS10
	IF ( NT .GT. 1 ) GO TO 370	DS10
C	FIRST ITERATION. CLEAR DATA SET 14 BEFORE ACCUMULATING	DS10
350	ICASC(1)= REGION	DS10
	ICASC(2)= ZONE	DS10
	ICASC(3)= STRATA	DS10
	ICASC(4)= 0	DS10
	DU 360 I=1, LDS14	DS10
	DSET14(I)= 0.0	DS10
360	CONTINUE	DS10
C		DS10
370	DU 380 I=1,19	DS10
	DSET14(I)= DSET14(I) + DSET10(I)	JULY76
380	CONTINUE	DS10
C	EQS. 170 - 172	DS10
	SQAES= SQAES + AERRS**2	DS10
	SQPERS= SQPERS + PRERRS**2	DS10
	SWYERS= SWYERS + YERRS**2	DS10
C		DS10
C		DS10
C	TEMPORARY DEBUGGING PRINTOUT	DS10
C		DS10
C		DS10
C	WRITE DATA SET 14 BACK ONTO CAS CUMULATIVE FILE	DS10
	CALL RWCASF (IRSTR,CASCUM,2)	DS10



C		DS10
	IF ( PRINTF .NE. 0 .AND. APREP .NE. 0 ) CALL CASOUT (ISTRAZ)	DS10
C	TEST FOR END OF ZONE	DS10
	IF ( ISTRAZ .LT. NSTRAZ ) GO TO 200	DS10
C		DS10
990	RETURN	DS10
	END	DS10

	FUR, IS DS123	DS123
	SUBROUTINE DS123	DS123
C	PROCESSES DATA SETS 1, 2, AND 3 AT THE SUBSTRATA LEVEL	DS123
C		DS123
C	ARGUMENT LIST FOR ERROR PROCESSING	ARGLST
	COMMON /ARGLST/	ARGLST
	1 NERRS ,NFATAL,NPERRS,NARG ,ARG(10)	ARGLST
	DIMENSION IARG(10)	ARGLST
	EQUIVALENCE ( IARG,ARG )	ARGLST
C		ARGLST
C	CAS CONTROL CARD INPUT DATA AND CONSTANTS	CASCM
	COMMON /CASCM /	CASCM
	1 AREACF,YCF ,PROCF ,APRUTS(4,2) ,PPRUTS(5,2) ,YPRUTS(3,2)	CASCM
	2 ,AKEAPS,S2MAX ,NHISTY,HH ,TOPT ,AUNITS,DISTFF,BWIND(4)	CASCM
	3 ,WPRIOR(4) ,APREP ,IPRD(3,14) ,NPDATE,PRDATE(14)	CASCM
	INTEGER HH, TOPT, AUNITS,DISTFF,BWIND,WPRIOR,APREP,PRDATE	CASCM
C		CASCM
C	DATA BLOCK FOR CAS CUMULATIVE FILE	CASCUM
C	CAS DATA SETS 14, 15, 16, AND 17	CASCUM
	COMMON /CASCUM/	CASCUM
	1 CASCUM(32),    BUFFER(504)	CASCUM
	DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22)	CASCUM
	1 ,DSET17(28)	CASCUM
	EQUIVALENCE ( ICASC,CASCUM )	CASCUM
	EQUIVALENCE ( DSET14,DSET15,DSET16,DSET17,CASCUM(5) )	CASCUM
	1 , ( SQAERS,SQAERZ,SQAERR,SQAERC,CASCUM(24) )	CASCUM
	2 , ( SQPERS,SQPERZ,SQPERR,SQPERC,CASCUM(25) )	CASCUM
	3 , ( SQYERS,SQYERZ,SQYERR,SQYERC,CASCUM(26) )	CASCUM
C		CASCUM
C	DATA BLOCK FOR CAS DISTRIBUTION FILE (DATA SET 19)	CASDSB
	DIMENSION CASDSB(303)	CASDSB
	EQUIVALENCE ( CASDSB,BUFFER )	CASDSB
	DIMENSION ICASD(303), HWA2K(60), WAKNEY(60), PIK(60)	CASDSB
	EQUIVALENCE ( ICASD,HWA2K,CASDSB ), ( WAKNEY,CASDSB(61) )	CASDSB
	1 , ( PIK,CASDSB(121) )	CASDSB
C		CASDSB
C	FLAGS AND COUNTERS FOR CAS SIMULATOR	CASFLG
	COMMON /CASFLG/	CASFLG
	1 H ,PPFLG ,NBW ,IBW ,WINDOW,IPD ,IPP ,PPDATE,NREGS	CASFLG
	2 ,NZTOT ,NSTRAT,NYESSK,NSSHSK,NCAMSK,NRYES ,NRSSH ,NRCAMS	CASFLG
	3 ,ENDC ,ENDREG,ENDZON,IRSTR ,IRZONE,IRREG	CASFLG

	4	,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13	CASFLG
	5	,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCON,LRREG ,LRZONE,LRSTR	CASFLG
		INTEGER PPFLG , WINDOW ; PDATE	CASFLG
C			CASFLG
C		CONTROL PARAMETERS FOR LEM PROGRAM	CNTRL
		COMMON /CNTRL /	CNTRL
	1	PRINTF,NSTART,SEED(7)	CNTRL
		INTEGER PRINTF	CNTRL
		DOUBLE PRECISION SEED	CNTRL
C			CNTRL
C		CAS DATA SETS 1,2, AND 3	DSET1
		COMMON /DSET1 /	DSET1
	1	ISUBST,TWAK ,HWAK ,EWAK ,M1K ,CT1K ,ANALVK,EPWK ,EPW2K	JULY76
	2	,SMPKPI,SUMPK2,SUMPK ,KSUB ,NCLASS	JULY76
		REAL M1K , M2K	JULY76
		DIMENSION DSET1(14), DSET2(14), DSET3(6)	JULY76
		EQUIVALENCE ( DSET1,DSET2,DSET3,ISUBST )	DSET1
	1	, ( M2K,M1K ), ( CT2K,CT3K,CT1K )	DSET1
C			DSET1
C		CAS DATA SETS 4, 5, AND 6 (AT STRATA LEVEL)	DSET4
		COMMON /DSET4 /	DSET4
	1	STRATA,TWAS1 ,HWAS1 ,EWAS1 ,XM1JS ,XCT1S ,ANVS1	JULY76
	2	,TWAS2 ,HWAS2 ,EWAS2 ,XM2JS ,XCT2S ,ANVS2 ,T	JULY76
	3	,TWAS3,HWAS3,XCT3S	
	4	,XYS ,XESTYS,EVYRS ,P2IDPK,V1V2S ,VARS ,ANVARS	JULY76
	5	,FILL4(57)	
		INTEGER STRATA	JULY76
		DIMENSION DSET4(24), DSET5(7), DSET6(3)	JULY76
		EQUIVALENCE ( DSET4,STRATA ), ( DSET5,TWAS2 ), ( DSET6,TWAS3 )	DSET4
C			DSET4
C		CAS DATA SET 7 (AT ZONE LEVEL)	DSET7
		COMMON /DSET7 /	DSET7
	1	ZONE ,HWAZ2 ,EZ ,M1K2KZ,ANALVZ,NSTRAZ,HWAZ1 ,EWAZ1 ,HWAZ3	JULY76
	2	,ESTVZ ,HWAZ12	JULY76
	3	,M1K2CL(10) ,EPWCL(10) ,EPW2CL(10) ,PKPICL(10)	JULY76
	4	,PK2CL(10) ,PKCL(10) ,SSQ(10)	JULY76
		INTEGER ZONE	JULY76
		REAL M1K2KZ, M1K2CL	JULY76
		DIMENSION DSET7(81)	JULY76
		EQUIVALENCE ( DSET7,ZONE )	DSET7
C			DSET7

C	FILE DEFINITIONS AND RECORD LENGTHS	FILES
	COMMON /FILES /	FILES
	1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ	FILES
	2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO	FILES
	3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD	FILES
	4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS	FILES
	INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT	FILES
	1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF	FILES
C		FILES
C	INDEX RECORD FOR INTERMEDIATE SUBSTRATA HISTORICAL DATA FILE	IXSUBH
	COMMON /IXSUBH/	IXSUBH
	1 LIXSSH,IXSUBH(1)	MOD1
C		IXSUBH
	COMMON/FILES1/	FILES1
	1 ISUBH2,LSUBH2,MXCLSS	FILES1
C	SUBSTRATA HISTORICAL DATA FROM SUBHST FILE	SSHDTA
	COMMON /SSHDTA/	SSHDTA
	1 COUN2 ,IREG2 ,IZONE2,ISTRA2,ISUBS2,NSEG ,IDSEG ,GRPNO ,HISTPW	SSHDTA
	2 ,AREAK ,PWK ,NAGR ,NA ,DELTPW,DELTPM,CV1 ,CV2 ,CV3	SSHDTA
	3 ,CV4 ,VMULTK,CLASS(18),MXK,RDSSH	JULY76
	INTEGER GRPNO , CLASS , RDSSH	JULY76
	DIMENSION SSHDTA(39)	JULY76
	EQUIVALENCE ( SSHDTA, COUN2 )	SSHDTA
C		SSHDTA
C	DEBUGGING PRINT FLAG	DS123
	COMMON /DEBUGF/ DEBUGF	DS123
C		DS123
C		DS123
	EQUIVALENCE ( IER,IARG(1) )	DS123
C		DS123
C	LOCAL VARIABLES	DS123
C	CUNK = QUANTITY WHICH IS CONSTANT FOR A GIVEN SUBSTRATA	DS123
C	INDEPENDENT OF SEGMENT (=NK*RK*AREAPS WHERE NK = NAGR)	DS123
C	FNK = NK = NAGR (FL. PT.)	DS123
C	I = DO LOOP INDEX	DS123
C	LEVEL = ERROR LEVEL (=0 FOR NON-FATAL ERROR, =1 FOR FATAL)	DS123
C	M2 = M2K (INTEGER)	DS123
C	PWKNEY = SUBSTRATA PROPORTION WHEAT (PW) FOR NON-EPOCH YEAR.	DS123
C	RK = RK (EQ. 1)	DS123
C	RKSQ = (RK*AREAPS)**2	DS123
C	SIGMA = STANDARD DEVIATION FOR BETA DISTRIBUTION ROUTINE.	DS123

C		DS123
C	ARRAY FOR SAVING HISTPW, PWK, AND AREAK BEFORE CONVERTING	JULY76
C	FROM PERCENT TO FRACTION.	JULY76
C	DIMENSION SSHSAV(3)	JULY76
C		JULY76
C		DS123
C	DO 210 I=2,LDS1	DS123
	DSET1(I)= 0.0	DS123
210	CONTINUE	DS123
C		DS123
	ISUBST= ISUBS2	DS123
	SSHSAV(1) = HISTPW	JULY76
	SSHSAV(2) = PWK	JULY76
	SSHSAV(3) = AREAK	JULY76
C	CONVERT HISTPW AND PW TO FRACTIONS FROM PERCENT.	DS123
	HISTPW= 0.01*HISTPW	DS123
	PWK= 0.01*PWK	DS123
C	CONVERT SUBSTRATA LAND AREA TO HECTARES FROM KM**2	DS123
	AREAK= 100.0*AREAK	DS123
C	EQ. 1	DS123
	RK= AREAK/( FLOAT(NA)*AREAPS )	DS123
	RKSO= (RK*AREAPS)**2	DS123
	FNK= NAGR	DS123
	CONK= FNK*RK*AREAPS	DS123
C	EQS. 7, 8, AND 10	DS123
	TWAK= CONK*PWK	DS123
	HWAK= CONK*HISTPW	DS123
	CT1K= 1.0	DS123
C		DS123
C	TEST GROUP NUMBER AND GENERATE DATA SET 1, 2, OR 3	DS123
	IF ( GRPNO - 2 ) 310,350,390	DS123
C		DS123
C	GROUP I SUBSTRATUM	DS123
C	CHECK THE NUMBER OF SEGMENTS IN THIS SUBSTRATUM	DS123
310	IF ( NSEG .GT. 0 ) GO TO 320	DS123
C	FATAL ERROR. NO SEGMENTS IN SUBSTRATUM	DS123
	CALL ERRMES (3HCAS,5HDS123,13,1)	DS123
	GO TO 990	DS123
C		DS123
C	PROCESS ALL SEGMENTS IN THIS GROUP I SUBSTRATUM.	DS123
C	EQS. 2A - 6A	DS123

320	CALL GROUP	DS123
	IF ( NFATAL .NE. 0 ) GO TO 990	DS123
C	WERE ANY GROUP I SEGMENTS ACQUIRED FOR THIS SUBSTRATUM	DS123
	IF ( M1K .EQ. 0.0 ) GO TO 390	DS123
C	GENERATE REST OF DATA SET 1 (EQS. 9, 11, AND 12)	DS123
	EWAK= CONK*EPWK/M1K	DS123
	VMULTK= ( FNK - M1K )*RKSQ*FNK/M1K	DS123
	ANALVK= VMULTK*(PWK*CV2)**2	DS123
C		DS123
C	AGGREGATE SUBSTRATA DATA SET 1 INTO DATA SET 4 (STRATA LEVEL)	DS123
C	( TWAK,HWAK,EWAK,M1K,MYVK,VMULTK,CT1K,ANALVK )	DS123
C	(EQS. 19-25, 37)	DS123
	DO 345 I=2,7	JULY76
	DSET4(I)= DSET4(I) + DSET1(I)	DS123
345	CONTINUE	DS123
	GO TO 385	JULY76
C		DS123
C	GROUP II SUBSTRATUM	DS123
C	CHECK THE NUMBER OF SEGMENTS IN THIS SUBSTRATUM	DS123
350	IF ( NSEG .EQ. 0 ) GO TO 360	DS123
C	PROCESS ALL GROUP II SEGMENTS IN THIS SUBSTRATA	DS123
C	EQS. 2B - 6B	DS123
	CALL GROUP	DS123
	IF ( NFATAL .NE. 0 ) GO TO 990	DS123
C		DS123
C	GENERATE REST OF DATA SET 2	DS123
360	IF ( TUPT .EQ. 0 ) GO TO 370	DS123
C		JULY76
C	COMPUTE NON-EPOCH YEAR WHEAT AREA	JULY76
	KSUB = KSUB + 1	JULY76
	WAKNEY(KSUB) = CV4*HWAK	JULY76
	HWA2K(KSUB) = HWAK	DS123
C		DS123
C	EQN. 16 ( DEFER DIVISION BY HWAK UNTIL AFTER ANALVK COMPUTED )	DS123
370	VMULTK= ( FNK*FNK - FNK )*RKSQ	DS123
C	EQN. 17	DS123
	ANALVK= VMULTK*( PWK*CV2 )**2	DS123
	VMULTK= VMULTK/HWAK	DS123
C		DS123
C	AGGREGATE SUBSTRATA DATA SET 2 INTO DATA SET 5 (STRATA LEVEL)	DS123
C	EQNS. 31,32,34,35,36,38,40	DS123

	DO 380 I=1,6	JULY76
	DSET5(I )= DSET5(I ) + DSET2(I+1)	DS123
380	CONTINUE	DS123
C	NOTE... AT THIS POINT EWAS2 HAS NOT BEEN COMPUTED YET AND	DS123
C	VMULTK AND ANVS2 (EQS. 36 AND 40) ARE INCOMPLETE	JULY76
C	(COMPLETED IN SUBROUTINE CAS2)	JULY76
	P2IDPK= P2IDPK + EPWK/HISTPW	DS123
C		JULY76
385	M1K2CL(NCLASS)= M1K2CL(NCLASS) + M2K	JULY76
	EPWCL(NCLASS) = EPWCL(NCLASS) + EPWK	JULY76
	EPW2CL(NCLASS)= EPW2CL(NCLASS) + EPW2K	JULY76
	PKPICL(NCLASS)= PKPICL(NCLASS) + SMPKPI	JULY76
	PK2CL(NCLASS) = PK2CL(NCLASS) + SUMPK2	JULY76
	PKCL(NCLASS) = PKCL(NCLASS) + SUMPK	JULY76
C	RESTORE ORIGINAL VALUES BEFORE WRITING BACK ONTO ISUBH2 FILE	JULY76
	HISTPW = SSHSAV(1)	JULY76
	PWK = SSHSAV(2)	JULY76
	AREAK = SSHSAV(3)	JULY76
C	WRITE SUBSTRATA DATA BACK ONTO ISUBH2 FILE	JULY76
	CALL KANACF (ISUBH2,NKSSH,SSHDTA,LSUBH2,IXSUBH,LIXSSH,2)	JULY76
	GO TO 990	DS123
C		DS123
C	GROUP III SUBSTRATUM. SET GROUP III FLAG	DS123
C	AGGREGATE SUBSTRATA DATA SET 3 INTO DATA SET 6 (STRATA LEVEL)	DS123
C	EQS. 47 - 49	DS123
390	TWAS3= TWAS3 + TWAK	DS123
	HWAS3= HWAS3 + HWAK	DS123
	XCT3S = XCT3S + CT3K	DS123
C		DS123
C		DS123
C		DS123
C	TEMPORARY DEBUGGING PRINTOUT	DS123
990	CONTINUE	
C		DS123
C		DS123
	RETURN	DS123
	END	DS123

```

000001 SUBROUTINE DS18 DS18
000002 C COMPUTES CLWA AND CLPRD IN DATA SET 18 ON THE FINAL ITERATION. DS18
000003 C DS18
000004 C ARGUMENT LIST FOR ERROR PROCESSING ARGLST
000005 COMMON /ARGLST/ ARGLST
000006 1 NERRS ,NFATAL,NPFRRS,NARG ,ARG(10) ARGLST
000007 DIMENSION IARG(10) ARGLST
000008 EQUIVALENCE ( IARG,ARG ) ARGLST
000009 C ARGLST
000010 C DATA BLOCK FOR CAS CUMULATIVE FILE CASCUM
000011 C CAS DATA SETS 14, 15, 16, AND 17 CASCUM
000012 COMMON /CASCUM/ CASCUM
000013 1 CASCUM(32), BUFR(504) CASCUM
000014 DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22) CASCUM
000015 1 ,DSET17(22) CASCUM
000016 EQUIVALENCE ( ICASC,CASCUM ) CASCUM
000017 EQUIVALENCE ( DSET14,DSET15,DSET16,DSET17,CASCUM(5) ) CASCUM
000018 1 , ( SQAERS,SQAERZ,SQAFRR,SQAERC,CASCUM(24) ) CASCUM
000019 2 , ( SQPFRR,SQPFRR,SQPFRR,SQPERC,CASCUM(25) ) CASCUM
000020 3 , ( SOYERS,SOYERZ,SOYFRR,SOYERL,CASCUM(26) ) CASCUM
000021 C CASCUM
000022 C FLAGS AND COUNTERS FOR CAS STIMULATOR CASFLG
000023 COMMON /CASFLG/ CASFLG
000024 1 H ,PPFLG ,NBW ,IBW ,WINDOW,IPD ,IPP ,PPDATE,NREGS CASFLG
000025 2 ,NZTOT ,NSIRAT,NYESSK,NSSHSK,NLAMS,NRYFS ,NRSSH ,NRLAMS CASFLG
000026 3 ,ENDC ,ENDREG,ENDZON,IRSTR ,IRZONE,IRRFG CASFLG
000027 4 ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13 CASFLG
000028 5 ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCON,LRREL ,LRZONE,LRSTR CASFLG
000029 INTEGER PPFLG , WINDOW , PPDATE CASFLG
000030 C CASFLG
000031 C STATISTICAL INFORMATION FOR LEM STATS
000032 COMMON /STATS / STATS
000033 1 ITR ,NSFGR,NCAMSR,NYESK ,NREC(7),NCASCR,NCASDR STATS
000034 EQUIVALENCE ( NI,ITER ) STATS
000035 C STATS
000036 C SUMMARY DATA FOR REPORTS SUMDTA
000037 COMMON /SUMDTA/ SUMDTA
000038 1 CVAEPT,CVEPTA,SUPER ,CVPEPT,CVEPT,CSUMR(18,18) SUMDTA
000039 C SUMDTA
000040 C INPUT DATA ... DS18
000041 C DS18
000042 C DS18
000043 C NT = ITER = MONTE CARLO ITERATION NUMBER DS18
000044 C IPP = PREDICTION POINT INDEX (INCLUDING BOWINDOWS) DS18
000045 C SQAERC = SUM OF SQUARES OF AREA ERRORS DS18
000046 C SQPERC = SUM OF SQUARES OF PRODUCTION ERRORS DS18
000047 C DSFT17(2) = TRUE WA DS18
000048 C DSFT17(3) = MEAN ESTIMATED WA DS18
000049 C DSET17(4) = MEAN AREA ERROR DS18
000050 C DSFT17(6) = TRUE PRODUCTION DS18
000051 C DSFT17(7) = MEAN ESTIMATED PRODUCTION DS18
000052 C DSFT17(8) = MEAN PRODUCTION ERROR DS18
000053 C DS18
000054 C OUTPUT QUANTITIES ... DS18
000055 C CSUMR(11,IPP) = CLWA DS18
000056 C CSUMR(15,IPP) = CLPRD DS18
000057 C DS18
000058 C LOCAL VARIABLES ... DS18

```

ORIGINAL PAGE IS  
 OF POOR QUALITY



000059	C	FNT = NT = MONTE CARLO ITERATION (FLOATING POINT)	DS18
000060	C	FNT1 = NT - 1	DS18
000061	C	VFAC = AREA VARIANCE ERROR FOR COUNTRY	DS18
000062	C	VFPC = PRODUCTION VARIANCE ERROR FOR COUNTRY	DS18
000063	C	Y = DIVISOR FOR X1 AND X2	DS18
000064	C	X1 = ARGUMENT FOR P(X) FUNCTION	DS18
000065	C	X2 = ARGUMENT FOR P(X) FUNCTION	DS18
000066	C		DS18
000067	C		DS18
000068	C	FW. 182	DS18
000069		FNT= NT	DS18
000070		FNT1= NT - 1	DS18
000071		VFAC= ( SOAFRC - (DSET17(4)**2)*FNT ) / FNT1	DS18
000072		ARG(1)= 4*VFAC	DS18
000073		IARG(2)= 182	DS18
000074		Y= YSUB(VFAC,DSET17(2))	DS18
000075		X1= ( DSET17(5) - 0.9*DSET17(2) ) / Y	DS18
000076		X2= ( DSET17(3) - 1.1*DSET17(2) ) / Y	DS18
000077	C	STORE CLWA IN CSUBR(11,IPP)	DS18
000078		CSUMR(11,IPP)= ( PSUB(X1) - PSUB(X2) ) * 100.0	DS18
000079	C		DS18
000080	C	FW. 183	DS18
000081		VFPC= ( SOVPC - (DSET17(8)**2)*FNT ) / FNT1	DS18
000082		ARG(1)= 4*VFPC	DS18
000083		IARG(2)= 183	DS18
000084		Y= YSUB(VFPC,DSET17(8))	DS18
000085		X1= ( DSET17(7) - 0.9*DSET17(6) ) / Y	DS18
000086		X2= ( DSET17(7) - 1.1*DSET17(6) ) / Y	DS18
000087	C	STORE CLPRD IN CSUBR(15,IPP)	DS18
000088		CSUMR(15,IPP)= ( PSUB(X1) - PSUB(X2) ) * 100.0	DS18
000089	C		DS18
000090	900	RETURN	DS18
000091		END	DS18

	FOR, IS DS456	
	SUBROUTINE DS456	DS456
C	PROCESSSES DATA SETS 4, 5, AND 6 AT THE STRATA LEVEL	DS456
C		DS456
C	CAS CONTROL CARD INPUT DATA AND CONSTANTS	CASCM
	COMMON /CASCM /	CASCM
	1 AREACF, YCF , PRDCF , APRUTS(4,2) , PPRUTS(5,2) , YPRUTS(3,2)	CASCM
	2 , AREAPS, S2MAX , NHISTY, HH , TOPT , AUNITS, DISTFF, BWIND(4)	CASCM
	3 , WPRIOR(4) , APREP , IPRD(3,14) , NPDATE, PRDATE(14)	CASCM
	INTEGER HH, TOPT, AUNITS, DISTFF, BWIND, WPRIOR, APREP, PRDATE	CASCM
C		CASCM
C	FLAGS AND COUNTERS FOR CAS SIMULATOR	CASFLG
	COMMON /CASFLG/	CASFLG
	1 H , PPFLG , NRW , IBW , WINDOW, IPD , IPP , PPDATE, NREGS	CASFLG
	2 , NZTOT , NSTRAT, NYESSK, NSSHSK, NCAMSK, NRYES , NRSSH , NRCAMS	CASFLG
	3 , ENDC , ENDREG, ENDZON, IRSTR , IRZONE, IRREG	CASFLG
	4 , LDS1 , LDS4 , LDS7 , LDS8 , LDS9 , LDS10 , LDS11 , LDS12 , LDS13	CASFLG
	5 , LDS14 , LDS15 , LDS16 , LDS17 , LRCOUN, LRREG , LRZONE, LRSTR	CASFLG
	INTEGER PPFLG , WINDOW , PPDATE	CASFLG
C		CASFLG
C	CAS DATA SETS 4, 5, AND 6 (AT STRATA LEVEL)	DSET4
	COMMON /DSET4 /	DSET4
	1 STRATA, TWAS1 , HWAS1 , EWAS1 , XM1JS , XCT1S , ANVS1	JULY76
	2 , TWAS2 , HWAS2 , EWAS2 , XM2JS , XCT2S , ANVS2 , T	JULY76
	3 , TWAS3, HWAS3, XCT3S	
	4 , XYS , XESTYS, EVYRS , P2IDPK, V1V2S , VARS , ANVARS	JULY76
	5 , FILL4(57)	
	INTEGER STRATA	JULY76
	DIMENSION DSET4(24), DSET5(7), DSET6(3)	JULY76
	EQUIVALENCE ( DSET4, STRATA ), ( DSET5, TWAS2 ), ( DSET6, TWAS3 )	DSET4
C		DSET4
C	CAS DATA SET 7 (AT ZONE LEVEL)	DSET7
	COMMON /DSET7 /	DSET7
	1 ZONE , HWAZ2 , EZ , M1K2KZ, ANALVZ, NSTRAZ, HWAZ1 , EWAZ1 , HWAZ3	JULY76
	2 , ESTVZ , HWAZ12	JULY76
	3 , M1K2CL(10) , EPWCL(10) , EPW2CL(10) , PKPICL(10)	JULY76
	4 , PK2CL(10) , PKCL(10) , SSQ(10)	JULY76
	INTEGER ZONE	JULY76
	REAL M1K2KZ, M1K2CL	JULY76
	DIMENSION DSET7(81)	JULY76
	EQUIVALENCE ( DSET7, ZONE )	DSET7

C		DSET7
C	CAS DATA SET 10 (STRATA DATA -- FINAL PASS)	JULY76
	COMMON /DSET10/	JULY76
	1 HWAS ,TWAS ,EWAS ,AERRS ,AVARS ,1PRODS,EPRODS,PRERRS,PRVAR	JULY76
	2 ,YS ,ESTYS ,YERRS ,M1JS ,M2JS ,CT1S ,CT2S ,CT3S ,ANAVS	JULY76
	3 ,ANPRVS,ES	JULY76
	REAL M1JS , M2JS	JULY76
	DIMENSION DSET10(20).	JULY76
	EQUIVALENCE ( DSET10,HWAS )	JULY76
C		DSET10
C	CAS DATA SET 11 (ZONE DATA -- FINAL PASS)	JULY76
	COMMON /DSET11/	DSET11
	1 HWAZ ,TWAZ ,EWAZ ,AERRZ ,AVARZ ,TPRODZ,EPRODZ,PRERRZ,PRVARZ	DSET11
	2 ,TYZ ,EYZ ,YERRZ ,M1Z ,M2Z ,CT1Z ,CT2Z ,CT3Z ,ANAVZ	DSET11
	3 ,ANPRVZ	DSET11
	REAL M1Z , M2Z	DSET11
	DIMENSION DSET11(19)	DSET11
	EQUIVALENCE ( DSET11,HWAZ )	DSET11
C		DSET11
C	FILE DEFINITIONS AND RECORD LENGTHS	FILES
	COMMON /FILES /	FILES
	1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ	FILES
	2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO	FILES
	3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD	FILES
	4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS	FILES
	INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT	FILES
	1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF	FILES
C		FILES
C	INDEX RECORD FOR CAS INTERMEDIATE DATA SET FILE (CASDSF)	IXCDSF
	COMMON /IXCDSF/	IXCDSF
	1 IXCDSF(1),LIXCDS	
C		IXCDSF
C	DEBUGGING PRINT FLAG	DS456
	COMMON /DEBUG/ DEBUGF	DS456
C		DS456
C		DS456
100	CONTINUE	DS456
C	WERE THERE ANY GROUP II SEGMENTS ACQUIRED FOR THIS STRATUM	DS456
	IF ( XM2JS .NE. 0.0 ) GO TO 480	DS456
C	NO. RECLASSIFY ALL GROUP II SUBSTRATA AS GROUP III SUBSTRATA	DS456
C	BY ADDING DATA SET TO DATA SET 6, THEN ZEROING OUT DATA SET 5	DS456

	TWAS3= TWAS3 + TWAS2	DS456
	HWAS3= HWAS3 + HWAS2	DS456
	XCT3S = XCT3S + XCT2S	DS456
	DO 470 I=1,7	JULY76
	DSET5(I)= 0.0	DS456
470	CONTINUE	DS456
	GO TO 500	DS456
C		DS456
C	GENERATE REST OF DATA SET 5 (EQNS. 33,36,40, AND 39)	DS456
480	EWAS2= HWAS2*P2IDPK/XM2JS	DS456
	ANVS2= ANVS2/XM2JS	DS456
	IF ( TOPT .NE. 0 .AND. XCT2S .GT. 1.0 ) CALL TSUB	DS456
C		DS456
C	WRITE DATA SETS 4,5,6 ON INTERMEDIATE FILE	DS456
500	IRSTR= IRSTR + 1	DS456
	NSTRAZ= NSTRAZ + 1	DS456
	NSTRAT= NSTRAT + 1	DS456
C	MUVE YS AND ESTYS FROM DATA DET 10 TO DATA SETS 4,5,6	DS456
C	BEFORE WRITING STRATA DATA ONTO CAS INTERMEDIATE FILE.	DS456
	XYS = YS	DS456
	XESTYS= ESTYS	DS456
	CALL RANACF (CASDSF,IRSTR,DSET4,LCASDS,IXCDSF,LIXCDS,2)	DS456
C		DS456
C	AGGREGATE STRATA DATA SETS 4,5,6 UP TO DATA SET 7 (ZONE LEVEL)	DS456
C	( EQS. 50-56,58,59,61,62,68,69 )	DS456
	TWAZ= TWAZ + TWAS1 + TWAS2 + TWAS3	DS456
	IF ( XM1JS + XM2JS .EQ. 0.0 ) GO TO 990	DS456
	M1K2KZ= M1K2KZ + XM1JS + XM2JS	DS456
	HWAZ1= HWAZ1 + HWAS1 + HWAS2	DS456
	EWAZ1= EWAZ1 + EWAS1 + EWAS2	DS456
C		DS456
990	RETURN	JULY76
	END	DS456

FOR, IS DS7

SUBROUTINE DS7

C  
C  
C  
C

PROCESSES DATA SET 7 AT THE ZONE LEVEL.

ARGUMENT LIST FOR ERROR PROCESSING

COMMON /ARGLST/

1 NERRS ,NFATAL ,NPERRS ,NARG ,ARG(10)

DIMENSION IARG(10)

EQUIVALENCE ( IARG,ARG )

C  
C

CAS CONTROL CARD INPUT DATA AND CONSTANTS

COMMON /CASCM /

1 AREACF ,YCF ,PROCF ,APRUTS(4,2) ,PPRUTS(5,2) ,YPRUTS(3,2)

2 ,AREAPS ,S2MAX ,NHISTY ,HH ,TOPT ,AUNITS ,DISTFF ,BWIND(4)

3 ,WPRIOR(4) ,APREP ,IPRD(3,14) ,NPDATE ,PRDATE(14)

INTEGER HH , TOPT , AUNITS ,DISTFF ,BWIND ,WPRIOR ,APREP ,PRDATE

C  
C

FLAGS AND COUNTERS FOR CAS SIMULATOR

COMMON /CASFLG/

1 H ,PPFLG ,NBW ,IBW ,WINDOW ,IPD ,IPP ,PPDATE ,NREGS

2 ,NZTOT ,NSTRAT ,NYESSK ,NSSHSK ,NCAMSK ,NRYES ,NRSSH ,NRCAMS

3 ,ENDC ,ENDREG ,ENDZON ,IRSTR ,IRZONE ,IRREG

4 ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13

5 ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCON ,LRREG ,LRZONE ,LRSTR

INTEGER PPFLG , WINDOW , PPDATE

C  
C

CONSTANT QUANTITIES FOR LEM PROGRAM

COMMON /CONST /

1 NTRMX ,MAXR ,MAXZ ,IMXSEG ,ENDFIL ,ITSHG

C

COMMON /FILES1/

1 ISUBH2 ,LSUBH2 ,MXCLSS

C

CAS DATA SET 7 (AT ZONE LEVEL)

COMMON /DSET7 /

1 ZONE ,HWAZ2 ,EZ ,M1K2KZ ,ANALVZ ,NSTRAZ ,HWAZ1 ,EWAZ1 ,HWAZ3

2 ,ESTVZ ,HWAZ12

3 ,M1K2CL(10) ,EPWCL(10) ,EPW2CL(10) ,PKPICL(10)

4 ,PK2CL(10) ,PKCL(10) ,SSQ(10)

INTEGER ZONE

REAL M1K2KZ , M1K2CL

DS7  
DS7  
DS7  
DS7  
ARGLST  
ARGLST  
ARGLST  
ARGLST  
ARGLST  
ARGLST  
CASCM  
CASCM  
CASCM  
CASCM  
CASCM  
CASCM  
CASCM  
CASCM  
CASCM  
CASFLG  
CASFLG  
CASFLG  
CASFLG  
CASFLG  
CASFLG  
CASFLG  
CASFLG  
CONST  
CONST  
CONST  
CONST  
FILES1  
FILES1  
DSET7  
DSET7  
JULY76  
JULY76  
JULY76  
JULY76  
JULY76  
JULY76

	DIMENSION DSET7(81)	JULY76
	EQUIVALENCE ( DSET7,ZONE )	DSET7
C		DSET7
C	CAS DATA SET 8 (AT REGION LEVEL)	DSET8
	COMMON /DSET8 /	DSET8
	1 REGION,HWAR2 ,ER ,M1K2KR,ANALVR,NZONES,HWAR1 ,EWAR1 ,ESTVR	JULY76
	2 ,M1M2ZR,FILL8(71)	JULY76
	INTEGER REGION	JULY76
	REAL M1K2KR	JULY76
	DIMENSION DSET8(10)	JULY76
	EQUIVALENCE ( DSET8,REGION )	DSET8
C		DSET8
C	CAS DATA SET 11 (ZONE DATA -- FINAL PASS)	JULY76
	COMMON /DSET11/	DSET11
	1 HWAZ ,TWAZ ,EWAZ ,AERRZ ,AVARZ ,TPRODZ,EPRODZ,PRERRZ,PRVARZ	DSET11
	2 ,TYZ ,EYZ ,YERRZ ,M1Z ,M2Z ,CT1Z ,CT2Z ,CT3Z ,ANAVZ	DSET11
	3 ,ANPRVZ	DSET11
	REAL M1Z , M2Z	DSET11
	DIMENSION DSET11(19)	DSET11
	EQUIVALENCE ( DSET11,HWAZ )	DSET11
C		DSET11
C	CAS DATA SET 12 (REGION DATA -- FINAL PASS)	JULY76
	COMMON /DSET12/	DSET12
	1 HWAR ,TWAR ,FWAR ,AERRR ,AVARR ,TPRODR,EPRODR,PRERRR,PRVARR	DSET12
	2 ,TYR ,EYR ,YERRR ,M1R ,M2R ,CT1R ,CT2R ,CT3R ,ANAVR	DSET12
	3 ,ANPRVR	DSET12
	REAL M1R , M2R	DSET12
	DIMENSION DSET12(19)	DSET12
	EQUIVALENCE ( DSET12,HWAR )	DSET12
C		DSET12
C	FILE DEFINITIONS AND RECORD LENGTHS	FILES
	COMMON /FILES /	FILES
	1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ	FILES
	2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO	FILES
	3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD	FILES
	4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS	FILES
	INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT	FILES
	1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF	FILES
C		FILES
C	INDEX RECORD FOR CAS INTERMEDIATE DATA SET FILE (CASDSF)	IXCDSF
	COMMON /IXCDSF/	IXCDSF

1	IXCDSF(1),LIXCDS	IXCDSF
C		DS7
C	DEBUGGING PRINT FLAG	DS7
C	COMMON /DEBUGF/ DEBUGF	DS7
C		DS7
C	DOUBLE PRECISION XGOP,ZER	
C	DOUBLE PRECISION A,B,D, XG01,XG02,XG03,XG04,XG05,XG06	
C	DATA XGOP/2.000/,ZER/0.000/	
C		DS7
C	LOCAL VARIABLES	DS7
C	A = REGRESSION COEFFICIENT USED TO CALCULATE S**2	DS7
C	B = REGRESSION COEFFICIENT USED TO CALCULATE S**2	DS7
C	D = DENOMINATOR OF B	DS7
C	SOSQ = S0**2	DS7
C		DS7
100	CONTINUE	DS7
C		DS7
C		DS7
C	GENERATE REST OF DATA SET 7 (ZONE LEVEL)	DS7
C		DS7
C	IF M1K2KZ = 0, NO ACQUIRED GROUP I OR GROUP II SEGMENTS IN ZONE.	DS7
C	HWAZ2 = EZ = ANALVZ = HWAZ1 = EWAZ1 = SSQ(CLASS) = 0.0	JULY76
C	IF ( M1K2KZ .EQ. 0.0 ) GO TO 780	JULY76
C		DS7
C	M1K2KZ .GT. 0. COMPUTE EZ (EQ. 63)	DS7
C	IF ( HWAZ1 .NE. 0.0 ) EZ= EWAZ1/HWAZ1	DS7
C	IF M1K2KZ .LT. 2, THEN HWAZ2 = 0 AND SSQ(CLASS) = 0 FOR ALL	JULY76
C	CLASSES IN ZONE	JULY76
C	IF ( M1K2KZ .LT. 2.0 ) GO TO 780	JULY76
C		DS7
C	M1K2KZ .GE. 2. SET HWAZ2 = HWAZ1 (EQ. 57)	JULY76
740	HWAZ2= HWAZ1	DS7
C	M1M2ZR= 1	DS7
C		DS7
C	COMPUTE S**2 ( EQS. 64-67 )	DS7
C	FOR EACH CLASS IN ZONE	JULY76
C	DO 770 ICL=1,MXCLSS	JULY76
C	IF ( M1K2CL(ICL) .EQ. 0.0 ) GO TO 780	JULY76
C	IF(M1K2CL(ICL) .GT. 1.0)GO TO 750	
C	LESS THAN 2 ACQUIRED SEGMENTS IN CLASS.	JULY76
C	ON THE FIRST MONTE CARLO ITERATION PRINT WARNING AND CONTINUE	JULY76

	IARG(1)= ICL	JULY76
	IARG(2)= M1K2CL(ICL)	JULY76
	CALL ERRMES (3HCAS,3HDS7,19,0)	JULY76
	GO TO 770	JULY76
C		JULY76
	750 IF ( M1K2CL(ICL) .LT. H ) GO TO 760	JULY76
C	NUMBER OF ACQUIRED SEGMENTS IN CLASS .GE. H.	JULY76
C	USE REGRESSION FORMULA	JULY76
	XG01 = M1K2CL(ICL)	
	XG02 = PK2CL(ICL)	
	XG03 = PKCL(ICL)	
	XG04 = PKPICL(ICL)	
	XG05 = EPWCL(ICL)	
	XG06 = EPW2CL(ICL)	
	D = XG01*XG02 - XG03**2	
	IF(D .EQ. ZER)GO TO 760	
	B = (XG01*XG04 - XG05*XG03)/D	
	A = (XG05 - B*XG03)/XG01	
	SOSQ = (XG06 - A*XG05 - B*XG04)/(XG01 - XG06)	
	GO TO 765	JULY76
C		JULY76
C	LESS THAN H BUT MORE THAN 1 ACQUIRED SEGMENTS IN ZONE.	JULY76
C	USE VARIANCE FORMULA.	JULY76
	760 SOSQ = ( EPW2CL(ICL) - EPWCL(ICL)**2 / M1K2CL(ICL) ) /	JULY76
	1 ( M1K2CL(ICL) - 1.0 )	JULY76
C		JULY76
	765 SSO(ICL) = AMIN1(SOSQ,S2MAX)	JULY76
C		JULY76
	770 CONTINUE	JULY76
C		DS7
C	WRITE DATA SET 7 ONTO INTERMEDIATE FILE	DS7
	780 IRZONE= IRZONE + 1	DS7
	NZTOT= NZTOT + 1	DS7
	NZONES= NZONES + 1	DS7
	CALL RANACF (CASDSF,IRZONE,DSET7,LCASDS,IXCDSF,LIXCDS,2)	DS7
C		DS7
C	AGGREGATE ZONE DATA SET 7 UP TO DATA SET 8 (REGION LEVEL)	DS7
C	EQNS. 70-76,78,79	DS7
	TWAR = TWAR + TWAZ	DS7
	HVAR2 = HWAR2 + HVAZ2	DS7
	M1K2KR= M1K2KR + M1K2KZ	DS7



```
C
990  HWAR1 = HWAR1 + HWAZ1
      EWAR1 = EWAR1 + EWAZ1
      RETURN
      END
```

```
DS7
DS7
DS7
DS7
DS7
```

```

000001      SUBROUTINE EJECT (NLINE)      EJECT
000002      C      RESTORES PAGE AND PRINTS THE PAGE HEADER      EJECT
000003      C      EJECT
000004      C      COMMON BLOCK DEFINITIONS      EJECT
000005      C      FILE DEFINITIONS AND RECORD LENGTHS      FILES
000006      COMMON /FILES /      FILES
000007      1  SEGID ,LSECID,CROPW ,LCROPW,SURHST,LSUBH ,ACQUIS,LACQ      FILES
000008      2  ,CANSF ,LCANSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESQ      FILES
000009      3  ,SIGEXT,LSIGEX,YESERR,LYESR,SEGTRU,LSEGTR,CASDIS,LCASD      FILES
000010      4  ,INP ,OUTP ,TACW ,LTACH ,CASDSF,LCASDS      FILES
000011      INTEGER SEGID ,CROPW ,SURHST,ACQUIS,CANSF ,CAMERR,CASF ,YESOUT      FILES
000012      1  ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACW ,CASDSF      FILES
000013      C      FILES
000014      C      ITEM CONTROL CARD INPUT DATA      LFMCM
000015      COMMON /LFMCM /      LFMCM
000016      1  TITLE(10) ,ICASF ,COUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ      LFMCM
000017      2  ,FNDR ,ENDZ ,ISTG ,ICAMS ,IYFS ,IACQ ,ICLASS,ISEXT ,ISCC      LFMCM
000018      3  ,ICASP ,ICASZ ,IPRCAM,IPRYES,IPRCAS,ICSPSG,ICSECW,ICSESH,ICSECE      LFMCM
000019      4  ,ICSEYM,ICSESF,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6      LFMCM
000020      5  ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSFCD      LFMCM
000021      DIMENSION RSEED(7)      LFMCM
000022      DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5      LFMCM
000023      1  ,PSFED6,RSEED7      LFMCM
000024      EQUIVALENCE ( RSEED,PSFED1 )      LFMCM
000025      INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ      LFMCM
000026      C      LFMCM
000027      C      PAGE EJECT CONTROL PARAMETERS FOR ITEM      PAGECM
000028      COMMON /PAGECM/      PAGECM
000029      1  NPAGE ,NLINE ,MXLINE,NSTTL ,SUBTTL(10)      PAGECM
000030      C      PAGECM
000031      C      EJECT
000032      NLINE= NLINE + 2      EJECT
000033      NPAGE= NPAGE + 1      EJECT
000034      WRITE (OUTP,1) TITLE, ICASF, NPAGE      EJECT
000035      1  FORMAT (1H1,4X,10A6,5X,25H LPP SIMULATION      CASE,15,7H PAGE,14      EJECT
000036      1  /)      EJECT
000037      IF ( NSTTL .EQ. 0 ) GO TO 900      EJECT
000038      WRITE (OUTP,2) SUBTTL      EJECT
000039      NLINE= NLINE + 3      EJECT
000040      2  FORMAT (/25X,10A6/)      EJECT
000041      900 RETURN      EJECT
000042      END      EJECT

```

```

000001      SUBROUTINE FRRMC                                EPRMC
000002      C      FRRMC MODEL CONTROL ROUTINE FOR THE LEM PROGRAM      ERRMC
000003      C      FOR EACH MONTE CARLO ITERATION ERRMC PROPERLY INITIALIZES THE      ERRMC
000004      C      RANDOM NUMBER SEEDS FOR THE FOLLOWING ERROR SOURCES ..      ERRMC
000005      C      * CLASSIFICATION ERROR (ICLASS)                        EPRMC
000006      C      * SIGNATURE EXTENSION ERROR (ISEXT)                  ERRMC
000007      C      * SEGMENT CROP CALENDAR ERROR (ISCC)                 ERRMC
000008      C      * CAS GROUP II NON-EPOCH YEAR, HISTORICAL PROPORTION WHEAT      ERRMC
000009      C      (ICAS2)                                               ERRMC
000010      C      * CAS GROUP III MULTI-YEAR PROPORTION OF WHEAT (ICAS3)      ERRMC
000011      C                                                                ERRMC
000012      C      COMMON BLOCK DEFINITIONS                             ERRMC
000013      C      CONTROL PARAMETERS FOR LEM PROGRAM                   ERRMC
000014      C      COMMON /CNTRL /                                         CNTRL
000015      C      1 PRINTF, RSTART, SEED(7)                             CNTRL
000016      C      INTEGER PRINTF                                         CNTRL
000017      C      DOUBLE PRECISION SEED                                  CNTRL
000018      C                                                                CNTRL
000019      C      LEM CONTROL CARD INPUT DATA                          CNTRL
000020      C      COMMON /LEMCM /                                         LEMCM
000021      C      1 TITLE(10) , ICASF , COUNTRY, NTRIAL, RSTART, IPRINT, STARIR, STARTZ      LEMCM
000022      C      2 , ENDR , ENDR , ISTG , ICAMS , IYES , IACO , ICLASS, ISEXT , ISCC      LEMCM
000023      C      3 , ICASP?, ICAS3 , IPRCAM, IPRYES, IPRCAS, ICSEFG, ICSECH, ICSEFH, ICSECE      LEMCM
000024      C      4 , ICSEFM, ICSEFF, ICSELC, RSEED1, RSEED2, RSEED3, RSEED4, RSEED5, RSEED6      LEMCM
000025      C      5 , RSEED7, ICSEST, ICSECU, ICSEYS, ICSECU, ICSEED      LEMCM
000026      C      DIMENSION RSEED(7)                                     LEMCM
000027      C      DOUBLE PRECISION RSEED , RSEED1, RSEED2, RSEED3, RSEED4, RSEED5      LEMCM
000028      C      1 , RSEED6, RSEED7                                     LEMCM
000029      C      EQUIVALENCE ( RSEED, RSEED1 )                          LEMCM
000030      C      INTEGER RSTART, STARIR, STARTZ, ENDR , ENDR           LEMCM
000031      C                                                                LEMCM
000032      C                                                                LEMCM
000033      C      INPUTS ... ICAMS, ICLASS, ISEXT, ISCC, ICASP?, ICAS3, AND RSEED      ERRMC
000034      C                                                                ERRMC
000035      C      OUTPUTS ... SEED                                       ERRMC
000036      C                                                                ERRMC
000037      C      LINKAGE ... CALL ERRMC                                  ERRMC
000038      C      ERRMC IS CALLED FROM THE LEM DRIVER                   ERRMC
000039      C                                                                ERRMC
000040      C      *****                                               ERRMC
000041      C                                                                ERRMC
000042      C                                                                ERRMC
000043      C                                                                ERRMC
000044      C      TEST THE CAMS OPTION. IF ICAMS .NE. 0, ALL 3 CAMS ERRORS ARE      ERRMC
000045      C      CONSTANT AND CAMS WILL BE CALLED ONLY ONCE.           ERRMC
000046      C      IF ICAMS = 0, THEN IN GENERAL EACH OF THE CAMS ERRORS MAY BE      ERRMC
000047      C      VARIED OR HELD CONSTANT INDEPENDENTLY.               ERRMC
000048      C                                                                ERRMC
000049      C      IF ( ICAMS .NE. 0 ) GO TO 200                          ERRMC
000050      C      ICAMS = 0. VARY CAMS ERRORS OR HOLD THEM CONSTANT AS SPECIFIED      ERRMC
000051      C      BY THE PARAMETERS ICLASS, ISEXT, AND ISCC              ERRMC
000052      C      IF ( ICLASS .EQ. 1 ) SEED(2) = RSEED(2)               ERRMC
000053      C      IF ( ISEXT .EQ. 1 ) SEED(3) = RSEED(3)                ERRMC
000054      C      IF ( ISCC .EQ. 1 ) SEED(4) = RSEED(4).                 ERRMC
000055      C                                                                ERRMC
000056      C      200 IF ( ICASP .EQ. 1 ) SEED(6) = RSEED(6)             ERRMC
000057      C      IF ( ICAS3 .EQ. 1 ) SEED(7) = RSEED(7)                ERRMC
000058      C      RETURN                                                 ERRMC

```

ORIGINAL PAGE IS  
OF POOR QUALITY

LRMC

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000001      SUBROUTINE ERRMES (PROG, SUBR, ICODE, LEVEL)
000002      C          CONTROLS THE PRINTING OF ALL ERROR MESSAGES FOR LEM.
000003      C
000004      C          INPUT PARAMETERS ...
000005      C          PROG = SUBPROGRAM NAME IN A6 FORMAT (E.G. 3HLEM, 4HCAMS, ETC.)
000006      C          SUPR = SUBROUTINE NAME IN A6 FORMAT (E.G. 5HINPUT)
000007      C          ICODE = ERROR CODE
000008      C          LEVEL = ERROR SEVERITY LEVEL (= 0 FOR NONFATAL, = 1 FOR FATAL)
000009      C
000010      C
000011      C          PARAMETERS TO BE PRINTED AS PART OF ERROR MESSAGE ARE PASSED
000012      C          IN THE ARRAY ARG IN /ARGLST/
000013      C
000014      C          COMMON BLOCK DEFINITIONS
000015      C          ARGUMENT LIST FOR ERROR PROCESSING
000016      C          COMMON /ARGLST/
000017      C          1  NERRS ,NFATAL, NPERRS, NARG ,ARG(10)
000018      C          DIMENSION IARG(10)
000019      C          EQUIVALENCE ( IARG, ARG )
000020      C
000021      C          CONSTANT QUANTITIES FOR LEM PROGRAM
000022      C          COMMON /CONST /
000023      C          1  NTRMX ,MAXR ,MAXZ ,IMXSEG, ENDFIL, ITSEG
000024      C
000025      C          FILE DEFINITIONS AND RECORD LENGTHS
000026      C          COMMON /FILES /
000027      C          1  SECID ,LSECID, CROPW ,LCROPW, SUBHST, LSUBH ,ACQUIS, LACQ
000028      C          2  ,CANSE ,LCANSE, CANERR, LCANER, CASE ,LCASE ,YESOUT, LYESO
000029      C          3  ,SIGEXT, LSIGEX, YESERR, LYESER, SEGTRU, LSEGTR, CASDIS, LCASD
000030      C          4  ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF, LCASUS
000031      C          INTEGER SECID ,CROPW ,SUBHST, ACQUIS, CANSE ,CANERR, CASE ,YESOUT
000032      C          1  ,SIGEXT, YESERR, SEGTRU, CASDIS, OUTP ,TACQ ,CASDSF
000033      C
000034      C
000035      C          LOCAL VARIABLES
000036      C          IMES = ERROR MESSAGE CODE
000037      C          BLANK = 3H = 10RK OF BLANKS USED TO FILL PART OF ERROR MESSAGE.
000038      C          NONFTL = 3HNON = PART OF ERROR MESSAGE
000039      C          (DISTINGUISHES BETWEEN NONFATAL AND FATAL ERRORS)
000040      C          ERRLVL = BLANK OR NONFTL (USED TO FILL PART OF ERROR MESSAGE)
000041      C
000042      C          RFAL NONFTL
000043      C
000044      C          DATA BLANK, NONFTL
000045      C          1  / 1H ,3HNON /
000046      C
000047      C          LINKAGE ... CALL ERRMES (PROG, SUBR, ICODE, LEVEL)
000048      C          ERRMES IS CALLED FROM LEM, INPUT, INPCHK
000049      C
000050      C          SUBROUTINES USED ... INPERR
000051      C
000052      C *****
000053      C
000054      C          IMES = ICODE
000055      C          IF ( IMES .EQ. 99 ) GO TO 990
000056      C
000057      C          IF ( LEVEL .NE. 0 ) GO TO 20
000058      C          NONFATAL ERROR

```

000059		ERRLVL = NONFTL	ERRMES
000060		NERRS = NERRS + 1	ERRMES
000061		GO TO 30	ERRMES
000062	C	FATAL ERROR	ERRMES
000063	20	ERRLVL = BLANK	ERRMES
000064		NFATAL = NFATAL + 1	ERRMES
000065	C		ERRMES
000066	30	CALL PAGER (6)	ERRMES
000067		WRITE (OUTP,1000) ERRLVL,PROG,SUBR,IMES	ERRMES
000068	1000	FORMAT (// 6H ****,A3,26HFATAL ERROR IN SUBPROGRAM ,A6,	ERRMES
000069		1 14H, SUBROUTINE ,A6,15H ERROR CODE ,I3,7H ****)	ERRMES
000070	C		ERRMES
000071	C	TEST FOR CALLING SUBPROGRAM/ROUTINE AND CALL PROPER LOWER LEVEL	ERRMES
000072	C	ROUTINE TO PRINT ERROR MESSAGE	ERRMES
000073		IF ( SUBR .EQ. 5HINPUT ) GO TO 150	ERRMES
000074		IF ( SUBR .NE. 6HINPCHK ) GO TO 200	ERRMES
000075	C	FRPOP DETECTED IN LEM INPUT PROCESSOR	ERRMES
000076	150	CALL INPERR (IMFS)	ERRMES
000077		GO TO 900	ERRMES
000078	C		ERRMES
000079	200	IF ( SUBR .NE. 6HCAMSN ) GO TO 300	ERRMES
000080	C		ERRMES
000081	C	FRPOP DETECTED IN CAMS CONTROL CARD DATA	ERRMES
000082		CALL CAMERS (IMFS)	ERRMES
000083		GO TO 900	ERRMES
000084	C		ERRMES
000085	300	IF ( SUBR .NE. 5HCASIN ) GO TO 400	ERRMES
000086		IF ( IMFS .GT. 17 ) GO TO 150	ERRMES
000087	C		ERRMES
000088	C	FRPOP DETECTED IN CAS CONTROL CARD DATA	ERRMES
000089		CALL CASER1 (IMFS)	ERRMES
000090		GO TO 900	ERRMES
000091	C		ERRMES
000092	400	NPERRS = NPERRS + 1	ERRMES
000093		IF ( PROG .NE. 4HCAMS ) GO TO 500	ERRMES
000094	C		ERRMES
000095	C	FRPOP DETECTED IN CAMS MODULE	ERRMES
000096		CALL CAMER2 (IMFS)	ERRMES
000097		GO TO 900	ERRMES
000098	C		ERRMES
000099	500	IF ( PROG .NE. 3HYLES ) GO TO 600	ERRMES
000100	C		ERRMES
000101		CALL PAGER (3)	ERRMES
000102	C	FRPOP DETECTED IN MODULE YES.	ERRMES
000103		GO TO (510,520), IMFS	ERRMES
000104	510	WRITE (OUTP,921)	ERRMES
000105	921	FORMAT (/62H0YES INPUT FILE (YESERR) - BEGINNING REGION AND ZONE	ERRMES
000106		NOT FOUND )	ERRMES
000107		GO TO 900	ERRMES
000108	C		ERRMES
000109	520	WRITE (OUTP,922)	ERRMES
000110	922	FORMAT (/59H0YES INPUT FILE (YESERR) - ENDING REGION AND ZONE	ERRMES
000111		NOT FOUND )	ERRMES
000112	C		ERRMES
000113	600	IF ( PROG .NE. 3HCAS ) GO TO 700	ERRMES
000114	C		ERRMES
000115	C	FRPOP DETECTED IN CAS SIMULATOR MODULE	ERRMES
000116		CALL CASLR2 (IMFS)	ERRMES
000117		GO TO 900	ERRMES
000118	C		ERRMES

000119	700	IF ( PROG .NE. 3HSTG ) GO TO 900	ERRMES
000120		CALL STGERR (INES)	ERRMES
000121	C		ERRMES
000122	900	RETURN	ERRMES
000123	990	CALL PAGER (3)	ERRMES
000124		WRITE (OUTP,1001)	ERRMES
000125	1001	FORMAT (//4SH JOB TERMINATED IN ERRMES DUE TO FATAL ERRORS )	ERRMES
000126		CALL WRAPUP	ERRMES
000127		STOP	ERRMES
000128		END	ERRMES





```

FOR, IS GETYS
  SUBROUTINE GETYS
C     READS STRATA YIELD DATA FROM YESOUT FILE AND OBTAINS THE
C     PROPER VALUE OF ESTIMATED YIELD FOR THE CURRENT BIOWINDOW
C     OR PREDICTION DATE.
C
C     ARGUMENT LIST FOR ERROR PROCESSING
COMMON /ARGLST/
1  NEKRS ,NFATAL ,NPERRS ,NARG  ,ARG(10)
  DIMENSION IARG(10)
  EQUIVALENCE ( IARG,ARG )
C
C     FLAGS AND COUNTERS FOR CAS SIMULATOR
COMMON /CASFLG/
1  H      ,PPFLG ,NBW   ,IBW   ,WINDOW,IPD   ,IPP   ,PPDATE,NREGS
2  ,NZZOT ,NSTRAT,NYESK ,NSSHSK,NCAMSK,NRYES ,NRSSH ,NRCAMS
3  ,ENDG  ,ENDREG,ENDZON,IRSTR ,IRZONE,IRREG
4  ,LDS1  ,LDS4  ,LDS7  ,LDS8  ,LDS9  ,LDS10 ,LDS11 ,LDS12 ,LDS13
5  ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCON ,LRREG ,LRZONE,LRSTR
  INTEGER PPFLG , WINDOW , PPDATE
C
C     CONTROL PARAMETERS FOR LEM PROGRAM
COMMON /CNTRL /
1  PRINTF ,NSTART,SEED(7)
  INTEGER PRINTF
  DOUBLE PRECISION SEED
C
C     CONSTANT QUANTITIES FOR LEM PROGRAM
COMMON /CONST /
1  NTRMX ,MAXR  ,MAXZ  ,IMXSEG,ENDFIL,ITSFG
C
C     CAS DATA SETS 4, 5, AND 6 (AT STRATA LEVEL)
COMMON /DSET4 /
1  STRATA ,TWAS1 ,HWAS1 ,EWAS1 ,XM1JS ,XCT1S ,ANVS1
2  ,TWAS2 ,HWAS2 ,EWAS2 ,XM2JS ,XCT2S ,ANVS2 ,T
3  ,TWAS3 ,HWAS3 ,XCT3S
4  ,XYS   ,XESTYS,EVYRS ,P2IDPK,V1V2S ,VARS  ,ANVARS
5  ,FILL4(57)
  INTEGER STRATA
  DIMENSION DSET4(24), DSET5(7), DSET6(3)
  EQUIVALENCE ( DSET4,STRATA ), ( DSET5,TWAS2 ), ( DSET6,TWAS3 )

```

```

GETYS
GETYS
GETYS
GETYS
GETYS
ARGLST
ARGLST
ARGLST
ARGLST
ARGLST
ARGLST
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CNTRL
CNTRL
CNTRL
CNTRL
CNTRL
CONST
CONST
CONST
CONST
DSET4
DSET4
JULY76
JULY76
JULY76
JULY76
JULY76
JULY76
DSET4

```

C		DSET4
C	CAS DATA SET 7 (AT ZONE LEVEL)	DSET7
	COMMON /DSET7 /	DSET7
	1 ZONE ,HWAZ2 ,EZ ,M1K2KZ,ANALVZ,NSTRAZ,HWAZ1 ,EWAZ1 ,HWAZ3	JULY76
	2 ,ESTVZ ,HWAZ12	JULY76
	3 ,M1K2CL(10) ,EPWCL(10) ,EPW2CL(10) ,PKPICL(10)	JULY76
	4 ,PK2CL(10) ,PKCL(10) ,SSQ(10)	JULY76
	INTEGER ZONE	JULY76
	REAL M1K2KZ, M1K2CL	JULY76
	DIMENSION DSET7(81)	JULY76
	EQUIVALENCE ( DSET7,ZONE )	DSET7
C		DSET7
C	CAS DATA SET 8 (AT REGION LEVEL)	DSET8
	COMMON /DSET8 /	DSET8
	1 REGION,HWAR2 ,ER ,M1K2KR,ANALVR,NZONES,HWAR1 ,EWAR1 ,ESTVR	JULY76
	2 ,M1M2ZR,FILL8(71)	JULY76
	INTEGER REGION	JULY76
	REAL M1K2KR	JULY76
	DIMENSION DSET8(10)	JULY76
	EQUIVALENCE ( DSET8,REGION )	DSET8
C		DSET8
C	CAS DATA SET 10 (STRATA DATA -- FINAL PASS)	JULY76
	COMMON /DSET10/	JULY76
	1 HWAS ,TWAS ,EWAS ,AERRS ,AVARS ,TPRODS,EPRODS,PRERRS,PRVARS	JULY76
	2 ,YS ,ESTYS ,YERRS ,M1JS ,M2JS ,CT1S ,CT2S ,CT3S ,ANAVS	JULY76
	3 ,ANPRVS,ES	JULY76
	REAL M1JS , M2JS	JULY76
	DIMENSION DSET10(20)	JULY76
	EQUIVALENCE ( DSET10,HWAS )	JULY76
C		DSET10
C	FILE DEFINITIONS AND RECORD LENGTHS	FILES
	COMMON /FILES /	FILES
	1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ	FILES
	2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESQ	FILES
	3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD	FILES
	4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS	FILES
	INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT	FILES
	1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF	FILES
C		FILES
C	SUBSTRATA HISTORICAL DATA FROM SUBHST FILE	SSHDTA
	COMMON /SSHDTA/	SSHDTA

```

1  COUN2 ,IREG2 ,IZONE2,ISTRA2,ISUBS2,NSEG ,IDSEG ,GRPND ,HISTPW SSHDTA
2  ,AREAK ,PWK ,NAGR ,NA ,DELTPW,DELTPM,CV1 ,CV2 ,CV3 SSHDTA
3  ,CV4 ,VMULTK,CLASS(18),MXK,RDSSH JULY76
INTEGER GRPND , CLASS , RDSSH JULY76
DIMENSION SSHDTA(39) JULY76
EQUIVALENCE ( SSHDTA, COUN2 ) SSHDTA
C SSHDTA
C STATISTICAL INFORMATION FOR LEM STATS
C COMMON /STATS / STATS
1 ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR STATS
EQUIVALENCE ( NT,ITER ) STATS
C STATS
C YIELD DATA FROM YESOUT FILE YESDTA
COMMON /YESDTA/ YESDTA
1 YSTR ,IZPRDD(6) ,YSCI(6) ,VSYCI(6) YESDTA
2 ,RDYES ,NYESPP YESDTA
INTEGER RDYES YESDTA
C YESDTA
C DEBUGGING PRINT FLAG GETYS
COMMON /DEBUG/ .DEBUGF GETYS
C GETYS
C GETYS
C READ STRATA YIELD DATA FROM YESOUT FILE GETYS
NRYES= NRYES + 1 GETYS
READ (YESOUT) YCOUN,REGION,ZONE,STRATA,YSTR GETYS
1 , ( IZPRDD(I),YSCI(I),VSYCI(I),I=1,6 ) GETYS
IF ( YCOUN .EQ. ENDFIL ) GO TO 999 GETYS
C GETYS
C ON THE FIRST ITERATION OF THIS RUN, CHECK FOR CONSISTENCY GETYS
C BETWEEN YESOUT AND SUBHST FILES. GETYS
IF ( NT .GT. NSTART ) GO TO 110 GETYS
IF ( NSTRAT .EQ. 0 ) GO TO 110 GETYS
IF ( YCOUN .EQ. ENDFIL ) GO TO 999 GETYS
IF ( REGION .NE. IREG2 ) GO TO 999 GETYS
IF ( ZONE .NE. IZONE2 ) GO TO 999 GETYS
IF ( STRATA .NE. ISTRA2 ) GO TO 999 GETYS
C GETYS
110 YS= YSTR GETYS
IF ( PPFLG .NE. 0 ) GO TO 200 GETYS
C GETYS
C FIND LAST NONZERO YIELD DATE FOR THIS STRATA GETYS

```

	NYESP= 6	GETYS
	DO 120 I=1,6	GETYS
	IF ( IZPRDD(NYESPP) .GT. 0 ) GO TO 130	GETYS
120	NYESP= NYESP - 1	GETYS
C		GETYS
C	ALL YIELD DATES ARE ZERO FOR THIS STRATA	GETYS
	CALL ERRMES (3HCAS,6HCASER2,7,1)	GETYS
	YSTR= -1.0	GETYS
	GO TO 900	GETYS
C		GETYS
C	PICK UP LAST VALUE OF ESTIMATED YIELD AND YIELD VARIANCE FOR	GETYS
C	BIOWINDOW (IBW)	GETYS
130	ESTYS= YSCI(NYESPP)	GETYS
	EVYRS= VSYCI(NYESPP)**2	GETYS
C		GETYS
C		GETYS
C	TEMPORARY DEBUGGING PRINTOUT	GETYS
	GO TO 900	GETYS
C		GETYS
C	PICK UP ESTIMATED YIELD AND YIELD VARIANCE FOR PREDICTION DATE	GETYS
200	II= 6	GETYS
	DO 210 I=1,6	GETYS
	IF ( IZPRDD(II) .EQ. 0 ) GO TO 210	GETYS
	IF ( PDATE .GE. IZPRDD(II) ) GO TO 220	GETYS
210	II= II - 1	GETYS
C	ERROR. PREDICTION DATE PDATE .LT. ALL ZULU PREDICTION DATES	GETYS
C	ON YESOUT FILE.	GETYS
	IARG(1)= IPD	GETYS
	IARG(2)= PDATE	GETYS
	CALL ERRMES (3HCAS,5HGETYS,16,0)	GETYS
	YSTR= -1.0	GETYS
	GO TO 900	GETYS
C		GETYS
220	ESTYS= YSCI(II)	GETYS
	EVYRS= VSYCI(II)**2	GETYS
C		GETYS
C		GETYS
C	TEMPORARY DEBUGGING PRINTOUT	GETYS
C		GETYS
C		GETYS
C		GETYS

```
C
C      TEMPORARY DEBUGGING PRINTOUT
900  CONTINUE
      RETURN
C
C
C
999  CALL ERRMES (3HCAS,5HGETYS,10,1)
      GO TO 900
      END
```

GETYS  
GETYS

GETYS  
GETYS  
GETYS  
GETYS  
GETYS  
GETYS

```

FOR, IS GROUP
SUBROUTINE GROUP
C   READS SEGMENT DATA FROM THE CAMS OUTPUT FILE (CAMSF), SELECTS
C   THE ESTIMATED PROPORTION WHEAT FOR THE PROPER BIOWINDOW FOR
C   EACH SEGMENT, AND AGGREGATES THE SEGMENT DATA UP TO THE
C   SUBSTRATA LEVEL
C
C   ARGUMENT LIST FOR ERROR PROCESSING
COMMON /ARGLST/
1  NERKS ,NFATAL,NPERRS,NARG ,ARG(10)
   DIMENSION IARG(10)
   EQUIVALENCE ( IARG,ARG )
C
C   CAS CONTROL CARD INPUT DATA AND CONSTANTS
COMMON /CASCM /
1  AREACF,YCF ,PRDCF ,APRUTS(4,2) ,PPRUTS(5,2) ,YPRUTS(3,2)
2  ,AREAPS,S2MAX ;NHISTY,HH ,TOPT ,AUNITS,DISTFF,BWIND(4)
3  ,WPRIOR(4) ,APREP ,IPRD(3,14) ,NPDATE,PRDATE(14)
   INTEGER HH, TOPT, AUNITS,DISTFF,BWIND,WPRIOR,APREP,PRDATE
C
C   FLAGS AND COUNTERS FOR CAS SIMULATOR
COMMON /CASFLG/
1  H ,PPFLG ,NBW ,IBW ,WINDOW,IPD ,IPP ,PPDATE,NREGS
2  ,NZTOT ,NSTRAT,NYESSK,NSSHOK,NCAMSK,NRYES ,NRSSH ,NRCAMS
3  ,ENDC ,ENDREG,ENDZON,IRSTR ,IRZONE,IRREG
4  ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13
5  ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCON,LRREG ,LRZONE,LRSTR
   INTEGER PPFLG , WINDOW , PPDATE
C
C   CAS DATA SETS 1,2, AND 3
COMMON /DSET1 /
1  ISUBST,TWAK ,HWAK ,EWAK ,M1K ,CT1K ,ANALVK,EPWK ,EPW2K
2  ,SMPKPI,SUMPK2,SUMPK ,KSUB ,NCLASS
   REAL M1K , M2K
   DIMENSION DSET1(14), DSET2(14), DSET3(6)
   EQUIVALENCE ( DSET1,DSET2,DSET3,ISUBST )
1  , ( M2K,M1K ), ( CT2K,CT3K,CT1K )
C
C   FILE DEFINITIONS AND RECORD LENGTHS
COMMON /FILES /
1  SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ

```

```

GROUP
GROUP
GROUP
GROUP
GROUP
ARGLST
ARGLST
ARGLST
ARGLST
ARGLST
CASCM
CASCM
CASCM
CASCM
CASCM
CASCM
CASCM
CASCM
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
CASFLG
DSET1
DSET1
JULY76
JULY76
JULY76
JULY76
DSET1
DSET1
DSET1
FILES
FILES
FILES

```

	2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYES0	FILES
	3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD	FILES
	4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS	FILES
	INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT	FILES
	1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF	FILES
C		FILES
C	LEM CONTROL CARD INPUT DATA	LEMCM
	COMMON /LEMCM /	LEMCM
	1 TITLE(10) ,ICASE ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTR,STARTR	LEMCM
	2 ,ENDR ,ENDZ ,ISTG ,ICAMS ,IYES ,IACQ ,ICLASS,ISEXT ,ISCC	LEMCM
	3 ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSECE	LEMCM
	4 ,ICSEYM,ICSESE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6	LEMCM
	5 ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD	LEMCM
	DIMENSION RSEED(7)	LEMCM
	DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5	LEMCM
	1 ,RSEED6,RSEED7	LEMCM
	EQUIVALENCE ( RSEED,RSEED1 )	LEMCM
	INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ	LEMCM
C		LEMCM
C	SEGMENT DATA FROM CAMS OUTPUT FILE (CAMSF)	SEGDTA
	COMMON /SEGDTA/	SEGDTA
	1 IDSEGT(5) ,ISEG ,TPWKI ,ZACDAY(4) ,EPWKI(4)	SEGDTA
	2 ,ERRPWI(4) ,ESTPWI	SEGDTA
	INTEGER ZACDAY	SEGDTA
C		SEGDTA
C	SUBSTRATA HISTORICAL DATA FROM SUBHST FILE	SSHDTA
	COMMON /SSHDTA/	SSHDTA
	1 COUN2 ,IREG2 ,IZONE2,ISTRA2,ISUBS2,NSEG ,IDSEG ,GRPNO ,HISTPW	SSHDTA
	2 ,AREAK ,PWK ,NAGR ,NA ,DELTPW,DELTPM,CV1 ,CV2 ,CV3	SSHDTA
	3 ,CV4 ,VMULTK,CLASS(18),MXK,RDSSH	JULY76
	INTEGER GRPNO , CLASS , RDSSH	JULY76
	DIMENSION SSHDTA(39)	JULY76
	EQUIVALENCE ( SSHDTA, COUN2 )	SSHDTA
C		SSHDTA
C	DEBUGGING PRINT FLAG	GROUP
	COMMON /DEBUGF/ DEBUGF	GROUP
C		GROUP
C		GROUP
	DD 490 N=1,NSEG	GROUP
C	READ SEGMENT DATA FROM CAMSF	GROUP
	NRCAMS= NRCAMS + 1	GROUP

	READ (CAMSF) IDSEGT, ISEG, TPWKI, (ZACDAY(I), EPWKI(I), ERRPWI(I)	GROUP
	1 , I=1,4 )	GROUP
C		GROUP
C		GROUP
C	TEMPORARY DEBUGGING PRINTOUT	GROUP
C		GROUP
C	TEST FOR CONSISTENCY BETWEEN CAMSF AND SUBHST	GROUP
C	IF ( IDSEGT(2) .NE. IREG2 ) GO TO 120	GROUP
C	IF ( IDSEGT(3) .NE. IZONE2 ) GO TO 120	GROUP
C	IF ( IDSEGT(4) .NE. ISTR2 ) GO TO 120	GROUP
C	IF ( IDSEGT(5) .EQ. ISUBS2 ) GO TO 200	GROUP
C	INCONSISTENCY BETWEEN CAMSF AND SUBHST.	GROUP
C	REGION, ZONE, STRATA, AND/OR SUBSTRATA FROM CAMSF AND SUBHST	GROUP
C	DO NOT AGREE.	GROUP
C	120 CALL ERMES (3HCAS, 5HGROUP, 11, 1)	GROUP
C	GO TO 900	GROUP
C		GROUP
C	200 IF ( PPFLG .EQ. 0 ) GO TO 300	GROUP
C		GROUP
C	PPFLG = 1. PROCESSING PREDICTION DATE.	GROUP
C	DO 210 I=1,4	GROUP
C	WINDOW= WPRIOR(I)	GROUP
C	IF ( WINDOW .EQ. 0 ) GO TO 490	GROUP
C	IF ( ZACDAY(WINDOW) .EQ. 0 ) GO TO 210	GROUP
C	IF ( ZACDAY(WINDOW) .LE. PDATE ) GO TO 400	GROUP
C	210 CONTINUE	GROUP
C	GO TO 490	GROUP
C		GROUP
C		GROUP
C	BIOWINDOW BEING PROCESSED	GROUP
C	300 WINDOW= IBW	GROUP
C	IF ( ZACDAY(WINDOW) .EQ. 0 ) GO TO 490	GROUP
C		GROUP
C	CONVERT EPWKI FROM PERCENT TO FRACTION	GROUP
C	400 ESTPWI= EPWKI(WINDOW)*0.01	GROUP
C	EQS. 2A, 3A OR 2B, 3B	GROUP
C	EPWK= EPWK + ESTPWI	GROUP
C	EPW2K= EPW2K + ESTPWI**2	GROUP
C	M1K= M1K + 1.0	GROUP
C	490 CONTINUE	GROUP



```
C      IF ( M1K .EQ. 0.0 ) GO TO 900
C      EQS. 4A-6A OR 4B-6B
      SMPKPI= HISTPW*EPWK
      SUMP2= M1K*HISTPW**2
      SUMPK = M1K*HISTPW
900    RETURN
      END
```

```
GROUP
GROUP
GROUP
GROUP
GROUP
GROUP
GROUP
GROUP
```

```

000001      SUBROUTINE IBETAI(X,A,B,P,IER)
000002      C
000003      C COMPUTE INCOMPLETE BETA INTEGRAL FOR ARGUMENTS
000004      C X BETWEEN ZERO AND ONE, A AND B POSITIVE.
000005      C
000006      C X VALUE TO WHICH FUNCTION IS TO BE INTEGRATED
000007      C A FIRST INPUT PARAMETER
000008      C B SECOND INPUT PARAMETER
000009      C P OUTPUT PROBABILITY THAT A RANDOM VARIABLE FROM A
000010      C BETA DISTRIBUTION HAVING PARAMETERS A AND B
000011      C WILL BE LESS THAN OR EQUAL TO X
000012      C IER ERROR FLAG WITH POSSIBLE VALUES
000013      C =40 X NOT BETWEEN RANGE 0 TO 1
000014      C =50 A AND/OR B NOT POSITIVE
000015      C =60 GAMMA FUNCTION RANGE VIOLATED (NOT .GT. 0. AND .LE. 88.)
000016      C
000017      LOGICAL INDEX
000018      C TEST FOR ADMISSIBILITY OF ARGUMENTS
000019      DATA ACU /1.E-8/
000020      P=X
000021      IFR=50
000022      IF(A.LE.0. .OR. B.LE.0.) RETURN
000023      IFR=40
000024      IF(X.LE.0. .OR. X.GE.1.) RETURN
000025      IFR=0
000026      C
000027      C CHANGE TAIL IF NECESSARY AND DETERMINE S
000028      ASB=A+B
000029      CX=1.0-X
000030      IF(A.GE.ASB*X) GO TO 10
000031      XX=CX
000032      CX=X
000033      AA=B
000034      BB=A
000035      INDEX=.TRUE.
000036      GO TO 20
000037      10 XX=X
000038      AA=A
000039      BB=B
000040      INDEX=.FALSE.
000041      20 TERM=1.0
000042      AI=1.0
000043      P=1.0
000044      NS=BB+CX*ASB
000045      C
000046      C USE SOPH REDUCTION FORMULAE
000047      RX=XX/CX
000048      30 TEMP=BB-AI
000049      IF(NS.LE.0) RX=XX
000050      40 TERM=TERM*TEMP*RX/(AA+AI)
000051      P=P+TERM
000052      IHP=ARG(TERM)
000053      IF(TEMP.LE.ACUCAND.TEMP.LE.ACUC*P) GO TO 50
000054      AI=AI+1.0
000055      NS=NS-1
000056      IF(NS.GE.0) GO TO 30
000057      TEMP=ASB
000058      ASB=ASB+1.0

```

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000059          READ(SFGTRU)COUN4,IREG4,IZONE4          INITI
000060          IF(COUN4.NE.4HZZZZ) GO TO 10             INITI
000061          NARG=0                                     INITI
000062          CALL FRRMES(4HCAMS,4HINIT,1,1)           INITI
000063          RETURN                                     INITI
000064          10 CONTINUE                                INITI
000065          IF((IREG4.NF.STARTR.OR.IZONE4.NF.STARTZ).AND.STARTR.NE.0) GO TO 20 INITI
000066          BACKSPACE SFGTRU                          INITI
000067          C                                          INITI
000068          C PASS OVER HEADERS ON OTHER INPUT FILES   INITI
000069          C SAVE WINDOW NAMES FROM ACQUIS, OPEN DA FILE INITI
000070          25 CONTINUE                                INITI
000071          IF(IACQU.GT.0) GO TO 30                     INITI
000072          REWIND ACQUIS                               INITI
000073          READ(ACQUIS)ISKP,ISKP,ICAS(2),ISKP,ISKP,HEAD INITI
000074          CALL TSAVE(0,0,IBAD)                       INITI
000075          30 CONTINUE                                INITI
000076          IF(ICAMR.GT.0) GO TO 40                     INITI
000077          REWIND CAMERR                              INITI
000078          READ(CAMERR)ISKP,ISKP,ICAS(3)              INITI
000079          40 CONTINUE                                INITI
000080          IF(ICROPW.GT.0) GO TO 50                     INITI
000081          REWIND CROPW                               INITI
000082          READ(CROPW)ISKP,ISKP,ICAS(4)              INITI
000083          50 CONTINUE                                INITI
000084          IF(ISIG.GT.0) GO TO 60                     INITI
000085          REWIND SIGEXT                             INITI
000086          READ(SIGEXT)ISKP,ISKP,ICAS(5)            INITI
000087          60 CONTINUE                                INITI
000088          C                                          INITI
000089          C OUTPUT HEADER OF OUTPUT FILE             INITI
000090          REWIND CAMSF                               INITI
000091          ITOT=ICAMSF-15                             INITI
000092          WRITE(CAMSF)NAME(1),NAME(2),ICASE,IMODEL,  INITI
000093          1 ICAS(3),ICAS(2),ICAS(4),ICAS(1),ICAS(5),IMULTI,ISCC,ICLASS, INITI
000094          1 ISEXT,IACO,ICAMS,(IFILL,I=1,ITOT)      INITI
000095          RETURN                                     INITI
000096          END                                         INITI

```

```

000001 .      SUBROUTINE INIT                               INIT.
000002      C      INITIALIZATION ROUTINE.  INITIAIZES RANDOM NUMBER SEEDS  INIT
000003      C      WRITES HEADER RECORDS, ETC.                               INIT
000004      C                                                                 INIT
000005      C      COMMON BLOCK DEFINITIONS                               INIT
000006      C      CONTROL PARAMETERS FOR LEM PROGRAM                       CNTRL
000007      COMMON /CNTRL /                                             CNTRL
000008      1 PRINTF, NSTART, SEED(7)                                       CNTRL
000009      INTEGER PRINTF                                                CNTRL
000010      DOUBLE PRECISION SEED                                          CNTRL
000011      C                                                                 CNTRL
000012      C      LEM CONTROL CARD INPUT DATA                             LFMCM
000013      COMMON /LFMCM /                                             LFMCM
000014      1 TITLE(10) , ICASE , COUNTRY, NIRIAL, RSTART, IPRINT, STARTP, STARTZ LFMCM
000015      2 , ENDR , ENDRZ , ISTG , ICAMS , IYFS , IACR , ICLASS, ISEXT , ISCC LFMCM
000016      3 , ICAS2 , ICAS3 , IPRCAM, IPRYES, IPRCAS, ICSESC, ICSELCW, ICSEF0H, ICSECE LFMCM
000017      4 , ICSEFM, ICSESF, ICSEAC, RSEED1, RSEED2, RSEED3, RSEED4, RSEED5, RSEED6 LFMCM
000018      5 , RSEED7, ICSEST, ICSECO, ICSEYS, ICSECU, ICSECD LFMCM
000019      DIMENSION RSEED(7)                                             LFMCM
000020      DOUBLE PRECISION RSEED , RSEED1, RSEED2, RSEED3, RSEED4, RSEED5 LFMCM
000021      1 , RSEED6, RSEED7 LFMCM
000022      EQUIVALENCE ( RSEED, RSEED1 ) LFMCM
000023      INTEGER RSTART, STARTP, STARTZ, ENDR , ENDRZ LFMCM
000024      C                                                                 LFMCM
000025      C                                                                 INIT
000026      C      LINKAGE ... CALLED FROM LEM DRIVER                       INIT
000027      C *****                                                    INIT
000028      C                                                                 INIT
000029      C                                                                 INIT
000030      C      INITIALIZE RANDOM NUMBER SEEDS                           INIT
000031      DO 10 I=1,7                                                    INIT
000032      SEED(I)= RSEED(I)                                             INIT
000033      10 CONTINUE                                                  INIT
000034      RETURN                                                         INIT
000035      END                                                            INIT

```

```

000001 SUBROUTINE INITI(ISFG,IACQU,ICAMER,ICROPW,ISIG,HEAD,ITSFG) INITI
000002 C INITI
000003 C THIS SUBROUTINE INITIALIZES THE INPUT FILES AND OUTPUT FILES, INITI
000004 C READY TO PROCESS (READ PAST HEADERS,ETC.) INITI
000005 C INITI
000006 C CAMS CONTROL CARD INPUT DATA CAMSCM
000007 COMMON/CAMSCM/ INDOFL,IMULTI,ISIGEX,ISKIP,ITMAX,IREP,IWIND, CAMSCM
000008 1 IGROUP(3,2,15),MS(3,2,3),G(3,2,2),H(3,2,2) CAMSCM
000009 REAL MS CAMSCM
000010 C CAMSCM
000011 C FILE DEFINITIONS AND RECORD LENGTHS FILEFS
000012 COMMON /FILEFS / FILEFS
000013 1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ FILEFS
000014 2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO FILEFS
000015 3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD FILEFS
000016 4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS FILEFS
000017 INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT FILEFS
000018 1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF FILEFS
000019 C FILEFS
000020 C ARGUMENT LIST FOR ERROR PROCESSING ARGLIST
000021 COMMON /ARGLIST/ ARGLIST
000022 1 NERRS ,NFATAL,NPFERRS,NARG ,ARG(10) ARGLIST
000023 DIMENSION IARG(10) ARGLIST
000024 EQUIVALENCE ( IARG,ARG ) ARGLIST
000025 C ARGLIST
000026 COMMON/SEGTRU/COUN4,IREG4,IZONE4,ISTRA4,ISUB4,ISEG4, SFGTRU
000027 1 I1,IPRIOR(6),ISPW,PI(2) SFGTRU
000028 C SEGTRU
000029 COMMON /LENMCM / LENMCM
000030 1 TITLE(10) ,ICASE ,CUNTRY,NTRIAL,RSIART,IPRINT,STARTR,STARTZ LENMCM
000031 2 ,FNDR ,END7 ,ISTG ,ICANS ,IYES ,IACO ,ICLASS,ISEXT ,YSCC LENMCM
000032 3 ,ICASP ,ICASS ,IPRCAM,IPRYES,IPRCAS,ICSFSG,ICSECM,ICSESH,ICSECE LENMCM
000033 4 ,ICSYH,ICSFSE,ICSLAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6 LENMCM
000034 5 ,RSEED7,ICSFST,ICSLCO,ICSEYS,ICSECU,ICSFCD LENMCM
000035 DIMENSION RSEED(7) LENMCM
000036 DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5 LENMCM
000037 1 ,RSEED6,RSEED7 LENMCM
000038 EQUIVALENCE ( RSEED,RSEED1 ) LENMCM
000039 INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ LENMCM
000040 C LENMCM
000041 COMMON/INDX/ INDEX( 1),IPOINT(2001),IPNT2(2001),IPEND,IPIN INDX
000042 COMMON/TRAINS/ COUNT,IREG7,IZONE7,ISTRA7,ISUB7,ISEG7, TRAINS
000043 1 ITWIN(4,25),ITTOT,ITM(3,4,25),TUB(3,4,25),TVV(3,4,25), TRAINS
000044 1 TPTRU,ITZULU(4),TPESI(4),TPERR(4),IFRTOT(3),TM(3),TV(3),TB(3) TRAINS
000045 INTEGER ITZULU TRAINS
000046 DIMENSION ITRAIN(129) TRAINS
000047 EQUIVALENCE (ITRAIN,COUNT) TRAINS
000048 COMMON/TACQ/ IHOLD(4,129),IHP TACQ
000049 DIMENSION HEAD( 4,4), NAME(2),ICAS(5) INITI
000050 DATA NAME/4HCAMS,4H OUT/ INITI
000051 DATA ICAS/5*0/ INITI
000052 DATA IFILL/0/ INITI
000053 C INITI
000054 C HEAD TO FIRST RECORD ON SFGTRU AND BACKSPACE INITI
000055 IF(ITSFG.GT.0) GO TO 25 INITI
000056 REWIND SEGTRU INITI
000057 HEAD(SFGTRU)ISKP,ISKP,ICAS(1),ITSFG INITI
000058 20 CONTINUE INITI

```

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000059      READ(SEGTRU)COUN4,IREG4,IZONE4          INITI
000060      IF(COUN4.NE.4HZZZZ) GO TO 10             INITI
000061      NARG=0                                    INITI
000062      CALL FRMES(4HCAMS,4HINIT,1,1)           INITI
000063      RETURN                                    INITI
000064      10 CONTINUE                               INITI
000065      IF((IREG4.NF.STARTR.OR.IZONE4.NF.STARTZ).AND.STARTR.NE.0) GO TO 20 INITI
000066      BACKSPACE SEGTRU                        INITI
000067      C                                         INITI
000068      C PASS OVER HEADERS ON OTHER INPUT FILES  INITI
000069      C SAVE WINDOW NAMES FROM ACQUIS, OPEN DA FILE INITI
000070      25 CONTINUE                               INITI
000071      IF(IACQU.GT.0) GO TO 30                 INITI
000072      REWIND ACQUIS                            INITI
000073      READ(ACQUIS)ISKP,ISKP,ICAS(2),ISKP,ISKP,HEAD INITI
000074      CALL TSAVE (0,0,IBAD)                  INITI
000075      30 CONTINUE                               INITI
000076      IF(ICAMFR.GT.0) GO TO 40                 INITI
000077      REWIND CAMERR                            INITI
000078      READ(CAMERR)ISKP,ISKP,ICAS(3)           INITI
000079      40 CONTINUE                               INITI
000080      IF(ICROPW.GT.0) GO TO 50                 INITI
000081      REWIND CROPW                             INITI
000082      READ(CROPW)ISKP,ISKP,ICAS(4)           INITI
000083      50 CONTINUE                               INITI
000084      IF(ISIG.GT.0) GO TO 60                 INITI
000085      REWIND SIGEXT                            INITI
000086      READ(SIGEXT)ISKP,ISKP,ICAS(5)         INITI
000087      60 CONTINUE                               INITI
000088      C                                         INITI
000089      C OUTPUT HEADER OF OUTPUT FILE          INITI
000090      REWIND CAMSF                             INITI
000091      ITOT=ICAMSF-15                           INITI
000092      WRITE(CAMSF)NAME(1),NAME(2),ICASE,IMODEL, INITI
000093      1  ICAS(3),ICAS(2),ICAS(4),ICAS(1),ICAS(5),IMULT1,ISCC,ICLASS, INITI
000094      1  ISEXT,IACO,ICAMS,(IFILL,I=1,ITOT)   INITI
000095      RETURN                                    INITI
000096      END

```

```

000001      SUBROUTINE INPCHK .                                INPCHK
000002      C      SUBROUTINE INPCHK CHECKS THE VALIDITY OF THE INPUT PARAMETERS INPCHK
000003      C      ON THE LEM CONTROL CARDS. IT ALSO READS THE HEADER RECORDS OF INPCHK
000004      C      EACH REQUIRED INPUT FILE AND CHECKS THE FILENAME, CASE NUMBER, INPCHK
000005      C      AND COUNTRY ON THAT FILE; ALSO INPCHK PRINTS THE INITIAL INPCHK
000006      C      PROBLEM STATUS INFORMATION INPCHK
000007      C      INPCHK
000008      C      COMMON BLOCK DEFINITIONS. INPCHK
000009      C      ARGUMENT LIST FOR ERROR PROCESSING INPCHK
000010      COMMON /ARGLST/ ARGLST
000011      1  NERRS ,NFATAL,NPFERRS,NARG ,ARG(10) ARGLST
000012      DIMENSION IARG(10) ARGLST
000013      EQUIVALENCE ( IARG,ARG ) ARGLST
000014      C      ARGLST
000015      C      DATA BLOCK FOR CAS CUMULATIVE FILE CASCUM
000016      C      CAS DATA SETS 14, 15, 16, AND 17 CASCUM
000017      COMMON /CASCUM/ CASCUM
000018      1  CASCUM(32),  BUFFER(504) CASCUM
000019      DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22) CASCUM
000020      1  ,DSET17(28) CASCUM
000021      EQUIVALENCE ( ICASC,CASCUM ) CASCUM
000022      EQUIVALENCE ( DSET14,DSET15,DSET16,DSET17,CASCUM(S) ) CASCUM
000023      1  , ( SOAFRS,SQAFR7,SQAFRR,SQAFRC,CASCUM(24) ) CASCUM
000024      2  , ( SQPFRR,SQPFZ,SQPFRR,SQPERC,CASCUM(25) ) CASCUM
000025      3  , ( SQYFRS,SQYERZ,SQYFRR,SQYERC,CASCUM(26) ) CASCUM
000026      C      CASCUM
000027      C      CONSTANT QUANTITIES FOR LEM PROGRAM CONST
000028      COMMON /CONST / CONST
000029      1  NTRMX ,MAXR ,MAXZ ,IMXSEG,ENDFIL,ITSFG CONST
000030      C      CONST
000031      C      FILE DEFINITIONS AND RECORD LENGTHS FILES
000032      COMMON /FILES / FILES
000033      1  SEGID ,LSEGID,CKOPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ FILES
000034      2  ,CAMSF ,LCAMSF,CAMERR,LCAMLR,CASF ,LCASF ,YESOUT,LYESU FILES
000035      3  ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTR,LSGTR,CASDIS,LCASD FILES
000036      4  ,INP ,OUIP ,TACQ ,LTACQ ,CASDSF,LCASUS FILES
000037      INTEGER SEGID ,LCROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT FILES
000038      1  ,SIGEXT,YESERR,SEGTR,CASDIS,OUIP ,TACQ ,CASDSF FILES
000039      C      FILES
000040      C      INDEX RECORD FOR CAS CUMULATIVE FILE (CAS) IXCAS
000041      COMMON /IXCAS/ IXCAS
000042      1  IXCAS( 1) ,LIXCAS IXCAS
000043      C      IXCAS
000044      C      LEM CONTROL CARD INPUT DATA LEMCM
000045      COMMON /LEMCM / LEMCM
000046      1  TITLE(10) ,ICASF ,COUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ LEMCM
000047      2  ,ENDR ,ENDZ ,ISTG ,ICAMS ,IYFS ,IACO ,ICLASS,ISEXT ,ISCL LEMCM
000048      3  ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECH,ICSESH,ICSECE LEMCM
000049      4  ,ICSEYH,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6 LEMCM
000050      5  ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECO,ICSECO LEMCM
000051      DIMENSION RSEED(7) LEMCM
000052      DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5 LEMCM
000053      1  ,RSEED6,RSEED7 LEMCM
000054      EQUIVALENCE ( RSEED,RSEED1 ) LEMCM
000055      INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ LEMCM
000056      C      LEMCM
000057      C      STATISTICAL INFORMATION FOR LEM STATS
000058      COMMON /STATS / STATS

```

```

000059      1  IIFR ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR      STATS
000060      EQUIVALENCE ( NT,IIFR )                                  STATS
000061      C                                                         STATS
000062      C                                                         INPCHK
000063      C      INPUTS ...                                         INPCHK
000064      C      ALL OF THE QUANTITIES IN THE COMMON BLOCKS /LEMCM/ AND INPCHK
000065      C      /FILES/ ARE REQUIRED BY INPCHK.                      INPCHK
000066      C      IN ADDITION THE QUANTITIES NTRMX, MAXR, AND MAXZ FROM INPCHK
000067      C      /CONST/ ARE REQUIRED.                                  INPCHK
000068      C      ALSO DEPENDING UPON INPUT OPTIONS SELECTED, SOME OF THE INPCHK
000069      C      FOLLOWING FILES MAY BE INPUT TO INPCHK SO THEIR HEADER INPCHK
000070      C      RECORDS MAY BE CHECKED ..                             INPCHK
000071      C      SECID , CROPR , SUBHSI , CAMERR , YESERR , SIGEXT , ACQUIS INPCHK
000072      C      SEGTRU , CAHSF , YESOUT , CASF , CASDIS              INPCHK
000073      C                                                         INPCHK
000074      C      OUTPUTS ...                                         INPCHK
000075      C      NERRS = NO. OF NONFATAL ERRORS DETECTED ON LEM CONTROL CARDS INPCHK
000076      C      NFATAL = NO. OF FATAL ERRORS DETECTED ON LEM CONTROL CARDS. E, INPCHK
000077      C                                                         INPCHK
000078      C      LOCAL VARIABLE DEFINITIONS                          INPCHK
000079      C      FILL = FILLER FOR HEADER RECORDS OF DATA FILES      INPCHK
000080      C      NFILL = NUMBER OF WORDS OF FILLER NECESSARY TO COMPLETE RECORD INPCHK
000081      C                                                         INPCHK
000082      C      LINKAGE ... CALL INPCHK                              INPCHK
000083      C      INPCHK IS CALLED FROM INPUT                          INPCHK
000084      C                                                         INPCHK
000085      C      SUBROUTINES USED ... ERRMES                          INPCHK
000086      C                                                         INPCHK
000087      C *****                                                    INPCHK
000088      C                                                         INPCHK
000089      C                                                         INPCHK
000090      C      TEMPORARILY SET ICSECU AND ICSECD = ICASE          INPCHK
000091      C      ICSECU= ICASE                                        INPCHK
000092      C      ICSECD= ICASE                                        INPCHK
000093      C                                                         INPCHK
000094      C      IF ( NTRIAL - RSTART .GT. NTRMX )                  INPCHK
000095      C      1          CALL ERRMES (3HLEM,6HINPCHK, 1,1)      INPCHK
000096      C                                                         INPCHK
000097      C      IF ( RSTART .GE. NTRIAL )                            INPCHK
000098      C      1          CALL ERRMES (3HLEM,6HINPCHK, 2,1)      INPCHK
000099      C                                                         INPCHK
000100      C      IF ( STARTR .LT. 0 ) GO TO 10                        INPCHK
000101      C      IF ( ENDR .EQ. 0 ) GO TO 20                         INPCHK
000102      C      IF ( STARTR .LE. ENDR .AND. ENDR .LE. MAXR ) GO TO 20 INPCHK
000103      C      10  CALL FRMES (3HLEM,6HINPCHK, 3,1)                INPCHK
000104      C                                                         INPCHK
000105      C      20  IF ( STARTZ .LT. 0 ) GO TO 30                     INPCHK
000106      C      IF ( ENDZ .EQ. 0 ) GO TO 40                         INPCHK
000107      C      IF ( STARTZ .LE. ENDZ .AND. ENDZ .LE. MAXZ ) GO TO 40 INPCHK
000108      C      30  CALL FRMES (3HLEM,6HINPCHK, 4,1)                INPCHK
000109      C                                                         INPCHK
000110      C      40  IF ( ISTG .LT. 0 .OR. ISTG .GT. 3 ) GO TO 50      INPCHK
000111      C      IF ( ICAMS .LT. 0 .OR. ICAMS .GT. 3 ) GO TO 50      INPCHK
000112      C      IF ( IYES .LT. 0 .OR. IYES .GT. 3 ) GO TO 50      INPCHK
000113      C      GO TO 60                                             INPCHK
000114      C      ISTG, ICAMS, AND/OR IYES IS NOT 0, 1, 2, OR 3      INPCHK
000115      C      50  CALL ERRMES (3HLEM,6HINPCHK, 5,1)              INPCHK
000116      C                                                         INPCHK
000117      C      60  IF ( ICAMS .NE. 0 .AND. ISTG .EQ. 0 )            INPCHK
000118      C      1          CALL ERRMES (3HLEM,6HINPCHK, 6,1)      INPCHK

```





```

000179 REWIND SIGEXT INPCHK
000180 C INPCHK
000181 C READ AND CHECK HEADER OF THE DATA ACQUISITION FILE INPCHK
000182 110 NFILL= LACD - 3 INPCHK
000183 REWIND ACQUTS INPCHK
000184 READ (ACQUIS) ARG(3),ARG(4),IARG(1), ( FILL,I=1,NFILL ) INPCHK
000185 ARG(6)= 6HACQUIS INPCHK
000186 IF ( ARG(3) .NE. 4HACQU .OR. ARG(4) .NE. 3HISI ) INPCHK
000187 1 CALL ERRMES (3HLEH,6HINPCHK,19,1) INPCHK
000188 NFILL= LACD - 1 INPCHK
000189 READ (ACQUIS) ARG(2), ( FILL,I=1,NFILL ) INPCHK
000190 IF ( IARG(1) .NE. ICSFAC .OR. ARG(2) .NE. COUNTRY ) INPCHK
000191 1 CALL ERRMES (3HLEH,6HINPCHK,11,1) INPCHK
000192 REWIND ACQUTS INPCHK
000193 C INPCHK
000194 120 IF ( IYFS .EQ. 0 ) GO TO 125 INPCHK
000195 IF ( IYFS .EQ. 2 ) GO TO 130 INPCHK
000196 IF ( RSTART .GT. 0 ) GO TO 130 INPCHK
000197 C IYFS= 0 OR IYFS= 1 OR 3 AND RSTART = 0. READ AND CHECK INPCHK
000198 C HEADER OF THE YES ERROR MODEL FILE. INPCHK
000199 125 NFILL= LYFSER - 3 INPCHK
000200 REWIND YESERR INPCHK
000201 READ (YFSERR) ARG(3),ARG(4),IARG(1), ( FILL,I=1,NFILL ) INPCHK
000202 ARG(6)= 6HYFSERR INPCHK
000203 IF ( ARG(3) .NE. 4HYESE .OR. ARG(4) .NE. 4HPROR ) INPCHK
000204 1 CALL ERRMES (3HLEH,6HINPCHK,19,1) INPCHK
000205 NFILL= LYFSER - 1 INPCHK
000206 READ (YFSERR) ARG(2), ( FILL,I=1,NFILL ) INPCHK
000207 IF ( IARG(1) .NE. ICSFYM .OR. ARG(2) .NE. COUNTRY ) INPCHK
000208 1 CALL ERRMES (3HLEH,6HINPCHK,12,1) INPCHK
000209 REWIND YESERR INPCHK
000210 C INPCHK
000211 C READ AND CHECK HEADER OF SUBSIRATA HISTORICAL FILE INPCHK
000212 130 NFILL= LSUBH - 3 INPCHK
000213 REWIND SUBHST INPCHK
000214 READ (SUBHST) ARG(3),ARG(4),IARG(1),IHXSEG INPCHK
000215 ARG(6)= 6HSUBHST INPCHK
000216 IF ( ARG(3) .NE. 4HSUB .OR. ARG(4) .NE. 4HHIST ) INPCHK
000217 1 CALL ERRMES (3HLEH,6HINPCHK,19,1) INPCHK
000218 NFILL= LSUBH - 1 INPCHK
000219 READ (SUBHST) ARG(2), ( FILL,I=1,NFILL ) INPCHK
000220 IF ( IARG(1) .NE. ICSESH .OR. ARG(2) .NE. COUNTRY ) INPCHK
000221 1 CALL ERRMES (3HLEH,6HINPCHK,15,1) INPCHK
000222 REWIND SUBHST INPCHK
000223 C INPCHK
000224 140 IF ( ICAMS .EQ. 2 ) GO TO 155 INPCHK
000225 IF ( ISTG .EQ. 2 ) GO TO 145 INPCHK
000226 IF ( RSTART .EQ. 0 ) GO TO 150 INPCHK
000227 IF ( ISTG .EQ. 0 ) GO TO 150 INPCHK
000228 C ISTG = 2 OR ISTG = 1 OR 3 AND RSTART .GT. 0 INPCHK
000229 145 NFILL= ISFGTR - 3 INPCHK
000230 REWIND SFGTRU INPCHK
000231 READ (SFGTRU) ARG(3),ARG(4),IARG(1), ( FILL,I=1,NFILL ) INPCHK
000232 ARG(6)= 6HSFGTRU INPCHK
000233 IF ( ARG(3) .NE. 4HSEGT .OR. ARG(4) .NE. 4HRUTH ) INPCHK
000234 1 CALL ERRMES (3HLEH,6HINPCHK,19,1) INPCHK
000235 NFILL= ISFGTR - 1 INPCHK
000236 READ (SFGTRU) ARG(2), ( FILL,I=1,NFILL ) INPCHK
000237 IF ( IARG(1) .NE. ICSFST .OR. ARG(2) .NE. COUNTRY ) INPCHK
000238 1 CALL ERRMES (3HLEH,6HINPCHK,14,1) INPCHK

```

```

000239          REWIND SEGTRU          INPCHK
000240          C          INPCHK
000241          150 IF ( RSTART .EQ. 0 ) GO TO 160          INPCHK
000242          IF ( ICAMS .EQ. 0 ) GO TO 160          INPCHK
000243          C          ICAMS = 2 OR ICAMS = 1 OR 3 AND RSTART .GT. 0          INPCHK
000244          155 NFILL= ICAMSF - 3          INPCHK
000245          REWIND CAMSF          INPCHK
000246          READ (CAMSF) ARG(3),ARG(4),IARG(1), ( FILL,I=1,NFILL )          INPCHK
000247          ARG(6)= 5HCAMSF          INPCHK
000248          IF ( ARG(3) .NE. 4HCAMS .OR. ARG(4) .NE. 4H OUT )          INPCHK
000249          1          CALL ERRMES (3HLEN,6HINPCHK,19,1)          INPCHK
000250          NFILL= ICAMSF - 1          INPCHK
000251          READ (CAMSF) ARG(2), ( FILL,I=1,NFILL )          INPCHK
000252          IF ( IARG(1) .NE. ICSECO .OR. ARG(2) .NE. CUNTRY )          INPCHK
000253          1          CALL ERRMES (3HLEN,6HINPCHK,15,1)          INPCHK
000254          REWIND CAMSF          INPCHK
000255          C          INPCHK
000256          160 IF ( IYES .EQ. 2 ) GO TO 165          INPCHK
000257          IF ( RSTART .EQ. 0 ) GO TO 170          INPCHK
000258          IF ( IYES .EQ. 0 ) GO TO 170          INPCHK
000259          C          IYES = 2 OR IYES = 1 OR 3 AND RSTART .GT. 0          INPCHK
000260          165 NFILL= IYFSO - 3          INPCHK
000261          REWIND YCSOUT          INPCHK
000262          READ (YCSOUT) ARG(3),ARG(4),IARG(1), ( FILL,I=1,NFILL )          INPCHK
000263          ARG(6)= 6HYFSOUT          INPCHK
000264          IF ( ARG(3) .NE. 3HYES .OR. ARG(4) .NE. IH )          INPCHK
000265          1          CALL ERRMES (3HLEN,6HINPCHK,19,1)          INPCHK
000266          NFILL= IYFSO - 1          INPCHK
000267          READ (YCSOUT) ARG(2), ( FILL,I=1,NFILL )          INPCHK
000268          IF ( IARG(1) .NE. ICSEYS .OR. ARG(2) .NE. CUNTRY )          INPCHK
000269          1          CALL ERRMES (3HLEN,6HINPCHK,16,1)          INPCHK
000270          REWIND YESOUT          INPCHK
000271          C          INPCHK
000272          C          OPEN CAS CUMULATIVE FILE          INPCHK
000273          170 DEFINE FILE 14(368,504,11,1DUM)          INPCHK
000274          C          *NEW          **=1
000275          IF ( RSTART .EQ. 0 ) GO TO 900          INPCHK
000276          C          INPCHK
000277          C          READ AND CHECK HEADER RECORD OF CAS CUMULATIVE FILE          INPCHK
000278          CALL HANACF (CASF,1,CASCUM,LCASF,IXCASF,LIXCAS,1)          INPCHK
000279          COUN= CASCUM(3)          INPCHK
000280          NT= ICASC(4)          INPCHK
000281          ARG(6)= 4HCASF          INPCHK
000282          ARG(3)= CASCUM(1)          INPCHK
000283          C          SHIFT FILENAME 4 CHARACTERS (24 BITS) TO THE LEFT          INPCHK
000284          C          BY MULTIPLYING BY 2**24          INPCHK
000285          IARG(4)= ICASC(1)*16777216          INPCHK
000286          IF ( CASCUM(1) .NE. 6HCASCUM ) CALL FRRMFS (3HLEN,6HINPCHK,19,1)          INPCHK
000287          IARG(1)= ICASC(2)          INPCHK
000288          IARG(2)= COUN          INPCHK
000289          IF ( ICASC(2) .NE. ICSECU .OR. COUN .NE. CUNTRY )          INPCHK
000290          1          CALL FRRMFS (3HLEN,6HINPCHK,17,1)          INPCHK
000291          IF ( NT .NE. RSTART ) CALL LRRMES (3HLEN,6HINPCHK,21,1)          INPCHK
000292          C          INPCHK
000293          900 RETURN          INPCHK
000294          END          INPCHK

```

```

000001      SUBROUTINE INPERR (ICODF)                INPERR
000002      PRINTS ERROR MESSAGES FOR THE LEM INPUT PROCESSOR  INPERR
000003      C                                          INPERR
000004      C      INPUT PARAMETER ...                INPERR
000005      C      ICODE = ERROR MESSAGE CODE        INPERR
000006      C                                          INPERR
000007      C      COMMON BLOCK DEFINITIONS          INPERR
000008      C      ARGUMENT LIST FOR ERROR PROCESSING  ARGLIST
000009      C      COMMON /ARGLIST/                   ARGLIST
000010      1  NIPRS ,NFATAL,NPERRS,NARG ,ARG(10)     ARGLIST
000011      DIMENSION IARG(10)                       ARGLIST
000012      EQUIVALENCE ( IARG,ARG )                ARGLIST
000013      C                                          ARGLIST
000014      C      CONSTANT QUANTITIES FOR LEM PROGRAM  CONST
000015      C      COMMON /CONST /                   CONST
000016      1  NTRMX ,MAXR ,MAXZ ,IMXSEG,FNDFIL,ITSFG  CONST
000017      C                                          CONST
000018      C      FILE DEFINITIONS AND RECORD LENGTHS  FILES
000019      C      COMMON /FILES /                   FILES
000020      1  SLGID ,LSEGID,CROPW ,LCROPW,SURHST,LSURH ,ACQUIS,LACQ  FILES
000021      2  ,CAMSF ,LCAMSF,CAMERR,LCAMLR,CASF ,LCASF ,YESOUT,LYESQ  FILES
000022      3  ,SIGEXI,LSIGEX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD  FILES
000023      4  ,INP ,OUTP ,TACU ,LTACU ,CASUSF,LCASDS  FILES
000024      INTEGER SECID ,CROPW ,SURHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT  FILES
000025      1 ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACU ,CASDSF  FILES
000026      C                                          FILES
000027      C      LEM CONTROL CARD INPUT DATA        LEMCM
000028      C      COMMON /LEMCM /                   LEMCM
000029      1  TITLE(10) ,ICASF ,CUNTRY,NTRIAL,RSTART,IPPINT,STARTR,STARTZ  LEMCM
000030      2  ,ENR ,ENDZ ,JSTG ,ICAMS ,IYFS ,IALO ,ILIAS5,ISEXT ,ISCC  LEMCM
000031      3  ,ICASP ,ICASS ,TPRCAM,IPRYS,IPPCAS,ICSESG,ICSLC4,ICSPSH,ICSECE  LEMCM
000032      4  ,ICSEYM,ICSESF,ICSEAC,RSEED1,RSEED2,RSEED3,RSFED4,RSEED5,RSEED6  LEMCM
000033      5  ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSLCD  LEMCM
000034      DIMENSION RSEED(7)                       LEMCM
000035      DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSFED3,RSEED4,RSEED5  LEMCM
000036      1 ,RSFED6,RSFED7                       LEMCM
000037      EQUIVALENCE ( RSEED,RSFED1 )             LEMCM
000038      INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ  LEMCM
000039      C                                          LEMCM
000040      C      STATISTICAL INFORMATION FOR LEM     STATS
000041      C      COMMON /STATS /                   STATS
000042      1  ITER ,NSEGTR,NCAMSR,NYESR ,NKFC(7),NCASCR,NCASDR  STATS
000043      EQUIVALENCE ( NI,ITER )                  STATS
000044      C                                          STATS
000045      C      LOCAL VARIABLES                    INPERR
000046      C      IMES = ERROR MESSAGE CODE        INPERR
000047      C      MXLFM = MAXIMUM ERROR MESSAGE CODE  INPERR
000048      C                                          INPERR
000049      C                                          INPERR
000050      DATA MXLFM / 21 /                       INPERR
000051      C                                          INPERR
000052      C      LINKAGE ... CALL INPERR (ICODF)    INPERR
000053      C      INPERR IS CALLED FROM ERRMES, WHICH IS CALLED FROM INPCHK  INPERR
000054      C                                          INPERR
000055      C      *****                          INPERR
000056      C                                          INPERR
000057      C                                          INPERR
000058      C      MOST ERROR MESSAGES OCCUPY 2 OR 3 LINES.  INPERR

```

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000059      IMES= ICODE                                INPFRR
000060      IF ( IMES .LT. 0 .OR. IMES .GT. MXLEM ) GO TO 980    INPFRR
000061      C      BRANCH TO PRINT PROPER MESSAGE                INPFRR
000062      GO TO (10,20,30,40,50,60,70,80,90,100,110,120,130,140,150,160,170 INPFRR
000063      1 ,180,190,200,210                                INPFRR
000064      2 ), IMES                                          INPFRR
000065      C                                                    INPFRR
000066      10 WRITE (OUTP,1001) NTRIAL,RSTART,NTRMX           INPFRR
000067      1001 FORMAT (48H0100 MANY MONIF CARLO TRIALS REQUESTED. NTRIAL=I4, INPFRR
000068      1 9H RSTART=I4/30H MAX. NO. OF TRIALS PER RUN IS,I4) INPFRR
000069      GO TO 999                                          INPFRR
000070      C                                                    INPFRR
000071      20 WRITE (OUTP,1002) RSTART,NTRIAL                INPFRR
000072      1002 FORMAT (8H0RSTART=I4,27H MUST BE LESS THAN NTRIAL=I4) INPFRR
000073      GO TO 999                                          INPFRR
000074      C                                                    INPFRR
000075      30 WRITE (OUTP,1003) STARTR,ENDR,MAXR            INPFRR
000076      1003 FORMAT (8H0STARTR=I4,29H MUST BE BETWEEN 0 AND ENDR=I4, INPFRR
000077      1 20H. ENDR MUST BE .LF.,I4)                    INPFRR
000078      GO TO 999                                          INPFRR
000079      C                                                    INPFRR
000080      40 WRITE (OUTP,1004) STARTZ,ENDZ,MAXZ            INPFRR
000081      1004 FORMAT (8H0STARTZ=I4,29H MUST BE BETWEEN 0 AND ENDZ=I4, INPFRR
000082      1 20H. ENDZ MUST BE .LF.,I4)                    INPFRR
000083      GO TO 999                                          INPFRR
000084      C                                                    INPFRR
000085      50 WRITE (OUTP,1005) ISTG,ICAMS,IYES              INPFRR
000086      1005 FORMAT (6H0ISTG=I2,9H, ICAMS=I2,I2H, AND IYES=I2,26H MUST ALL BIMPERR
000087      IE 0,1,2, OR 3.)                                INPFRR
000088      GO TO 999                                          INPFRR
000089      C                                                    INPFRR
000090      60 CALL PAGER (1)                                  INPFRR
000091      WRITE (OUTP,1006) ICAMS,ISTG                     INPFRR
000092      1006 FORMAT (48H0IF ICAMS IS NONZERO, THEN ISTG MUST BE NONZERO./ INPFRR
000093      1 81H I.I. IF THE CAMS FRORS ARE HFLO CONSTANI, THEN 50 MUST THE INPFRR
000094      PSEGMNT TRUTH ERROR./8H ICAMS=I5,8H ISTG=I5) INPFRR
000095      GO TO 999                                          INPFRR
000096      C                                                    INPFRR
000097      70 WRITE (OUTP,1007) IARG(1),IARG(2),ICSESG,CUNTRY INPFRR
000098      1007 FORMAT (13H0CASE NUMBR=I5,I3H OR COUNTRY ;A6,57H FROM SEGMENT I INPFRR
000099      10 FILE DOES NOT AGREE WITH INPUTS ICSESG=I5/14H AND CUNTRY= A6) INPFRR
000100      GO TO 999                                          INPFRR
000101      C                                                    INPFRR
000102      80 WRITE (OUTP,1008) IARG(1),IARG(2),ICSECH,CUNTRY INPFRR
000103      1008 FORMAT (13H0CASE NUMBR=I5,I3H OR COUNTRY ,A6,58H FROM CROP WIND INPFRR
000104      10H FILE DOES NOT AGREE WITH INPUTS ICSECH=I5/14H AND CUNTRY= A6) INPFRR
000105      GO TO 999                                          INPFRR
000106      C                                                    INPFRR
000107      90 WRITE (OUTP,1009) IARG(1),IARG(2),ICSECE,CUNTRY INPFRR
000108      1009 FORMAT (13H0(CASE NUMBR=I5,I3H OR COUNTRY ,A6,57H FROM CAMS ERRO INPFRR
000109      1R FILE DOES NOT AGREE WITH INPUTS ICSECE=I5/14H AND CUNTRY= A6) INPFRR
000110      GO TO 999                                          INPFRR
000111      C                                                    INPFRR
000112      100 WRITE (OUTP,1010) IARG(1),IARG(2),ICSESE,CUNTRY INPFRR
000113      1010 FORMAT (13H0(CASE NUMBR=I5,I3H OR COUNTRY ,A6,62H FROM THE SIGNA INPFRR
000114      1TURE EXTENSION FILE DOES NOT AGREE WITH INPUTS / INPFRR
000115      2 9H ICSESE=I5,I4H AND CUNTRY= A6)                INPFRR
000116      GO TO 999                                          INPFRR
000117      C                                                    INPFRR
000118      110 WRITE (OUTP,1011) IARG(1),IARG(2),ICSLAC,CUNTRY INPFRR

```

```

000119      1011 FORMAT (13HOCASE NUMBER=15,13H OR COUNTRY ,A6,67H FROM THE DATA INPERR
000120      1ACQUISITION FILE DOES NOT AGREE WITH INPUTS ICSFAC=15/ INPERR
000121      2 14H AND CUNTRY= A6) INPERR
000122      GO TO 999 INPERR
000123      C INPERR
000124      120 WRITE (OUTP,1020) IARG(1),IARG(2),ICSEYM,CUNTRY INPERR
000125      1020 FORMAT (13HOCASE NUMBER=15,13H OR COUNTRY ,A6,66H FROM THE YES F INPERR
000126      1RROR MODEL FILE DOES NOT AGREE WITH INPUTS ICSEYM=15/ INPERR
000127      2 14H AND CUNTRY= A6) INPERR
000128      GO TO 999 INPERR
000129      C INPERR
000130      130 WRITE (OUTP,1030) IARG(1),IARG(2),ICSESH,CUNTRY INPERR
000131      1030 FORMAT (13HOCASE NUMBER=15,13H OR COUNTRY ,A6,63H FROM THE SUBST INPERR
000132      1RATA HISTORICAL FILE DOES NOT AGREE WITH INPUTS/ INPERR
000133      2 9H ICSESH=15,14H AND CUNTRY= A6) INPERR
000134      GO TO 999 INPERR
000135      C INPERR
000136      140 WRITE (OUTP,1040) IARG(1),IARG(2),ICSEST,CUNTRY INPERR
000137      1040 FORMAT (13HOCASE NUMBER=15,13H OR COUNTRY ,A6,64H FROM THE SEGM INPERR
000138      1NT TRUTH FILE DOES NOT AGREE WITH INPUTS ICSEST=15/14H AND CUNTRY INPERR
000139      1= A6) INPERR
000140      GO TO 999 INPERR
000141      C INPERR
000142      150 WRITE (OUTP,1050) IARG(1),IARG(2),ICSECO,CUNTRY INPERR
000143      1050 FORMAT (13HOCASE NUMBER=15,13H OR COUNTRY ,A6,62H FROM THE CAMS INPERR
000144      1OUTPUT FILE DILS NOT AGREE WITH INPUTS ICSECO=15/14H AND CUNTRY= INPERR
000145      2 A6) INPERR
000146      GO TO 999 INPERR
000147      C INPERR
000148      160 WRITE (OUTP,1060) IARG(1),IARG(2),ICSEYS,CUNTRY INPERR
000149      1060 FORMAT (13HOCASE NUMBER=15,13H OR COUNTRY ,A6,61H FROM THE YES O INPERR
000150      1UTPUT FILE DOES NOT AGREE WITH INPUTS ICSEYS= 15/14H AND CUNTRY = INPERR
000151      2 A6) INPERR
000152      GO TO 999 INPERR
000153      C INPERR
000154      170 WRITE (OUTP,1070) IARG(1),IARG(2),ICSEYS,CUNTRY INPERR
000155      1070 FORMAT (13HOCASE NUMBER=15,13H OR COUNTRY ,A6,65H FROM THE CAS C INPERR
000156      1UM OUTPUT FILE DOES NOT AGREE WITH INPUTS ICASE = 15/ INPERR
000157      2 14H AND CUNTRY= A6) INPERR
000158      GO TO 999 INPERR
000159      C INPERR
000160      180 WRITE (OUTP,1080) IARG(1),IARG(2),ICSECO,CUNTRY INPERR
000161      1080 FORMAT (13HOCASE NUMBER=15,13H OR COUNTRY ,A6,66H FROM THE CAS D INPERR
000162      11ST OUTPUT FILE DOES NOT AGREE WITH INPUTS ICASE = 15/ INPERR
000163      2 14H AND CUNTRY= A6) INPERR
000164      GO TO 999 INPERR
000165      C INPERR
000166      C INPERR
000167      190 WRITE (OUTP,1190) ARG(6),ARG(3),ARG(4) INPERR
000168      1190 FORMAT (51H0IMPROPER HEADER LABEL ON FILE ,A6,10H. LABEL =2A4) INPERR
000169      GO TO 999 INPERR
000170      C INPERR
000171      200 WRITE (OUTP,1200) ARG(1) INPERR
000172      1200 FORMAT (81H0IMPROPER LABEL AND SEQUENCE NUMBER ON A LFM CONTROL CA INPERR
000173      1RD. LABEL AND SLO. NO. = A6) INPERR
000174      GO TO 999 INPERR
000175      C INPERR
000176      210 WRITE (OUTP,1210) ARG(3),NT,RSTART INPERR
000177      1210 FORMAT (26H0ITERATION NUMBER NT FROM ,A6,7H FILE = 14, INPERR
000178      1 30H DOES NOT AGREE WITH RSTART = 14,23H FROM 164 CONTROL CARD) INPERR

```

000179	GO TO 999	INPFRR
000180		INPFRR
000181	C	INPFRR
000182	980 WRITE (OUTP,1980) IMFS	INPFRR
000183	1980 FORMAT(52H0 ERROR IN SUBR. INPFRR. ILLFGAL ERROR MESSAGE CODE,15)	INPFRR
000184	C	INPFRR
000185	999 RETURN	INPFRR
	END	INPFRR

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000001      SUBROUTINE INPT(ISEG,IACQU,ICAMFR,ICROPH,ISIGX,IPASS,      INP
000002      1 IDONE,IFND)      INP
000003      C      INP
000004      C      THIS SUBROUTINE GETS THE NEXT SFT OF RECORDS TO PROCESS FROM      INP
000005      C      THE INPUT FILES.      INP
000006      C      INP
000007      COMMON/SEGTRU/COUN4,IREG4,IZONE4,ISTRA4,ISUR4,ISEG4,      SFGTRU
000008      1 IT,IPRIOR(6),ISPW,PT(2)      SIGTRU
000009      COMMON/ACQUIS/COUN1,IREG1,IZONE1,ISTRA1,ISUB1,ISEG1,      ACQUIS
000010      1 IWIN(4,25),ITOTL      ACQUIS
000011      COMMON/CAMFRR/ COUN2,IREG2,IZONE2,ISTRA2,ISUB2,ISEG2,      CAMFRR
000012      1 PW(3,4),ERR(3,4),SIGERR(3,4)      CAMFRR
000013      COMMON/CROPW/COUN3,IREG3,IZONE3,ISTRA3,ISUB3,      CROPW
000014      1 STAR1(2,4),END(2,4),SD(2),ERR(2,5)      CROPW
000015      INTFGR START,END,SD,ERR      CROPW
000016      COMMON/SIGEX/COUN5,IREG5,IZONE5,ZH(3,2),ZSIG(3,2,6)      SIGEX
000017      C      FILE DEFINITIONS AND RECORD LENGTHS      FILES
000018      COMMON /FILES /      FILES
000019      1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ      FILES
000020      2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYES0      FILES
000021      3 ,SIGEXT,LSIGEX,YESERR,LYESR,SEGTRU,LSEGTR,CASDIS,LCASD      FILES
000022      4 ,INP ,OUTP ,IACQ ,LIACQ ,CASDSF,LCASD      FILES
000023      INTFGR SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT      FILES
000024      1 ,SIGEXT,LYESRR,SEGTRU,CASDIS,OUTP ,IACQ ,CASDSF      FILES
000025      C      FILES
000026      COMMON/INDX/ INDEX( 1),TPOINT(2001),IPNT2(2001),IPLND,IPIN      INDX
000027      COMMON/TACQ/INHLD(4,129),INP      TACQ
000028      C      LEM CONTROL CARD INPUT DATA      LEMCM
000029      COMMON /LEMCM /      LEMCM
000030      1 TITLE(10) ,ICASF ,COUNTRY,NTRIAL,RSTART,IPRINT,STARIR,STARTZ      LEMCM
000031      2 ,ENDR ,ENDZ ,ISIG ,ICAMS ,IYFS ,IACQ ,ICLASS,ISEXT ,ISCC      LEMCM
000032      3 ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESC,ICSLCW,ICSEFSH,ICSECE      LEMCM
000033      4 ,ICSEYH,ICSESF,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6      LEMCM
000034      5 ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD      LEMCM
000035      DIMENSION RSEED(7)      LEMCM
000036      DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5 ,      LEMCM
000037      1 ,RSEED6,RSEED7      LEMCM
000038      EQUIVALENCE ( RSEED,RSEED1 )      LEMCM
000039      INTEGER RSTART,STARIR,STARIZ,ENDR ,ENDZ      LEMCM
000040      C      LEMCM
000041      C      CAMS CONTROL CARD INPUT DATA      CAMSCH
000042      COMMON/CAMSCM/ IMODEL,IMULTI,ISIGEX,ISKIP,ITMAX,IREP,IWIND,      CAMSCH
000043      1 IGROUP(3,2,15),MS(3,2,5),G(3,2,2),H(3,2,2)      CAMSCH
000044      REAL MS      CAMSCH
000045      C      CAMSCH
000046      C      ARGUMENT LIST FOR ERROR PROCESSING      ARGST
000047      COMMON /ARGST/      ARGST
000048      1 NEPRS,NFATAL,NPERRS,NARG ,ARG(10)      ARGST
000049      DIMENSION IARG(10)      ARGST
000050      EQUIVALENCE ( IARG,ARG )      ARGST
000051      C      ARGST
000052      C      STATISTICAL INFORMATION FOR LEM      STATS
000053      COMMON /STATS /      STATS
000054      1 ITER ,NSEGTR,NCAMSK,NYESR ,NREC(7),NCASCR,NCASDR      STATS
000055      EQUIVALENCE ( NI,ITER )      STATS
000056      C      STATS
000057      COMMON/TRAINS/ COUN7,IREG7,IZONE7,ISTRA7,ISUR7,ISEG7,      TRAINS
000058      1 IWIN(4,25),ITOT,THM(3,4,25),THP(3,4,25),TVV(3,4,25),

```



```

000059      1  TPTIME,TIZULU(4),TPEST(4),TPFRR(4),TFRTOT(3),TH(3),TV(3),TB(3) TRAINS
000060      INIFGR TIZULU TRAINS
000061      DIMENSION ITRAIN(129) TRAINS
000062      EQUIVALENCE(ITRAIN,COUN7) TRAINS
000063      30 CONTINUE INP
000064      IF(ISFG.GT.0) GO TO 10 INP
000065      IF(IPFG4.EQ.ENDR.AND.IZONE4.NE.FNDZ) IEND=1 INP
000066      READ(SELTRU)COUN4,IREG4,IZONE4,ISTRA4,ISUB4,ISEG4, INP
000067      1  IT,(IPRIOR(I),I=1,6),TSPH,(PT(I),I=1,2) INP
000068      C INP
000069      C CHECK IF DONE INP
000070      IF(ENDZ.EQ.0.AND.COUN4.NE.4HZZZZ) GO TO 10 INP
000071      IF(FNDZ.EQ.0.AND.COUN4.FU.4HZZZZ) GO TO 20 INP
000072      IF(TEND.EQ.0.AND.COUN4.FU.4HZZZZ) GO TO 21 INP
000073      IF((IFND.FU.1).AND.(IREG4.NE.ENDR.OR.IZONE4.NE.FNDZ) INP
000074      1 .AND.COUN4.NE.4HZZZZ) GO TO 21 INP
000075      IF(COUN4.EQ.4HZZZZ) GO TO 20 INP
000076      GO TO 10 INP
000077      C INP
000078      C ERROR RETURN - NO END ZONE INP
000079      21 CONTINUE INP
000080      IDONE=2 INP
000081      NARG=0 INP
000082      CALL FRAMES(4HCAMS,4HINPT,2,0) INP
000083      C INP
000084      C DONE PROCESSING INP
000085      20 CONTINUE INP
000086      IDONE=1 INP
000087      RETURN INP
000088      C INP
000089      C CHECK IF TRAINING OR ORDINARY SEGMENT, AND BRANCH INP
000090      10 CONTINUE INP
000091      C INP
000092      C ACQUIS. PASS OR SPECIAL CASE - ORDINARY SEGMENT INP
000093      IF(IPASS.FU.0) GO TO 200 INP
000094      C INP
000095      C TRAINING PASS - SKIP OVER ORDINARY'S INP
000096      IF(IPASS.FU.1.AND.IT.FU.1) GO TO 30 INP
000097      IF(IPASS.FU.1.AND.IT.FU.0) GO TO 200 INP
000098      C INP
000099      C ORDINARY PASS INP
000100      IF(IPASS.EQ.2.AND.IT.FU.1) GO TO 200 INP
000101      C INP
000102      C ORDINARY PASS - TRAINING SEGMENTS - WRITE TO OUTPUT FILE INP
000103      C GET FROM SCRATCH FILE INP
000104      CALL TSAVE(ISFG4,1,TBAD) INP
000105      WRITE(CAMSF)COUN7,IREG7,IZONE7,ISTRA7,ISUB7,ISEG7, INP
000106      1  TPTIME,(TIZULU(I),TPEST(I),TPFRR(I),I=1,4) INP
000107      NCAMSP=NCAMSR+1 INP
000108      GO TO 30 INP
000109      200 CONTINUE INP
000110      C INP
000111      C READ ACQUIS. FILE INP
000112      IF(IACQU.GT.0) GO TO 400 INP
000113      READ(ACQUIS)COUN1,IREG1,IZONE1,ISTRA1,ISUB1,ISEG1, INP
000114      1  ((TWIN(I,J),J=1,25),I=1,4),ITOTAL INP
000115      C INP
000116      C MISSING RECORD INP
000117      IAKG(1)=6HACQUIS INP
000118      IF(COUN1.FU.4HZZZZ) GO TO 310 INP

```

```

000119          IF(TSF01.NE.1SEG4) GO TO 200          INP
000120          IF(COUN1.EQ.4HZZZZ) GO TO 310          INP
000121          GO TO 400                                INP
000122          C .                                     INP
000123          C . MISSING RECORD ERROR RETURN        INP
000124          310 CONTINUE                             INP
000125          NARG=1                                   INP
000126          IDONE=2                                  INP
000127          CALL FRRMFS(4HCAMS,4HTN01,3,1)         INP
000128          RETURN                                   INP
000129          C .                                     INP
000130          C . READ CAMERR FILE                    INP
000131          400 CONTINUE                             INP
000132          IF(1ACQU.LE.0)NREC(7)=NREC(7)+1        INP
000133          IF(ICAMER.GT.0) GO TO 500              INP
000134          DO 430 I=1,4                             INP
000135          PW(1,I)=PT(1)/100.                      INP
000136          PW(2,I)=0.                                INP
000137          PW(3,I)=0.                                INP
000138          430 CONTINUE                             INP
000139          DO 452 I=2,3                             INP
000140          DO 454 J=1,4                             INP
000141          BERR(I,J)=0.                              INP
000142          SIGERR(I,J)=0.                          INP
000143          454 CONTINUE                             INP
000144          452 CONTINUE                             INP
000145          410 CONTINUE                             INP
000146          IF(IMOD11.EQ.2) GO TO 420              INP
000147          READ(CAMERR)COUN2,IREG2,1ZONE2,ISTRA2,ISUB2,ISEG2, INP
000148          1 ((PW(1,J),I=1,3),(BERR(I,J),SIGERR(I,J),I=1,3),ISKP, INP
000149          1 ISKP),J=1,4)                            INP
000150          GO TO 440                                  INP
000151          420 CONTINUE                             INP
000152          READ(CAMERR) COUN2,IRFG2,1ZONE2,ISTRA2,ISUB2,ISEG2, INP
000153          1 ((ISKP,I=1,9),BERR(1,J),SIGERR(1,J),J=1,4) INP
000154          440 CONTINUE                             INP
000155          IARG(1)=6HCAMERR                         INP
000156          IF(COUN2.EQ.4HZZZZ) GO TO 310          INP
000157          IF(1SEG2.NE.1164) GO TO 410            INP
000158          NREC(4)=NREC(4)+1                       INP
000159          C .                                     INP
000160          C . READ (R)PW FILE                      INP
000161          500 CONTINUE                             INP
000162          IF(ICROPW.GT.0) GO TO 600              INP
000163          IF(TSP03.EQ.ISUB4) GO TO 600            INP
000164          READ(CROPW)COUN3,IREG3,1ZONE3,ISTRA3,ISUB3, INP
000165          1 ((START(I,J),END(I,J),J=1,4),SD(1),(ERR(I,J),J=1,5)),I=1,2) INP
000166          IARG(1)=5HCROP1                          INP
000167          IF(COUN3.EQ.4HZZZZ) GO TO 310          INP
000168          IF(TSUB3.NE.ISUB4) GO TO 500            INP
000169          NREC(2)=NREC(2)+1                       INP
000170          600 CONTINUE                             INP
000171          IARG(1)=5HCROP1                          INP
000172          C . CHECK IF NO DATA = WINTER/SPRING   INP
000173          IF(ICROPW.LE.0.AND.START(1+ISPW,2).EQ.0.) GO TO 310 INP
000174          C .                                     INP
000175          C . READ SIGEXI FILE                    INP
000176          IF(SIGEX.GT.0) GO TO 700                INP
000177          IF(1ZONE5.LE.1ZONE4) GO TO 700          INP
000178          DO 642 I=2,3                              INP

```

000179	ZB(J,1)=-1.	INP
000180	DO 644 J=1,2	INP
000181	DO 646 K=1,6	INP
000182	ZSIG(I,J,K)=0.	INP
000183	646 CONTINUE	INP
000184	644 CONTINUE	INP
000185	642 CONTINUE	INP
000186	640 CONTINUE	INP
000187	IF (IMODEL.EQ.2) GO TO 610	INP
000188	READ(SIGEXT)COUN5,IREG5,IZONE5,	INP
000189	1 ((ZP(I,J),J=1,2),((ZSIG(I,J,K),K=1,6),J=1,2),I=1,3)	INP
000190	GO TO 620	INP
000191	610 CONTINUE	INP
000192	READ(SIGEXT)COUN5,IREG5,IZONE5,	INP
000193	1 (ISKP,I=1,42),(ZB(I,J),J=1,2),((ZSIG(I,J,K),K=1,6),J=1,2)	INP
000194	620 CONTINUE	INP
000195	IARG(1)=5HSIGEX	INP
000196	IF(COUN5.EQ.4HZZZZ) GO TO 310	INP
000197	IF(IZONE5.NE.IZONE4) GO TO 640	INP
000198	DO 634 I=1,3	INP
000199	ZB(I,1)=ZB(I,1)+1.	INP
000200	634 CONTINUE	INP
000201	NREC(6)=NREC(6)+1	INP
000202	700 CONTINUE	INP
000203	C	INP
000204	C CHECK RANGE ON PT(2)	INP
000205	IDUNE=0	INP
000206	IF(PT(2)*PW(2,IWIND).LT.(PT(2)+PT(1)-100.))	INP
000207	1 PT(2)=(100.-PT(1))/(100.-PW(2,IWIND))	INP
000208	IF(PT(2)*PW(2,IWIND).GT.PT(1)) PT(2)=PT(1)/PW(2,IWIND)	INP
000209	RETURN	INP
000210	END	INP

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000001      SUBROUTINE INPUT                                INPUT
000002      C      READS AND CHECKS LEM CONTROL CARD INPUT    INPUT
000003      C      ALSO CALL ROUTINES TO READ CONTROL CARD INPUT FOR CAMS AND CAS. INPUT
000004      C      INPUT
000005      C      COMMON BLOCK DEFINITIONS                    INPUT
000006      C      ARGUMENT LIST FOR ERROR PROCESSING          ARGLIST
000007      COMMON /ARGLIST/                                    ARGLIST
000008      1  NERRS ,NFATAL,NPFERRS,NARG ,ARG(10)             ARGLIST
000009      DIMENSION IARG(10)                                  ARGLIST
000010      EQUIVALENCE ( IARG,ARG )                            ARGLIST
000011      C      ARGLIST
000012      C      FILE DEFINITIONS AND RECORD LENGTHS          FILES
000013      COMMON /FILES /                                     FILES
000014      1  SEGID ,LSLGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ  FILES
000015      2  ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYLSO  FILES
000016      3  ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTPU,LSGTR,CASDIS,LCASD  FILES
000017      4  ,INP ,OUTP ,TACW ,LTACW ,CASDSF,LCASDS           FILES
000018      INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT  FILES
000019      1 ,SIGEXT,YESERR,SGTRU,CASDIS,OUTP ,TACW ,CASDSF     FILES
000020      C      FILES
000021      C      LEM CONTROL CARD INPUT DATA                  LFMCM
000022      COMMON /LFMCM /                                     LFMCM
000023      1  TITLE(10) , ICASF ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ  LFMCM
000024      2  ,FNDR ,ENDZ ,ISTG ,ICAMS ,IYES ,IACQ ,ICLASS,ISEXT ,ISCC  LFMCM
000025      3  ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRLAS,ICSFSG,ICSECM,ICSF3H,ICSECE  LFMCM
000026      4  ,ICSEYM,ICSF5F,ICSLAC,RSEED1,RSFED2,RSEED3,RSEED4,RSEED5,RSEED6  LFMCM
000027      5  ,RSEED7,ICSEST,ICSECO,ICSEYS,ICSECU,ICSECD       LFMCM
000028      DIMENSION RSFED(7)                                  LFMCM
000029      DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5  LFMCM
000030      1 ,RSEED6,RSEED7                                     LFMCM
000031      EQUIVALENCE ( RSEED,RSFED1 )                        LFMCM
000032      INTEGER PSTART,STARTR,STARTZ,ENDR ,FNDR           LFMCM
000033      C      LFMCM
000034      C      PAGE EJECT CONTROL PARAMETERS FOR LEM        PAGECM
000035      COMMON /PAGECM/                                     PAGECM
000036      1  NPAGE ,NLINE ,MXLINE,NSITL ,SUBITL(10)          PAGECM
000037      C      PAGECM
000038      C      INPUT
000039      C      LOCAL VARIABLES                                INPUT
000040      C      LBL = CONTROL CARD LABEL AND SEQUENCE NUMBER IN A6 FORMAT  INPUT
000041      REAL LBL,LBL1                                       INPUT
000042      C      INPUT
000043      C      LINKAGE ... CALL INPUT                        INPUT
000044      C      INPUT IS CALLED FROM THE LEM DRIVER          INPUT
000045      C      INPUT
000046      C      SUBROUTINES CALLED ...                       INPUT
000047      C      EJECT, ERRMES, INPCHK, CAMSIN, CASIN        INPUT
000048      C      INPUT
000049      C      *****
000050      C      INPUT
000051      C      INPUT
000052      C      READ FIRST LEM CONTROL CARD                   INPUT
000053      HEAD (INP,1)  TITLE,LBL1                            INPUT
000054      1  FORMAT (10A6,14X,A6)                              INPUT
000055      C      INPUT
000056      C      READ SECOND LEM CONTROL CARD                  INPUT
000057      HEAD (INP,2)  ICASF,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ  INPUT
000058      1  ,FNDR,FNDR7,ISTG,ICAMS,IYES,IACQ,ICLASS,ISEXT,ISCC,ICAS2,ICAS3  INPUT

```

```

000059      2  ,IPRCAM,IPRYES,IPRCAS,LBL          INPUT
000060      2  FORMAT (14,1X,A6,2I4,I3,4I4,12I3,A6) INPUT
000061      C                                          INPUT
000062      C      CHECK LABEL AND SEQUENCE NUMBER OF FIRST CONTROL CARD. INPUT
000063      IF ( LBL1 .EQ. 6HLEM 01 ) GO TO 200    INPUT
000064      ARG(1)= LBL1                             INPUT
000065      NARG= 1                                   INPUT
000066      CALL FRRMFS (3HLEM,5HINPUT,20,1)        INPUT
000067      C                                          INPUT
000068      200 NPAGL= 0                              INPUT
000069      CALL POFCT (17)                          INPUT
000070      WRITE (OUTP,10)                          INPUT
000071      10  FORMAT (/ 20X,45H L E M   I N P U T   C O N T R O L   C A R D S /) INPUT
000072      WRITE (OUTP,11) TITLE,LBL1              INPUT
000073      11  FORMAT (/7H TITLE/2X,10A6,14X,A6)    INPUT
000074      WRITL (OUTP,12) ICASE,CNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARIZ INPUT
000075      1  ,FN[R,LND7,ISTG,ICAMS,IYES,IACG,ICLASS,ISFXT,ISCL,ICAS2,ICAS3 INPUT
000076      2  ,IPRCAM,IPRYES,IPRCAS,LBL          INPUT
000077      12  FORMAT(107H ICASE CNTRY NTRIAL RSTART IPRINT STARTR STARIZ INPUT
000078      1  ENDF LND7 ISTG ICAMS IYES IACG ICLASS ISFXT / INPUT
000079      2  16,3X,A6,I1,I8,I7,I9,I8,I7,I6,I5,I6,I7,I6,I7,I7/ INPUT
000080      3  52H ISCL ICAS2 ICAS3 IPRCAM IPRYES IPRCAS LABEL/ INPUT
000081      4  I5,I6,I7,I8,I8,I8,4X,A6)           INPUT
000082      C      CHECK LABEL AND SEQUENCE NUMBER OF SECOND CONTROL CARD INPUT
000083      IF ( LBL .EQ. 6HLEM 02 ) GO TO 300    INPUT
000084      ARG(1)= LBL                             INPUT
000085      NARG= 1                                   INPUT
000086      CALL FRRMFS (3HLEM,5HINPUT,20,1)        INPUT
000087      C                                          INPUT
000088      C      READ THIRD CONTROL CARD          INPUT
000089      300 READ (INP,3) ICSESG,ICSECW,ICSESH,ICSECE,ICSEYM,ICSESE,ICSEAC INPUT
000090      1  ,ICSEST,ICSECO,ICSEYS,RSEED1,RSEED2,LBL INPUT
000091      3  FORMAT (10I4,8X,20I2,0,2X,A6)         INPUT
000092      WRITE (OUTP,13) ICSESG,ICSECH,ICSESH,ICSECE,ICSEYM,ICSESE,ICSEAC INPUT
000093      1  ,ICSEST,ICSECO,ICSEYS,RSEED1,RSEED2,LBL INPUT
000094      13  FORMAT (55H ICSESG ICSECW ICSESH ICSECE ICSEYM ICSESE ICSEAC INPUT
000095      1  ,24H ICSEST ICSECO ICSEYS/16,9I8/    INPUT
000096      1  8X,6HRSEED1,13X,6HRSEED2,10X,5HLABEL/2021,12,3X,A6) INPUT
000097      C      CHECK LABEL AND SEQUENCE NUMBER OF THIRD CONTROL CARD INPUT
000098      IF ( LBL .EQ. 6HLEM 03 ) GO TO 400    INPUT
000099      ARG(1)= LBL                             INPUT
000100      NARG= 1                                   INPUT
000101      CALL FRRMFS (3HLEM,5HINPUT,20,1)        INPUT
000102      C                                          INPUT
000103      C      READ FOURTH CONTROL CARD        INPUT
000104      400 READ (INP,4) RSEED3,RSEED4,RSEED5,RSEED6,RSEED7,LBL INPUT
000105      4  FORMAT (50I2,0,14X,A6)               INPUT
000106      WRITE (OUTP,14) RSEED3,RSEED4,RSEED5,RSEED6,RSEED7,LBL INPUT
000107      14  FORMAT (/8X,6HRSEED3,14X,6HRSEED4,14X,6HRSEED5,14X,6HRSEED6,14X INPUT
000108      1  ,6HRSEED7,10X,5HLABEL/5020,12,3X,A6) INPUT
000109      C      CHECK LABEL AND SEQUENCE NUMBER OF FOURTH CONTROL CARD INPUT
000110      IF ( LBL .EQ. 6HLEM 04 ) GO TO 1000   INPUT
000111      ARG(1)= LBL                             INPUT
000112      NARG= 1                                   INPUT
000113      CALL FRRMFS (3HLEM,5HINPUT,20,1)        INPUT
000114      C                                          INPUT
000115      C      CHECK IEM CONTROL CARD DATA FOR ERRORS. ALSO CHECK INPUT FILE INPUT
000116      C      HEADERS.                        INPUT
000117      1000 CALL INPCHK                        INPUT
000118      C                                          INPUT

```

000119	C	READ AND CHECK CAMS CONTROL CARDS	INPUT
000120		CALL CAMSIN	INPUT
000121	C	READ AND CHECK CAS CONTROL CARDS	INPUT
000122		CALL CASIN	INPUT
000123	C		INPUT
000124		CALL PAGER (5)	INPUT
000125		WRITE (OUTP,20) NERRS,NFATAL	INPUT
000126	20	FORMAT (//5X,15,43H NONFATAL ERRORS DETECTED ON CONTROL CARDS//	INPUT
000127	1	5X,15,43H FATAL ERRORS DETECTED ON CONTROL CARDS)	INPUT
000128	900	RETURN	INPUT
000129		END	INPUT

ORIGINAL PAGE IS  
OF POOR QUALITY



	DIMENSION ICASD(303), HWA2K(60), WAKNEY(60), PIK(60)	CASDSB
	EQUIVALENCE ( ICASD,HWA2K,CASDSB ), ( WAKNEY,CASDSB(61) )	CASDSB
	1 , ( PIK,CASDSB(121) )	CASDSB
C		CASDSB
C	FLAGS AND COUNTERS FOR CAS SIMULATOR	LEM
C	( CHECK LISTING OF CAS FOR PROPER LENGTH OF COMMON BLOCK )	LEM
	COMMON /CASFLG/	LEM
	1 CASFLG(40)	LEM
C		LEM
C	CONTROL PARAMETERS FOR LEM PROGRAM	CNTRL
	COMMON /CNTRL /	CNTRL
	1 PRINTF,NSTART,SEED(7)	CNTRL
	INTEGER PRINTF	CNTRL
	DOUBLE PRECISION SEED	CNTRL
C		CNTRL
C	CONSTANT QUANTITIES FOR LEM PROGRAM .	CONST
	COMMON /CONST /	CONST
	1 NTRMX ,MAXR ,MAXZ ,IMXSEG,ENDFIL,ITSFG	CONST
C		CONST
C	FILE DEFINITIONS AND RECORD LENGTHS	FILES
	COMMON /FILES /	FILES
	1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ	FILES
	2 ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESQ	FILES
	3 ,SIGEXT,LSIGEX,YFSERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD	FILES
	4 ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS	FILES
	INTEGER SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT	FILES
	1 ,SIGEXT,YFSERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF	FILES
C		FILES
C	INDEX RECORD FOR CAS CUMULATIVE FILE (CASF)	IXCASF
	COMMON /IXCASF/	IXCASF
	1 IXCASF(1),LIXCAS	
C		IXCASF
C	INDEX RECORD FOR CAS DISTRIBUTION FILE	IXDISF
	COMMON /IXDISF/	IXDISF
	1 IXDISF(1),LIXDIS	
C	NOTE... 506 ONLY ALLOWS UP TO 8 PREDICTION POINTS INCLUDING	IXDISF
C	BIOWINDOWS ( 506 = 1 + 1 + 8*63, INDEX + HEADER + 8 PRED. PTS.)	IXDISF
C		IXDISF
C	INDEX RECORD FOR INTERMEDIATE SUBSTRATA HISTORICAL DATA FILE	IXSUBH
	COMMON /IXSUBH/	IXSUBH
	1 LIXSSH,IXSUBH(1)	MOD1



C		IXSUBH
	COMMON/FILES1/	FILES1
	1 ISUBH2,LSUBH2,MXCLSS	FILES1
C	LEM CONTROL CARD INPUT DATA	LEMCM
	COMMON /LEMCM /	LEMCM
	1 TITLE(10) ,ICASE ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ	LEMCM
	2 ,ENDR ,ENDZ ,ISTG ,ICAMS ,IYES ,IACQ ,ICLASS,ISEXT ,ISCC	LEMCM
	3 ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECW,ICSESH,ICSECE	LEMCM
	4 ,ICSEYM,ICSESE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6	LEMCM
	5 ,RSEED7,ICSEST,ICSECO,ICSEFYS,ICSECU,ICSECD	LEMCM
	DIMENSION RSEED(7)	LEMCM
	DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5	LEMCM
	1 ,RSEED6,RSEED7	LEMCM
	EQUIVALENCE ( RSEED,RSEED1 )	LEMCM
	INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ	LEMCM
C		LEMCM
C	PAGE EJECT CONTROL PARAMETERS FOR LEM	PAGECM
	COMMON /PAGECM/	PAGECM
	1 NPAGE ,NLINE ,MXLINE,NSITL ,SUBTTL(10)	PAGECM
C		PAGECM
C	STATISTICAL INFORMATION FOR LEM	STATS
	COMMON /STATS /	STATS
	1 ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR	STATS
	EQUIVALENCE ( NT,ITER )	STATS
C		STATS
C	YIELD DATA FROM YESOUT FILE	YESDTA
	COMMON /YESDTA/	YESDTA
	1 YSTR ,IZPRDD(6) ,YSCI(6) ,VSYCI(6)	YESDTA
	2 ,RDYES ,NYESPP	YESDTA
	INTEGER RDYES	YESDTA
C		YESDTA
C		LEM
C	LOCAL VARIABLES	LEM
C	I = INDEX IN MONTE CARLO DO LOOP	LEM
C		LEM
C	LINKAGE ... LEM IS CALLED DIRECTLY BY THE OPERATING SYSTEM	LEM
C		LEM
C	SUBROUTINES USED ...	LEM
C	START , INPUT , ERRMES, INIT , ERRMC , SETPRF, STG ,CAMS	LEM
C	YES , CAS , WRAPUP	LEM
C		LEM

```

C ***** LEM
C LEM
C LEM
C INITIALIZE STORAGE, FLAGS, ETC. LEM
CALL RANACF(4,0,0,0,0,0,0)
CALL RANACF(14,0,0,0,0,0,0)
CALL RANACF(15,0,0,0,0,0,0)
CALL RANACF(16,0,0,0,0,0,0)
CALL START LEM
C LEM
C READ AND CHECK ALL CONTROL CARD DATA LEM
CALL INPUT LEM
C LEM
C CHECK FOR FATAL ERRORS LEM
IF ( NFATAL .NE. 0 ) CALL ERRMES (3HLEM,3HLEM,99,2) LEM
C LEM
C PERFORM INITIALIZATION TASKS (INITIALIZE RANDOM NO. SEEDS) LEM
CALL INIT LEM
C LEM
C MONTE CARLO LOOP LEM
NSTART= RSTART + 1 LEM
DO 500 I=NSTART,NTRIAL LEM
ITER= 1 LEM
C ERROR MODEL CONTROL - SET RANDOM NO. SEED FOR EACH ERROR SOURCE LEM
CALL ERRMC LEM
C LEM
C TEST SEGMENT TRUTH FLAG LEM
IF ( ICAMS .EQ. 2 ) GO TO 300 LEM
IF ( ICAMS .NE. 0 .AND. ITER .GT. 1 ) GO TO 300 LEM
IF ( ISTG .EQ. 0 ) GO TO 120 LEM
IF ( ISTG - 2 ) 110,200,110 LEM
C SEGMENT TRUTH FLAG = 1 OR 3. CALL SEGMENT TRUTH GENERATOR ONLY LEM
C ON THE FIRST ITERATION. LEM
110 IF ( ITER .GT. 1 ) GO TO 200 LEM
C SET PRINT FLAG (PRINTF) FOR STG LEM
120 CALL SETPRF (IPRINT) LEM
C CALL SEGMENT TRUTH GENERATOR LEM
CALL STG LEM
IF ( NFATAL .NE. 0 ) GO TO 999 LEM
C LEM
C TEST CAMS ERROR FLAG LEM

```

```

200 IF ( ICAMS .EQ. 0 ) GO TO 220 LEM
    IF ( ICAMS - 2 ) 210,300,210 LEM
C   CAMS ERROR FLAG = 1 OR 3. CALL CAMS ONLY ON THE FIRST ITERATION LEM
210 IF ( ITER .GT. 1 ) GO TO 300 LEM
C   SET PRINT FLAG (PRINTF) FOR CAMS LEM
220 CALL SETPRF (IPRCAM) LEM
    CALL CAMS LEM
    IF ( NFATAL .NE. 0 ) GO TO 999 LEM
C LEM
C   TEST YES ERROR FLAG LEM
300 IF ( IYES .EQ. 0 ) GO TO 320 LEM
    IF ( IYES - 2 ) 310,400,310 LEM
C   YES ERROR FLAG = 1 OR 3. CALL YES ONLY ON THE FIRST ITERATION LEM
310 IF ( ITER .GT. 1 ) GO TO 400 LEM
C   SET PRINT FLAG (PRINTF) FOR YES LEM
320 CALL SETPRF (IPRYES) LEM
    CALL YES LEM
    IF ( NFATAL .NE. 0 ) GO TO 999 LEM
C LEM
C   SET PRINT FLAG (PRINTF) FOR CAS LEM
400 CALL SETPRF (IPRCAS) LEM
    CALL CAS LEM
    IF ( NFATAL .NE. 0 ) GO TO 999 LEM
C   END OF MONTE CARLO LOOP LEM
500 CONTINUE LEM
C LEM
C   END OF JOB. PRINT PROGRAM STATUS AT THE END OF THE JOB. LEM
    CALL WRAPUP LEM
    STOP LEM
C LEM
999 CALL ERRMES (3HLEM;3HLEM,99,0) LEM
    STOP LEM
    END LEM

```

```

000001          SUBROUTINE LFPA(FLOA,LMO,LYR,ALFGM,DAYS)          LFPA
000002          C ..          LFPA
000003          C MODULE = P1LFPA          LFPA
000004          C OCTOBER 1, 1973          LFPA
000005          C          LFPA
000006          C          LFPA
000007          C JUNE 26,1973          LFPA
000008          C          LFPA
000009          C MODULE P1LFPA - POINT TARGET PERFORMANCE PREDICTOR          LFPA
000010          C          LFPA
000011          C GIVEN DAY,MONTH,YEAR = SUBR. LFPA RETURNS THE RIGHT ASCENSION OF          LFPA
000012          C GREENWICH AT MIDNIGHT OF A GIVEN DAY          LFPA
000013          C          LFPA
000014          C REFERENCE EPOCH IS 0 HOUR 1JAN1950          LFPA
000015          C DATA RADIAN /57.29578/          LFPA
000016          C          LFPA
000017          C COMPUTE DAYS IN FULL YEARS FROM EPOCH TO LYR          LFPA
000018          C DAYS TO 1JAN1963 IS 4748.          LFPA
000019          C          LFPA
000020          C DAYS=4748.          LFPA
000021          C NOTE--LYR MUST BE GREATER THAN OR EQUAL TO (19)64          LFPA
000022          C LASTYR=LYR-1          LFPA
000023          C DO 20 IF=63, LASTYR          LFPA
000024          C KREMO=MOD((T-60),4)          LFPA
000025          C IF(KREMO.GT.0) GO TO 10          LFPA
000026          C DAYS=DAYS+366          LFPA
000027          C GO TO 20          LFPA
000028          C 10 DAYS=DAYS+365          LFPA
000029          C 20 CONTINUE          LFPA
000030          C IF(LMO=1) 30,40,30          LFPA
000031          C 30 IF(LMO=2) 60,50,60          LFPA
000032          C 40 DAYS=DAYS+FLOA-1.          LFPA
000033          C GO TO 270          LFPA
000034          C 50 DAYS=DAYS+FLOA+30.          LFPA
000035          C GO TO 270          LFPA
000036          C 60 KDLI=MOD((LYR-60),4)          LFPA
000037          C IF(KDLI.GT.0) GO TO 70          LFPA
000038          C DAYS=DAYS+59.          LFPA
000039          C GO TO 80          LFPA
000040          C 70 DAYS=DAYS+58.          LFPA
000041          C 80 IF(LMO=3) 270,170,90          LFPA
000042          C 90 IF(LMO=5) 180,190,100          LFPA
000043          C 100 IF(LMO=7) 280,210,110          LFPA
000044          C 110 IF(LMO=9) 220,230,120          LFPA
000045          C 120 IF(LMO=11) 280,250,260          LFPA
000046          C 170 DAYS=DAYS+FLOA          LFPA
000047          C GO TO 270          LFPA
000048          C 180 DAYS=DAYS+FLOA+31.          LFPA
000049          C GO TO 270          LFPA
000050          C 190 DAYS=DAYS+FLOA+61.          LFPA
000051          C GO TO 270          LFPA
000052          C 200 DAYS=DAYS+FLOA+92.          LFPA
000053          C GO TO 270          LFPA
000054          C 210 DAYS=DAYS+FLOA+122.          LFPA
000055          C GO TO 270          LFPA
000056          C 220 DAYS=DAYS+FLOA+153.          LFPA
000057          C GO TO 270          LFPA
000058          C 230 DAYS=DAYS+FLOA+184.          LFPA

```

000059  
000060  
000061  
000062  
000063  
000064  
000065  
000066  
000067  
000068  
000069  
000070

GO TO 270  
240 DAYS=DAYS+FLDA+214.  
GO TO 270  
250 DAYS=DAYS+FLDA+245.  
GO TO 270  
260 DAYS=DAYS+FLDA+275.  
270 .CONTINUE  
AI FGM=AMUD(SHGL((.10007554203+(.98564734600)\*DAYS+  
1(2.90150-13)\*DAYS\*\*2))+360.)  
AI FGM=AI FGM/RADIAN  
RETURN  
END

LFPA  
LFPA  
LFPA  
LFPA  
LFPA  
LFPA  
LFPA  
LFPA  
LFPA  
LFPA  
LFPA  
LFPA

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000001      SUBROUTINE MULTI(TYPE,SEASON,IWIN,M)          MULTI
000002      C                                          MULTI
000003      C THIS SUBROUTINE CALCULATES THE MULTI-TEMPORAL ERROR FOR TRAINING MULTI
000004      C SEGMENTS.                                MULTI
000005      C                                          MULTI
000006      C      CAMS CONTROL CARD INPUT DATA          CAMSCM
000007      COMMON/CAMSCM/ IMODEL,IMULTI,ISIGFX,ISKIP,ITMAX,IREP,IWIND, CAMSCM
000008      1 IGROUP(3,2,15),MS(3,2,3),G(3,2,2),H(3,2,2) CAMSCM
000009      REAL MS,                                       CAMSCM
000010      C                                          CAMSCM
000011      COMMON/ERROR/TITL(4),IDATE,PESTIM,TOT,ALOCAL,ERTOT(3) ERROR
000012      1 ,ERRIAS(3),ERRAND(3),CITOT(3),CLHIAS(3),CLPAND(3),DELTA, ERROR
000013      1 CRUPD, 7(3,2),MULT(3),IID,TRAINA,TRAIND ERROR
000014      DIMENSION IERS(40)                             ERROR
000015      EQUIVALENCE(IITI,IERS)                         ERROR
000016      REAL MULT                                       ERROR
000017      INTEGER IID,CRUPD                               ERROR
000018      INTEGER TYPE,SEASON                             MULTI
000019      DIMENSION IWIN(4),INDEX(16)                    MULTI
000020      REAL M                                           MULTI
000021      DATA INDEX/0,1,2,5,3,6,8,11,4,7,9,12,10,13,14,15/ MULTI
000022      IFIND=1+1*IWIN(1)+2*IWIN(2)+4*IWIN(3)+8*IWIN(4) MULTI
000023      ISTATF=INDEX(IFIND)                             MULTI
000024      IWHATM=IGROUP(TYPE,SEASON,ISTATE)              MULTI
000025      M=MS(TYPE,SEASON,IWHATH)                       MULTI
000026      C ERROR REPORT CALCULATION                   MULTI
000027      10 CONTINUE                                     MULTI
000028      MULT(TYPE)=M                                    MULTI
000029      RETURN                                          MULTI
000030      END                                             MULTI

```

000001		SUBROUTINE PAGER (NLINES)	PAGER
000002	C	AUTOMATIC PAGING SUBROUTINE. PERMITS A MAXIMUM OF MXLINE	PAGER
000003	C	LINES PER PAGE.	PAGER
000004	C		PAGER
000005	C	PAGE EJECT CONTROL PARAMETERS FOR LEM	PAGEFCM
000006		COMMON /PAGECM/	PAGEFCM
000007		1 NPAGE ,NLINE ,MXLINE ,NSTTL ,SUBTTL(10)	PAGEFCM
000008	C		PAGEFCM
000009	C		PAGER
000010	C		PAGER
000011		NLINE = NLINE + NLINES	PAGER
000012		IF ( NLINE .LE. MXLINE ) GO TO 900	PAGER
000013	C		PAGER
000014		CALL EJECT (NLINES)	PAGER
000015	900	RETURN	PAGER
000016		END	PAGER

```

000001      FUNCTION PSUB (XX)                PSUB
000002      C      CALCULATES FUNCTION P(X) FOR CONFIDENCE LEVEL CALCULATIONS PSUB
000003      C                                          PSUB
000004      X= ABS(XX)                            PSUB
000005      C      IF ABS (X) .GT. 1.E20, THEN SET P(X) = 0 IF X IS NEGATIVE PSUB
000006      C      OR P(X) = 1 IF X IS POSITIVE. PSUB
000007      PX = 0.0                               PSUB
000008      IF ( X .GT. 1.E20 ) GO TO 800        PSUB
000009      PX= ((( 0.019527*X + 0.000344 ) *X + 0.115194 ) *X + 0.196854 ) *X PSUB
000010      1 + 1.0                                PSUB
000011      PX= 0.5/ PX**4                          PSUB
000012      800 IF ( XX .GT. 0.0 ) PX= 1.0 - PX PSUB
000013      PSUB= PX                               PSUB
000014      900 RETURN                            PSUB
000015      END                                  PSUB

```





GO TO 900	RANACF
C IUPT = 1. READ RECORD IREC	RANACF
200 READ(IFILE'IREC,ERR=600)(BUF(I),I=1,N)	
GO TO 900	RANACF
C IUPT = 2. WRITE RECORD IREC	RANACF
300 WRITE(IFILE'IREC,ERR=600)(BUF(I),I=1,N)	
GO TO 900	RANACF
C IUPT = -1. CLOSE FILE	RANACF
400 CONTINUE	
GO TO 900	
600 WRITE(6,901)IFILE,IREC	
STOP	
901 FURMAT(1H0,91H *** AN IRRECOVERABLE I/O ERROR HAS OCCURRED ON READ	
LING A RECORD FROM A DIRECT ACCESS FILE /	
210X,6H FILE=,I5,8H RECORD=,I5,31H THE JOB IS BEING ABANDONED ***)	
900 RETURN	RANACF
END	RANACF

```
000001      SUBROUTINE RDM1A(FL,U)                                RDM1A
000002      C . RANDOM NUMBER GENERATOR FOR ALL COMPUTERS        RDM1A
000003      DOUBLE PRECISION C1,C2,R1,R2,T,FL,TWO35,ONE,ZERO,XMOD,YMOD RDM1A
000004      DATA C1,C2,ONE,ZERO/5051749376.D1,84365.D0,1.D0,0.D0/  RDM1A
000005      T=TWO35/34559738368.D0/                                RDM1A
000006      XMOD(T) = DMOD(T,TWO35)                                RDM1A
000007      YMOD(T) = DMOD(T,202144.D0)                             RDM1A
000008      T = FL                                                  RDM1A
000009      IF(T .EQ. ZERO) T = ONE                                  RDM1A
000010      R2 = YMOD(T)                                           RDM1A
000011      R1 = T - R2                                           RDM1A
000012      T = XMOD(XMOD(C1*R2+C2*R1) + C2*R2)                 RDM1A
000013      U = T/TWO35                                           RDM1A
000014      FL = T                                                  RDM1A
000015      RETURN                                               RDM1A
000016      END                                                  RDM1A
```



```

000059 1600 FORMAT(2X,17X,9HACQ DATE ,7HESIM. ,2X,7HTOTAL ) REPORT
000060 WRITE(OUTP,1700) REPORT
000061 1700 FORMAT(2X,17)CROP WINDOW ,9HMO/DY/YR ,7HPROP. ,2X,7HERROR )REPORT
000062 30 CONTINUE REPORT
000063 10 CONTINUE REPORT
000064 IF(IREP.LF.0) GO TO 40 REPORT
000065 CALL PAGER(3) REPORT
000066 CALL FZULU(IGATE,IOUT) REPORT
000067 WRITE(OUTP,1010)(TITL(I),I=1,4),IOUT(2),IOUT(3),IOUT(1),PESTIM, REPORT
000068 1 TOT, (ERR01(I),I=1,3),(CLTOT(I),I=1,3),DELTA,MULT(1) REPORT
000069 1010 FORMAT(2X,4A1,1X,I2,2(1H/,12),1X,F6.2,1X,F7.2 ,5H TOT , REPORT
000070 1 6(F6.3,1X),F5.2,2X,2HM ,F4.2) REPORT
000071 WRITE(OUTP,1020) (LRBIAS(I),I=1,3),(CLBIAS(I),I=1,3),CROPD, REPORT
000072 1 MULT(2) REPORT
000073 1020 FORMAT(4X,5HBIAS ,6(F6.3,1X),13 ,4X ,2HM ,F4.2) REPORT
000074 WRITE(OUTP,1030) (ERRAND(I),I=1,3),(CLRAND(I),I=1,3),MULT(3) REPORT
000075 1030 FORMAT(4X,5HRAND ,6(F6.3,1X),7X,2HO ,F4.2) REPORT
000076 RETURN REPORT
000077 40 CONTINUE REPORT
000078 CALL FZULU(IGATE,IOUT) REPORT
000079 CALL PAGER(1) REPORT
000080 WRITE(OUTP,1040)(TITL(I),I=1,4),IOUT(2),IOUT(3),IOUT(1),PESTIM,TOT REPORT
000081 1040 FORMAT(2X,4A4,1X,I2,1H/,I2,1H/,I2,1X,F6.2,1X,F7.2) REPORT
000082 RETURN REPORT
000083 C***** REPORT
000084 C REPORT
000085 C ORDINARY SEGMENTS REPORT
000086 200 CONTINUE REPORT
000087 IF(IFIRST.GT.1) GO TO 230 REPORT
000088 C REPORT
000089 C FIRST ACQ. FOR SEGMENT - PRINT HEADERS REPORT
000090 CALL PAGER(7) REPORT
000091 WRITE(OUTP,1300) REPORT
000092 WRITE(OUTP,1000) REPORT
000093 WRITE(OUTP,2100)COUN4,IREG4,IZONE4,ISTR44,ISUB4,ISEG4 REPORT
000094 2100 FORMAT(2X,8HCOUNTPY ,A4,8H,REGION ,I2,6H,7ONE ,13, REPORT
000095 1 8H,SJPATA ,I3,11H,SUBSTRATA ,I4,18H,ORDINARY SEGMENT ,I4) REPORT
000096 WRITE(OUTP,1200)PT(1) REPORT
000097 WRITE(OUTP,1300) REPORT
000098 210 CONTINUE REPORT
000099 IF(IREP.LF.0) GO TO 220 REPORT
000100 WRITE(OUTP,2400) REPORT
000101 2400 FORMAT(2X,17X,9HACQ DATE ,7HESIM. ,7HTOTAL ,12X, REPORT
000102 1 7HERROR ,10X,10HSTG,EXT. ,22X,5HTRAIN) REPORT
000103 WRITE(OUTP,2500) REPORT
000104 2500 FORMAT(2X,17)CROP WINDOW ,9HMO/DY/YR ,7HPROP. , REPORT
000105 1 7HERPOR ,5X,2(7HMHEAT ,7HMIXED ,7MOTHER ),2X,6HZ1 , REPORT
000106 1 6HZ2 ,4HSEG.) REPORT
000107 GO TO 230 REPORT
000108 220 CONTINUE REPORT
000109 WRITE(OUTP,1600) REPORT
000110 WRITE(OUTP,1700) REPORT
000111 230 CONTINUE REPORT
000112 C REPORT
000113 C PRINT INFO REPORT
000114 IF(IREP.LF.0) GO TO 240 REPORT
000115 CALL PAGER(3) REPORT
000116 CALL FZULU(IGATE,IOUT) REPORT
000117 WRITE(OUTP,2010)(TITL(I),I=1,4),IOUT(2),IOUT(3),IOUT(1),PESTIM, REPORT
000118 1 TOT, (ERR01(I),I=1,3),(CLTOT(I),I=1,3),(Z(I),I=1,2),IID REPORT

```

000119	2010	FORMAT(2X,4A4,1X,I2,2(1H/,12),1X,F6.2,1X,F7.2,5H TOT	REPORT
000120	1	6(F6.3,1X),2HW,2(F5.2,1X),I4)	REPORT
000121		WRITE(OUTP,2020) (ERBIAS(I),I=1,3),(CLBIAS(I),I=1,3),	REPORT
000122	1	(7(2,I),I=1,2),TRAINA	REPORT
000123	2020	FORMAT(2X,5HBIAS,6(F6.3,1X),2HW,2(F5.2,1X),F6.2)	REPORT
000124		WRITE(OUTP,2030)ALUCAL,(ERRAND(I),I=1,3),(CLRAND(I),I=1,3),	REPORT
000125	1	(7(3,I),I=1,2),TRAIND	REPORT
000126	2030	FORMAT(35X,F6.2,1X,5HRAND,6(F6.3,1X),2HW,2(F5.2,1X),F6.2)	REPORT
000127		RETURN	REPORT
000128	240	CONTINUE	REPORT
000129		CALL PAGER(1)	REPORT
000130		CALL FZULU(IDATE,IOUT)	REPORT
000131		WRITE(OUTP,1040)(TITL(I),I=1,4),IOUT(2),IOUT(3),IOUT(1),PESTIM,TOT	REPORT
000132		RETURN	REPORT
000133		C*****	REPORT
000134		C	REPORT
000135		SPECIAL CASE NO ACQUIS. FILE	REPORT
000136	300	CONTINUE	REPORT
000137		IF (IFIRST.GT.1) GO TO 310	REPORT
000138		CALL PAGER(7)	REPORT
000139		WRITE(OUTP,1300)	REPORT
000140		WRITE(OUTP,1000)	REPORT
000141		WRITE(OUTP,3100)COUN4,IREG4,IZONE4,ISTR44,ISUH4,ISEG4	REPORT
000142	3100	FORMAT(2X,8HCOUNTRY,4,8H,REGION,12,6H,ZONE,13,	REPORT
000143	1	8H,STRATA,13,11H,SURSTRATA,14,9H,SEGMENT,14)	REPORT
000144		WRITE(OUTP,1200)PT(1)	REPORT
000145		WRITE(OUTP,1300)	REPORT
000146		WRITE(OUTP,1600)	REPORT
000147		WRITE(OUTP,1700)	REPORT
000148	310	CONTINUE	REPORT
000149		CALL PAGER(1)	REPORT
000150		CALL FZULU(IDATE,IOUT)	REPORT
000151		WRITE(OUTP,1040)(TITL(I),I=1,4),IOUT(2),IOUT(3),IOUT(1),PESTIM,TOT	REPORT
000152		RETURN	REPORT
000153		END	REPORT

```

000001          SUBROUTINE RWKASF (IRFC,DSLOC,IRDWR)          RWKASF
000002          C      READS A DATA SET FROM THE CAS CUMULATIVE FILE OR      RWKASF
000003          C      WRITES A DATA SET ONTO THE CAS CUMULATIVE FILE.      RWKASF
000004          C      RWKASF
000005          C      CALLING SEQUENCE PARAMETERS ...      RWKASF
000006          C      IRFC = RECORD NUMBER TO READ/WRITE      RWKASF
000007          C      DSLOC = ORIGIN OF DATA SET TO READ/WRITE      RWKASF
000008          C      IRDWR = READ/WRITE FLAG (=1 TO READ, =2 TO WRITE)      RWKASF
000009          C      RWKASF
000010          C      WHEN READING CAS, THE DATA IS FIRST READ INTO A BUFFER.      RWKASF
000011          C      THEN THE DATA FOR THE PROPER PREDICTION POINT IS MOVED INTO      RWKASF
000012          C      THE ORIGIN SPECIFIED BY DSLOC.      RWKASF
000013          C      RWKASF
000014          C      WHEN WRITING CAS, THE DATA IS FIRST MOVED INTO THE BUFFER.      RWKASF
000015          C      AND THEN IS WRITTEN ONTO THE CAS CUMULATIVE FILE.      RWKASF
000016          C      RWKASF
000017          C      DIMENSION DSLOC(28)      RWKASF
000018          C      DATA BLOCK FOR CAS CUMULATIVE FILE      RWKASF
000019          C      CAS DATA SPTS 14, 15, 16, AND 17      RWKASF
000020          C      COMMON /CASCUM/      RWKASF
000021          C      1 CASLUM(32), BUFR(504)      RWKASF
000022          C      DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22)      RWKASF
000023          C      1 ,DSET17(28)      RWKASF
000024          C      EQUIVALENCE ( ICASC,CASCUM )      RWKASF
000025          C      EQUIVALENCE ( DSET14,DSET15,DSET16,DSET17,CASCUM(5) )      RWKASF
000026          C      1 , ( SDAFRS,SQALRZ,SQAFRR,SQALRC,CASCUM(24) )      RWKASF
000027          C      2 , ( SQPFRS,SQPERZ,SQPFRR,SQPERC,CASCUM(25) )      RWKASF
000028          C      3 , ( SOYFRS,SOYERZ,SOYFRR,SOYERC,CASCUM(26) )      RWKASF
000029          C      RWKASF
000030          C      FLAGS AND COUNTERS FOR CAS SIMULATOR      RWKASF
000031          C      COMMON /CASFLG/      RWKASF
000032          C      1 N ,PPFLG ,MWH ,IRW ,WINDOW ,IPD ,IPP ,PPDATE,NREGS      RWKASF
000033          C      2 ,NZTOT ,NSTRAT,NYLSSK,NSSHSK,NLANSK,NRYES ,NRSSH ,NRCAMS      RWKASF
000034          C      3 ,FNDC ,ENDREC,ENDZON,IRSTR ,IRZONE,IRREG      RWKASF
000035          C      4 ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13      RWKASF
000036          C      5 ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCON,LRREG ,LRZONE,LRSTR      RWKASF
000037          C      INTEGER PPFLG , WINDOW , PPDATE      RWKASF
000038          C      RWKASF
000039          C      FILE DEFINITIONS AND RECORD LENGTHS      RWKASF
000040          C      COMMON /FILES /      RWKASF
000041          C      1 SLCID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACO      RWKASF
000042          C      2 ,CANSF ,ICANSF,CAMERR,LCAMPL,CASF ,LCASF ,YESOUT,LYESU      RWKASF
000043          C      3 ,SIGEXT,LSIGFX,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD      RWKASF
000044          C      4 ,INP ,OUTP ,TACW ,LTACW ,CASDSF,LCASD      RWKASF
000045          C      INTEGER SLCID ,CROPW ,SUBHST,ACQUIS,CANSF ,CAMERR,CASF ,YESOUT      RWKASF
000046          C      1 ,SIGEXT,LYSERR,SEGTRU,CASDIS,OUTP ,TACW ,CASDSF      RWKASF
000047          C      RWKASF
000048          C      INDEX RECORD FOR CAS CUMULATIVE FILE (CASF)      RWKASF
000049          C      COMMON /IXCASF /      RWKASF
000050          C      1 IXCASF( 1 ) ,LIXCAS      RWKASF
000051          C      RWKASF
000052          C      RWKASF
000053          C      SET POINTER TO PICK UP PROPER DATA SET FROM BUFFER      RWKASF
000054          C      L= (IPP - 1)*28 + 1      RWKASF
000055          C      IRW= IRDWR      RWKASF
000056          C      IF ( IRW .EQ. 1 ) GO TO 300      RWKASF
000057          C      RWKASF
000058          C      MOVE DATA SET INTO BUFFER.      RWKASF

```

ORIGINAL PAGE IS  
OF POOR QUALITY

000059  
000060  
000061  
000062  
000063  
000064  
000065  
000066  
000067  
000068  
000069  
000070  
000071  
000072  
000073  
000074  
000075

DO 210 I=1,28  
BUFFR(L)= DSLOC(I)  
210 L= L + 1  
C  
C NOW READ OR WRITE DATA FROM OR ONTO RANDOM ACCESS FILE.  
300 CALL RANACF (CASE,IREC,BUFFR,LCASE,IXCASE,LIXCAS,IRW)  
C  
C IF ( IRW .EQ. 2 ) GO TO 900  
C  
C DATA HAS READ FROM FILE. NOW MOVE DATA FROM BUFFER INTO  
C PROPER DATA SET.  
DO 310 I=1,28  
DSLOC(I)= BUFFR(L)  
310 L= L + 1  
C  
900 RETURN  
END

RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF  
RWCASF



```

000001      SUBROUTINE RWDISF (ILEVFL,DSET)      RWDISF
000002      C      READS AND WRITES DATA FROM/ONTO THE CAS DISTRIBUTION FILE.  RWDISF
000003      C
000004      C      CALLING SEQUENCE PARAMETERS ...  RWDISF
000005      C      LEVFL = 0 FOR COUNTRY  RWDISF
000006      C      = 1 FOR REGION  RWDISF
000007      C      = 2 FOR ZONE  RWDISF
000008      C
000009      C      DSET = DATA SFT 13 FOR COUNTRY  RWDISF
000010      C      = DATA SFT 12 FOR REGION  RWDISF
000011      C      = DATA SFT 11 FOR ZONE  RWDISF
000012      C
000013      C      DIMENSION DSET(19)  RWDISF
000014      C
000015      C      COMMON BLOCKS  RWDISF
000016      C      CAS CONTROL CARD INPUT DATA AND CONSTANTS  RWDISF
000017      C      COMMON /CASCM /  CASCM
000018      1  ARAFCF,YCF ,PRDCF ,APRUTS(4,2) ,PPRUTS(4,2) ,YPRUTS(3,2)  CASCM
000019      2  ,AREAPS,S2MAX ,NHISTY,HH ,TOPT ,AUNITS,DISTFF,BWIND(4)  CASCM
000020      3  ,WPPIOR(4) ,APREP ,IPRD(3,14) ,NPPATE,PRDATE(14)  CASCM
000021      INTEGER HH, TOPT, AUNITS,DISTFF,BWIND,WPPIOR,APREP,PRDATE  CASCM
000022      C
000023      C      DATA BLOCK FOR CAS CUMULATIVE FILE  CASCM
000024      C      CAS DATA SF13 14, 15, 16, AND 17  CASCM
000025      C      COMMON /CASCM/  CASCM
000026      1  CASCM(32),  BUFFER(504)  CASCM
000027      DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22)  CASCM
000028      1  ,DSET17(28)  CASCM
000029      EQUIVALENCE ( ICASC,CASCM )  CASCM
000030      EQUIVALENCE ( DSF114,DSET15,DSF116,DSET17,CASCM(5) )  CASCM
000031      1  , ( SQAERS,SQAERZ,SQAFRR,SQAERC,CASCM(24) )  CASCM
000032      2  , ( SQPERS,SQPERZ,SQPFRR,SQPERC,CASCM(25) )  CASCM
000033      3  , ( SQYERS,SQYERZ,SQYFRR,SQYERC,CASCM(26) )  CASCM
000034      C
000035      C      DATA BLOCK FOR CAS DISTRIBUTION FILE (DATA SFT 19)  CASDSB
000036      DIMENSION CASDSB(303)  CASDSB
000037      EQUIVALENCE ( CASDSB,BUFFER )  CASDSB
000038      DIMENSION ICASD(303), HWA2K(60), WAKNEY(60), PIK(60)  CASDSB
000039      EQUIVALENCE ( ICASD,HWA2K,CASDSB ), ( WAKNEY,CASDSB(61) )  CASDSB
000040      1  , ( PIK,CASDSB(121) )  CASDSB
000041      C
000042      C      FLAGS AND COUNTERS FOR CAS SIMULATOR  CASFLG
000043      C      COMMON /CASFLG/  CASFLG
000044      1  N ,PPFLG ,NBW ,IMW ,WINDOW,IPD ,IPP ,PPDATE,NREGS  CASFLG
000045      2  ,NZTOT ,NSTRAT,NYFSSK,NSSHSK,NCAMSK,NRYFS ,NRSSH ,NRCAMS  CASFLG
000046      3  ,ENDC ,LNDRLG,ENDZON,IRSTR ,IRZONE,IRREG  CASFLG
000047      4  ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13  CASFLG
000048      5  ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCONN,LRREG ,LRZONE,LRSTR  CASFLG
000049      INTEGER PPFLG , WINDOW , PPDATE  CASFLG
000050      C
000051      C      FILE DEFINITIONS AND RECORD LENGTHS  FILES
000052      C      COMMON /FILES /  FILES
000053      1  SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ  FILES
000054      2  ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESQ  FILES
000055      3  ,SIGEX ,LSIGEX,YESERR,LYESR,SELTRU,SELGIR,LCASD ,LCASD  FILES
000056      4  ,INP ,OUIP ,TACQ ,LTACQ ,CASDSF,LCASD  FILES
000057      INTEGER SEGID ,(CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT  FILES
000058      1  ,SIGEX,YESERR,SELTRU,CASDIS,OUIP ,TACQ ,CASDSF  FILES

```



000119	C	ITERATION NT	RWDISF
000120	130	CASDSB(NT+3)= DSET(4)	RWDISF
000121		CASDSB(NT+103)= DSET(8)	RWDISF
000122		CASDSB(NT+203)= DSET(12)	RWDISF
000123	C		RWDISF
000124	C	WRITE RECORD BACK ONTO CAS DISTRIBUTION FILE.	RWDISF
000125		CALL RANACF (CASDIS,IREC,CASDSB,LCASD,IXDISF,LIXDIS,2)	RWDISF
000126	C		RWDISF
000127		IF ( LEVEL .NE. 0 ) GO TO 900	RWDISF
000128	C		RWDISF
000129	C	PROCESS SECOND COUNTRY RECORD	RWDISF
000130		IREC= IREC + 1	RWDISF
000131		IF ( NT .GT. 1 ) GO TO 220	RWDISF
000132	C	STORE REFERENCE VALUES FOR SECOND COUNTRY RECORD.	RWDISF
000133		CASDSB(1)= 100.0	RWDISF
000134		CASDSB(2)= 100.0	RWDISF
000135		GO TO 230	RWDISF
000136	C		RWDISF
000137	C	READ RECORD INTO BUFFER	RWDISF
000138	220	CALL RANACF (CASDIS,IREC,CASDSB,LCASD,IXDISF,LIXDIS,1)	RWDISF
000139	C		RWDISF
000140		STORE CLFNA, CLEPRD, AND CLATEC FOR ITERATION NT.	RWDISF
000141	230	CASDSB(NT+3)= DSET(20)	RWDISF
000142		CASDSB(NT+103)= DSET(21)	RWDISF
000143		CASDSB(NT+203)= DSET(22)	RWDISF
000144	C		RWDISF
000145	C	WRITE RECORD BACK ONTO CAS DISTRIBUTION FILE.	RWDISF
000146		CALL RANACF (CASDIS,IREC,CASDSB,LCASD,IXDISF,LIXDIS,2)	RWDISF
000147	C		RWDISF
000148	C	PROCESS THIRD COUNTRY RECORD	RWDISF
000149		IREC= IREC + 1	RWDISF
000150		IF ( NT .EQ. 1 ) GO TO 330	RWDISF
000151	C	REFERENCE VALUES ALREADY STORED IN CASDSB.	RWDISF
000152	C		RWDISF
000153	C	READ DATA RECORD INTO BUFFER	RWDISF
000154		CALL RANACF (CASDIS,IREC,CASDSB,LCASD,IXDISF,LIXDIS,1)	RWDISF
000155	C		RWDISF
000156	C	STORE CLPTWC, CLATWC, AND CLPTWC FOR ITERATION NT.	RWDISF
000157	330	CASDSB(NT+3)= DSET(23)	RWDISF
000158		CASDSB(NT+103)= DSET(24)	RWDISF
000159		CASDSB(NT+203)= DSET(25)	RWDISF
000160	C		RWDISF
000161	C	WRITE RECORD BACK ONTO CAS DISTRIBUTION FILE.	RWDISF
000162		CALL RANACF (CASDIS,IREC,CASDSB,LCASD,IXDISF,LIXDIS,2)	RWDISF
000163	C		RWDISF
000164	900	RETURN	RWDISF
000165		END	RWDISF

	FOR, IS SEGTAB	
	SUBROUTINE SEGTAB	SEGTAB
C	THIS ROUTINE FORMS THE SEGMENT TABLES TO BE USED TO DETERMINE	SEGTAB
C	CLASS	SEGTAB
C	TABLES NECESSARY TO DETERMINE CLASS SETS WITHIN A ZONE	CLSTAB
	COMMON /CLSTAB/	CLSTAB
1	ISTRAT(300), ISBSTR(300), NSCNT(300), IGROUP(300), IDAT1(300),	MOD1
2	IDAT2(300), XORRD(300), IXPT(300), IRANK(300), IBPT(10), IEPT(10),	MOD1
3	MAXCLS, ICLCNT, ISUB1, NAGQ	CLSTAB
	DIMENSION DAT1(300), DAT2(300), RANK(300)	MOD1
	EQUIVALENCE (IDAT1(1), DAT1(1)), (IDAT2(1), DAT2(1)), (IRANK(1),	CLSTAB
	IRANK(1))	CLSTAB
	DIMENSION IGAP(300), GAP(300)	MOD1
	EQUIVALENCE (GAP(1), IGAP(1))	SEGTAB
	DATA IMAX/300/, XCON/10.E20/	MOD1
	IPT = 0	SEGTAB
	DO 5 I=1, IMAX	SEGTAB
	IGAP(I) = 0	SEGTAB
	XORD(I) = 0.0	SEGTAB
	IXPT(I) = 0	SEGTAB
	IRANK(I) = 0	SEGTAB
5	CONTINUE	SEGTAB
	ICT = 1	SEGTAB
	DO 30 I=1, ISUB1	SEGTAB
	IF(NSCNT(I) .EQ. 0) GO TO 30	SEGTAB
	ITEM = NSCNT(I)	SEGTAB
	DO 15 J=1, ITEM	SEGTAB
	IPT = IPT + 1	SEGTAB
	IGAP(IPT) = IDAT1(I)	SEGTAB
	IRANK(IPT) = IDAT2(I)	SEGTAB
15	CONTINUE	SEGTAB
	IXPT(I) = ICT	SEGTAB
	ICT = ICT + NSCNT(I)	SEGTAB
30	CONTINUE	SEGTAB
	SUM = 0.0	SEGTAB
	DO 35 I=1, IPT	SEGTAB
	DAT2(I) = GAP(I)*SQRT(RANK(I)*(1. - RANK(I)))	MOD1
	SUM = SUM + DAT2(I)	SEGTAB
35	CONTINUE	SEGTAB
	DO 40 I=1, IPT	SEGTAB
	RANK(I) = DAT2(I)/SUM	SEGTAB



```

000001          SUBROUTINE SETPRF (IPR)                                SETPRF
000002          C          SETS THE PRINT FLAG PRINTF TO PRINT REPORTS OR SUPPRESS SETPRF
000003          C          PRINTING FOR A GIVEN MODULE DEPENDING UPON THE ITERATION NUMBERS SFIPRF
000004          C          AND THE INPUT PRINT FLAG FOR THAT MODULE          SFIPRF
000005          C          SFIPRF
000006          C          INPUT PARAMETER ...                          SFIPRF
000007          C          IPR = 0 TO PRINT REPORTS ON FIRST AND LAST ITERATIONS, SETPRF
000008          C          IPR = 1 TO PRINT REPORTS ON EVERY ITERATION,    SETPRF
000009          C          IPR = 2 TO PRINT REPORTS ONLY ON THE LAST ITERATION, SFIPRF
000010          C          IPR = 3 TO SUPPRESS PRINTING.                  SFIPRF
000011          C          SFIPRF
000012          C          COMMON BLOCK DEFINITIONS                     SETPRF
000013          C          CONTROL PARAMETERS FOR LEM PROGRAM           CNTRL
000014          C          COMMON /CNTRL /                               CNTRL
000015          C          1 PRINTF, NSTART, SEED( )                   CNTRL
000016          C          INTEGER PRINTF                               CNTRL
000017          C          DOUBLE PRECISION SEED                       CNTRL
000018          C          CNTRL
000019          C          LEM CONTROL CARD INPUT DATA                 LFMCM
000020          C          COMMON /LFMCM /                               LFMCM
000021          C          1 TITLE(10) , ICASE , CUNTRY, NTRIAL, RSTART, IPRINT, STARTR, STARTZ LFMCM
000022          C          2 , FNDR , , ENDZ , , ISTG , ICAMS , IYFS , IACO , ICLASS, ISEX1 , ISCC LFMCM
000023          C          3 , ICAS2 , ICAS3 , IPRCAM, IPRYES, IPRCAS, ICSE5G, ICSECH, ICSESH, ICSECE LFMCM
000024          C          4 , ICSEYM, ICSESF, ICSEAL, RSEED1, RSEED2, RSEED3, RSEED4, RSEED5, RSEED6 LFMCM
000025          C          5 , RSEED7, ICSEST, ICSECO, ICSEYS, ICSECU, ICSECD LFMCM
000026          C          DIMENSION RSEED(7)                            LFMCM
000027          C          DOUBLE PRECISION RSEED , RSEED1, RSEED2, RSEED3, RSEED4, RSEED5 LFMCM
000028          C          1 , RSEED6, RSEED7                            LFMCM
000029          C          EQUIVALENCE ( RSEED, RSEED1 )                 LFMCM
000030          C          INTEGER RSTART, STARTR, STARTZ, ENDR , ENDZ LFMCM
000031          C          LFMCM
000032          C          STATISTICAL INFORMATION FOR LEM                STATS
000033          C          COMMON /STATS /                                STATS
000034          C          1 ITER , NSEGR, NCLMSR, NYESR , NRFC(7), NCASCR, NCASDR STATS
000035          C          EQUIVALENCE ( NI, ITER )                       STATS
000036          C          STATS
000037          C          SFIPRF
000038          C          LINKAGE ... CALL SETPRF (IPR)                 SFIPRF
000039          C          SETPRF IS CALLED FROM THE LEM DRIVER          SFIPRF
000040          C          SFIPRF
000041          C          *****                                           SFIPRF
000042          C          SFIPRF
000043          C          SFIPRF
000044          C          INITIALLY TURN PRINT FLAG OFF.                SFIPRF
000045          C          PRINTF= 0                                      SFIPRF
000046          C          TEST INPUT PRINT FLAG                          SFIPRF
000047          C          IF ( IPR .EQ. 3 ) GO TO 90                    SFIPRF
000048          C          IF ( IPR = 1 ) 10,30,20                        SFIPRF
000049          C          IPR = 0. PRINT ON FIRST AND LAST ITERATIONS OF THIS RUN SFIPRF
000050          C          10 IF ( ITER .EQ. NSTART ) GO TO 30            SFIPRF
000051          C          IPR = 2 OR IPR = 0, AND NOT FIRST ITERATION SFIPRF
000052          C          20 IF ( ITER .NE. NTRIAL ) GO TO 90           SFIPRF
000053          C          IPR = 1 OR IPR= 0 AND FIRST OR LAST ITERATION OR IPR = 2 AND SFIPRF
000054          C          LAST ITERATION                                SFIPRF
000055          C          30 PRINTF= 1                                    SFIPRF
000056          C          90 RETURN                                       SFIPRF
000057          C          END                                             SFIPRF

```

```

000001      SUBROUTINE SGEEXT(SEED3,TYPE,WINDOW,IUSE,XI)      SIGFXT
000002      C      SIGFXT
000003      C      THIS SUBROUTINE CALCULATES THE SIGNATURE EXTENSION ERROR FOR      SIGFXT
000004      C      ORDINARY SEGMENTS.      SIGFXT
000005      C      SIGEXT
000006      COMMON/CAMERR/ COUN2,IRFG2,IZONF2,ISTR2,ISUB2,ISFG2,      CAMFRR
000007      1 PW(3,4),BFRR(3,4),SIGFRR(3,4)      CAMFRR
000008      COMMON/TRAINS/ COUN7,IRFG7,IZONE7,ISTR7,ISUR7,ISEG7,      TRAINS
000009      1 TIMIN(4,25),TITOT,TM(3,4,25),TUB(3,4,25),TV(3,4,25),      TRAINS
000010      1 TPTIME,TIZULU(4),IPEST(4),TPFRR(4),TERTOT(3),TM(3),TV(3),TB(3)      TPAINS
000011      INTEGER TIZULU      TRAINS
000012      DIMENSION ITRAIN(129)      TRAINS
000013      EQUIVALENCE(ITRAIN,COUN7)      TPAINS
000014      COMMON/SIGEX/COUN5,IRFG5,IZONF5,ZB(3,2),ZSIG(3,2,6)      SIGEX
000015      C      CONTROL PARAMETERS FOR LEN PROGRAM      CNTRL
000016      COMMON /CNTRL /      CNTRL
000017      1 PRINTF,NSIART,SEED(7)      CNTRL
000018      INTEGER PRINTF      CNTRL
000019      DOUBLE PRECISION SEED      CNTRL
000020      C      CNTRL
000021      C      CAMS CONTROL CARD INPUT DATA      CAMSCM
000022      COMMON/CAMSCM/ ITHOFL,IMUL1,ISIGX,ISKIP,ITMAX,IREP,IWIND,      CAMSCM
000023      1 IGROUP(3,2,15),MS(3,2,3),G(3,2,2),H(3,2,2)      CAMSCM
000024      REAL MS      CAMSCM
000025      C      CAMSCM
000026      COMMON/ERROR/TITL(4),TDATF,PESTIM,TOT,ALCAL,ERTOT(3)      ERROR
000027      1 ,LMBIAS(3),LPRAND(3),CI TOT(3),CLBIAS(3),CLPAND(3),DELTA,      ERROR
000028      1 CRUPD, Z(3,2),MULT(3),TID,IRAINA,IRAIND      ERROR
000029      DIMENSION IFRS(40)      ERROR
000030      EQUIVALENCE(TITL,IFRS)      ERROR
000031      REAL MULT      ERROR
000032      INTEGER TID,CRUPD      ERROR
000033      C      ARGUMENT LIST FOR ERROR PROCESSING      ARGST
000034      COMMON /ARGST/      ARGST
000035      1 NIFRS ,NFATAL,NPFRRS,NARG ,ARG(10)      ARGST
000036      DIMENSION IARG(10)      ARGST
000037      EQUIVALENCE ( IARG,ARG )      ARGST
000038      C      ARGST
000039      DOUBLE PRECISION SEED3      SIGFXT
000040      INTEGER TYPE, WINDOW      SIGEXT
000041      DIMENSION V(2)      SIGEXT
000042      SIGMA=PW(TYPE,WINDOW)*ABS(TERTOT(TYPE)*ISIGEX*ZSIG(TYPE,1,IUSE)      SIGFXT
000043      1 +(1-ISIGEX)*ZSIG(TYPE,2,IUSE))      SIGFXT
000044      XBAR=PW(TYPE,WINDOW)* (1. +TERTOT(TYPE) *ZB(TYPE,1) +ZB(TYPE,2))      SIGFXT
000045      CALL METAD(SEED3,XBAR,SIGMA,XI,0,IER)      SIGEXT
000046      NARG=1      SIGFXT
000047      IARG(1)=IFR      SIGEXT
000048      IF(IER.GT.0) CALL ERRMES(4HCAMS,5HSGEXT,4,0)      SIGEXT
000049      IF(IER.GE.5) XI=XBAR      SIGFXT
000050      C      SIGEXT
000051      C      COMPUTE ERROR REPORT QUANTITIES      SIGFXT
000052      10 CONTINUE      SIGEXT
000053      IF(PRIINTF.LE.0.OR,IREP.LE.0) RETURN      SIGEXT
000054      V(1)=0.      SIGEXT
000055      V(2)=0.      SIGEXT
000056      IF(SIGMA.LE.0.) GO TO 20      SIGFXT
000057      IF(1SIGEX.GE.1)V(1)=(XI-XBAR)/(PW(TYPE,WINDOW)*TERTOT(TYPE))      SIGEXT
000058      IF(1SIGEX.LE.0)V(2)=(XI-XBAR)/PW(TYPE,WINDOW)      SIGFXT

```

ORIGINAL PAGE IS  
OF POOR QUALITY

000059	DO CONTINUE	SIGFXT
000060	Z(TYPE,1)=ZB(TYPE,1)+V(1)	SIGFXT
000061	Z(TYPE,2)=ZB(TYPE,2)+V(2)	SIGFXT
000062	ERTOT(TYPE)=ERTOT(TYPE)*Z(TYPE,1)+Z(TYPE,2)	SIGFXT
000063	ERBIAS(TYPE)=TB(TYPE)*TB(TYPE)*ZB(TYPE,1)+ZB(TYPE,2)	SIGFXT
000064	ERKAND(TYPE)=TB(TYPE)*(TV(TYPE)*ZB(TYPE,1)+TB(TYPE)*V(1)	SIGFXT
000065	+TV(TYPE)*V(1))+V(2)	SIGFXT
000066	CLTOT(TYPE)=(TB(TYPE)+TV(TYPE))*Z(TYPE,1)+Z(TYPE,2)	SIGFXT
000067	CLBIAS(TYPE)=TB(TYPE)*ZB(TYPE,1)+ZB(TYPE,2)	SIGFXT
000068	CLKAND(TYPE)=TV(TYPE)+ZB(TYPE,1)+TB(TYPE)*V(1)	SIGFXT
000069	+TV(TYPE)*V(1)+V(2)	SIGFXT
000070	RETURN	SIGFXT
000071	END	SIGFXT



```

000001          SUBROUTINE START                                START
000002      C      JOB INITIALIZATION ROUTINE. INITIALIZES STORAGE; FLAGS;    START
000003      C      COUNTERS, ETC.                                     START
000004      C                                                         START
000005      C      COMMON BLOCK DEFINITIONS                          START
000006      C      ARGUMENT LIST FOR ERROR PROCESSING                ARGLIST
000007      C      COMMON /ARGLIST/                                    ARGLIST
000008      C      1  NERRS ,NFATAL,NPERRS,NARG ,ARG(10)             ARGLIST
000009      C      DIMENSION IARG(10)                                  ARGLIST
000010      C      EQUIVALENCE ( IARG,ARG )                          ARGLIST
000011      C                                                         ARGLIST
000012      C      CONTROL PARAMETERS FOR LEM PROGRAM              CNTRL
000013      C      COMMON /CNTRL /                                     CNTRL
000014      C      1  PRINTF,NSSTART,SEED(7)                        CNTRL
000015      C      INTEGER PRINTF                                     CNTRL
000016      C      DOUBLE PRECISION SEED                            CNTRL
000017      C                                                         CNTRL
000018      C      CONSTANT QUANTITIES FOR LEM PROGRAM             CONST
000019      C      COMMON /CONST /                                     CONST
000020      C      1  NIMX ,MAXR ,MAXZ ,IMXSEG,ENDFIL,ITSFG          CONST
000021      C                                                         CONST
000022      C      FILE DEFINITIONS AND RECORD LENGTHS              FILES
000023      C      COMMON /FILES /                                     FILES
000024      C      1  SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACO  FILES
000025      C      2  ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESU  FILES
000026      C      3  ,SIGEXT,LSIGEXT,YESERR,LYESER,SEGTRU,LSEGTR,CASDIS,LCASD  FILES
000027      C      4  ,JMP ,QUIP ,TACQ ,LTACQ ,CASDSF,LCASDS        FILES
000028      C      INTEGER SEGID ,LROFW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT  FILES
000029      C      1  ,SIGEXT,YESERR,SEGTRU,CASDIS,QUIP ,TACQ ,CASDSF  FILES
000030      C                                                         FILES
000031      C      LEM CONTROL CARD INPUT DATA                      LFMCM
000032      C      COMMON /LEMCM /                                    LFMCM
000033      C      1  TITL(10) ,ICASF ,COUNTRY,NTRIAL,NSSTART,IPRINT,STARTR,STARTZ  LFMCM
000034      C      2  ,FNDZ ,ENDZ ,ISTG ,ICAMS ,IYES ,IACQ ,ICLASS,ISEXT ,ISCC  LFMCM
000035      C      3  ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECH,ICSESH,ICSECE  LFMCM
000036      C      4  ,ICSEYM,ICSESE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6  LFMCM
000037      C      5  ,RSEED7,ICSEST,ICSECO,ICSEFYS,ICSECU,ICSEFCO  LFMCM
000038      C      DIMENSION RSEED(7)                                  LFMCM
000039      C      DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5  LFMCM
000040      C      1  ,RSEED6,RSEED7                                  LFMCM
000041      C      EQUIVALENCE ( RSEED,RSEED1 )                      LFMCM
000042      C      INTEGER RSTART,STARTR,STARTZ,ENDR ,FNDZ          LFMCM
000043      C                                                         LFMCM
000044      C      PAGE EJECT CONTROL PARAMETERS FOR LEM            PAGECM
000045      C      COMMON /PAGECM/                                    PAGECM
000046      C      1  NPAGE ,NLINE ,MXLINE,NSITL ,SUBTTL(10)        PAGECM
000047      C                                                         PAGECM
000048      C      STATISTICAL INFORMATION FOR LEM                   STATS
000049      C      COMMON /STATS /                                     STATS
000050      C      1  ITR ,NSEGTP,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR  STATS
000051      C      EQUIVALENCE ( NI,ITR )                             STATS
000052      C                                                         STATS
000053      C                                                         START
000054      C      LINKAGE ...  CALLED BY LEM DRIVER                START
000055      C                                                         START
000056      C                                                         START
000057      C      NSITL= 0                                          START
000058      C                                                         START

```

ORIGINAL PAGE IS  
OF POOR QUALITY

000059  
000060  
000061  
000062  
000063  
000064

DO 110 I=1,7  
NREC(I)= 0  
CONTINUE  
C  
RETURN  
END

START  
START  
START  
START  
START

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000001      SUBROUTINE STG                                STG
000002      C      SEGMENT TRUTH GENERATOR FOR THE LEM PROGRAM      STG
000003      C                                                                STG
000004      C      READS DATA FROM THE SEGMENT ID FILE AND THE SUBSTRATA HISTORICAL STG
000005      C      FILE. CALCULATES THE TRUE PW AND TRUF PM FOR EACH SEGMENT, STG
000006      C      AND GENERATES THE SEGMENT TRUTH FILE STG
000007      C                                                                STG
000008      C      BESIDES THE TWO INPUT FILES (SEGID AND SUBHST) THE FOLLOWING STG
000009      C      QUANTITIFS ARE INPUTS TO STG ... STG
000010      C      ICASF = CASE NUMBER STG
000011      C      CUNTRY = COUNTRY STG
000012      C      NTRIAL = FINAL MONTE CARLO ITERATION FOR THIS RUN STG
000013      C      RSTART = INITIAL MONTE CARLO ITEPATION FOR THIS RUN = 1 STG
000014      C      STARTR = STARTING REGION STG
000015      C      STARIZ = STARTING ZONE STG
000016      C      ENDR = ENDING REGION STG
000017      C      FNDZ = ENDING ZONE STG
000018      C      ISTG = SEGMENT TRUTH OPTION STG
000019      C      =0 TO VARY SEGMENT TRUTH ERROR ON EVERY ITERATION, STG
000020      C      =1 TO HOLD ERROR CONSTANT BY PERFORMING CALCULATIONS ONLY STG
000021      C      ON THE FIRST ITERATION, STG
000022      C      =3 TO ELIMINATE SEGMENT TRUTH ERROR (ERROR IS ZERO) STG
000023      C      SEGMENT TRUTH FILE WILL BE WRITTEN ONLY ON THE FIRST STG
000024      C      ITERATION IF ISTG = 1 OR 3 STG
000025      C      STG SHOULD NEVER BE CALLED IF ISTG = 2. STG
000026      C      ITR = MONTE CARLO ITERATION NUMBER STG
000027      C      PRINTF = PRINT FLAG (=1 TO PRINT REPORT, =0 OTHERWISE) STG
000028      C      SEED(1)= RANDOM NUMBER SEED FOR SEGMENT TRUTH STG
000029      C                                                                STG
000030      C      THE FOLLOWING OUTPUT QUANTITIES ARE STORED IN COMMON BY STG ...STG
000031      C      NRFC(1)= NO. OF DATA RECORDS PROCESSFD BY STG FROM SEGID STG
000032      C      NRFC(3)= NO. OF DATA RECORDS PROCESSFD BY STG FROM SUBHST STG
000033      C      NSFGTR = NO. OF RECORDS WRITTEN ON THE SEGMENT TRUTH FILE. STG
000034      C                                                                STG
000035      C      COMMON BLOCK DEFINITIONS STG
000036      C      ARGUMENT LIST FOR ERRUR PROCESSING ARGLIST
000037      C      COMMON /ARCLST/ ARGLIST
000038      C      1  NERRS ,NFATAL,NPERRS,NARG ,ARG(10) ARGLIST
000039      C      DIMENSION IARG(10) ARGLIST
000040      C      EQUIVALENCE ( IARG,ARG ) ARGLIST
000041      C                                                                ARGLIST
000042      C      CONTROL PARAMETERS FOR LEM PROGRAM CNTRL
000043      C      COMMON /CNTRL / CNTRL
000044      C      1  PRINTI,NSSTART,SEED(7) CNTRL
000045      C      INTEGER PRINTF CNTRL
000046      C      DOUBLE PRECISION SEED CNTRL
000047      C                                                                CNTRL
000048      C      CONSTANT QUANTITIES FOR LEM PROGRAM CONST
000049      C      COMMON /CONST / CONST
000050      C      1  NTRMX ,MAXR ,MAXZ ,IMXSEG,FNDFIL,ITSFG CONST
000051      C                                                                CONST
000052      C      FILE DEFINITIONS AND RECORD LENGTHS FILES
000053      C      COMMON /FILES / FILES
000054      C      1  SLGID ,LSEGLD,CNRPW ,LCRPPW,SUBHST,LSUHH ,ALOUIS,LACO FILES
000055      C      2  CAMSF,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESO FILES
000056      C      3  SIGEX1,LSIGEX,YESERR,LYESER,SFGTR,LSEGTR,CASDIS,LCASD FILES
000057      C      4  IOP ,OUIP ,IACO ,LIACO ,CASUSF,LCASUS FILES
000058      C      INTEGER SEGID ,CRPPW ,SUBHST,ALOUIS,CAMSF ,CAMERR,CASF ,YESOUT FILES

```

```

000059      1 ,SIGFX1,YESERR,SFGTRU,CASDIS,OUTP ,TACU ,CASDSF      FILFS
000060      C      FILFS
000061      C      LFMCM
000062      C      COMMON /LEHCM /      LFMCM
000063      1  TITL(10)      ,ICASF ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ      LFMCM
000064      2 ,ENDR ,ENDZ ,ISTG ,ICAMS ,IYFS ,IACQ ,ICLASS,ISEXT ,ISCC      LFMCM
000065      3 ,ICAS2 ,ICAS3 ,IPRCAM,IPRYFS,IPRLAS,ICFSG,ICSECH,ICSESH,ICSECL      LFMCM
000066      4 ,ICSEYM,ICSEFE,ICSEAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6      LFMCM
000067      5 ,RSEED7,ICSEST,ICSECU,ICSEYS,ICSECU,ICSECD      LFMCM
000068      DIMENSION RSEED(7)      LFMCM
000069      DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5      LFMCM
000070      1 ,RSEED6,RSEED7      LFMCM
000071      EQUIVALENCE ( RSEED,RSEED1 )      LFMCM
000072      INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ      LFMCM
000073      C      LFMCM
000074      C      PAGE EJECT CONTROL PARAMETERS FOR LEM      PAGECM
000075      C      COMMON /PAGECM/      PAGECM
000076      1  NPAGE ,NLINE ,MXLINE,NSTTL ,SUBITL(10)      PAGECM
000077      C      PAGECM
000078      C      STATISTICAL INFORMATION FOR LEM      STATS
000079      C      COMMON /STATS /      STATS
000080      1  ITER ,NSEGTR,NCAMSR,NYESR ,NRFC(?),NCASCR,NCASDR      STATS
000081      EQUIVALENCE ( NI,ITER )      STATS
000082      C      STATS
000083      C      DATA FOR SEGMENT TRUTH GENERATOR      STGDTA
000084      C      COMMON /STGDTA/      STGDTA
000085      1  COUN ,IREG ,IZONE ,ISTRAT,ISUBS ,ISEG ,ITRAIN,ITSPRI(6)      STGDTA
000086      2 ,SLAT ,SLONG ,GRIDNO,ISW ,COUN2 ,IREG2 ,IZONF2,ISTRA2      STGDTA
000087      3 ,ISUBS2,NSEG ,IDSEG ,GRPNU ,HISTPW,AREA ,PWK ,NAGR      STGDTA
000088      4 ,NA ,DELIPW,DELIPM,CV1 ,CV2 ,CV3 ,CV4 ,PKI      STGDTA
000089      5 ,PKI ,AVEPW ,SUMPW ,SNBR ,PMLEAN,PW ,PM ,ERRPW      STGDTA
000090      6 ,SIGMA ,LRRPW      STGDTA
000091      DIMENSION ISEG(150), PW(150), PM(150), ERRPW(150)      STGDTA
000092      INTEGER GRIDNO,GRPNU      STGDTA
000093      C      STGDTA
000094      C      STG
000095      C      LOCAL VARIABLES      STG
000096      C      NAME = ALPHANUMERIC FILENAME FOR THE SEGMENT TRUTH FILE      STG
000097      C      RUSID = READ FLAG FOR SEGID ( = 1 TO SKIP READING SEGID FOR      STG
000098      C      ONE PASS, 0 OTHERWISE.)      STG
000099      C      EADD = END-OF-DATA FLAG ( = 1 WHEN THE END OF DATA IS <      STG
000100      C      DEFICTED ON SEGID AND/OR SUBST)      STG
000101      C      NSEGS = NUMBER OF SEGMENTS FOUND ON THE CURRENT SUBSTRATA      STG
000102      C      (SHOULD = NSEG)      STG
000103      C      ERROR= ERROR FLAG RETURNED FROM SUBR. BETAD      STG
000104      C      ZERO = ZERO WORD USED TO FILL OUT SHORT RECORDS ON SFGTRU FILE      STG
000105      C      NITL = NUMBER OF WORDS REQUIRED TO FILL OUT SHORT RECORDS      STG
000106      C      STG
000107      C      LINKAGE ... CALL STG      STG
000108      C      STG IS CALLED FROM THE LEM DRIVER      STG
000109      C      STG
000110      C      SUBROUTINES USED ...      STG
000111      C      BETAD = BETA DISTRIBUTION ROUTINE      STG
000112      C      ERRMES = ERROR MESSAGE ROUTINE      STG
000113      C      STG
000114      C      FILENAME FOR SEGMENT TRUTH FILE      STG
000115      DIMENSION NAME(2)      STG
000116      DATA NAME / 4HSEG1,4HTRUTH /,ZEPO/0/
000117      C      STG
000118      C      *****

```

ORIGINAL PAGE IS  
 OF POOR QUALITY

```

000119 C STG
000120 C STG
000121 C SKIP HEADER RECORDS OF SEGMENT ID FILE AND SUBSTRATA HIST. FILE STG
000122 RFWIND SEGID STG
000123 RFWIND ($FGID) STG
000124 RFWIND SUBHST STG
000125 READ (SUBHST) STG
000126 RFWIND SEGIRU STG
000127 C WRITE HEADER RECORD OF SEGMENT TRUTH FILE STG
000128 NFILL= 1$FGTR - 4 STG
000129 WRITE (SEGIRU) NAME,ICASE,IISFG,( ZERO,I=1,NFILL ) STG
000130 C STG
000131 C INITIALIZE FLAGS, COUNTERS, ETC. STG
000132 NREC(1)= 0 STG
000133 NREC(3)= 0 STG
000134 NSEGIS = 0 STG
000135 RDSID = 0.0 STG
000136 ENDD = 0.0 STG
000137 SUMPW = 0.0 STG
000138 NSEGS = 0 STG
000139 NLINE= HXLINE STG
000140 C READ DATA RECORD FROM SUBSTRATA HISTORICAL FILE STG
000141 C STG
000142 200 READ (SUBHST) COUN2,IREG2,IZONE2,ISTR2,ISUBS2,NSFG STG
000143 1 , ( IISFG(I),I=1,IMXISFG ), GRPNO,HISTPW,AREA,PKW,NAGR,NA,DELTPW STG
000144 2 ,DELTPW,CV1,CV2,CV3,CV4 STG
000145 220 IF ( COUN2 .EQ. ENDFIL ) GO TO 600 STG
000146 C ARE REGION AND ZONE FROM SUBHST WITHIN THE RANGE DETERMINED BY STG
000147 C STARTR, STARTZ, ENDR, AND ENDZ STG
000148 IF ( IREG2 - STARTR ) 200,230,240 STG
000149 C IREG2 = STARTR. NOW COMPARE IZONE2 TO STARTZ STG
000150 230 IF ( IZONE2 .LT. STARTZ ) GO TO 200 STG
000151 C IREG2 .GE. STARTR AND IZONE2 .GE. STARTZ STG
000152 240 IF ( ENDR .EQ. 0 ) GO TO 260 STG
000153 IF ( IREG2 - ENDR ) 260,250,600 STG
000154 C IREG2 = ENDR. NOW COMPARE IZONE2 TO ENDZ STG
000155 250 IF ( IZONE2 .GT. ENDZ ) GO TO 600 STG
000156 C IREG2 .LE. ENDR AND IZONE2 .LT. ENDR STG
000157 260 IF ( NSFG .EQ. 0 ) GO TO 200 STG
000158 C ADVANCE SUBHST COUNTER STG
000159 NREC(3)= NREC(3) + 1 STG
000160 C STG
000161 C ARE WE READY TO READ A SEGMENT FROM THE SEGMENT ID FILE STG
000162 C ( WE MAY HAVE ALREADY READ THE FIRST SEGMENT FOR THE CURRENT STG
000163 C SUBSTRATA BEFORE READING THE SUBSTRATA FILE ) STG
000164 IF ( POSID .EQ. 0.0 ) GO TO 300 STG
000165 C SET FLAG TO READ SEGMENT ID FILE NEXT TIME THROUGH THIS LOGIC STG
000166 RDSID= 0.0 STG
000167 GO TO 400 STG
000168 C STG
000169 C READ A DATA RECORD FROM THE SEGMENT ID FILE STG
000170 300 READ ($FGID) COUN,IREG,IZONE,ISTRAT,ISUBS,ISFC,ITRAIN,ITSPRL STG
000171 1 ,SLAT,SLONG,GRIDNO,ISW STG
000172 320 IF ( COUN .EQ. ENDFIL ) GO TO 600 STG
000173 C ARE REGION AND ZONE FROM SIGID WITHIN THE RANGE DETERMINED BY STG
000174 C STARTR, STARTZ, ENDR, AND ENDZ. STG
000175 IF ( IREG - STARTR ) 300,330,340 STG
000176 330 IF ( IZONE .LT. STARTZ ) GO TO 300 STG
000177 C IREG .GE. STARTR AND IZONE .GE. STARTZ STG
000178 340 IF ( ENDR .EQ. 0 ) GO TO 400 STG

```

```

000179          IF ( TRFG - ENDR ) 400,350,600          STG
000180          C          IRFG = ENDR. NOW COMPARE IZONE TO ENDZ          STG
000181          350          IF ( IZONE .GT. ENDZ ) GO TO 600          STG
000182          C          IRFG .LE. ENDR AND IZONE .LE. ENDZ          STG
000183          C          STG
000184          C          COMPARE SUBSTRATA FROM SEGID TO SUBSTRATA FROM SUBHST.          STG
000185          400          IF ( TRFG - IRLG2 ) 440,410,470          STG
000186          410          IF ( IZONE - IZONE2 ) 440,420,470          STG
000187          420          IF ( ISTRAT - ISTRAT2 ) 440,430,470          STG
000188          430          IF ( ISUBS - ISUBS2 ) 440,480,470          STG
000189          C          STG
000190          C          SUBSTRATA FROM SEGID .LT. SUBSTRATA FROM SUBHST          STG
000191          C          SOMETHING IS WRONG. THE FILES ARE INCONSISTENT WITH EACH OTHER          STG
000192          C          OR ONE FILE IS OUT OF ORDER. WRITE ERROR MESSAGE, DROP THIS          STG
000193          C          SEGMENT AND CONTINUE.          STG
000194          440          IF ( ITRF .EQ. PSTART + 1 ) CALL ERRMES (3HSTG,3HSTG,1,0)          STG
000195          GO TO 300          STG
000196          C          STG
000197          C          SUBSTRATA FROM SEGID .GT. SUBSTRATA FROM SUBHST.          STG
000198          C          THE END OF THE CURRENT SUBSTRATA FROM SUBHST HAS BEEN REACHED.          STG
000199          C          SET FLAG TO SKIP READING SEGID ON THE NEXT PASS SINCE THE          STG
000200          C          FIRST SEGMENT OF THE NEXT SUBSTRATA HAS ALREADY BEEN READ FROM          STG
000201          C          SEGID.          STG
000202          470          RDSID= 1,0          STG
000203          GO TO 610          STG
000204          C          IS THIS THE FIRST ITERATION FOR THIS RUN.          STG
000205          480          IF ( ITRF .GT. RSTART + 1 ) GO TO 500          STG
000206          C          FIRST ITERATION. IS SEGMENT FROM SEGID IN IDSEF ARRAY FROM          STG
000207          C          SUBHST          STG
000208          DO 490 I=1,NSEG          STG
000209          IF ( ISFG .EQ. IDSEG(I) ) GO TO 500          STG
000210          490          CONTINUE          STG
000211          C          SEGMENT IS NOT IN IDSEG. PRINT WARNING AND DROP THIS SEGMENT          STG
000212          CALL ERRMS (3HSIG,3HSTG,2,0)          STG
000213          GO TO 300          STG
000214          C          STG
000215          500          PWKI= PWK          STG
000216          PMKI= PWKI*DELTPM          STG
000217          C          TEST FOR ZERO ERROR CASE ( ISTG = 3 )          STG
000218          IF ( ISTG .EQ. 3 ) GO TO 520          STG
000219          C          STG
000220          C          COMPUTE TRUE PW AND TRUE PM FOR THIS SEGMENT.          STG
000221          SIGMA= PWK*CV2/100.0          STG
000222          CALL BETAD (SFED(1),PWK/100.0,SIGMA,PWKI,0,IERROR)          STG
000223          IARG(1)= IERROR          STG
000224          IF (IERROR .NE. 0)CALL ERRMES(3HSTG,3HSTG,3,0)          *NEW
000225          IF (IERROR .EQ. 3)PWKI = .01*PWK          *NEW
000226          PMMEAN= PWKI*DELTPM          STG
000227          SIGMA= PMMEAN*CV3          STG
000228          CALL BETAD (SFED(1),PMMEAN,SIGMA,PWKI,0,IERROR)          STG
000229          IARG(1)= IERROR          STG
000230          IF (IERROR .NE. 0)CALL ERRMES(3HSTG,3HSTG,4,0)          *NEW
000231          IF (IERROR .EQ. 3)PWKI = PMMEAN          *NEW
000232          C          STG
000233          PWKI= 100.0*PWKI          STG
000234          PMKI= 100.0*PMKI          STG
000235          C          STG
000236          C          WRITE RECORD ON SEGMENT TRUTH FILE          STG
000237          520          WRITE (SEGTRU) COUNTRY,TRFG,IZONE,ISTRAT,ISUBS,ISEG,ITRAIN,ITSPRL          STG
000238          I ,ISW,PWKI,PMKI          STG

```

```

000239 C ADVANCE COUNTERS STG
000240 NSEGS= NSFGS + 1 STG
000241 NREC(1)= NREC(1) + 1 STG
000242 NSFGTR= NSLGTR + 1 STG
000243 SUMPW= SUMPW + PWK1 STG
000244 PW(NSFGS)= PWK1 STG
000245 PM(NSFGS)= PMK1 STG
000246 GO TO 300 STG
000247 C STG
000248 C END OF A SUBSTRATUM. STG
000249 C SET END-OF-DATA FLAG STG
000250 600 ENDD= 1.0 STG
000251 C STG
000252 610 IF ( PRINTF .EQ. 0 ) GO TO 650 STG
000253 C COMPUTE AVERAGE PW FOR THIS SUBSTRATA STG
000254 IF ( NSFGS .LE. 0 ) GO TO 650 STG
000255 SNBR= NSEGS STG
000256 AVEPW= SUMPW/SNBR STG
000257 C COMPUTE ERROR IN SEGMENT PW STG
000258 DO 630 I=1,NSEGS STG
000259 ERRPW(I)= PW(I) - PWK STG
000260 630 CONTINUE STG
000261 C STG
000262 C PRINT-SEGMENT TRUTH REPORT DATA FOR THIS SUBSTRATA STG
000263 C STG
000264 IF ( NLINE + NSIG+1 .LE. MXLINE ) GO TO 640 STG
000265 C FJFCT PAGE AND PRINT HEADERS BEFORE PRINTING SEGMENT TRUTH DATA STG
000266 CALL FJFCT (5) STG
000267 WRITE (OUTP,1) STG
000268 1 FORMAT (/30X,34HS ELEMENT TRUTH REPORT// STG
000269 1 11X,11HTRUE PW FOR,14X,11HTRUE PW FOR,6X,7HAVERAGE,9X,5HERROR STG
000270 2 ,7X,11HTRUE PW FOR,32H SUBSTRATA SUBSTRATA SEGMENT,6X, STG
000271 3 7HSELEMENT,10X,2HPW,12X,5HIN PW,9X,7HSEGMENT,5X,9HITERATION) STG
000272 640 CALL PACLR (NSIG+1) STG
000273 WRITE (OUTP,2) 1SUBS2,PWK,1DSEG(1),PW(1),AVEPW,ERRPW(1),PM(1) STG
000274 1 ,11ER STG
000275 2 FORMAT (/17,F13.4,110.4F15.4,114) STG
000276 IF ( NSIGS .LE. 1 ) GO TO 650 STG
000277 WRITE (OUTP,3) ( 1DSEG(I),PW(I),ERRPW(I),PM(I),I=2,NSEGS ) STG
000278 3 FORMAT (130,F15.4,15X,2F15.4) STG
000279 C IF NSEGS .NE. NSFG, THEN PRINT WARNING THAT SEGMENT IDS ARE STG
000280 C INCORRECT. STG
000281 650 IARG(1)= NSFGS STG
000282 IF ( NSEGS .NE. NSEG ) CALL ERRMES (3HSTG,3HSTG,5,0) STG
000283 NSEGS= 0 STG
000284 SUMPW= 0.0 STG
000285 IF ( ENDD .EQ. 0.0 ) GO TO 200 STG
000286 C END OF DATA ON SEGID AND/OR SUBST STG
000287 900 NFILL= LSFCTR - 1 STG
000288 WRITE (SECTRU) ENDFIL, ( 7ERU,I=1,NFILL ) STG
000289 ENDFILE SFGTRU STG
000290 REWIND SECTRU STG
000291 IF ( NSFGTR .EQ. 0 ) CALL ERRMES (3HSTG,3HSTG,6,0) STG
000292 RETURN STG
000293 C STG
000294 END STG

```

\*\*\*2

```

000001          SUBROUTINE STGERR (ICODE)          STGFRR
000002          PRINTS ERROR MESSAGES FOR SEGMENT TRUTH GENERATOR          STGFRR
000003          C          C          STGFRR
000004          C          ARGUMENT LIST FOR ERROR PROCFSING          ARGLIST
000005          COMMON /ARGLIST/          ARGIST
000006          1  NERRS ,NFATAL,NPFRRS,NARG ,ARG(10)          ARGIST
000007          DIMENSION IARG(10).          ARGIST
000008          EQUIVALENCE ( IARG,ARG )          ARGIST
000009          C          ARGIST
000010          C          FILE DEFINITIONS AND RECORD LENGTHS          FILES
000011          COMMON /FILES /          FILES
000012          1  SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ          FILES
000013          2  ,CAMSF ,LCAMSF,CAMERR,LCAMER,CASF ,LCASF ,YESOUT,LYESU          FILES
000014          3  ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRU,LSECTR,CASDIS,LCASD          FILES
000015          4  ,INP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS          FILES
000016          INIFGR SEGID ,CROPW ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YESOUT          FILES
000017          1  ,SIGEXT,YESERR,SEGTRU,CASDIS,OUTP ,TACQ ,CASDSF          FILES
000018          C          FILES
000019          C          DATA FOR SEGMENT TRUTH GENERATOR          STGDTA
000020          COMMON /SIGDTA/          STGDTA
000021          1  COUN ,IREG ,IZONE ,ISTRAT,ISUBS ,ISEG ,ITRAIN,ITSPRL(6)          STGDTA
000022          2  ,SLAT ,SLONG ,GRIDNO,ISH ,COUN2 ,IREG2 ,IZONE2,ISTRAT          STGDTA
000023          3  ,ISUBS2,NSEG ,IUSEG,GRPN0 ,HISIPW,AREA ,PWK ,NAGR          STGDTA
000024          4  ,NA ,DELTPW,DELTPM,CV1 ,CV2 ,CV3 ,CV4 ,PWKI          STGDTA
000025          5  ,PMKI ,AVLPPW,SUNPW ,SNDR ,PMMEAN,PW ,PM ,ERRPW          STGDTA
000026          6  ,SIGMA ,ERRPW          STGDTA
000027          DIMENSION ISEG(150), Pw(150), PM(150), FRRPW(150)          STGDTA
000028          INIFGR GRIDNO,GRPN0          STGDTA
000029          C          STGDTA
000030          C          STGFRR
000031          IMES= ICODE          STGFRR
000032          GO TO (100,200,300,400,500,600), IMES          STGFRR
000033          C          STGFRR
000034          100 WRITE (OUTP,1) IREG,IREG2,IZONE,IZONE2,ISTRAT,ISTRAT2,ISUBS,ISUBS2          STGFRR
000035          1  FORMAT (71H)THE SEGMENT ID FILE AND THE SUBSTRATA HISTORICAL FILE          STGFRR
000036          1ARE INCONSISTENT/13X,14HSEGID SUBHST/7H REGION,11,19/5H ZONE,          STGFRR
000037          2 11,19/7H STRATA,11,19/11H SUBSTRATA,17,19)          STGFRR
000038          GO TO 900          STGFRR
000039          C          STGFRR
000040          200 WRITE (OUTP,2) ISEG,IREG,IZONE,ISTRAT,ISUBS          STGFRR
000041          2  FORMAT (40H)SEGMENT ,15,11H IS NOT IN ISEG FROM SUBHST FOR REGION          STGFRR
000042          1 ,14,8H , ZONE ,14,10H , STRATA ,14,13H , SUBSTRATA ,14/          STGFRR
000043          2 5X,23H)SEGMENT WILL BE DROPPED)          STGFRR
000044          GO TO 900          STGFRR
000045          C          STGFRR
000046          300 WRITE (OUTP,3) IARG(1),PWK,SIGMA,PWKI          STGFRR
000047          3  FORMAT (40H)ERROR RETURN FROM BEIAD ROUTINE. IER= ,12,8H . PWK=          STGFRR
000048          1 F13.6,8H SIGMA=,F13.6,7H PWKI=,E13.6)          STGFRR
000049          GO TO 900          STGFRR
000050          C          STGFRR
000051          400 WRITE (OUTP,4) IARG(1),PMMEAN,SIGMA,PMKI          STGFRR
000052          4  FORMAT (40H)ERROR RETURN FROM ULFAD ROUTINE. ILR= ,12,11H . PMMEAN          STGFRR
000053          1= ,F13.6,8H SIGMA=,E13.6,7H PMKI=,E13.6)          STGFRR
000054          GO TO 900          STGFRR
000055          C          STGFRR
000056          500 WRITE (OUTP,5) IARG(1),NSEG          STGFRR
000057          5  FORMAT (19H)WARNING... NSEGS= 14,29H .NE. NSEG (FROM SUBHST) =          STGFRR
000058          1 14/29H SEGMENT IDS MAY BE INCORRECT )          STGFRR

```

ORIGINAL PAGE IS  
OF POOR QUALITY



000059		GO TO 900	STGERR
000060	C		STGERR
000061	600	WRITE (OUTP,6)	STGERR
000062	6	FORMAT (60HOWARNING... NO SEGMENTS PROCESSED BY SFGMENT TRUTH GENE	STGERR
000063		IRATOR )	STGERR
000064	C		STGERR
000065	900	RETURN	STGERR
000066		END	STGERR

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000001 SUBROUTINE SUMREP SUMREP
000002 C.   FLAGS AND COUNTERS FOR CAS SIMULATOR CASFLG
000003 COMMON /CASFLG/ CASFLG
000004 1 H ,PPFLG ,NBW ,IRW ,WINDOW,IPD ,IPP ,PPDATE,NREGS CASFLG
000005 2 ,NZTOT ,NSTRT,NYESK,NSSISK,NCAMSK,NRYES ,NRSSH ,NRCAMS CASFLG
000006 3 ,ENDC ,ENDREG,ENDZON,IRSTR ,IRZONE,IRREG CASFLG
000007 4 ,LDS1 ,LDS4 ,LDS7 ,LDS8 ,LDS9 ,LDS10 ,LDS11 ,LDS12 ,LDS13 CASFLG
000008 5 ,LDS14 ,LDS15 ,LDS16 ,LDS17 ,LRCCUN,LRREG ,LRZONE,LRSTR CASFLG
000009 INTEGER PPFLG , WINDOW , PPDATE CASFLG
000010 C.   FILE DEFINITIONS AND RECORD LENGTHS CASFLG
000011 C.   FILE DEFINITIONS AND RECORD LENGTHS FILES
000012 COMMON /FILES / FILES
000013 1 SEGID ,LSEGID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ FILES
000014 2 ,CAMSF ,LCAMSF,CAMERR,LCAMLR,CASF ,LCASF ,YESOUT,LYESQ FILES
000015 3 ,SIGEXT,LSIGEX,YESERR,LYESER,SEGTRO,LSIGTR,CASDIS,LCASD FILES
000016 4 ,TWP ,OUTP ,TACQ ,LTACQ ,CASDSF,LCASDS FILES
000017 INTEGER SEGID ,CROPW , SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YFSOUT FILES
000018 1 ,SIGEXT,YESERR,SEGTRO,CASDIS,OUTP ,TACQ ,CASDSF FILES
000019 C.   LEN CONTROL CARD INPUT DATA FILES
000020 C.   LEN CONTROL CARD INPUT DATA LFMCM
000021 COMMON /LFMCM / LFMCM
000022 1 TITLE(10) ,ICASF ,COUNTRY,NTRIAL,RSIART,IPRINT,STARTR,STARTZ LFMCM
000023 2 ,FNDR ,ENDZ ,ISTG ,ICAMS ,IYFS ,IACQ ,ICLASS,ISEXT ,ISCC LFMCM
000024 3 ,ICASP ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSEFC,ICSELCW,ICSESH,ICSECC LFMCM
000025 4 ,ICSEYH,ICSESE,ICSEAC,RSEFD1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6 LFMCM
000026 5 ,RSEFD7,ICSEST,ICSECU,ICSEYS,ICSECU,ICSECD LFMCM
000027 DIMENSION RSEED(7) LFMCM
000028 DOUBLE PRECISION RSEFD ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5 LFMCM
000029 1 ,RSEFD6,RSEED7 LFMCM
000030 EQUIVALENCE ( RSEED,RSEED1 ) LFMCM
000031 INTEGER RSTART,STARTR,STARTZ,ENDR ,FNDR LFMCM
000032 C.   LFMCM
000033 C.   PAGE EJECT CONTROL PARAMETERS FOR LEM PAGECM
000034 COMMON /PAGECM/ PAGECM
000035 1 NPAGE ,NLINE ,MXLINE,NSTTL ,SUBTTL(10) PAGECM
000036 C.   PAGECM
000037 C.   STATISTICAL INFORMATION FOR LEM STATS
000038 COMMON /STATS / STATS
000039 1 ITER ,NSIGTR,NCAMSK,NYESK ,NREL(7),NLCASCR,NCASDP STATS
000040 EQUIVALENCE ( NI,ITER ) STATS
000041 C.   STATS
000042 C.   CAS CONTROL CARD INPUT DATA AND CONSTANTS CASCM
000043 COMMON /CASCM / CASCM
000044 1 AREACF,YCF ,PRDCF ,APRUTS(4,2) ,PPRUTS(3,2) ,YPRUTS(3,2) CASCM
000045 2 ,AREAPS,SPMAX ,NHISTY,HH ,TOPT ,AUNITS,DISTFF,BWIND(4) CASCM
000046 3 ,WPRIOR(4) ,APRFP ,IPRD(3,14) ,PPDATE,PPDATE(14) CASCM
000047 INTEGER HH, TOPT, AUNITS,DISTFF,BWIND,WPRIOR,APRFP,PPDATE CASCM
000048 C.   CASCM
000049 C.   SUMMARY DATA FOR REPORTS SUMDTA
000050 COMMON /SUMDTA/ SUMDTA
000051 1 CVALPT,CVLP1A,SDPER ,CVFPPT,CVFP1P,CSUMR(10,18) SUMDTA
000052 C.   SUMDTA
000053 C.   CAS DATA SET 13 (COUNTRY DATA -- SECOND PASS) DSET13
000054 COMMON /DSET13/ DSET13
000055 1 HWAC ,HWAC ,FWAC ,AFRR ,AVARC ,TPRODC,TPRODC,PREARR,PRVARC DSET13
000056 2 ,TYC ,EYC ,YERRC ,MIC ,M2C ,CT1C ,CT2C ,CT3C ,ANAVC DSET13
000057 3 ,APRVC,CLBWA ,CLFPRD,CLATEC,CLPTFC,CLATWC,CLP1WC DSET13
000058 RTAL MIC , M2C DSET13

```



000119	4500	FORMAT(2X,9HTRUE AREA,9X,F10.2,3X,4A6)	SUMREP
000120		WRITE(OUTP,5500) IYC,(YPRUTS(I,INDX),I=1,3)	SUMREP
000121	5500	FORMAT(2X,10HTRUE YIELD,8X,F10.2,3X,5A6)	SUMREP
000122		WRITE(OUTP,6500) TPRDC,(PPRUTS(I,INDX),I=1,5)	SUMREP
000123	6500	FORMAT(2X,15HTRUE PRODUCTION, 3X,F10.2;3X,5A6)	SUMREP
000124			SUMREP
000125	C	SECOND PAGE	SUMREP
000126	C	HEADERS	SUMREP
000127		CALL FJFCT(11)	SUMREP
000128		WRITE(OUTP,7000)	SUMREP
000129		WRITE(OUTP,3000) CUNTRY,NT	SUMREP
000130		WRITE(OUTP,7500)	SUMREP
000131	7500	FORMAT(//30X,2HAREA CONFIDENCE LEVELS,24X,	SUMREP
000132	1	28HPRODUCTION CONFIDENCE LEVELS )	SUMREP
000133		WRITE(OUTP,8500)	SUMREP
000134	8500	FORMAT(1X,10HPRDUCTION )	SUMREP
000135		WRITE(OUTP,9500)	SUMREP
000136	9500	FORMAT(4X,5HPPOINT,12X,2(10HTRUE/ERROR,2X,7HFST/EST,2X,	SUMREP
000137	1	HTRUE/EST,5X,7HTRUE/WC,11X)/)	SUMREP
000138			SUMREP
000139	C	WRITE OUT PREDICTION POINTS FOR SECOND PAGE	SUMREP
000140		IPP=0	SUMREP
000141		DO 40 J=1,4	SUMREP
000142		IF(H-IND(I).EQ.0) GO TO 40	SUMREP
000143		IPP=IPP+1	SUMREP
000144		WRITE(OUTP,1100) I,(CSUMR(J,IPP),J=11,18)	SUMREP
000145	1100	FORMAT(6X,11,15X,2(4F10.3,10X))	SUMREP
000146	40	CONTINUE	SUMREP
000147		IF(NPDATE.EQ.0) GO TO 50	SUMREP
000148		DO 60 J=1,NPDATE	SUMREP
000149		IPP=IPP+1	SUMREP
000150		WRITE(OUTP,2100) IPRD(2,1),IPRD(3,1),IPRD(1,1),	SUMREP
000151	1	(CSUMR(J,IPP),J=11,18)	SUMREP
000152	2100	FORMAT(2X,2(12,1H/),12,10X,2(4F10.3,10X))	SUMREP
000153	60	CONTINUE	SUMREP
000154	50	CONTINUE	SUMREP
000155		CALL PAGLR(IPP)	SUMREP
000156		CALL PAGEP(3)	SUMREP
000157		WRITE(OUTP,3100)	SUMREP
000158	3100	FORMAT(//10X,	SUMREP
000159	1	55HTRUE/ERROR AREA AND PRODUCTION CONFIDENCE LEVELS ARE ,*	SUMREP
000160	1	35HCALCULATED ONLY FOR FINAL ITERATION )	SUMREP
000161	C	SET NLINE TO EJECT PAGE AFTER COUNTRY SUMMARY REPORT BEFORE	SUMREP
000162	C	PRINTING ANY MORE OUTPUT	SUMREP
000163		NLINE=MXLINE + 1	SUMREP
000164	900	RETURN	SUMREP
000165		END	SUMREP

ORIGINAL PAGE IS  
OF POOR QUALITY



000059	IPOINT(IPEND+1)=9999999	,ISAVE
000060	CALL SORTAG(IPOINT,1,IPEND,IPNT2)	,ISAVE
000061	CALL RANACF(TACQ,0,0,0,0,0,-1)	,ISAVE
000062	RETURN	,ISAVE
000063	C	,ISAVE
000064	C READ FROM FILE	,ISAVE
000065	C	,ISAVE
000066	C FIND INDEX TO INDEX, BINARY SEARCH	,ISAVE
000067	30 CONTINUE	,ISAVE
000068	IL=1	,ISAVE
000069	IH=IPEND	,ISAVE
000070	32 CONTINUE	,ISAVE
000071	ILOOK=(IH+IL)/2	,ISAVE
000072	IF(IPOINT(ILOOK).EQ.ISEG) GO TO 35	,ISAVE
000073	IF(IPOINT(ILOOK).GT.ISEG) IH=ILOOK-1	,ISAVE
000074	IF(IPOINT(ILOOK).LT.ISEG) IH=ILOOK+1	,ISAVE
000075	IF(IH.GE.IL) GO TO 32	,ISAVE
000076	IRAD=1	,ISAVE
000077	RETURN	,ISAVE
000078	C	,ISAVE
000079	C FOUND CORRECT INDEX	,ISAVE
000080	35 CONTINUE	,ISAVE
000081	C	,ISAVE
000082	C READ IN RECORD IF NOT ALREADY READ	,ISAVE
000083	IPIN=IPNT2(ILOOK)	,ISAVE
000084	CALL RANACF(TACQ,IPIN,ITRAIN,1020,INDEX,1,1)	,ISAVE
000085	RETURN	,ISAVE
000086	END	,ISAVE

	FOR, IS TSUB	
	SUBROUTINE TSUB	TSUB
C	COMPUTES THE QUANTITY T (SECOND TERM OF PPS AREA VARIANCE EQN.)	TSUB
C	T IS GIVEN BY EQ. 39 IN CAS PROBLEM DESCRIPTION.	TSUB
C		TSUB
C	DATA BLOCK FOR CAS CUMULATIVE FILE	CASCUM
C	CAS DATA SETS 14, 15, 16, AND 17	CASCUM
	COMMON /CASCUM/	CASCUM
	1 CASCUM(32),     BUFFR(504)	CASCUM
	DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22)	CASCUM
	1 ,DSET17(28)	CASCUM
	EQUIVALENCE ( ICASC,CASCUM )	CASCUM
	EQUIVALENCE ( DSET14,DSET15,DSET16,DSET17,CASCUM(5) )	CASCUM
	1 , ( SQAERS,SQAERZ,SQAERR,SQAERC,CASCUM(24) )	CASCUM
	2 , ( SQPERS,SQPERZ,SQPERR,SQPERC,CASCUM(25) )	CASCUM
	3 , ( SQYERS,SQYERZ,SQYERR,SQYERC,CASCUM(26) )	CASCUM
C		CASCUM
C	DATA BLOCK FOR CAS DISTRIBUTION FILE (DATA SET 19)	CASDSB
	DIMENSION CASDSB(303)	CASDSB
	EQUIVALENCE ( CASDSB,BUFFR )	CASDSB
	DIMENSION ICASD(303), HWA2K(60), WAKNEY(60), PIK(60)	CASDSB
	EQUIVALENCE ( ICASD,HWA2K,CASDSB ), ( WAKNEY,CASDSB(61) )	CASDSB
	1 , ( PIK,CASDSB(121) )	CASDSB
C		CASDSB
C	CAS DATA SETS 4, 5, AND 6 (AT STRATA LEVEL)	DSET4
	COMMON /DSET4 /	DSET4
	1 STRATA,TWAS1 ,HWAS1 ,EWAS1 ,XM1JS ,XCT1S ,ANVS1	JULY76
	2 ,TWAS2 ,HWAS2 ,EWAS2 ,XM2JS ,XCT2S ,ANVS2 ,T	JULY76
	3 ,TWAS3 ,HWAS3 ,XCT3S	
	4 ,XYS     ,XESTYS,EVYRS ,P2IDPK,V1V2S ,VARS ,ANVARS	JULY76
	5 ,FILL4(57)	
	INTEGER STRATA	JULY76
	DIMENSION DSET4(24), DSET5(7), DSET6(3)	JULY76
	EQUIVALENCE ( DSET4,STRATA ), ( DSET5,TWAS2 ), ( DSET6,TWAS3 )	DSET4
C		DSET4
C		TSUB
	CON = XM2JS/HWAS2	TSUB
	NS2 = XCT2S	TSUB
C	COMPUTE ALL PI(K), THE SUM OF PI(K)**2 OVER ALL SUBSTRATA,	TSUB
C	AND THE SUM OF PI(K)**3 OVER ALL SUBSTRATA.	TSUB
	SUM2= 0.0	TSUB

	SUM3= 0.0	TSUB
	DO 110 K=1,NS2	TSUB
	PIK(K)= CON*HWA2K(K)	TSUB
	SUM2= SUM2 + PIK(K)**2	TSUB
	SUM3= SUM3 + PIK(K)**3	TSUB
110	CONTINUE	TSUB
C		TSUB
C	COMPUTE CONSTANTS WHICH DEPEND ONLY UPON M2JS AND HWA2	TSUB
C	INDEPENDENT OF SUBSTRATA	TSUB
	CON1= (XM2JS-1.0)/XM2JS	TSUB
	CON2= CON1/XM2JS	TSUB
	CON3 = 2.0*CON2/XM2JS	TSUB
	CON3S= CON2*SUM2/XM2JS	TSUB
	CON4S= 3.0*CON3S/XM2JS	TSUB
	CON4S3= CON3*SUM3/XM2JS	TSUB
	CON5S2= CON4S*SUM2/XM2JS	TSUB
C		TSUB
	NS2M1= NS2 - 1	TSUB
	DO 210 K=1,NS2M1	TSUB
	WAKPIK= WAKNEY(K)/PIK(K)	TSUB
	PIK2= PIK(K)**2	TSUB
	PIK3= PIK2*PIK(K)	TSUB
C		TSUB
	KP1= K + 1	TSUB
	DO 210 KP=KP1,NS2	TSUB
	PIKPKP= PIK(K)*PIK(KP)	TSUB
	TERM2= PIK2*PIK(KP) + PIK(K)*PIK(KP)**2	TSUB
C		TSUB
	PIKPP= CON1*PIKPKP + CON2*TERM2 - CON3S*PIKPKP	TSUB
	1 + CON3*( PIK3*PIK(KP) + PIK(K)*PIK(KP)**3 + PIK2*PIK(KP)**2 )	TSUB
	2 - CON4S*TERM2 + CON5S2*PIKPKP - CON4S3*PIKPKP	TSUB
C		TSUB
	T= T + ( PIKPKP - PIKPP ) * ( WAKPIK - WAKNEY(KP) / PIK(KP) )**2	TSUB
210	CONTINUE	TSUB
C		TSUB
900	RETUKN	TSUB
	END	TSUB



```

000001. SUBROUTINE WRAPUP WRAPUP
000002 C WRITES HEADER RECORDS ON CAS CUMULATIVE FILE AND CAS DISTR. FILE WRAPUP
000003 C CLOSSES RANDOM ACCESS FILES (CASCUM AND CASDIS) WRAPUP
000004 C PRINTS STATUS INFORMATION AT END OF RUN. WRAPUP
000005 C WRAPUP
000006 C ARGUMENT LIST FOR ERROR PROCESSING ARGLIST
000007 COMMON /ARGLIST/ ARGLIST
000008 1 NLFERS, NFATAL, NPERRS, NARG, ARG(10) ARGLIST
000009 DIMENSION IARG(10) ARGLIST
000010 EQUIVALENCE ( IARG,APG ) ARGLIST
000011 C ARGLIST
000012 C CAS CONTROL CARD INPUT DATA AND CONSTANTS CASCUM
000013 COMMON /CASCUM / CASCUM
000014 1 AKFACE, YCF, PHDEF, APRUTS(4,2), PPRUTS(5,2), YPRUTS(3,2) CASCUM
000015 2, ARFAPS, SPMAX, NHISTY, HH, TOPT, AUNITS, DISTFF, HWIN(4) CASCUM
000016 3, WPRIOR(4), APREP, IPRD(3,14), NPDATE, PRDATE(14) CASCUM
000017 INTEGER HH, TOPT, AUNITS, DISTFF, HWIN, WPRIOR, APRFP, PRDATE CASCUM
000018 C CASCUM
000019 C DATA BLOCK FOR CAS CUMULATIVE FILE CASCUM
000020 C CAS DATA SETS 14, 15, 16, AND 17 CASCUM
000021 COMMON /CASCUM/ CASCUM
000022 1 CASCUM(32), BUFFER(504) CASCUM
000023 DIMENSION ICASC(32), DSET14(22), DSET15(22), DSET16(22) CASCUM
000024 1, DSET17(28) CASCUM
000025 EQUIVALENCE ( ICASC, CASCUM ) CASCUM
000026 EQUIVALENCE ( DSET14, DSET15, DSET16, DSET17, CASCUM(5) ) CASCUM
000027 1, ( SQAFRS, SQALRZ, SQAFRR, SQAFRC, CASCUM(24) ) CASCUM
000028 2, ( SQPFRR, SQPIRZ, SQPFRR, SQPERC, CASCUM(25) ) CASCUM
000029 3, ( SQYFRS, SQYFRZ, SQYFRR, SQYERC, CASCUM(26) ) CASCUM
000030 C CASCUM
000031 C DATA BLOCK FOR CAS DISTRIBUTION FILE (DATA SET 19) CASDSB
000032 DIMENSION CASDSB(303) CASDSB
000033 EQUIVALENCE ( CASDSB, BUFFER ) CASDSB
000034 DIMENSION ICASD(303), HWAZK(60), WAKNEY(60), PIK(60) CASDSB
000035 EQUIVALENCE ( ICASD, HWAZK, CASDSB ), ( WAKNEY, CASDSB(61) ) CASDSB
000036 1, ( PIK, CASDSB(121) ) CASDSB
000037 C CASDSB
000038 C FLAGS AND COUNTERS FOR CAS SIMULATOR CASFLG
000039 COMMON /CASFLG/ CASFLG
000040 1 H, PFLG, MBW, IBW, WINDOW, IPD, IPP, PPDATE, NREGS CASFLG
000041 2, HZTOT, NSTRAT, NYFSSK, NSSHSK, NCAMSK, NPYES, NKSSH, NRCAMS CASFLG
000042 3, ENDC, ENDREL, ENDZON, LRSTR, IRZONE, IRREG CASFLG
000043 4, LDS1, LDS4, LDS7, LDS8, LDS9, LDS10, LDS11, LDS12, LDS13 CASFLG
000044 5, LDS14, LDS15, LDS16, LDS17, LRCCUN, LRREG, LRZONE, LRSTR CASFLG
000045 INTEGER PFLG, WINDOW, PPDATE CASFLG
000046 C CASFLG
000047 C CONTROL PARAMETERS FOR LEM PROGRAM CNTRL
000048 COMMON /CNTRL / CNTRL
000049 1 PRINTF, NSTART, SLED(7) CNTRL
000050 INTEGER PRINTF CNTRL
000051 DOUBLE PRECISION SEED CNTRL
000052 C CNTRL
000053 C FILE DEFINITIONS AND RECORD LENGTHS FILES
000054 COMMON /FILES / FILES
000055 1, SEGID, LSEGID, CROPW, LCROPW, SUBHST, LSUBH, ACOUTS, LACR FILES
000056 2, CAMSF, LCAMSF, CAMLR, LCAMLR, CASF, LCASF, YESOUT, LYESO FILES
000057 3, SIGEXI, LSIGEX, YLESLR, LYESLR, SEGIPU, LSEGIP, CASDIS, LCASD FILES
000058 4, INP, OUTP, TACU, LTACU, CASDSF, LCASDS FILES

```

```

000059      INTEGER SEGID ,CROPH ,SUBHST,ACQUIS,CAMSF ,CAMERR,CASF ,YFSOUT  FILES
000060      1 ,SIGEXT,YLESRR,SECTRU,CASDIS,OUTP ,TACQ ,CASDSF  FILES
000061      C      INDEX RECORD FOR CAS CUMULATIVE FILE (CASF)  FILES
000062      COMMON /IXCAS/  IXCASF
000063      1 IXCAS( 1) ,LIXCAS  IXCASF
000064      C      DATA BLOCK FOR CAS DISTRIBUTION FILE  IXDISF
000065      COMMON /IXDISF/  IXDISF
000066      1 IXDISF( 1), LIXDIS  IXDISF
000067      C      NOTE... 506 ONLY ALLOWS UP TO 8 PREDICTION POINTS INCLUDING  IXDISF
000068      HIGHWINDOWS ( 506 = 1 + 1 + 8*63, INDEX + HEADER + 8 PKED. PTS.) IXDISF
000069      C      LEM CONTROL CARD INPUT DATA  LFMCM
000070      COMMON /LEMCM /  LFMCM
000071      1 TITLE(10) ,ICASF ,CUNTRY,NTRIAL,RSTART,IPRINT,STARTR,STARTZ  LFMCM
000072      2 ,ENDR ,ENDZ ,ISTG ,ICAMS ,IYES ,IACO ,ICLASS,ISEXT ,ISCC  LFMCM
000073      3 ,ICASP ,ICAS3 ,IPRCAM,IPRYES,IPRCAS,ICSESG,ICSECH,ICSESH,ICSECE  LFMCM
000074      4 ,ICSEYM,ICSESF,ICSLAC,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5,RSEED6  LFMCM
000075      5 ,RSEED7,ICSEST,ICSECU,ICSEYS,ICSECU,ICSECP  LFMCM
000076      DIMENSION RSEED(7)  LFMCM
000077      DOUBLE PRECISION RSEED ,RSEED1,RSEED2,RSEED3,RSEED4,RSEED5  LFMCM
000078      1 ,RSEED6,RSEED7  LFMCM
000079      EQUIVALENCE ( RSEED,RSEED1 )  LFMCM
000080      INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ  LFMCM
000081      C      STATISTICAL INFORMATION FOR LEM  STATS
000082      COMMON /STATS /  STATS
000083      1 ITER ,NSEGIR,NLANSR,NYLSR ,NREC(7),NCASCR,NCASDP  STATS
000084      EQUIVALENCE ( NT,ITER )  STATS
000085      C      WRITE HEADER RECORD ON CAS CUMULATIVE FILE  WRAPUP
000086      CASCUM(1)= 6HCASCUM  WRAPUP
000087      ICASC(2)= ICASE  WRAPUP
000088      CASCUM(3)= CUNTRY  WRAPUP
000089      ICASC(4)= NT  WRAPUP
000090      ICASC(5)= NREFS  WRAPUP
000091      ICASC(6)= NZTOT  WRAPUP
000092      ICASC(7)= NSTRT  WRAPUP
000093      C      STORE HIGH WINDOW NUMBERS IN WORDS 10-13 OF HEADER RECORD  WRAPUP
000094      C      NBW= 0  WRAPUP
000095      DO 110 I=1,4  WRAPUP
000096      ICASC(I+9)= 0  WRAPUP
000097      IF ( BWINDD(I) .EQ. 0 ) GO TO 110  WRAPUP
000098      NBW= NBW + 1  WRAPUP
000099      ICASC(NBW+9)= 1  WRAPUP
000100      110 CONTINUE  WRAPUP
000101      C      STORE NBW AND NDATE IN WORDS 8 AND 9 OF HEADER RECORD  WRAPUP
000102      ICASC(8)= NBW  WRAPUP
000103      ICASC(9)= NDATE  WRAPUP
000104      C      STORE ZULU PREDICTION DATES IN WORDS 14-27 OF HEADER RECORD  WRAPUP
000105      DO 120 I=1,14  WRAPUP
000106      ICASC(I+13)= PDATE(I)  WRAPUP
000107      120 CONTINUE  WRAPUP
000108      C      FILL IN REST OF HEADER RECORD WITH ZEROS  WRAPUP
000109      DO 130 I=28,LCASF  WRAPUP

```

ORIGINAL PAGE IS  
OF POOR QUALITY



```

000001          SUBROUTINE YES                                YES
000002          C                                            YES
000003          C THIS SUBROUTINE CALCULATES THE ESTIMATED YIELD FROM THE TRUE YIELD YES
000004          C AND A RANDOM NUMBER FROM A BETA DISTRIBUTION, A BIAS AND A YES
000005          C STANDARD DEVIATION. IT NEEDS INPUT FILE YESERR AND PRODUCES YES
000006          C OUTPUT FILE YESOUT, ALSO AN OPTIONAL REPORT. YES
000007          C                                            YES
000008          C LEM CONTROL CARD INPUT DATA LFMCM
000009          COMMON /ILMCM / LFMCM
000010          1 TITL(10) ,ICASE ,CUNTRY,NTRIAL,RSTART,IPRINI,STARTR,STARTZ LFMCM
000011          2 ,FNDR ,LNDZ ,ISTG ,ICAMS ,IYES ,IACO ,ICLASS,ISEXT ,ISCC LFMCM
000012          3 ,ICAS2 ,ICAS3 ,IPRCAM,IPRYES,IPPCAS,ICSTSG,ICSECK,ICSESH,ICSECE LFMCM
000013          4 ,ICSEYK,ICSESE,ICSEAC,RSEFD1,RSEED2,RSEED3,RSEFD4,RSEED5,RSEED6 LFMCM
000014          5 ,RSEED7,ICSFST,ICSECO,ICSEYS,ICSECU,ICSFCD LFMCM
000015          DIMENSION PSEED(7) LFMCM
000016          DOUBLE PRECISION RSEFD ,RSEED1,RSEED2,PSEED3,RSEED4,RSEED5 LFMCM
000017          1 ,RSEED6,RSEED7 LFMCM
000018          EQUIVALENCE ( RSEFD,RSEFD1 ) LFMCM
000019          INTEGER RSTART,STARTR,STARTZ,ENDR ,ENDZ LFMCM
000020          C                                            LFMCM
000021          C CONTROL PARAMETERS FOR LEM PROGRAM CNTRL
000022          COMMON /CNTRL / CNTRL
000023          1 PRINTF,NSSTART,SEED(7) CNTRL
000024          INTEGER PRINTF CNTRL
000025          DOUBLE PRECISION SEED CNTRL
000026          C CNTRL
000027          C ARGUMENT LIST FOR ERROR PROCESSING ARGLIST
000028          COMMON /ARGLIST/ ARGLIST
000029          1 NERRS ,NFATAL,NPERRS,NARG ,ARG(10) ARGLIST
000030          DIMENSION IARG(10) ARGLIST
000031          EQUIVALENCE ( IARG,ARG ) ARGLIST
000032          C ARGLIST
000033          C FILE DEFINITIONS AND RECORD LENGTHS FILES
000034          COMMON /FILES / FILES
000035          1 SECID ,LSECID,CROPW ,LCROPW,SUBHST,LSUBH ,ACQUIS,LACQ FILES
000036          2 ,CANSF ,LCANSF,CAMERR,LCAHRR,CASF ,LCASF ,YESOUT,LYCSO FILES
000037          3 ,SIGEXT,LSIGEX,YESERR,LYESER,SLGTRU,LSEGIT,CASDIS,LCASD FILES
000038          4 ,JNP ,OUIP ,TACQ ,LTACQ ,CASDSF,LCASOS FILES
000039          INTEGER SECID ,CROPW ,SUBHST,ACQUIS,CANSF ,CAMERR,CASF ,YESOUT FILES
000040          1 ,SIGEXT,LYSEPR,SECTRU,CASDIS,OUIP ,TACQ ,CASDSF FILES
000041          C FILES
000042          C STATISTICAL INFORMATION FOR LEM STATS
000043          COMMON /STAT3 / STATS
000044          1 ITER ,NSEGTR,NCAMSR,NYESR ,NREC(7),NCASCR,NCASDR STATS
000045          EQUIVALENCE ( NI,ITER ) STATS
000046          C STATS
000047          C PAGE EJECT CONTROL PARAMETERS FOR LEM PAGECM
000048          COMMON /PAGECM/ PAGECM
000049          1 NPAGE ,NLINE ,MXLINE,NSITL ,SUBITL(10) PAGECM
000050          C PAGECM
000051          COMMON/YESIN/ COUN,IRLG,IZONE,ISTRAT,YTRUE,IZULU(6),BIAS(6), YES
000052          1 SD(6) YES
000053          COMMON/YESOUT/ CID,IRECID,IZONID,ISIRID,YSTR,IZPRDD(6),YSCI(6), YES
000054          1 VSYCI(6) YES
000055          DIMENSION YNAME(2),IOUT(3) YES
000056          DATA IFILL /0/ YES
000057          DATA YNAME(1)/3HYF/,YNAME(2)/1H / YES
000058          DATA IZZZ/411ZZZ/ YES

```

000059	DATA INEW /0/	YES	
000060	INEW = 0		*NEW
000061	REWIND YESERR	YES	
000062	REWIND YESOUT	YES	
000063	NYLSK=0	YES	
000064	NRLC(5)=1	YES	
000065	NARG=0	YES	
000066	NSTTL=0	YES	
000067	C	YES	
000068	C SKIP HEADFR	YES	
000069	READ(YESERR)	YES	
000070	C	YES	
000071	C SKIP TO BEGINNING ZONE	YES	
000072	10 READ(YESERR) COUN,IREG,IZONE,ISTRAT,YTRUE,	YES	
000073	1 (IZONU(I),BIAS(I),SD(I),I=1,6)	YES	
000074	IF(COUN.NE.ZZZ) GO TO 20	YES	
000075	C	YES	
000076	C IF CANNOT FIND START ZONE, REPORT ERROR	YES	
000077	CALL FRMMFS(3HYFS,3HYFS,1,1)	YES	
000078	RETURN	YES	
000079	20 CONTINUE	YES	
000080	C	YES	
000081	C IF FOUND START RECORD = START PROCESSING RECORDS	YES	
000082	IF ((IRICONE,STARTR,OR,IZONE.NE,STARTZ).AND,STARTR.NE,0) GO TO 10	YES	
000083	ITEMP=IYLSO-3	YES	
000084	C WRITE HEADER TO OUTPUT FILE	YES	
000085	WRITE(YESOUT)YNAME(1),YNAME(2),ICASF,(IFILL,I=1,ITEMP)	YES	
000086	22 CONTINUE	YES	
000087	LID=COUN	YES	
000088	IRLGID=IKFG	YES	
000089	IZONID=IZONE	YES	
000090	ISTRID=ISTRAT	YES	
000091	YSTR=YTRUE	YES	
000092	C	YES	
000093	C WRITE HEADING ON OUTPUT REPORT IF OPTION ON	YES	
000094	IF(PRINTF.EC,0) GO TO 28	YES	
000095	INEW=INEW+1	YES	
000096	IF(INEW.GE,4) INEW=1	YES	
000097	IF(INEW.GT,1) GO TO 27	YES	
000098	CALL IJECT(2)	YES	
000099	WRITE(QUIP,1020)	YES	
000100	WRITE(QUIP,1000)ITER	YES	
000101	1000 FORMAT(32X,48HYFS YIELD ESTIMATE DATA REPORT -ITERATION NO. ,	YES	
000102	1 15)	YES	
000103	27 CONTINUE	YES	
000104	CALL PAGER(6)	YES	
000105	WRITE(QUIP,1020)	YES	
000106	WRITE(QUIP,1020)	YES	
000107	WRITE(QUIP,1010)COUN,IREG,IZONE,ISTRAT	YES	
000108	1010 FORMAT( 2X,8HCOUNTRY ,A4,8H REGION ,I2,6H ZONE ,I3,9H STRATUM ,I3)	YES	
000109	WRITE(QUIP,1020)	YES	
000110	1020 FORMAT(1X)	YES	
000111	WRITE(QUIP,1030)	YES	
000112	1030 FORMAT(6X,14HPREDICT.DATE ,I2HTRUE YIELD ,2X,15HESTIM.YIELD ,	YES	
000113	1 1X, 10HPERCENT ,15HSTANDARD DEV. )	YES	
000114	WRITE(QUIP,1040)	YES	
000115	1040 FORMAT(6X,8HMO/OY/YR ,6X ,14HQIN./HECTAR ,14HQIN./HECTAR ,	YES	
000116	1 10HFERRR ,14HQIN./HECTAR )	YES	
000117	28 CONTINUE	YES	
000118	C INITIALIZE OUTPUT RECORD TO ZEROS	YES	

ORIGINAL PAGE IS  
OF POOR QUALITY

```

000119      DO 35 J=1,6                                YFS
000120      IZPRDD(J)=0                                YFS
000121      YSCI(J)=0.                                  YFS
000122      VSYCI(J)=0.                                YFS
000123      35 CONTINUE                                  YFS
000124      C                                          YFS
000125      C  OUTPUT RECORD FOR EACH PREDICTION POINT, COMPUTING ESTIM. YIELD YFS
000126      DO 40 J=1,6                                YFS
000127      IF (IZULU(J).EQ.0) GO TO 50                YFS
000128      IZPRDD(J)=IZULU(J)                          YFS
000129      VSYCI(J)=SD(J)                              YFS
000130      YSCI(J)=YTRUF                                YFS
000131      C                                          YFS
000132      C  CHECK FOR NO ERROR ESTIM. OPTION        YFS
000133      IF (IYFS.EQ.3) GO TO 50                      YFS
000134      CALL BETAD(SEED(5),0.,0.,RN+1,IFR)          YFS
000135      YSCI(J)=YSTR+BIAS(J)+RN*SD(J)               YFS
000136      IF (YSCI(J).LT.0.0) YSCI(J)=0.0            YFS
000137      30 CONTINUE                                  YFS
000138      C                                          YFS
000139      C  IF REPORT OPTION ON, PRINT LINE ON REPORT YFS
000140      IF (PRINTF.EQ.0) GO TO 40                    YFS
000141      CALL FZHLU(IZULU(J),IOUT)                     YFS
000142      ER=0.00001                                    YFS
000143      IF (YSTR.GT.0.0) FR=0.0                       YFS
000144      PERCNT=ABS(YSCI(J)-YSTR)/(YSTR+FR)*100.        YFS
000145      CALL PACER(1)                                  YFS
000146      WRITE (OUTP,1060) (IOUT(?), IOUT(3), IOUT(1), YSTR, YSCI(J), PERCNT, SD(J) YFS
000147      1060 FORMAT(6X, I2, 1H/, I2, 1H/, I2, 4X, F10.2, 4X, F10.2, 6X, F6.2, 2X, F10.2) YFS
000148      40 CONTINUE                                  YFS
000149      50 CONTINUE                                  YFS
000150      C                                          YFS
000151      C  WRITE RECORD TO OUTPUT FILE                YFS
000152      WRITE(YFSOUT) I ID, IREGID, IZONID, ISTRID, YSTR, YFS
000153      1 (IZPRDD(J), YSCI(J), VSYCI(J), J=1,6)        YFS
000154      NYESR=NYESR+1                                  YFS
000155      C                                          YFS
000156      C  READ NEXT RECORD                          YFS
000157      IF (IREG.EQ.FNDR.AND.IZONE.EQ.FNDZ) IFND=1    YFS
000158      READ(YSERR) COUN, IREG, IZONE, ISTRAT, YTRUF, YFS
000159      1 (IZULU(I), BIAS(I), SD(I), I=1,6)            YFS
000160      NREC(5)=NREC(5)+1                              YFS
000161      IF (FNDZ.EQ.0.AND.COUN.NE.ZZZZ) GO TO 22      YFS
000162      IF (FNDZ.EQ.0.AND.COUN.EQ.ZZZZ) GO TO 60      YFS
000163      IF (FNDZ.EQ.0.AND.COUN.EQ.4HZZZZ) GO TO 55    YFS
000164      IF ((IEND.EQ.1).AND.(IREG.NE.ENDR.OR.IZONE.NE.ENDZ) YFS
000165      1 .AND.COUN.NE.4HZZZZ) GO TO 55              YFS
000166      IF (COUN.EQ.4HZZZZ) GO TO 60                  YFS
000167      GO TO 22                                       YFS
000168      C                                          YFS
000169      C  CANNOT FIND ENDING ZONE                    YFS
000170      55 CONTINUE                                  YFS
000171      C  REPORT ERROR                                YFS
000172      CALL FRMES(3HYFS, 3HYFS, 2, 0)              YFS
000173      60 CONTINUE                                  YFS
000174      C                                          YFS
000175      C  WRITE TRAILER RECORD TO OUTPUT FILE AND CLEAN UP YFS
000176      NREC(5)=NREC(5)+1                              YFS
000177      ITEMP=IYLSU-1                                  YFS
000178      WRITE(YFSOUT) ZZZZ, (IFILL, I=1, ITEMP)        YFS

```

YFS  
YFS  
YFS  
YFS

REWIND YESOUT  
REWIND YESERR  
RETURN  
END

000179  
000180  
000181  
000182

ORIGINAL PAGE IS  
OF POOR QUALITY

000001		FUNCTION YSUB (AA,B)	YSUB
000002	C	COMPUTES THE QUANTITY Y USED IN THE CONFIDENCE LEVEL	YSUR
000003	C	CALCULATIONS.	YSUB
000004	C		YSUB
000005	C	CALLING SEQUENCE PARAMETERS ...	YSUB
000006	C	AA = VARIANCE	YSUR
000007	C	B = REFERENCE VALUE	YSUB
000008	C		YSUB
000009	C	ARGUMENT LIST FOR ERROR PROCESSING	ARGLST
000010		COMMON /ARGLS1/	ARGLST
000011		1 NERRS ,NFATAL,NPERRS,NARG ,ARG(10)	ARGLST
000012		DIMENSION IARG(10)	ARGLST
000013		EQUIVALENCE ( IARG,ARG )	ARGLST
000014	G		ARGLST
000015	C		YSUR
000016		DATA ICTR / 0 /	YSUR
000017	C		YSUR
000018	C		YSUR
000019		A = AA	YSUR
000020		IF ( A .GT. 0.0 ) GO TO 120	YSUR
000021	C		YSUR
000022	C	A IS NEGATIVE OR ZERO.	YSUR
000023		IF ( -A .LT. 1.E-7*B ) GO TO 110	YSUR
000024		ARG(3) = A	YSUR
000025		ARG(4) = B	YSUR
000026		ICTR = ICTR + 1	YSUR
000027		IF ( ICTR .LT. 6 ) CALL ERRMES (3HCAS,4HYSUB,18,0)	YSUR
000028	110	A = 0.0	YSUR
000029	C		YSUR
000030	120	YSUR = AMAX1 ( SORT(A),1.E-30 )	YSUR
000031	C		YSUR
000032	900	RETURN	YSUR
000033		END	YSUB

11. TOC

ORIGINAL PAGE IS  
OF POOR QUALITY