


Thermal Radiation Analysis System TRASYS II

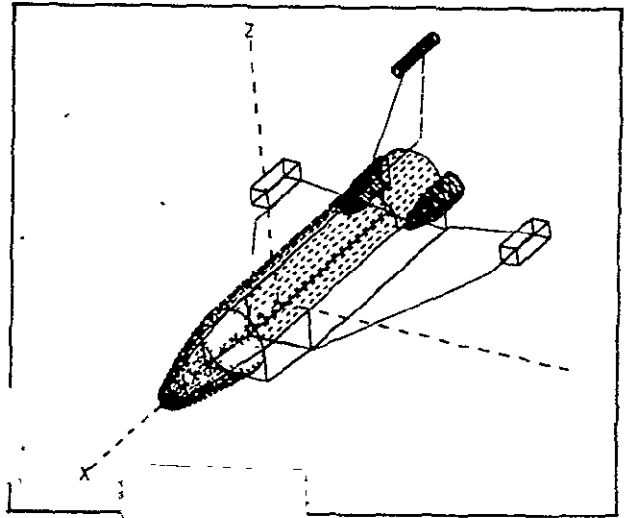

(NASA-CR-151825): THERMAL RADIATION ANALYSIS
SYSTEM (TRASYS 2). USER'S MANUAL: APPENDIX
H: UNIVAC EXEC 8 EDITION: SAMPLE PROBLEMS/
(Martin Marietta Corp.) 455 p

N78-78419

00/61 Unclas
28618



REPRODUCED BY
NATIONAL TECHNICAL
INFORMATION SERVICE
U.S. DEPARTMENT OF COMMERCE
SPRINGFIELD, VA. 22161

MARTIN MARIETTA

APPENDIX H

Sample problems run on the NASA/JSC Univac 1110, Exec 8 system.

This entire section has been changed for Revision 1.

CONTENTS

Page

Sample Case 1 - NPLLOT/SFCAL/FFCAL/GBCAL/RKCAL Executions.
Original (non-restart) run.

INPUT DATA	H-2
OUTPUT DATA	H-73
PLOTS	H-109

Sample Case 2 - SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOT Executions.
(Restart from Sample 1, with source editing.)

INPUT DATA	H-114
OUTPUT DATA	H-134
PLOTS	H-207

Sample Case 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN Executions.
(Restart from Sample 2, with source editing.)

INPUT DATA	H-220
OUTPUT DATA	H-237

Sample Case 4 - FFCAL/GBCAL/RCCAL Executions. Shows use of
MESS and ERN nodes and multi-configuration operations.
(Restart, with source editing.)

INPUT DATA	H-306
OUTPUT DATA	H-335

Sample Case 5 - FFCAL/RBCAL/GBCAL/RKCAL/DRCAL/AQCAL/QOCAL
Executions. Shows specular-diffuse radiation model results.
(No source editing.)

INPUT DATA	H-366
OUTPUT DATA	H-388

SAMPLE CASE 1

0ED,R V0GT0,CASE1
FILE IN FIELD 1 DISABLED--ACCEPTED
FILE IN FIELD 1 IN USE BY ANOTHER RUN
READ-ONLY MODE
CASE UPPER ASSUMED
ED 14.02-06/22-20:26-(0.)
EDIT

NO DECK V0GT

1:0RUN,R/R RVMH01.3240-F261-C,ES3-N03711.07.150
10:0ADD ES3-TRASYS°TRASYS.STARTH
11:0SETC 0100
12:0ADD PREPRO
13:0HEADER OPTIONS DATA
14:TITLE SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/0BCAL/RKCAL - ORIGINAL RUN
15: MODEL = SAMPLE
16: RSO = RSTSAMI
17:0HEADER SURFACE DATA
18:C
19:C-----THIS SURFACE DATA BLOCK IS USED IN SAMPLE CASES 1 THROUGH 5
20:C-----WITH VARIOUS PORTIONS OF IT BEING ACTIVATED FOR THE DIFFERENT
21:C-----CASES.
22:C
23:BCS BOXINR
24:S SURFN = 1
25: TYPE = RECT
26: ACTIVE = BOTTOM
27: PROP = 0.9,0.9
28: P1 = 1.0, 0.0, 1.0
29: P2 = 1.0, 0.0, 0.0
30: P3 = 1.0, 1.0, 0.0
31: COM = * INNER RIGHT FRONT *
32:S SURFN = 2
33: TYPE = RECT
34: ACTIVE = BOTTOM
35: PROP = 0.9,0.9
36: P1 = 1.0, 1.0, 1.0
37: P2 = 1.0, 1.0, 0.0
38: P3 = 0.0, 1.0, 0.0
39: COM = * INNER RIGHT SIDE *
40:S SURFN = 3
41: TYPE = RECT
42: ACTIVE = TOP
43: PROP = 0.9,0.9
44: P1 = 0.0, 0.0, 1.0
45: P2 = 0.0, 0.0, 0.0
46: P3 = 0.0, 1.0, 0.0
47: COM = * INNER RIGHT BACK *
48:S SURFN = 4
49: TYPE = RECT
50: ACTIVE = TOP
51: PROP = 0.9,0.9
52: P1 = 1.0, 1.0, 0.0
53: COM = * INNER RIGHT BOTTOM *
54:BCS BOXINL,IMGBCS=BOXINR,NINC=10,IREFSF=1000
55:C
56:C-----THE FOREGOING CARD IMAGES DCS BOXINR IN REFERENCE PLANE 1000
57:C-----TO CREATE BCS BOXINL. THE INTERIOR OF THE BOX WAS INPUT IN
58:C-----THIS MANNER TO FACILITATE THE INPUT OF SAMPLE CASE 4 TO SHOW


```

59:C-----THE USE OF 'MESS' AND 'ERN' NODES.
60:C
61:R      REFNO      = 1000
62:      P1         = 1.0, 0.0, 1.0
63:      P2         = 1.0, 0.0, 0.0
64:      P3         = 0.0, 0.0, 0.0
65:      COM        = * IMAGING PLANE *
66:BCS    LIDINR
67:S      SURFN     = 5
68:      TYPE       = RECT
69:      ACTIVE     = BOTTOM
70:      PROP       = 0.9,0.9
71:      P1         = 1.0, 1.0, 0.0
72:      COM        = * INNER RIGHT LID *
73:S      SURFN     = 15
74:      IMAGSF     = 5
75:      IREFSF     = 1000
76:      COM        = * INNER LEFT LID *
77:BCS    BOXOUT
78:S      SURFN     = 21
79:      TYPE       = BOXS
80:      ACTIVE     = OUT
81:      SHADE      = NO
82:      PROP       = 0.2,0.9
83:      P1         = 1.01,-1.01, 1.01
84:      P2         = 1.01, 1.01, 1.01
85:      P3         = -0.01, 1.01, 1.01
86:      P4         = -0.01, 1.01,-0.01
87:      COM        = * OUTER SURFACES *
88:BCS    LIDOUT
89:S      SURFN     = 28
90:      TYPE       = RECT
91:      ACTIVE     = TOP
92:      SHADE      = NO
93:      PROP       = 0.2,0.9
94:      P1         = 1.01,-1.01, 0.01
95:      P2         = 1.01, 1.01, 0.01
96:      P3         = -0.01, 1.01, 0.01
97:      COM        = * OUTER SURFACE OF LID *
98:C
99:C-----THE NEXT TWO BCS'S (MESSR AND MESSL) ARE ACTIVATED IN SAMPLE
100:C-----CASE 4 ONLY.
101:C
102:BCS    MESSR
103:S      SURFN     = 101
104:      TYPE       = RECT
105:      ACTIVE     = TOP
106:      PROP       = 1.0,1.0
107:      P1         = 1.0, 0.0, 1.0
108:      P2         = 1.0, 0.0, 0.0
109:      P3         = 0.0, 0.0, 0.0
110:      COM        = * PRIMARY MESS NODE, RIGHT SIDE *
111:BCS    MESSL
112:S      SURFN     = 111
113:      TYPE       = RECT
114:      ACTIVE     = BOTTOM
115:      PROP       = 1.0,1.0

```

```

116:      P1          = 1.0, 0.0, 1.0
117:      P2          = 1.0, 0.0, 0.0
118:      P3          = 0.0, 0.0, 0.0
119:      COM          = ° PRIMARY MESS NODE, LEFT SIDE °
120:C
121:C-----THE FOLLOWING BCS (LIDSP) IS ACTIVATED IN SAMPLE CASE 3 ONLY.
122:C
123:BCS    LIDSP
124:S      SURFN      = 200
125:      TYPE        = RECT
126:      ACTIVE      = BOTTOM
127:      PROP         = 0.1,0.1
128:      SPRI         = 0.8
129:      SPRS         = 0.8
130:      P1           = 1.0,-1.0, 0.0
131:      P2           = 1.0, 1.0, 0.0
132:      P3           = 0.0, 1.0, 0.0
133:      COM          = ° SPECULAR LID °
134:HEADER BCS DATA
135:BCS    BOXINR
136:BCS    BOXINL
137:BCS    LIDINR .0.,0.,1.,0.,-45.,0.
138:BCS    BOXOUT
139:BCS    LIDOUT .0.,0.,1.,0.,-45.,0.
140:BCS    MESSR
141:BCS    MESSL
142:BCS    LIDSP .0.,0.,1.,0.,-45.,0.
143:HEADER FORM FACTOR DATA
144:C
145:C-----ENTER KNOWN ZERO FORM FACTORS AND EQUIVALENT FORM FACTORS FOR
146:C-----CASE1.
147:C
148:FIG    CASE1
149:NOQEA  1,2,3,4,11,12,13,14,5,15,21,22,23,24,25,26,END
150:BOTH   21,ZERO
151:      22,ZERO
152:      23,ZERO
153:      24,ZERO
154:      25,ZERO
155:      26,ZERO
156:      1,1,0.
157:      11,12,1,2
158:      11,13,1,3
159:      11,14,1,4
160:      11,15,1,5
161:      1,11,0.
162:      11,2,1,12
163:      11,3,1,13
164:      11,4,1,14
165:      11,5,1,15
166:      2,2,0.
167:      2,3,1,2
168:      2,4,1,4
169:      12,13,2,3
170:      12,14,2,4
171:      12,15,2,5
172:      12,3,2,13

```

173: 12.4.2.14
174: 12.5.2.15
175: 3.3.0.
176: 3.4.1.4
177: 13.14.3.4
178: 13.15.3.5
179: 3.13.0.
180: 13.4.3.14
181: 13.5.3.15
182: 4.4.0.
183: 14.15.4.5
184: 4.14.0.
185: 14.5.4.15
186: 5.5.0.
187: 5.15.0.

188: HEADER CORRESPONDENCE DATA

189: C

190: C-----ENTER CORRESPONDENCE DATA FOR CASE 2

191: C

192: FIG CASE2

193: 1 = 1.11.22

194: 2 = 2.25

195: 3 = 3.13.24

196: 4 = 4.14.21

197: 5 = 5.15.26

198: 12 = 12.23

199: C

200: C-----ENTER CORRESPONDENCE DATA FOR CASE 3 TO COMBINE FORM FACTORS

201: C

202: FIG CASE3,FF

203: 1 = 1.11.22

204: 2 = 2.25

205: 3 = 3.13.24

206: 4 = 4.14.21

207: 5 = 5.15.26

208: 12 = 12.23

209: HEADER OPERATIONS DATA

210: C

211: C-----BUILD THE CASE 1 CONFIGURATION

212: C

213: BUILD CASE1,BOXINR,BOXINL,LIDINR,BOXOUT,LIDOUT

214: C

215: C-----PLOT THE CASE 1 CONFIGURATION INDICATING THE ACTIVE

216: C-----SIDES OF THE NODES.

217: C

218: CALL NOATAS(0,0,0,YES,0)

219: L NPL0T

220: C

221: C-----CALCULATE SHADOW FACTOR TABLES FOR SUBSEQUENT USE

222: C-----SAMPLE CASE 2 IN THE CALCULATION OF DIRECT FLUXES.

223: C

224: L SFCAL

225: C

226: C-----CALCULATE THE FORM FACTOR MATRIX.

227: C

228: L FFCAL

229: C

230:C-----CALCULATE THE GRAY BODY MATRIX.
231:C
232: CALL GEDATA(BOTH,0,FF)
233:L GDCAL
234:C
235:C-----CALCULATE AND PUNCH RADIATION CONDUCTORS.
236:C
237: CALL RKDATA(0.0.0.0,SPACE.999.0.0.0.0)
238:L RKCAL
239:END OF DATA
240:8PHD,8LEP
241:8ASG,T/S RSO.8C.RSO.82.RSO APPENDIX H, CASE 1.
242:8ADD PROCSS
250:8FIN
NO CORRECTIONS APPLIED.

8FREE TPFS.

8ASG.T TPFS..F4/0/TRX/400

QED ES3-TRASYS*TRASYS.PREPRON.TPF\$.PREPRO
CASE UPPER ASSUMED
ED 14.02-06/22-20:26-(0.)
EDIT
LINES:57 FIELDATA

0ED ES3-TRASYS*TRASYS.PROCSSH.TPFS.PROCSS
CASE UPPER ASSUMED
ED 14.02-06/22-20:26-(1.)
EDIT
LINES:103 FIELDATA

0SETC 0100

0SETC.1

0ASG,AQ ES3-TRASYS*LIBRYN.
FAC WARNING 040200004000

0ASG,T 1.,F4/0/TRK/600

0ASG,T 2.,F4/0/TRK/600

0ASG,T 3.,F4/0/TRK/600

0ASG,T DIR.,F17/0/POS/5

0ASG,T FFR.,F17/0/POS/9

0ASG,T GBIRR.,F17/0/POS/5

0ASG,T RIO.,F17/0/POS/9

0ASG,T SQNTL.,F17/0/TRK/10

0ASG,T PLSR.,F17/0/TRK/320

0AS0.T TQR..F17/0/TRK/320

0USE 8.R10

0USE 14.RSI

0USE 16.SQNTL

0USE 21.FFR

0USE 22.DIR

0USE 23.GBIRR

0USE 25.PLSR

0USE 26.TQR

0XQT ES3-TRASYS*LIBRYN.CHECK

0TEST TNE/1/S3

0JUMP L1
INTERVENING STATEMENTS SKIPPED

0L1:AS0.T RI02..F17/0/POS/9

0AS0.T RI05..F17/0/POS/20

0ASG.T DATAI..F17/0/POS/9

0ASG.T CMPL..F17/0/TRK/20

0ASG.T INFO

0ASG.T MAP.

0ASG.T MASS.F17/0/POS/20

0TEST TE/1/56

0JUMP L15
INTERVENING STATEMENTS SKIPPED

0L15:FREE 14

0USE 4,DATAI

0USE 9,RI05

0USE 10,RI02

0USE 11,INFO

0USE 12,CHERG

0USE 13,EMERG

8USE 14.MASSI

8USE 15.MASS

8USE 20.CRPL

8USE 27.MAP

8ASG.AQ ES3-TRASYS*COMPLRN.
FAC WARNING 040200004000

0DATA.I INFO.
DATA T7 RL70-5 06/22-20:26:21
END DATA. IMAGE COUNT: 20

0XQT ES3-TRASYS*COMPLRN.ABS

MASA/HARTIN HARIETTA
 THERMAL RADIATION ANALYSIS SYSTEM
 UNIVAC 1110/EXEC 8

TTTTTTTTTTTT
 TTTTTTTTTTTT
 TT YYY TT
 TTT
 TTT
 TTT
 TTT
 TTT
 TTT
 TTTTTT

RRRRRRRR
 RRRRRRRR
 RRR RRR
 RRR RRR
 RRRRRRRR
 RRR RRR
 RRR RRR
 RRR RRR
 RRR RRR

AAAAAA
 AAAAAAAAAA
 AAAAAAAAAA
 AAA AAA
 AAA AAA
 AAAAAAAAAA
 AAA AAA
 AAA AAA
 AAA AAA
 AAAAA AAAAA

SSSSSSSS
 SSSSSSSSSS
 SSS SS
 SSS
 SSSSSSSSS
 SSS
 SSS
 SS SSS
 SSSSSSSSSS
 SSSSSSSSS

TRASYS II

YYYY YYYY
 YYY YYY
 YYY YYY
 YYY YYY
 YYYYY
 YYY
 YYY
 YYY
 YYYYYY

SSSSSSSS
 SSSSSSSSSS
 SSS SS
 SSS
 SSSSSSSSS
 SSS
 SS SSS
 SSSSSSSSSS
 SSSSSSSSS

PRE-PROCESSOR EXECUTION

VERSION.MODIFICATION ... UC2E3
 MODIFICATION DATE 052878
 DATE OF RUN 062278
 TIME OF RUN 202623
 JOB NUMBER RYMH01

MODEL = N/A
OPTION AND TITLE DATA BLOCKS

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

INPUT HEADER OPTIONS DATA
INPUT TITLE SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/OBCAL/RKCAL - ORIGINAL RUN
INPUT MODEL = SAMPLE
INPUT RSO = RSTSAH1

DATE 062270 TIME 202625

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS), UNIVAC/EXC 8 VERSION

PAGE 2

MODEL = SAMPLE
TRASYS INFORMATION TO USER

SAMPLE CASE 1 - NLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

```

.....
.
.  ATTENTION  TRASYS  USERS  .
.
.....

```

THIS SECTION OF THE TRASYS PRINTOUT WAS DEvised TO INFORM THE TRASYS USERS OF THE STATUS OF THE TRASYS PROGRAM WITHOUT HAVING TO PRINTOUT ALL THE STATUS INFORMATION ON EVERY RUN. TO OBTAIN ADDITIONAL INFORMATION ON HOW TO USE THIS SECTION OF THE TRASYS PRINTOUT, PLACE A (INFO=INFO) IN THE OPTIONS DATA BLOCK.

FOR TRASYS ASSISTANCE AND/OR POSSIBLE TRASYS PROGRAM PROBLEMS, PLEASE CONTACT BOB VOGT AT JSC-2326.

NEWRL 08/29/77 DOCUMENTATION ADDITION

THE TRASYS -N- VERSION HAS BEEN UPDATED TO THE UC2E2 AND UL2E4 LEVEL. SEE LATEST USERS MANUAL FOR INFORMATION ON USER-CALLED SUBROUTINE, ARGUMENT CHANGES AND NEW CAPABILITIES.

END OF TRASYS INFORMATION FILE

++NOTE++ DATA ORIGINATION FROM INPUT FILE, NO -RSI- SOURCE EDITING

MODEL = SAMPLE
MODEL HISTORY

SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/OBCAL/RKCAL - ORIGINAL RUN

MODEL NAME SAMPLE

MODEL TITLE SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/OBCAL/RKCAL - ORIGINAL RUN

MOD LABEL	RUN NUMBER	JOB	RUN DATA	RUN TIME	RSI TAPE	RSO TAPE	RTI TAPE	RTO TAPE	CMERG TAPE	EMERG TAPE	BCDOU TAPE	TRAJ TAPE	USER1 TAPE	USER2 TAPE
AA	RVHH01		062278	202625					RSTSAM					

DATE 062278 TIME 202626 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION PAGE 4

MODEL = SAMPLE SOURCE DATA EDIT DIRECTIVES SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

MODEL = SAMPLE SURFACE DATA INPUT BLOCK SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

INPUT	HEADER SURFACE DATA	1	AA
INPUT	C	2	AA
INPUT	C-----THIS SURFACE DATA BLOCK IS USED IN SAMPLE CASES 1 THROUGH 5	3	AA
INPUT	C-----WITH VARIOUS PORTIONS OF IT BEING ACTIVATED FOR THE DIFFERENT	4	AA
INPUT	C-----CASES.	5	AA
INPUT	C	6	AA
INPUT	BCS BOXINR	7	AA
INPUT	S SURFN = 1	8	AA
INPUT	TYPE = RECT	9	AA
INPUT	ACTIVE = BOTTOM	10	AA
INPUT	PROP = 0.9,0.9	11	AA
INPUT	P1 = 1.0, 0.0, 1.0	12	AA
INPUT	P2 = 1.0, 0.0, 0.0	13	AA
INPUT	P3 = 1.0, 1.0, 0.0	14	AA
INPUT	COM = * INNER RIGHT FRONT *	15	AA
INPUT	S SURFN = 2	16	AA
INPUT	TYPE = RECT	17	AA
INPUT	ACTIVE = BOTTOM	18	AA
INPUT	PROP = 0.9,0.9	19	AA
INPUT	P1 = 1.0, 1.0, 1.0	20	AA
INPUT	P2 = 1.0, 1.0, 0.0	21	AA
INPUT	P3 = 0.0, 1.0, 0.0	22	AA
INPUT	COM = * INNER RIGHT SIDE *	23	AA
INPUT	S SURFN = 3	24	AA
INPUT	TYPE = RECT	25	AA
INPUT	ACTIVE = TOP	26	AA
INPUT	PROP = 0.9,0.9	27	AA
INPUT	P1 = 0.0, 0.0, 1.0	28	AA
INPUT	P2 = 0.0, 0.0, 0.0	29	AA
INPUT	P3 = 0.0, 1.0, 0.0	30	AA
INPUT	COM = * INNER RIGHT BACK *	31	AA
INPUT	S SURFN = 4	32	AA
INPUT	TYPE = RECT	33	AA
INPUT	ACTIVE = TOP	34	AA
INPUT	PROP = 0.9,0.9	35	AA
INPUT	P1 = 1.0, 1.0, 0.0	36	AA
INPUT	COM = * INNER RIGHT BOTTOM *	37	AA
INPUT	BCS BOXINL,IMGBCS=BOXINR,NINC=10,IREFSF=1000	38	AA
INPUT	C	39	AA
INPUT	C-----THE FOREGOING CARD IMAGES BCS BOXINR IN REFERENCE PLANE 1000	40	AA
INPUT	C-----TO CREATE BCS BOXINL. THE INTERIOR OF THE BOX WAS INPUT IN	41	AA
INPUT	C-----THIS MANNER TO FACILITATE THE INPUT OF SAMPLE CASE 4 TO SHOW	42	AA
INPUT	C-----THE USE OF 'MESS' AND 'ERN' NODES.	43	AA
INPUT	C	44	AA

IMAGING SURFACE (1) BCS (BOXINR), GENERATING SURFACE (11) BCS (BOXINL)
 IMAGING SURFACE (2) BCS (BOXINR), GENERATING SURFACE (12) BCS (BOXINL)
 IMAGING SURFACE (3) BCS (BOXINR), GENERATING SURFACE (13) BCS (BOXINL)

MODEL = SAMPLE SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
 SURFACE DATA INPUT BLOCK

CARD ORGIN 12345670 1 2345670 2 2345670 3 2345670 4 2345670 5 2345670 6 2345670 7 2345670 8 EDIT NO. OLD EDIT NO. LABEL

INPUT	BCS	DESCRIPTION	VALUE	EDIT NO.	OLD EDIT NO.	LABEL	
		IMAGING SURFACE (4) BCS (BOXINR), GENERATING SURFACE (14) BCS (BOXINL)					
INPUT	R	REFNO	= 1000	45		AA	
INPUT		P1	= 1.0, 0.0, 1.0	46		AA	
INPUT		P2	= 1.0, 0.0, 0.0	47		AA	
INPUT		P3	= 0.0, 0.0, 0.0	48		AA	
INPUT		COM	= * IMAGING PLANE *	49		AA	
INPUT	BCS	LIDINR		50		AA	
INPUT	S	SURFN	= 5	51		AA	
INPUT		TYPE	= RECT	52		AA	
INPUT		ACTIVE	= BOTTOM	53		AA	
INPUT		PROP	= 0.9,0.9	54		AA	
INPUT		P1	= 1.0, 1.0, 0.0	55		AA	
INPUT		COM	= * INNER RIGHT LID *	56		AA	
INPUT	S	SURFN	= 15	57		AA	
INPUT		IMAGSF	= 5	58		AA	
INPUT		IREFSF	= 1000	59		AA	
INPUT		COM	= * INNER LEFT LID *	60		AA	
INPUT	BCS	BOXOUT		61		AA	
INPUT	S	SURFN	= 21	62		AA	
INPUT		TYPE	= BOX5	63		AA	
INPUT		ACTIVE	= OUT	64		AA	
INPUT		SHADE	= NO	65		AA	
INPUT		PROP	= 0.2,0.9	66		AA	
INPUT		P1	= 1.01,-1.01, 1.01	67		AA	
INPUT		P2	= 1.01, 1.01, 1.01	68		AA	
INPUT		P3	= -0.01, 1.01, 1.01	69		AA	
INPUT		P4	= -0.01, 1.01,-0.01	70		AA	
INPUT		COM	= * OUTER SURFACES *	71		AA	
INPUT	BCS	LIDOUT		72		AA	
INPUT	S	SURFN	= 26	73		AA	
INPUT		TYPE	= RECT	74		AA	
INPUT		ACTIVE	= TOP	75		AA	
INPUT		SHADE	= NO	76		AA	
INPUT		PROP	= 0.2,0.9	77		AA	
INPUT		P1	= 1.01,-1.01, 0.01	78		AA	
INPUT		P2	= 1.01, 1.01, 0.01	79		AA	
INPUT		P3	= -0.01, 1.01, 0.01	80		AA	
INPUT		COM	= * OUTER SURFACE OF LID *	81		AA	
INPUT	C	C-----THE NEXT TWO BCS'S (MESSR AND MESSL) ARE ACTIVATED IN SAMPLE				82	AA
INPUT		C-----CASE 4 ONLY.				83	AA
INPUT	C					84	AA
INPUT	BCS	MESSR		85		AA	
INPUT	S	SURFN	= 101	86		AA	
INPUT		TYPE	= RECT	87		AA	
INPUT		ACTIVE	= TOP	88		AA	
INPUT		PROP	= 1.0,1.0	89		AA	
INPUT				90		AA	

DATE 062278 TIME 202834

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC B VERSION PAGE 7

MODEL = SAMPLE
SURFACE DATA INPUT BLOCK

SAMPLE CASE 1 - NPLOT/SECAL/FFCAL/OBCAL/RKCAL - ORIGINAL RUN

CARD ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD EDIT NO.	LABEL
INPUT		P1	=	1.0, 0.0, 1.0													91		AA
INPUT		P2	=	1.0, 0.0, 0.0													92		AA
INPUT		P3	=	0.0, 0.0, 0.0													93		AA
INPUT		COM	=	* PRIMARY MESS NODE, RIGHT SIDE *													94		AA
INPUT	BCS	MESSL															95		AA
INPUT	S	SURFN	=	111													96		AA
INPUT		TYPE	=	RECT													97		AA
INPUT		ACTIVE	=	BOTTOM													98		AA
INPUT		PROP	=	1.0, 1.0													99		AA
INPUT		P1	=	1.0, 0.0, 1.0													100		AA
INPUT		P2	=	1.0, 0.0, 0.0													101		AA
INPUT		P3	=	0.0, 0.0, 0.0													102		AA
INPUT		COM	=	* PRIMARY MESS NODE, LEFT SIDE *													103		AA
INPUT	C																104		AA
INPUT	C	-----THE FOLLOWING BCS (LIDSP) IS ACTIVATED IN SAMPLE CASE 5 ONLY.															105		AA
INPUT	C																106		AA
INPUT	BCS	LIDSP															107		AA
INPUT	S	SURFN	=	200													108		AA
INPUT		TYPE	=	RECT													109		AA
INPUT		ACTIVE	=	BOTTOM													110		AA
INPUT		PROP	=	0.1, 0.1													111		AA
INPUT		SPRI	=	0.0													112		AA
INPUT		SPRS	=	0.0													113		AA
INPUT		P1	=	1.0, -1.0, 0.0													114		AA
INPUT		P2	=	1.0, 1.0, 0.0													115		AA
INPUT		P3	=	0.0, 1.0, 0.0													116		AA
INPUT		COM	=	* SPECULAR LID *													117		AA

MODEL = SAMPLE
BCS DATA INPUT BLOCK

SAMPLE CASE 1 - MFL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

CARD ORGIN	12345670 1	2345670 2	2345670 3	2345670 4	2345670 5	2345670 6	2345670 7	2345670 8	EDIT NO.	OLD EDIT NO.	LABEL
INPUT	HEADER	BCS DATA							118		AA
INPUT	BCS	BOXINR							119		AA
INPUT	BCS	BOXINL							120		AA
INPUT	BCS	LIDINR	.0..0..1..0..-45..0.						121		AA
INPUT	BCS	BOXOUT							122		AA
INPUT	BCS	LIDOUT	.0..0..1..0..-45..0.						123		AA
INPUT	BCS	HESSR							124		AA
INPUT	BCS	HESSL							125		AA
INPUT	BCS	LIDSP	.0..0..1..0..-45..0.						126		AA

MODEL = SAMPLE SAMPLE CASE 1 - WPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
 FORM FACTOR DATA INPUT BLOCK

CARD	ORGIN	12345670	1	2345670	2	32345670	3	42345670	4	52345670	5	62345670	6	72345670	7	82345670	8	EDIT NO.	OLD EDIT NO.	LABEL		
INPUT				HEADER FORM FACTOR DATA																127	AA	
INPUT				C																	128	AA
INPUT				C-----ENTER KNOWN ZERO FORM FACTORS AND EQUIVALENT FORM FACTORS FOR																	129	AA
INPUT				C-----CASE1.																	130	AA
INPUT				C																	131	AA
INPUT				FIG CASE1																	132	AA
INPUT				NODEA 1,2,3,4,11,12,13,14,5,15,21,22,23,24,25,26.END																	133	AA
INPUT				BOTH 21.ZERO																	134	AA
INPUT				22.ZERO																	135	AA
INPUT				23.ZERO																	136	AA
INPUT				24.ZERO																	137	AA
INPUT				25.ZERO																	138	AA
INPUT				26.ZERO																	139	AA
INPUT				1,1,0.																	140	AA
INPUT				11,12,1,2																	141	AA
INPUT				11,13,1,3																	142	AA
INPUT				11,14,1,4																	143	AA
INPUT				11,15,1,5																	144	AA
INPUT				1,11,0.																	145	AA
INPUT				11,2,1,12																	146	AA
INPUT				11,3,1,13																	147	AA
INPUT				11,4,1,14																	148	AA
INPUT				11,5,1,15																	149	AA
INPUT				2,2,0.																	150	AA
INPUT				2,3,1,2																	151	AA
INPUT				2,4,1,4																	152	AA
INPUT				12,13,2,3																	153	AA
INPUT				12,14,2,4																	154	AA
INPUT				12,15,2,5																	155	AA
INPUT				12,3,2,13																	156	AA
INPUT				12,4,2,14																	157	AA
INPUT				12,5,2,15																	158	AA
INPUT				3,3,0.																	159	AA
INPUT				3,4,1,4																	160	AA
INPUT				13,14,3,4																	161	AA
INPUT				13,15,3,5																	162	AA
INPUT				3,13,0.																	163	AA
INPUT				13,4,3,14																	164	AA
INPUT				13,5,3,15																	165	AA
INPUT				4,4,0.																	166	AA
INPUT				14,15,4,5																	167	AA
INPUT				4,14,0.																	168	AA
INPUT				14,5,4,15																	169	AA
INPUT				5,5,0.																	170	AA
INPUT				5,15,0.																	171	AA

MODEL = SAMPLE CORRESPONDENCE DATA INPUT BLOCK SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/OBCAL/RKCAL - ORIGINAL RUN

CARD ORIGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD EDIT NO.	LABEL
INPUT			HEADER														172		AA
INPUT			C														173		AA
INPUT			C-----														174		AA
INPUT			C														175		AA
INPUT			F10				CASE2										176		AA
INPUT							1										177		AA
INPUT							2										178		AA
INPUT							3										179		AA
INPUT							4										180		AA
INPUT							5										181		AA
INPUT							12										182		AA
INPUT			C														183		AA
INPUT			C-----														184		AA
INPUT			C														185		AA
INPUT			F10				CASE3,FF										186		AA
INPUT							1										187		AA
INPUT							2										188		AA
INPUT							3										189		AA
INPUT							4										190		AA
INPUT							5										191		AA
INPUT							12										192		AA

DATE 062270 TIME 202650 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 6 VERSION PAGE 11

MODEL = SAMPLE SAMPLE CASE 1 - RPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
OPERATION DATA INPUT BLOCK (PASS 1)

CARD ORIGIN	12345670 1	2345670 2	2345670 3	2345670 4	2345670 5	2345670 6	2345670 7	2345670 8	EDIT NO.	OLD EDIT NO.	LABEL
INPUT	HEADER OPERATIONS DATA								193		AA

++++ OPERATIONS DATA BLOCK (PASS 1) COMPLETE +++++

MODEL = SAMPLE OPERATION DATA INPUT BLOCK (PASS 2) SAMPLE CASE 1 - NPLLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

CARD ORGIN	12345670 1	2345670 2	2345670 3	2345670 4	2345670 5	2345670 6	2345670 7	2345670 8	EDIT NO.	OLD EDIT NO.	LABEL
INPUT	C								194		AA
INPUT	C-----	BUILD THE CASE 1 CONFIGURATION							195		AA
INPUT	C								196		AA
PROG	STEP	-1							0		
INPUT	BUILD	CASE1,BOXINR,BOXINL,LIDINR,BOXOUT,LIDOUT							197		AA
PROG		CALL BUILD (BOXINR,BOXINL,LIDINR,BOXOUT,LIDOUT)							0		
PROG		CALL ADD (BOXINL)							0		
PROG		CALL ADD (LIDINR)							0		
PROG		CALL ADD (BOXOUT)							0		
PROG		CALL ADD (LIDOUT)							0		
INPUT	C								198		AA
INPUT	C-----	PLOT THE CASE 1 CONFIGURATION INDICATING THE ACTIVE							199		AA
INPUT	C-----	SIDES OF THE NODES.							200		AA
INPUT	C								201		AA
INPUT		CALL NDATA(0,0,0,YES,0)							202		AA
INPUT	L	NPLOT							203		AA
INPUT	C								204		AA
INPUT	C-----	CALCULATE SHADOW FACTOR TABLES FOR SUBSEQUENT USE							205		AA
INPUT	C-----	SAMPLE CASE 2 IN THE CALCULATION OF DIRECT FLUXES.							206		AA
INPUT	C								207		AA
INPUT	L	SFCAL							208		AA
INPUT	C								209		AA
INPUT	C-----	CALCULATE THE FORM FACTOR MATRIX.							210		AA
INPUT	C								211		AA
INPUT	L	FFCAL							212		AA
INPUT	C								213		AA
INPUT	C-----	CALCULATE THE GRAY BODY MATRIX.							214		AA
INPUT	C								215		AA
INPUT		CALL GBDATA(BOTH,0,FF)							216		AA
INPUT	L	GBCAL							217		AA
INPUT	C								218		AA
INPUT	C-----	CALCULATE AND PUNCH RADIATION CONDUCTORS.							219		AA
INPUT	C								220		AA
INPUT		CALL RKDATA(0,0,0,0,SPACE,999,0,0,0,0)							221		AA
INPUT	L	RKCAL							222		AA
INPUT		END OF DATA							223		AA

MODEL = SAMPLE
 PROCESSOR CORE ALLOCATION

SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

THE FOLLOWING IS THE PROCESSOR CORE ALLOCATION FOR THOSE SEGMENTS WHICH WILL BE LOADED IN THIS EXECUTION (APPROX.) ...

	OCTAL/DECIMAL
TRASYS (Q) SEGMENT	121204/ 41604
OPERATIONS DATA (NOT KNOWN AT THIS TIME).....	175000/ 64000
INITIALIZATION SEGMENT	122300/ 42176
FORM FACTOR SEGMENT	136100/ 48192
SHADOW FACTOR SEGMENT	136000/ 48128
NODE PLOTTER SEGMENT	123600/ 42880
GRAY BODY SEGMENT	124000/ 43008
RADATION CONDUCTOR SEGMENT	125500/ 43840
GRAY BODY DYNAMIC COMMON	000276/ 190
RADIATION CONDUCTOR DYNAMIC COMMON	000574/ 380
GRAY BODY MINIMUM - MAXIMUM CORE	123557/ 42863 - 123707/ 42951
RADIATION CONDUCTOR MINIMUM - MAXIMUM CORE	125212/ 43658 - 125456/ 43822
MINIMUM CORE NEEDED FOR PROCESSOR EXECUTION	136100/ 48192
MAXIMUM CORE NEEDED FOR PROCESSOR EXECUTION	136100/ 48192
AMOUNT OF CORE THAT WILL BE USED BY PROCESSOR .	136100/ 48192

MODEL @ SAMPLE SAMPLE CASE 1 - MFL0T/SFCAL/FFCAL/OBCAL/RKCAL - ORIGINAL RUN
 WRAP UP OF THE PRE-PROCESSOR

PRE-PROCESSOR ACCOUNTING INFORMATION	CP-SEC	DYN-STORAGE
SOURCE EDITING	1.262	676
DOCUMENTATION DATA PRE-PROCESSING000	0
QUANTITIES DATA PRE-PROCESSING037	266
ARRAY DATA PRE-PROCESSING000	0
SURFACE DATA PRE-PROCESSING (PASS 1) ...	1.416	64
SURFACE DATA PRE-PROCESSING (PASS 2)612	1141
BCS DATA PRE-PROCESSING214	186
FORM FACTOR DATA PRE-PROCESSING827	1169
SHADOW DATA PRE-PROCESSING000	0
FLUX DATA PRE-PROCESSING000	0
CORRESPONDENCE DATA PRE-PROCESSING223	101
OPERATIONS DATA PRE-PROCESSING	1.736	872
SUBROUTINE DATA PRE-PROCESSING209	0
SEQUENTIAL TAPE INITIALIZATION022	0
TOTAL CP TIME FOR PRE-PROCESSOR	7.088 DECIMAL SECONDS OR 000010 OCTAL SECONDS	
MINIMUM DYNAMIC STORAGE NEEDED BY PRE-PROCESSOR ..	1169 DECIMAL WORDS	
DYNAMIC STORAGE AVAILABLE TO PRE-PROCESSOR	10000 DECIMAL WORDS	

NORMAL TERMINATION BY PRE-PROCESSOR

@PHD,BLEP

@ASG,T/S RSO,.BC,R50,92,R50 APPENDIX H, CASE 1.

@TEST TNE/1/S3

@JUMP L3
 INTERVENING STATEMENTS SKIPPED

@L3:FREE DATA1.

H-27
 @FREE 14

0FREE R105.

0FREE R102

0FREE CHERG

0FREE ENERG

0FREE INFO

0FOR.S1 TPF\$.TRASYS
FOR S0E3-06/22/78-20:27:01 (.0)

MAIN PROGRAM

STORAGE USED: CODE(1) 000123; DATA(0) 000001; BLANK COMMON(2) 000000

COMMON BLOCKS:

0003	CCONST	000205
0004	TAPE	000042
0005	RSTRT	000017
0006	TITLE	000037
0007	PLOT	000234
0010	BLKDIR	000040
0011	BCSN	000010
0012	INDX	000001
0013	NMODIR	000050
0014	INDXS	000023
0015	INDXN	000023
0016	DIHS	000157
0017	OSTR	000271
0020	IFS	000045
0021	IKS	000045
0022	PR	000112
0023	PSH	000224
0024	TSTR	000515
0025	ALPH	000023
0026	AREA	000023
0027	EH1SS	000023
0030	SRIR	000023
0031	SRSO	000023
0032	TRIR	000023
0033	TRSO	000023
0034	NODE	000023
0035	ODTEMP	000144
0036	ORBIT	000121
0037	OSTORE	000044
0040	1STPDR	000001
0041	NSPEC	000001
0042	ISPEC	000001
0043	SREFL1	000001
0044	SREFLS	000001
0045	PLOTTR	000051
0046	LNGSEG	000027

EXTERNAL REFERENCES (BLOCK, NAME)

0047	RDPROG
0050	ODPROG
0051	PRDUMP
0052	FFPROG
0053	RBPROG
0054	CMPROG
0055	SFPROG
0056	NPPROG

0057 .OPPROG
 0060 DIFPROG
 0061 DRPROG
 0062 GBPROG
 0063 RCPROG
 0064 AQPROG
 0065 QOPROG
 0066 FLPROG
 0067 HFPROG
 0070 HRPAPU
 0071 EXIT
 0072 NINTR\$
 0073 NERR\$
 0074 NSTOPS

STORAGE ASSIGNMENT (BLOCK, TYPE, RELATIVE LOCATION, NAME)

0001	000004	100L	0001	000040	1300L	0001	000043	1325L	0001	000046	1350L	0001	000051	1400L
0001	000054	1500L	0001	000057	1600L	0001	000062	1700L	0001	000065	1750L	0001	000070	1800L
0001	000073	1900L	0001	000076	2000L	0001	000101	2100L	0001	000104	2200L	0001	000107	2300L
0001	000112	2400L	0001	000115	3000L	0036	000000	ALAN	0025	000000	ALPH	0036	000016	APER
0003	000202	AQPRNT	0003	000172	ARAD	0028	000000	AREA	0036	000001	ASUM	0036	000114	ATHT
0036	000037	BETA	0036	000015	BETAS	0011	000003	BOXINL	0011	000004	BOXINR	0011	000005	BOXOUT
0036	000036	CIGMA	0036	000014	CIGMAS	0036	000065	CLOCK	0036	000068	CONE	0036	000112	DAWN
0003	000146	DELCT	0003	000014	DIACC	0003	000015	DIACCS	0018	000000	DIMS	0003	000016	DINOSH
0003	000017	DIPNCH	0003	000143	DLTLINE	0036	000113	DOY	0017	000000	DSTR	0006	000027	DTE
0003	000000	DTR	0036	000111	DUSK	0036	000003	DWP	0036	000004	ECC	0003	000168	ELPBEA
0027	000000	EMISS	0003	000020	FFACC	0003	000021	FFACCS	0003	000125	FFCMB	0003	000133	FFDISF
0003	000022	FFHIN	0003	000175	FFNAC	0003	000024	FFNOSH	0003	000025	FFPNCH	0003	000026	FFPRNT
0003	000023	FFRATL	0003	000171	FFZERO	0003	000147	FOG	0003	000203	GAUSS	0003	000030	GBWBND
0036	000026	GRAV	0036	000030	HA	0036	000031	HP	0003	000115	IAI	0003	000113	IALBFL
0003	000060	IAQOBI	0003	000061	IAQOBS	0003	000063	IAQSDA	0003	000064	IAQSDP	0003	000062	IAQSDS
0003	000116	IAS	0003	000027	IAUTOC	0036	000063	ICALFL	0003	000130	ICMBL	0037	000000	IDSTR
0003	000124	IEQFF	0003	000123	IFFSHO	0020	000000	IFS	0006	000033	IHSTEP	0021	000000	IKS
0003	000164	ILLUMN	0003	000105	IMESS	0003	000131	INCORE	0015	000000	INDXN	0014	000000	INDXS
0036	000101	INSHAD	0003	000163	INTMF	0007	000077	IOPNPNP	0007	000201	IOPNV	0007	000113	IOPNVU
0007	000105	IOPFIT	0036	000006	IORBIT	0036	000005	IORNT	0003	000010	IOVL	0006	000031	IPAGE
0003	000114	IPLAFL	0045	000004	IPLNA	0045	000005	IPLSN	0045	000000	IPLUNT	0003	000034	IROMP
0003	000065	IQOARY	0003	000066	IQOCOR	0003	000074	IQOTAB	0003	000077	IQOTME	0003	000032	IRKCN
0003	000035	IRKNSP	0036	000073	IROTX	0036	000074	IROTY	0036	000075	IROTZ	0003	000140	IRSI
0003	000141	IRTI	0003	000174	ISFAC	0036	000077	ISFT	0007	000233	ISHO	0003	000137	ISK1P
0036	000025	ISKPSO	0003	000112	ISOLFL	0042	000000	ISPEC	0003	000106	ISPND	0040	000000	ISTPDR
0003	000150	ISTR	0003	000057	ITRALL	0003	000053	ITRCA0	0003	000054	ITRCB0	0003	000055	ITRCC0
0003	000056	ITRCDO	0003	000042	ITRC10	0003	000043	ITRC20	0003	000044	ITRC30	0003	000045	ITRC40
0003	000046	ITRC50	0003	000047	ITRC60	0003	000050	ITRC70	0003	000051	ITRC80	0003	000052	ITRC90
0045	000047	IIPLOT	0004	000033	KBCDOU	0004	000035	KRSI	0004	000038	KRSO	0004	000037	KRTI
0004	000040	KRTO	0004	000034	KTRAJ	0046	000011	LAQSEG	0046	000023	LCHCOM	0046	000022	LCHSEG
0046	000006	LDISEG	0046	000021	LDRSEG	0046	000002	LFFSEG	0046	000010	LGBCOM	0046	000007	LGBSEG
0011	000006	LIDINR	0011	000007	LIDOUT	0011	000000	LIDSP	0008	000032	LINE	0046	000025	LKFSEG
0046	000004	LNPSEG	0046	000000	LQDSEG	0046	000005	LQDSEG	0046	000016	LPLCOM	0046	000015	LPLSEG
0046	000013	LQOCOM	0046	000012	LQOSEG	0046	000014	LRQSEG	0046	000020	LRCCOM	0046	000017	LRCSEG
0046	000001	LROSEG	0046	000003	LSFSEG	0003	000003	MAXBC	0046	000024	MAXFL	0003	000151	MB
0011	000001	MESSL	0011	000002	MESSR	0003	000153	MFCO	0003	000154	MFLUK	0003	000152	MG
0003	000142	MITSIN	0006	000035	MLINE	0003	000200	MNND	0006	000026	MODELN	0003	000135	MRSRC
0003	000155	MSRF	0007	000232	NACT	0004	000023	NBCDOU	0003	000100	NBCDSK	0010	000000	NSLKDR
0003	000013	NBLKLN	0003	000156	NCNT	0046	000026	NCURFL	0004	000000	NDI	0004	000001	NOIR

0003	000157	NELN	0003	000107	NERN	0004	000002	NFF	0004	000003	NFFR	0003	000201	NFFYTP
0003	000144	NFIGCO	0003	000162	NFIGFF	0003	000178	NFIGGB	0045	000048	NFRNC	0004	000004	NGBIR
0004	000005	NGBIRR	0004	000008	NGBSO	0003	000165	NIBBLE	0008	000039	NJOB	0012	000000	NLRIO
0003	000110	NMESS	0003	000160	NHIR	0006	000038	NHOOEL	0013	000008	NHODIR	0003	000132	NHODLS
0003	000004	NH	0003	000006	NHOD	0003	000128	NHODC	0003	000127	NHODU	0034	000000	NODE
0004	000010	NOUT	0004	000017	NPLS	0004	000020	NPLSR	0007	000000	NPNMP	0007	000008	NPTIT
0004	000022	NPUN	0007	000017	NPVU	0004	000011	NRAM	0004	000007	NRARR	0003	000177	NRMOD
0004	000025	NRSI	0004	000026	NRSO	0003	000138	NRSR	0005	000008	NRSRCS	0005	000011	NRSRCE
0005	000003	NRSRCI	0005	000000	NRSRCO	0005	000014	NRSRCT	0004	000027	NRTI	0004	000030	NRTO
0003	000005	NS	0004	000041	NSCRR	0004	000012	NSCRI	0004	000013	NSCR2	0004	000014	NSCR3
0041	000000	NSPEC	0036	000064	NSPFF	0003	000111	NSPND	0004	000021	NSQNTL	0003	000012	NSSTEP
0003	000011	NSTEP	0003	000145	NSTPOI	0003	000122	NSTPL	0003	000121	NSTSOL	0003	000007	NSURF
0006	000013	NTITLE	0004	000015	NTQ	0004	000018	NTQR	0004	000024	NTRAJ	0004	000031	NUSERI
0004	000032	NUSER2	0035	000000	ODTEMP	0036	000027	OINC	0007	000121	OPROT	0007	000202	OPRPLN
0007	000165	OPSCL	0007	000173	OPSLR	0007	000216	OPTIMP	0007	000224	OPTIMS	0007	000210	OPTRUE
0038	000041	ORNT	0036	000011	PALB	0036	000007	PERIOD	0003	000002	PI	0036	000108	PLCL
0045	000050	PLCMB	0036	000107	PLCO	0045	000001	PLCRVF	0045	000008	PLLABX	0045	000013	PLLABY
0045	000020	PLTITI	0045	000032	PLTIT2	0036	000100	PLTYPE	0045	000002	PLXMPF	0045	000003	PLYMPF
0038	000076	PNAME	0022	000000	PR	0036	000012	PRAD	0036	000002	PSD	0023	000000	PSH
0003	000067	QOAMPF	0003	000070	QOFMPF	0003	000076	QOPNCH	0003	000072	QORMPF	0003	000075	QOTAPE
0003	000071	QOTMPF	0003	000073	QOTYPE	0003	000102	RALB	0038	000067	RATE	0003	000104	RFRAC
0003	000031	RKAMPF	0003	000033	RKMIN	0003	000038	RKPNCH	0003	000037	RKSP	0003	000040	RKTAPE
0036	000070	ROTX	0036	000071	ROTY	0036	000072	ROTZ	0003	000103	RPLAN	0003	000101	RSOLAR
0036	000013	RSUN	0003	000001	RTD	0036	000040	RTMET	0003	000204	RTOL	0003	000161	SAOS
0003	000134	SFPRNT	0036	000102	SHADIN	0036	000103	SHAOUT	0003	000041	SIGMA	0038	000024	SOL
0036	000115	SOLO	0038	000052	SPINT	0043	000000	SREFLI	0044	000000	SREFLS	0030	000000	SRIR
0031	000000	SRSO	0003	000173	STRACK	0036	000034	STRDEC	0036	000033	STRRA	0038	000104	SUNCL
0036	000105	SUNCO	0036	000035	SUNDEC	0036	000118	SUNPYO	0036	000032	SUNRA	0003	000167	TDIAN
0003	000170	THGHT	0038	000022	TIMEPR	0036	000021	TIMEST	0038	000110	TIMSP	0008	000000	TITLE
0008	000030	TME	0032	000000	TRIR	0033	000000	TRSO	0003	000117	TRUANF	0003	000120	TRUANI
0036	000023	TRUEAN	0024	000000	TSTR	0036	000017	WDS	0038	000010	WSS	0038	000020	WSUN
0007	000025	ZNPROT	0007	000071	ZNPSCl									

00101	1*	COMMON /CCONST/	DTR	RTD	PI	MAXBC	NN	000000
00101	2*	.	NS	NNOD	NSURF	IOVL	NSTEP	NSSTEP
00101	3*	.	NBLKLN	DIACC	DIACCS	DINOSH	DIPNCH	FFACC
00101	4*	.	FFACCS	FFMIN	FFRATL	FFNOSH	FFPNCH	FFPRNT
00101	5*	.	IAUTOC	GBWBND	RKAMPF	IRKCN	RKMIN	IPRDMP
00101	6*	.	IRKNSP	RKPNCH	RKSP	RKTAPE	SIGMA	ITRC10
00101	7*	.	ITRC20	ITRC30	ITRC40	ITRC50	ITRC60	ITRC70
00101	8*	.	ITRC80	ITRC90	ITRCA0	ITRCB0	ITRCD0	ITRCD0
00101	9*	.	ITRALL	IAQGBI	IAQGBS	IAQSDS	IAQSDA	IAQSDP
00101	10*	.	IQOARY	IQOCOR	QOAMPF	QOFMPF	QOTMPF	QORMPF
00101	11*	.	QOTYPE	IQOTAB	QOTAPE	QOPNCH	IQOTME	NBCDSK
00101	12*	.	RSOLAR	RALB	RPLAN	RFRAC	INESH	ISPND
00101	13*	.	NERN	NMESS	NSPND	ISOLFL	IALBFL	IPLAFL
00101	14*	.	IAI	IAS	TRUANF	TRUANI	NSTSOL	NSTPL
00101	15*	.	IFFSHO	IEQFF	FFCMB	NNODC	NNODU	ICMBL
00101	16*	.	INCORE	NMODLS	FFDISF	SFPRNT	NRSRC	NRSR
00101	17*	.	ISKIP	IRST	IRTI	HITSIN	DLTLE	
00103	18*	COMMON /CCONST/	NFIGCO	NSTPDI	DELCT	FOO	ISTRT	000001
00103	19*	.	MB	MG	MFCO	MFLUK	MSRF	NCONT
00103	20*	.	NELN	NHIR	SAOS	NFIGFF	INTMF	ILLUMN
00103	21*	.	NIBBLE	ELPBEA	TDIAN	THGHT	FFZERO	ARAD

00103	22*	.	. STRACK	. ISFAC	. FFNAC	. NFICGB	. NRHOD	. MNND	000001
00103	23*	.	. MFTYP	. AQRNT	. GAUSS	. RTOL			000001
00104	24*	1	COMMON /TAPE /	. NDI	. NDIR	. NFF	. NFFR		000001
00104	25*	2		. NGBIR	. NGBIRR	. NGBSO	. NRARR		000001
00104	26*	3		. NOUT	. NRAM	. NSCR1	. NSCR2		000001
00104	27*	4		. NSCR3	. NTQ	. NTQR	. NPLS		000001
00104	28*	5		. NPLSR	. NSQNTL	. NPUN	. NBCDOU		000001
00104	29*	6		. NTRAJ	. NRSI	. NRSO	. NRTI		000001
00104	30*	7		. NRTO	. NUSER1	. NUSER2			000001
00104	31*	8		. NBCDOU	. KTRAJ	. KRSI	. KRSO		000001
00104	32*	9		. KRTI	. KRTO	. NSCR			000001
00105	33*	1	COMMON /RSTRT /	. NRSRC(3)		. NRSRC1(3)			000001
00105	34*	2		. NRSRCB(3)		. NRSRC(3)			000001
00105	35*	3		. NRSRCT(3)					000001
00106	36*	1	COMMON /TITLE /	. TITLE(11)		. NTITLE(11)			000001
00106	37*	2		. MODELN	. DTE	. THE	. IPAGE		000001
00106	38*	3		. LINE	. INSTEP	. NJOB	. NLINE		000001
00106	39*	4		. NMODEL					000001
00107	40*	1	COMMON /PLOT /	. NPNNP(8)		. NPTIT(9)			000001
00107	41*	2		. NPVU(8)		. ZNPROT(8,8)			000001
00107	42*	3		. ZNPSC(8)		. IOPNNP(8)			000001
00107	43*	4		. IOPTIT(8)		. IOPNVU(8)			000001
00107	44*	5		. OPROT(8,8)		. OPSCL(6)			000001
00107	45*	6		. OPSCLR(6)		. IOPNV			000001
00107	46*	7		. OPRPLN(6)		. OPTRUE(6)			000001
00107	47*	8		. OPTIMP(6)		. OPTIMS(6)			000001
00107	48*	9		. NACT		. ISHO			000001
00110	49*	1	COMMON /BLKDIR/	. NBLKDR(4, 8)					000001
00111	50*	2	COMMON /BCSN /	. LIDSP	. MESSL	. MESSR	. BOXINL	. BOXINR	000001
00111	51*	3	. BOXOUT	. LIDINR	. LIDOUT				000001
00112	52*	4	COMMON /INDX /	. NLRIO					000001
00113	53*	5	COMMON /NHODIR/	. NHODIR(2, 20)					000001
00114	54*	6	COMMON /INDXS /	. INDXS (19)					000001
00115	55*	7	COMMON /INDXM /	. INDXM (19)					000001
00116	56*	8	COMMON /DIMS /	. DIMS(3, 37)					000001
00117	57*	9	COMMON /DSTR /	. DSTR (5, 37)					000001
00120	58*	1	COMMON /IFS /	. IFS (37)					000001
00121	59*	2	COMMON /IKS /	. IKS (37)					000001
00122	60*	3	COMMON /PR /	. PR (2, 37)					000001
00123	61*	4	COMMON /PSH /	. PSH (4, 37)					000001
00124	62*	5	COMMON /TSTR /	. TSTR (3,3, 37)					000001
00125	63*	6	COMMON /ALPH /	. ALPH (19)					000001
00126	64*	7	COMMON /AREA /	. AREA (19)					000001
00127	65*	8	COMMON /EMISS /	. EMISS (19)					000001
00130	66*	9	COMMON /SRIR /	. SRIR (19)					000001
00131	67*	1	COMMON /SRSO /	. SRSO (19)					000001
00132	68*	2	COMMON /TRIR /	. TRIR (19)					000001
00133	69*	3	COMMON /TRSO /	. TRSO (19)					000001
00134	70*	4	COMMON /NODE /	. NODE (19)					000001
00135	71*	5	COMMON /ODTEMP/	. ODTEMP(100)					000001
00136	72*	6	COMMON /ORBIT /	. ALAN	. ASUN	. PSD	. DWP		000001
00136	73*	7		. ECC	. IORNT	. IORBIT	. PERIOD		000001
00136	74*	8		. HSS	. PALB	. PRAD	. RSUN		000001
00136	75*	9		. CIGMAS	. BETAS	. APER	. WDS		000001
00136	76*	1		. HSUN	. TIMEST	. TIMEPR	. TRUEAN		000001
00136	77*	2		. SOL	. ISKPSO	. GRAV	. OINC		000001
00136	78*	3		. HA	. HP	. SUNRA	. STRRA		000001

00136	79°	7	. STRDEC	. SUNDEC	. CIGMA	. BETA	000001
00136	80°	8	. RTHET	. ORNT(3,3)		. SPINT(3,3)	000001
00136	81°	9	. ICALFL	. NSPFF	. CLOCK	. CONE	000001
00136	82°	0	. RATE	. ROTX	. ROTY	. ROTZ	000001
00136	83°	1	. IROTX	. IROTY	. IROTZ	. PNAME	000001
00136	84°	2	. ISFT	. FLYPE	. INSHAD	. SHADIN	000001
00136	85°	3	. SHAOUT	. SUNCL	. SUNCO	. FLCL	000001
00136	86°	4	. PLCO	. TIMSP	. DUSK	. DAMN	000001
00136	87°	5	. DOY	. ATMT	. SOLO	. SUNPVO(3)	000001
00137	88°		COMMON /DSTORE/	IDSTR (12,3)			000001
00140	89°		COMMON /ISTPOR/	ISTPOR(1)			000001
00141	90°		COMMON /NSPEC /	NSPEC			000001
00142	91°		COMMON /ISPEC /	ISPEC (1)			000001
00143	92°		COMMON /SREFLI/	SREFLI(1)			000001
00144	93°		COMMON /SREFLS/	SREFLS(1)			000001
00145	94°		COMMON /PLOTTR/	IPLUNT . PLCRVF	. PLXMPF	. PLYMPF	000001
00145	95°	1		. IPLNA . IPLSN	. PLLABX(5)		000001
00145	96°	2		. PLLABY(5)	. PLTITI(10)		000001
00145	97°	3		. PLTIT2(12)	. NFRMC	. IIPLOT	000001
00145	98°	4		. PLCM8			000001
00146	99°		COMMON /LNGSEG/	LODSEG . LRDSEG	. LFFSEG	. LSFSEG	000001
00146	100°	1		. LNPSEG . LOPSEG	. LDISEG	. LGBSEG	000001
00146	101°	2		. LGBCOM . LAQSEG	. LQOSEG	. LQOCOM	000001
00146	102°	3		. LRBSEG . LPLSEG	. LPLCOM	. LRCSEG	000001
00146	103°	4		. LRCCOM . LDRSEG	. LCMSEG	. LCMCOM	000001
00146	104°	5		. MAXFL . LHFSEG	. NCURFL		000001
00147	105°		CALL ROPROG				000001
00150	106°	100	CONTINUE				000004
00151	107°		CALL OOPROG				000004
00152	108°		IF(IPROMP.NE.0)	CALL PROUMP (IPROMP)			000005
00154	109°		GO TO (1300,1400,1500,1600,1700,1800,1900,2000,				000012
00154	110°	1	2100,1325,2200,2300,1750,1350,2400,3000				000012
00154	111°	2), IOVL				000012
00155	112°	1300	CONTINUE				000040
00156	113°		CALL FFPROG				000040
00157	114°		GO TO 100				000041
00160	115°	1325	CONTINUE				000043
00161	116°		CALL RBPROG				000043
00162	117°		GO TO 100				000044
00163	118°	1350	CONTINUE				000046
00164	119°		CALL CMPROG				000046
00165	120°		GO TO 100				000047
00166	121°	1400	CONTINUE				000051
00167	122°		CALL SFPROG				000051
00170	123°		GO TO 100				000052
00171	124°	1500	CONTINUE				000054
00172	125°		CALL NPPROG				000054
00173	126°		GO TO 100				000055
00174	127°	1600	CONTINUE				000057
00175	128°		CALL OPPROG				000057
00176	129°		GO TO 100				000060
00177	130°	1700	CONTINUE				000062
00200	131°		CALL DIPROG				000062
00201	132°		GO TO 100				000063
00202	133°	1750	CONTINUE				000065
00203	134°		CALL DRPROG				000065
00204	135°		GO TO 100				000066

00205	136°	1800	CONTINUE	000070
00206	137°		CALL GBPROG	000070
00207	138°		GO TO 100	000071
00210	139°	1900	CONTINUE	000073
00211	140°		CALL RCPROG	000073
00212	141°		GO TO 100	000074
00213	142°	2000	CONTINUE	000076
00214	143°		CALL AQPROG	000076
00215	144°		GO TO 100	000077
00216	145°	2100	CONTINUE	000101
00217	146°		CALL QOPROG	000101
00220	147°		GO TO 100	000102
00221	148°	2200	CONTINUE	000104
00222	149°		CALL PLPROG	000104
00223	150°		GO TO 100	000105
00224	151°	2300	CONTINUE	000107
00225	152°		CALL RCPROG	000107
00226	153°		GO TO 100	000110
00227	154°	2400	CONTINUE	000112
00230	155°		CALL MFPROG	000112
00231	156°		GO TO 100	000113
00232	157°	3000	CONTINUE	000115
00233	158°		CALL WRAPUP	000115
00234	159°		CALL EXIT	000116
00235	160°		END	000122

END OF COMPILATION: NO DIAGNOSTICS.

GFOR.SI TFFS.ODPROG
FOR S0E3-06/22/78-20:27:12 (.0)

SUBROUTINE ODPROG ENTRY POINT 000170

STORAGE USED: CODE(1) 000172; DATA(0) 000053; BLANK COMMON(2) 000000

COMMON BLOCKS:

0003	CCONST	000205
0004	TAPE	000042
0005	RSTRT	000017
0006	TITLE	000037
0007	PLOT	000234
0010	BLKDIR	000040
0011	BCSN	000010
0012	INDX	000001
0013	NMODIR	000050
0014	INDXS	000023
0015	INDXN	000023
0016	OIMS	000157
0017	DSTR	000271
0020	IFS	000045
0021	IKS	000045
0022	PR	000112
0023	PSH	000224
0024	TSTR	000515
0025	ALPH	000023
0026	AREA	000023
0027	EMISS	000023
0030	SRIR	000023
0031	SRSO	000023
0032	TRIR	000023
0033	TRSO	000023
0034	NODE	000023
0035	ODTEMP	000144
0036	ORBIT	000121
0037	DSTORE	000044
0040	ISTPDR	000001
0041	NSPEC	000001
0042	ISPEC	000001
0043	SREFLI	000001
0044	SREFLS	000001
0045	PLOTTR	000051
0046	LNKSEG	000027
0047	DIRECT	000034

EXTERNAL REFERENCES (BLOCK, NAME)

0050	INTOD
0051	BUILDCC
0052	ADD
0053	NOATAS
0054	GBDATA

0055 RKDATA
 0056 NERR2\$
 0057 NERR3\$

STORAGE ASSIGNMENT (BLOCK, TYPE, RELATIVE LOCATION, NAME)

0001	000020	10100L	0001	000033	10101L	0001	000073	10102L	0001	000104	10103L	0001	000114	10104L				
0001	000132	10105L	0001	000157	10106L	0038	000000	ALAN	0000	R	000027	ALL	0025	000000	ALPH			
0036	000016	APER	0003	000202	AQPRNT	0003	000172	ARAD	0028	000000	AREA	0036	000001	ASUN				
0036	000114	ATMT	0000	R	000033	AUTO	0000	R	000036	AV	0000	R	000040	BCDOU	0036	000037	BETA	
0038	000015	BETAS	0000	R	000023	BOTH	0011	R	000003	BOXINL	0011	R	000004	BOXINR	0011	R	000005	BOXOUT
0036	000036	CIGMA	0036	000014	CIGMAS	0036	000065	CLOCK	0000	R	000005	CM	0036	000066	CONE			
0000	R	000034	CORR	0036	000112	DAWN	0003	000146	DELCT	0003	000014	DIACC	0003	000015	DIACCS			
0016	000000	DIMS	0003	000018	DINOSH	0003	000017	DIPNCH	0047	000000	DIRCT	0003	000143	DLTLM				
0036	000113	DOY	0017	000000	DSTR	0006	000027	DTE	0003	000000	DTR	0036	000111	DUSK				
0036	000003	DHP	0000	R	000011	EAR	0036	000004	ECC	0003	000168	ELPBEA	0027	000000	EMISS			
0000	R	000004	FF	0003	000020	FFACC	0003	000021	FFACCS	0003	000125	FFCMB	0003	000133	FFD1SF			
0003	000022	FFMIN	0003	000175	FFNAC	0003	000024	FFNOSH	0003	000025	FFPNCH	0003	000026	FFPRNT				
0003	000023	FFRATL	0003	000171	FFZERO	0003	000147	FOO	0003	000203	GAUSS	0003	000030	GBWBND				
0036	000026	GRAV	0036	000030	HA	0036	000031	HP	0003	000115	IAI	0003	000113	IALBFL				
0003	000060	IAQGBI	0003	000061	IAQGBS	0003	000083	IAQSDA	0003	000084	IAQSDP	0003	000062	IAQSDS				
0003	000116	IAS	0003	000027	IAUTOC	0036	000063	ICALFL	0003	000130	ICHBL	0037	000000	IOSTR				
0003	000124	IEQFF	0003	000123	IFFSHO	0020	000000	IFS	0008	000033	IHSTEP	0021	000000	IKS				
0003	000164	ILLUMN	0003	000105	IHESH	0003	000131	INCORE	0015	000000	INDXN	0014	000000	INDXS				
0000	000047	INJP\$	0036	000101	INSHAD	0003	000163	INTMF	0007	000077	IOPNPN	0007	000201	IOPNV				
0007	000113	IOPNVU	0007	000105	IOPNVT	0036	000008	IORBIT	0036	000005	IORNT	0003	I	000010	IOVL			
0006	000031	IPAGE	0003	000114	IPLAFL	0045	000004	IPLNA	0045	000005	IPLSN	0045	000000	IPLUNT				
0003	000034	IPROHP	0003	000065	IQOARY	0003	000066	IQOCOR	0003	000074	IQOTAB	0003	000077	IQOTME				
0000	I	000025	IR	0003	000032	IRKCN	0003	000035	IRKNSP	0036	000073	IROTX	0036	000074	IROTY			
0036	000075	IROTZ	0003	000140	IRSI	0003	000141	IRTI	0003	000174	ISFAC	0036	000077	ISFT				
0007	000233	ISHO	0003	000137	ISKIP	0036	000025	ISKPSO	0003	000112	ISOLFL	0042	000000	ISPEC				
0003	000106	ISPND	0040	000000	ISTPOR	0003	000150	ISTR	0003	000057	ISTRALL	0003	000053	ITRCAO				
0003	000054	ITRCBO	0003	000055	ITRCCO	0003	000056	ITRCDO	0000	I	000032	ITRCO	0003	000042	ITRCIO			
0003	000043	ITRC20	0003	000044	ITRC30	0003	000045	ITRC40	0003	000046	ITRC50	0003	000047	ITRC60				
0003	000050	ITRC70	0003	000051	ITRC80	0003	000052	ITRC90	0045	000047	IIPLOT	0000	I	000014	JUP			
0004	000033	KBCDOU	0004	000035	KRSI	0004	000036	KRSO	0004	000037	KRTI	0004	000030	KRTO				
0000	I	000042	KSTEP	0004	000034	KTRAJ	0048	000011	LAQSEG	0048	000023	LCMCOM	0048	000022	LCHSEG			
0046	000006	LDISEG	0046	000021	LDRSEG	0046	000002	LFFSEG	0048	000010	LOBCOM	0048	000007	LOBSEG				
0011	I	000006	LIDINR	0011	I	000007	LIDOUT	0011	000000	LIDSP	0006	000072	LINE	0048	000025	LKFSEG		
0046	000004	LNPSEG	0046	000000	LODSEG	0046	000005	LOPSEG	0046	000011	LPLCOM	0046	000015	LFLSEG				
0046	000013	LQOCOM	0046	000012	LQOSEG	0046	000014	LRBSEG	0046	000014	LRCOM	0046	000017	LRCSEG				
0046	000001	LRDSEG	0046	000003	LSFSEG	0000	I	000013	MAR	0003	000003	MAXBC	0046	000024	MAXFL			
0003	000151	MB	0000	I	000007	MER	0011	000001	MESSL	0011	000002	MESSR	0003	000153	MFCO			
0003	000154	MFLUK	0003	000152	MO	0003	000142	MITSIN	0006	000038	MLINE	0003	000200	MNID				
0006	000026	MODELN	0000	I	000012	MOO	0003	000135	MRSRC	0003	000155	MRRF	0007	000232	MACT			
0004	000023	NBCDOU	0003	000100	NBCDSK	0010	000000	NBLKDR	0003	000013	NBLKLN	0003	000156	NCONT				
0046	000026	NCURFL	0004	000000	NOI	0004	000001	NOIR	0003	000147	NELN	0000	I	000016	NEP			
0003	000107	NERN	0004	000002	NFF	0004	000003	NFFR	0003	000201	NFFTYP	0003	000144	NFIGCO				
0003	000162	NFIGFF	0003	000176	NFIGGB	0045	000046	NFRMC	0004	000004	NGDIR	0004	000005	NGDIRR				
0004	000006	NGBSO	0003	000165	NIBBLE	0006	000034	NJOB	0012	000006	NLRIO	0003	000110	NHESH				
0003	000160	NM1R	0006	000036	NMODEL	0013	000000	NMODIR	0003	000132	NMODLS	0003	000004	NN				
0003	000006	NNOD	0003	000126	NNODC	0003	000127	NNODU	0000	I	000000	NO	0034	000000	NODE			
0000	I	000003	NOSH	0004	000010	NOUT	0004	000017	NPLS	0004	000020	NPLSR	0007	000000	NPNPN			
0007	000006	NPTIT	0004	000022	NPUN	0007	000017	NPVU	0004	000011	NRAN	0004	000007	NRARR				
0003	000177	NRMOD	0004	000025	NRSI	0004	000026	NRSO	0003	000138	NRSR	0005	000006	NRSRBC				
0005	000011	NRSRCE	0005	000003	NRSRCL	0005	000000	NRSRCL	0005	000014	NRSRCL	0004	000027	NRTI				

0004	000030	NRT0	0003	000005	NS	0004	000041	NSCR1	0004	000012	NSCR1	0004	000013	NSCR2
0004	000014	NSCR3	0041	000000	NSPEC	0036	000064	NSPFF	0003	000111	NSPND	0004	000021	NSQNTL
0003	000012	NSSTEP	0003	000011	NSTEP	0003	000145	NSTPDI	0003	000122	NSTPL	0003	000121	NSTSQL
0003	000007	NSURF	0008	000013	NTITLE	0004	000015	NTQ	0004	000016	NTQR	0004	000024	NTRAJ
0004	000031	NUSE1	0004	000032	NUSE2	0035	000000	ODTEMP	0036	000027	OINC	0007	000121	OPROT
0007	000202	OPRPLN	0007	000165	OPSC1	0007	000173	OPSC1R	0007	000216	OPTIMP	0007	000224	OPTIMS
0007	000210	OPTRUE	0036	000041	ORNT	0036	000011	PALB	0000	R 000041	PALL	0036	000007	PERIOD
0003	000002	PI	0036	000106	PLCL	0045	000050	PLCMB	0036	000107	PLCO	0045	000001	PLCRVF
0045	000006	PLLABX	0045	000013	PLLABY	0045	000020	PLTITI	0045	000032	PLTIT2	0036	000100	PLTYPE
0045	000002	PLXMPF	0045	000003	PLYMPF	0036	000076	PNAME	0022	000000	PR	0036	000012	PRAD
0036	000002	PSD	0023	000000	PSH	0000	R 000031	PUN	0003	000067	QOAMPF	0003	000070	QOFMPF
0003	000076	QOPNCH	0003	000072	QORMPF	0003	000075	QOTAPE	0003	000071	QOTMPF	0003	000073	QOSTYPE
0003	000102	RALB	0036	000067	RATE	0000	R 000006	RB	0000	R 000022	READ	0003	000104	RFRAC
0003	000031	RKAMPF	0003	000033	RKMIN	0003	000036	RKPNCH	0003	000037	RKSP	0003	000040	RKTAPE
0036	000070	ROTX	0036	000071	ROTY	0036	000072	ROTX	0003	000103	RPLAN	0003	000101	RSOLAR
0036	000013	RSUN	0003	000001	RTD	0036	000040	RTMET	0003	000204	RTOL	0003	000181	SAOS
0000	R 000015	SAT	0000	R 000021	SAVE	0003	000134	SFPRNT	0000	R 000002	SHAD	0036	000102	SHADIN
0036	000103	SHAOUT	0003	000041	SIGMA	0036	000024	SOL	0000	R 000024	SOLAR	0036	000115	SOLO
0000	R 000030	SPACE	0036	000052	SPINT	0043	000000	SREFLI	0044	000000	SREFLS	0030	000000	SRIR
0031	000000	SRSO	0003	000173	STRACK	0036	000034	STRDEC	0038	000033	STRRA	0000	R 000020	SUN
0036	000104	SUNCL	0036	000105	SUNCO	0036	000035	SUNDEC	0036	000116	SUNPVO	0036	000032	SUNRA
0000	R 000026	TAPE	0003	000167	TDIAM	0003	000170	THGHT	0036	000022	TIMEPR	0036	000021	TIMEST
0036	000110	TIKSP	0006	000000	TITLE	0006	000030	TME	0032	000000	TRIR	0033	000000	TRSD
0003	000117	TRUANF	0003	000120	TRUANI	0036	000023	TRUEAN	0024	000000	TSTR	0000	R 000017	URA
0000	R 000037	USER1	0000	R 000010	VEN	0036	000017	WDS	0036	000010	WSS	0036	000020	WSUN
0000	R 000001	YES	0000	R 000035	ZERO	0007	000025	ZNPROT	0007	000071	ZNPSCL			

H-37

00101	1*	SUBROUTINE	ODPROG											000000
00103	2*	COMMON	/CONST/	DTR	RTD	PI	MAXBC	NN						000000
00103	3*	.	.	NS	NNOD	NSURF	IOVL	NSTEP	NSSTEP					000000
00103	4*	.	.	NBLKLN	DIACC	DIACCS	DINOSH	DIPNCH	FFACC					000000
00103	5*	.	.	FFACCS	FFMIN	FFRATL	FFNOSH	FFPNCH	FFPRNT					000000
00103	6*	.	.	IAUTOC	GBWNO	RKAMPF	IRKCN	RKMIN	IPROMP					000000
00103	7*	.	.	IRKNSP	RKPNCH	RKSP	RKTAPE	SIGMA	ITRC10					000000
00103	8*	.	.	ITRC20	ITRC30	ITRC40	ITRC50	ITRC60	ITRC70					000000
00103	9*	.	.	ITRC80	ITRC90	ITRCA0	ITRCB0	ITRCC0	ITRCD0					000000
00103	10*	.	.	ITRALL	IAQGB1	IAQGBS	IAQSDS	IAQSDA	IAQSDP					000000
00103	11*	.	.	IQOARY	IQOCOR	QOAMPF	QOFMPF	QOTMPF	QORMPF					000000
00103	12*	.	.	QOTYPE	IQOTAB	QOTAPE	QOPNCH	IQOTME	NGCDSK					000000
00103	13*	.	.	RSOLAR	RALB	RPLAN	RFRAC	IMESS	ISPND					000000
00103	14*	.	.	NERN	NMESS	NSPND	ISOLFL	IALBFL	IPLAFL					000000
00103	15*	.	.	IAI	IAS	TRUANF	TRUANI	NSTSOL	NSTPL					000000
00103	16*	.	.	IFFSHO	IEOFF	FFCHB	NNODC	NNODU	ICMBL					000000
00103	17*	.	.	INCORE	NMODLS	FFDISF	SFPRNT	MRSRC	NRSP					000000
00103	18*	.	.	ISKIP	IRSI	IRTI	MITSIN	DLTLNE						000000
00104	19*	COMMON	/CONST/	NFIGCO	NSTPDI	DELCT	FOG	ISTRT						000000
00104	20*	.	.	MB	MG	MFCO	MFLUK	MSRF	NCONT					000000
00104	21*	.	.	NELN	NMIR	SAOS	NFIGFF	INTMF	ILLUMN					000000
00104	22*	.	.	NIBBLE	ELPBEA	TDIAM	THGHT	FFZERO	ARAD					000000
00104	23*	.	.	STRACK	ISFAC	FFNAC	NFIGGB	NRM0D	MNND					000000
00104	24*	.	.	NFFTYF	AQPRNT	GAUSS	RTOL							000000
00105	25*	COMMON	/TAPE /	NDI	NOIR	NFF	NFFR							000000
00105	26*	1		NGBIR	NGBIRR	NGBSO	NRARR							000000
00105	27*	2		NOUT	NRRAN	NSCR1	NSCR2							000000

00105	28°	3	. NSCR3	. NTG	. NTOR	. NPLS	000000		
00105	29°	4	. NPLSR	. NSQNTL	. NPUN	. NBCDOW	000000		
00105	30°	5	. NTRAJ	. NRSI	. NRSO	. NRTI	000000		
00105	31°	6	. NRTO	. NUSER1	. NUSER2		000000		
00105	32°	7	. KBCDOU	. KTRAJ	. KRSI	. KRSO	000000		
00105	33°	8	. KRTI	. KRTO	. NSCR		000000		
00106	34°		COMMON /RSTRY /	. NRSRCO(3)	. NRSRC1(3)		000000		
00106	35°	1		. NRSRCB(3)	. NRSRCE(3)		000000		
00106	36°	2		. NRSRCT(3)			000000		
00107	37°		COMMON /TITLE /	. TITLE(11)	. NTITLE(11)		000000		
00107	38°	1		. MODELN	. DTE	. THE	. IPAGE	000000	
00107	39°	2		. LINE	. IHSTEP	. NJOB	. MLINE	000000	
00107	40°	3		. MMODEL				000000	
00110	41°		COMMON /PLOT /	. NPNNP(6)	. NPTIT(9)			000000	
00110	42°	1		. NPVU(6)	. ZNPROT(6,6)			000000	
00110	43°	2		. ZNPSCL(6)	. IOPNNP(6)			000000	
00110	44°	3		. IOPTIT(6)	. IOPNVU(6)			000000	
00110	45°	4		. OPROT(6,6)	. OPSCL(6)			000000	
00110	46°	5		. OPSCLR(6)	. IOPNV			000000	
00110	47°	6		. OPRPLN(6)	. OPTTRUE(6)			000000	
00110	48°	7		. OPTIMP(6)	. OPTIMS(6)			000000	
00110	49°	8		. NACT	. ISHO			000000	
00111	50°		COMMON /BLKDIR/	. NBLKDR(4, 8)				000000	
00112	51°		COMMON /BCSN /	. LIDSP	. HESSL	. HESSR	. BOXINL	. BOXINR	000000
00112	52°		. BOXOUT	. LIDINR	. LIDOUT				000000
00113	53°		COMMON /INDX /	. MLRIO					000000
00114	54°		COMMON /NMODIR/	. NMODIR(2, 20)					000000
00115	55°		COMMON /INDXS /	. INDXS (19)					000000
00116	56°		COMMON /INDXN /	. INDXN (19)					000000
00117	57°		COMMON /DIHS /	. DIHS(3, 37)					000000
00120	58°		COMMON /DSTR /	. DSTR (5, 37)					000000
00121	59°		COMMON /IFS /	. IFS (37)					000000
00122	60°		COMMON /IKS /	. IKS (37)					000000
00123	61°		COMMON /PR /	. PR (2, 37)					000000
00124	62°		COMMON /PSH /	. PSH (4, 37)					000000
00125	63°		COMMON /TSTR /	. TSTR (3,3, 37)					000000
00126	64°		COMMON /ALPH /	. ALPH (19)					000000
00127	65°		COMMON /AREA /	. AREA (19)					000000
00130	66°		COMMON /EMISS /	. EMISS (19)					000000
00131	67°		COMMON /SRIR /	. SRIR (19)					000000
00132	68°		COMMON /SRSO /	. SRSO (19)					000000
00133	69°		COMMON /TRIR /	. TRIR (19)					000000
00134	70°		COMMON /TRSO /	. TRSO (19)					000000
00135	71°		COMMON /NODE /	. NODE (19)					000000
00138	72°		COMMON /ODTEMP/	. ODTEMP(100)					000000
00137	73°		COMMON /ORBIT /	. ALAN	. ASUN	. PSD	. DMP		000000
00137	74°	1		. ECC	. IORNT	. IORBIT	. PERIOD		000000
00137	75°	2		. WSS	. PALB	. PRAD	. RSUN		000000
00137	76°	3		. CIGMAS	. BETAS	. APER	. HDS		000000
00137	77°	4		. WSUH	. TIMEST	. TIMEPR	. TRUEAN		000000
00137	78°	5		. SOL	. ISKPSO	. GRAV	. OINC		000000
00137	79°	6		. HA	. HP	. SUNRA	. STRRA		000000
00137	80°	7		. STRDEC	. SUNDEC	. CIGMA	. BETA		000000
00137	81°	8		. RTHET	. ORNT(3,3)	. SPINT(3,3)			000000
00137	82°	9		. ICALFL	. NSPFF	. CLOCK	. CONE		000000
00137	83°	0		. RATE	. ROTX	. ROTY	. ROTZ		000000
00137	84°	1		. IROTX	. IROTY	. IROTZ	. PNAME		000000

00137	88°	2	. ISFT	. PLYTYPE	. INSHAD	. SHADIN	000000
00137	86°	3	. SNAOUT	. SUNCL	. SUNCO	. PLCL	000000
00137	87°	4	. FLCO	. TIMSP	. DUSK	. DAWN	000000
00137	88°	5	. DOY	. ATHT	. SOLO	. SUNPVO(3)	000000
00140	89°		COMMON /DSTORE/	IDSTR (12,3)			000000
00141	90°		COMMON /ISTPDR/	ISTPDR(1)			000000
00142	91°		COMMON /NSPEC /	NSPEC			000000
00143	92°		COMMON /ISPEC /	ISPEC (1)			000000
00144	93°		COMMON /SREFLI/	SREFLI(1)			000000
00145	94°		COMMON /SREFLS/	SREFLS(1)			000000
00146	95°		COMMON /PLOTTR/	1PLUNT . PLCRVF	. PLXHPF . PLYHPF		000000
00146	96°	1	. IPLNA	. IPLSN	. PLLABX(5)		000000
00146	97°	2	. PLLABY(5)		. PLTIT1(10)		000000
00146	98°	3	. PLTIT2(12)		. NFRMC . IIPLOT		000000
00146	99°	4	. PLCHB				000000
00147	100°		COMMON /LNGSEG/	LODSEG . LRDSEG	. LFFSEG . LSFSEG		000000
00147	101°	1	. LNPSEG	. LOPSEG	. LDISEG . LGBSEG		000000
00147	102°	2	. LOBCOM	. LAQSEG	. LQOSEG . LQOCOM		000000
00147	103°	3	. LR0SEG	. LPLSEG	. LPLCOM . LRCSEG		000000
00147	104°	4	. LRCCOM	. LDRSEG	. LCMSEG . LCMCOM		000000
00147	105°	5	. MAXFL	. LMFSEG	. NCURFL		000000
00150	106°		COMMON /DIRCT /	DIRCT(28)			000000
00151	107°		DATA NO	/2HNO /			000000
00153	108°		DATA YES	/3HYES /			000000
00155	109°		DATA SHAD	/4HSHAD /			000000
00157	110°		DATA NOSH	/4HNOSH /			000000
00161	111°		DATA FF	/2HFF /			000000
00163	112°		DATA CH	/2HCH /			000000
00165	113°		DATA RB	/2HRB /			000000
00167	114°		DATA MER	/3HMER /			000000
00171	115°		DATA VEN	/3HVEN /			000000
00173	116°		DATA EAR	/3HEAR /			000000
00175	117°		DATA MOO	/3HMOO /			000000
00177	118°		DATA MAR	/3HMAR /			000000
00201	119°		DATA JUP	/3HJUP /			000000
00203	120°		DATA SAT	/3HSAT /			000000
00205	121°		DATA NEP	/3HNEP /			000000
00207	122°		DATA URA	/3HURA /			000000
00211	123°		DATA SUN	/3HSUN /			000000
00213	124°		DATA SAVE	/4HSAVE /			000000
00215	125°		DATA READ	/4HREAD /			000000
00217	126°		DATA BOTH	/4HBOTH /			000000
00221	127°		DATA SOLAR	/3HSOL /			000000
00223	128°		DATA IR	/2HIR /			000000
00225	129°		DATA TAPE	/4HTAPE /			000000
00227	130°		DATA ALL	/3HALL /			000000
00231	131°		DATA SPACE	/5HSPACE /			000000
00233	132°		DATA PUN	/3HPUN /			000000
00235	133°		DATA ITRCON	/2HON /			000000
00237	134°		DATA AUTO	/4HAUTO /			000000
00241	135°		DATA CORR	/4HCORR /			000000
00243	136°		DATA ZERO	/4HZERO /			000000
00245	137°		DATA AV	/2HAV /			000000
00247	138°		DATA USER1	/5HUSER1 /			000000
00251	139°		DATA BCDOU	/5HBCDOU /			000000
00253	140°		DATA PALL/4HPALL/				000000
00253	141°						000000

C

00253	142°	C-----BUILD THE CASE 1 CONFIGURATION		193	-000000
00253	143°	C		193	000000
00255	144°		CALL INTOD		000000
00256	145°		KSTEP = NSTEP		000001
00257	146°		IF(KSTEP.GT.100) KSTEP = 100		000003
00261	147°	GO TO (10100			000011
00261	148°), KSTEP			000011
00261	149°	C			000011
00261	150°	C*****			000011
00261	151°	C			000011
00261	152°	CSTEP -1		0	000011
00261	153°	C			000011
00262	154°	10100	CONTINUE		000020
00263	155°	GO TO (10101 , 10102 , 10103 , 10104 , 10105 , 10106			000020
00263	156°), NSSTEP			000020
00264	157°	10101	CONTINUE		000033
00264	158°	CBUILD CASE1,BOXINR,BOXINL,LIDINR,BOXOUT,LIDOUT		197	000033
00265	159°	CALL BUILD0 (BOXINR,6HCASE1)		0	000033
00266	160°	CALL ADD (BOXINL)		0	000038
00267	161°	CALL ADD (LIDINR)		0	000041
00270	162°	CALL ADD (BOXOUT)		0	000044
00271	163°	CALL ADD (LIDOUT)		0	000047
00271	164°	C		198	000047
00271	165°	C-----PLOT THE CASE 1 CONFIGURATION INDICATING THE ACTIVE		199	000047
00271	166°	C-----SIDES OF THE NODES.		200	000047
00271	167°	C		201	000047
00272	168°	CALL NDATA5(0.0,0.YES,0)		202	000052
00272	169°	C			000052
00272	170°	CL NPL0T		203	000052
00272	171°	C			000052
00273	172°		IOVL = 3		000061
00274	173°		NSTEP = 1		000063
00275	174°		NSSTEP = 2		000065
00276	175°		RETURN		000067
00277	176°	10102	CONTINUE		000073
00277	177°	C		204	000073
00277	178°	C-----CALCULATE SHADOW FACTOR TABLES FOR SUBSEQUENT USE		205	000073
00277	179°	C-----SAMPLE CASE 2 IN THE CALCULATION OF DIRECT FLUXES.		206	000073
00277	180°	C		207	000073
00277	181°	C			000073
00277	182°	CL SFCAL		208	000073
00277	183°	C			000073
00300	184°		IOVL = 2		000073
00301	185°		NSTEP = 1		000074
00302	186°		NSSTEP = 3		000076
00303	187°		RETURN		000100
00304	188°	10103	CONTINUE		000104
00304	189°	C		209	000104
00304	190°	C-----CALCULATE THE FORM FACTOR MATRIX.		210	000104
00304	191°	C		211	000104
00304	192°	C			000104
00304	193°	CL FFCAL		212	000104
00304	194°	C			000104
00305	195°		IOVL = 1		000104
00306	196°		NSTEP = 1		000105
00307	197°		NSSTEP = 4		000106
00310	198°		RETURN		000110

00311	199°	10104	CONTINUE				000114
00311	200°	C				213	000114
00311	201°	C-----CALCULATE THE GRAY BODY MATRIX.				214	000114
00311	202°	C				215	000114
00312	203°	CALL GBDATA(BOTH,0,FF)				216	000114
00312	204°	C					000114
00312	205°	CL GBCAL				217	000114
00312	206°	C					000114
00313	207°		IOVL	=	6		000120
00314	208°		NSTEP	=	1		000122
00315	209°		NSSTEP	=	5		000124
00316	210°		RETURN				000126
00317	211°		CONTINUE				000132
00317	212°	10105				218	000132
00317	213°	C				219	000132
00317	214°	C-----CALCULATE AND PUNCH RADIATION CONDUCTORS.				220	000132
00317	214°	C				221	000132
00320	215°	CALL RKDATA(0.0,0.0,SPACE,999,0.0,0.0,0)				222	000132
00320	216°	C					000132
00320	217°	CL RKCAL					000132
00320	218°	C					000132
00321	219°		IOVL	=	12		000145
00322	220°		NSTEP	=	1		000147
00323	221°		NSSTEP	=	6		000151
00324	222°		RETURN				000153
00325	223°	10106	CONTINUE				000157
00326	224°		IOVL	=	16		000157
00327	225°		RETURN				000160
00330	226°		END				000171

END OF COMPILATION: NO DIAGNOSTICS.

OFOR.SI TPFS.RDPROG
FOR SOE3-05/22/78-20:27:20 (.0)

SUBROUTINE RDPROG ENTRY POINT 000011

STORAGE USED: CODE(1) 000013; DATA(0) 000004; BLANK COMMON(2) 000000

EXTERNAL REFERENCES (BLOCK. NAME)

0003 RDMAIN
0004 NERR3\$

STORAGE ASSIGNMENT (BLOCK. TYPE. RELATIVE LOCATION. NAME)

0000 000000 INJPS

00101	1*	SUBROUTINE RDPROG	000000
00103	2*	CALL RDMAIN	000000
00104	3*	RETURN	000001
00105	4*	END	000012

END OF COMPILATION: NO DIAGNOSTICS.

OFOR.SI TPFS.FFPROG
 FOR SOE3-06/22/78-20:27:32 (.0)

SUBROUTINE FFPROG ENTRY POINT 000011

STORAGE USED: CODE(1) 000013; DATA(0) 000004; BLANK COMMON(2) 000000

COMMON BLOCKS:

0003 FFVALI 000023
 0004 FFVALS 000023
 0005 BFE 000023
 0006 BFA 000023
 0007 FFRS11 000001
 0010 FFRS12 000001
 0011 FFRS13 000001
 0012 FFRS14 000001
 0013 FFRS15 000001
 0014 FFSHDC 000023
 0015 FFSUMC 000023
 0016 FFEQ 000023

EXTERNAL REFERENCES (BLOCK, NAME)

0017 FFMAIN
 0020 NERR3S

STORAGE ASSIGNMENT (BLOCK, TYPE, RELATIVE LOCATION, NAME)

0006	000000	BFA	0005	000000	BFE	0013	000000	FFRS1A	0012	000000	FFRS1E	0010	000000	FFRS1I
0011	000000	FFRS1S	0003	000000	FFVALI	0004	000000	FFVALS	0016	000000	INDXF	0000	000000	INJPS
0014	000000	ISHAD	0007	000000	NODERI	0015	000000	SUM						

00101	1*	SUBROUTINE FFPROG												000000
00103	2*	COMMON /FFVALI/	FFVALI(19)										000000
00104	3*	COMMON /FFVALS/	FFVALS(19)										000000
00105	4*	COMMON /BFE /	BFE(19)										000000
00106	5*	COMMON /BFA /	BFA(19)										000000
00107	6*	COMMON /FFRS11/	NODERI(1)										000000
00110	7*	COMMON /FFRS12/	FFRS1I(1)										000000
00111	8*	COMMON /FFRS13/	FFRS1S(1)										000000
00112	9*	COMMON /FFRS14/	FFRS1E(1)										000000
00113	10*	COMMON /FFRS15/	FFRS1A(1)										000000
00114	11*	COMMON /FFSHDC/	ISHAD(19)										000000
00115	12*	COMMON /FFSUMC/	SUM(19)										000000
00116	13*	COMMON /FFEQ/	INDXF(19)										000000
00117	14*	CALL FFMAIN												000000
00120	15*	RETURN												000001
00121	16*	END												000012

END OF COMPILATION: NO DIAGNOSTICS.

8FOR.S1 TPF\$.SFPROG
FOR SOE3-06/22/78-20:27:37 (.0)

SUBROUTINE SFPROG ENTRY POINT 000011

STORAGE USED: CODE(1) 000013; DATA(0) 000004; BLANK COMMON(2) 000000

COMMON BLOCKS:

0003 SFSHDC 000023
0004 SFQDP 000023
0005 SFQDR 000023
0006 SFQDS 000023

EXTERNAL REFERENCES (BLOCK, NAME)

0007 SFMAIN
0010 NERR3\$

STORAGE ASSIGNMENT (BLOCK, TYPE, RELATIVE LOCATION, NAME)

0000 000000 INJP\$ 0003 000000 ISHAD 0004 000000 QDP 0005 000000 QDR 0006 000000 QDS

00101	1*	SUBROUTINE SFPROG	000000
00103	2*	COMMON /SFSHDC/ ISHAD(19)	000000
00104	3*	COMMON /SFQDP / QDP(19)	000000
00105	4*	COMMON /SFQDR / QDR(19)	000000
00106	5*	COMMON /SFQDS / QDS(19)	000000
00107	6*	CALL SFMAIN	000000
00110	7*	RETURN	000001
00111	8*	END	000012

END OF COMPILATION: NO DIAGNOSTICS.

@FOR,SI TPF\$.MPPROG
FOR 50E3-06/22/78-20:27:41 (1.0)

SUBROUTINE MPPROG ENTRY POINT 000011

STORAGE USED: CODE(1) 000013; DATA(0) 000004; BLANK COMMON(2) 000000

COMMON BLOCKS:

0003 MNP 000023

EXTERNAL REFERENCES (BLOCK, NAME)

0004 NPMAN
0005 NERR3\$

STORAGE ASSIGNMENT (BLOCK, TYPE, RELATIVE LOCATION, NAME)

0000 000000 INJP\$ 0003 000000 MNP

00101	1*	SUBROUTINE MPPROG	000000
00103	2*	COMMON /MNP / MNP(19)	000000
00104	3*	CALL NPMAN	000000
00105	4*	RETURN	000001
00106	5*	END	000012

END OF COMPILATION: NO DIAGNOSTICS.

@FOR.SI TPF\$.GBPROG
FOR SOE3-06/22/70-20:27:45 (.0)

SUBROUTINE GBPROG ENTRY POINT 000011

STORAGE USED: CODE(1) 000013; DATA(0) 000004; BLANK COMMON(2) 000000

COMMON BLOCKS:

0003 FA 000023
0004 SPACE 000023
0005 XSPACE 000023
0006 BLKGB 000276

EXTERNAL REFERENCES (BLOCK, NAME)

0007 GBMAIN
0010 NERR3\$

STORAGE ASSIGNMENT (BLOCK, TYPE, RELATIVE LOCATION, NAME)

0003 000000 FA 0000 000000 INJP\$ 0006 000000 IX 0004 000000 SPACE 0005 000000 XSPACE

00101	1*	SUBROUTINE GBPROG	000000
00103	2*	COMMON /FA / FA (19)	000000
00104	3*	COMMON /SPACE / SPACE (19)	000000
00105	4*	COMMON /XSPACE/ XSPACE(19)	000000
00106	5*	COMMON /BLKGB / IX(190)	000000
00107	6*	CALL GBMAIN	000000
00110	7*	RETURN	000001
00111	8*	END	000012

END OF COMPILATION: NO DIAGNOSTICS.

FOR SI TPFS.RCPROG
FOR S0E3-06/22/78-20:27:48 (.0)

SUBROUTINE RCPROG ENTRY POINT 000011

STORAGE USED: CODE(1) 000013; DATA(0) 000004; BLANK COMMON(2) 000000

COMMON BLOCKS:

0003 ISPN 000144
0004 MSND 000144
0005 NDS 000024
0006 SFS 000024
0007 SPCNO 000024
0010 RCEMIT 000024
0011 RCARET 000024
0012 RCSUM1 000023
0013 RCSUM2 000023
0014 BLKRC 000574

EXTERNAL REFERENCES (BLOCK, NAME)

0015 RCHAIN
0016 NERR3\$

STORAGE ASSIGNMENT (BLOCK, TYPE, RELATIVE LOCATION, NAME)

0011	000000	AREAT	0010	000000	EMIT	0000	000000	INJPS	0003	000000	ISPN	0014	000000	IX
0004	000000	MSND	0005	000000	NDS	0006	000000	SF	0007	000000	SPACNO	0012	000000	SUM1
0013	000000	SUM2												

00101	1*	SUBROUTINE RCPROG												000000
00103	2*	COMMON /ISPN /	ISPN	(100)									000000
00104	3*	COMMON /MSND /	MSND	(100)									000000
00105	4*	COMMON /NDS /	NDS	(20)									000000
00106	5*	COMMON /SFS /	SF	(20)									000000
00107	6*	COMMON /SPCNO /	SPACNO	(20)									000000
00110	7*	COMMON /RCEMIT/	EMIT	(20)									000000
00111	8*	COMMON /RCARET/	AREAT	(20)									000000
00112	9*	COMMON /RCSUM1/	SUM1	(19)									000000
00113	10*	COMMON /RCSUM2/	SUM2	(19)									000000
00114	11*	COMMON /BLKRC /	IX	(380)									000000
00115	12*	CALL RCHAIN												000000
00116	13*	RETURN												000001
00117	14*	END												000012

H-48

END OF COMPILATION: NO DIAGNOSTICS.

0FREE CNPL.

0COPY.1 MAP..MAPP
FURPUR 27R1 RL72-0 06/22/70 20:27:54

0FREE MAP

0PREP TPFS
FURPUR 27R1 RL72-0 06/22/70 20:27:54
END PREP.

0MAP,S HAPP,TRASYS
 MAP20R2 RL71-3 06/22/78 20:27:56 (0,)
 SIR: SI ELEMENT IS NON-SIR TYPE SDF *IF000000000

1. LIB TPF\$
2. LIB ES3-TRASYS*LIBRYN
3. LIB HSC*PLTLIB
4. LIB HSC*LOCALIB
5. SEG TR
6. IN TPF\$.TRASYS
7. IN NTRANS/JSC
8. SEG RD*.(TR)
9. IN TPF\$.RDPROG
10. SEG OD*.(TR)
11. IN TPF\$.ODPROG
12. SEG FF*.(TR)
13. IN TPF\$.FFPROG
14. SEG SF*.(TR)
15. IN TPF\$.SFPROG
16. SEG NP*.(TR)
17. IN TPF\$.NPPROG
18. SEG GB*.(TR)
19. IN TPF\$.GBPROG
20. SEG RC*.(TR)
21. IN TPF\$.RCPROG
22. END

ADDRESS LIMITS 001000 064120 26193 IBANK WORDS DECIMAL
 065000 123007 15368 DBANK WORDS DECIMAL
 SEGMENT LOAD TABLE 065000 065037
 INDIRECT LOAD TABLE 065040 065752
 STARTING ADDRESS 027243

SEGMENT TR 001000 030660 065753 104534

DEPTH(COMMONBLOCK)		DEPTH		065753	065760
FPACK\$/MSC8	\$(013)		\$(0)	065761	066107
NBF00\$			\$(2)	066110	070335
NCNVTS/FOR68	\$(1)	001000 001221	\$(2)	070336	070432
NINPTS/FOR-E3-CORR	\$(1)	001222 002616	\$(2)	070433	070468
NFIND\$/FOR-E3	\$(1)	002617 003036	\$(2)	070467	070537
NFTCH\$/FOR-E2	\$(1)	003037 003321	\$(2)	070540	070553
NOTINS/FOR-E3	\$(1)	003322 003616	\$(2)	070554	070557
NCLOS\$/FOR-E3	\$(1)	003617 004054	\$(2)	070560	070605
NRBLK\$/FOR-E2	\$(1)	004055 004077			
NSWTC\$/FOR69	\$(1)	004100 004124			
NBSBL\$/FOR-E3	\$(1)	004125 004161			
NUPDA\$/FOR68	\$(1)	004162 004215			
NHBLI\$/FOR68	\$(1)	004216 004327			
NFCHK\$/FOR-E3	\$(1)	004330 005321	\$(2)	070606	070756
	\$(3)	005322 005322	\$(4)	070757	071030
NFTV\$/FOR-E2	\$(1)	005323 005345			
NBDCV\$/FOR-E3	\$(1)	005346 005476	\$(2)	071031	071106

NIOERS/FOR-E3	\$(1)	005477	005716	\$(2)	071107	071258
NFMTS/FOR-E3	\$(1)	005717	006601	\$(2)	071257	071333
CLOSESF/FOR-TE3	\$(1)	006602	006602			
NEXP6S/FOR-E3	\$(1)	006603	007000	\$(2)	071334	071405
TANCOTANS/FOR59	\$(1)	007001	007176	\$(2)	071406	071426
ATANS/FOR59	\$(1)	007177	007402	\$(2)	071427	071460
NWDAS/FOR-E3	\$(1)	007403	010150	\$(2)	071461	071464
NRDAS/FOR-E3	\$(1)	010151	010600	\$(2)	071465	071477
SQRTS/FOR59	\$(1)	010601	010641	\$(2)	071500	071511
SINCOS\$/FOR-E3	\$(1)	010642	010776	\$(2)	071512	071534
NDEFS/FOR-E3	\$(1)	010777	011571	\$(2)	071535	071836
NFINPS/FOR-E3	\$(1)	011572	012217	\$(2)	071637	071722
NRWNS/FOR-E3	\$(1)	012220	012303	\$(2)	071723	071734
NOBUS\$/FOR68	\$(1)	012304	012344			
NBKSPS/FOR-E3	\$(1)	012345	013100	\$(2)	071735	071762
NHEFS/FOR-E2	\$(1)	013101	013306	\$(2)	071763	072002
NIERS/FOR-E3	\$(1)	013307	013465	\$(2)	072003	072122
NFOUS/FOR-E3	\$(1)	013466	014105	\$(2)	072123	072144
FORVCOMS/FOR-TE3				\$(2)	072145	072154
NERCOMS/FOR-TE3	\$(1)	014106	014165	\$(2)	072155	072170
FORCOMS/FORFTN				\$(2)	072171	072176
ERUS/SYS72-8						
NTABS/E3-JSC				\$(2)	072177	072236
NSTOP\$/FORE3-JSC	\$(1)	014166	014265	\$(2)	072237	072310
NERRS/FOR-E3	\$(1)	014266	014627	\$(2)	072311	072470
EXITSF/FOR-TE3	\$(1)	014630	014630			
IDLS/SYS64	\$(1)	014631	014677			
NERTRANS/JSC-E3	\$(1)	014700	015054	\$(2)	072471	072600
	\$(037)	INFO-010-LC				
SCCTAB/SMICHI				\$(0)	072601	072704
PRINTV/SMICHI	\$(1)	015055	015167	\$(0)	072705	072713
PAC	\$(1)	015170	015212			
UNPAC	\$(1)	015213	015227			
BXLTR				\$(0)	072714	073343
FNODES/LLIB11	\$(1)	015230	015342	\$(4)	073344	073344
	\$(013)	DEPTH				
CNVRT	\$(1)	015343	017077	\$(0)	073345	073704
				\$(2)	BLANK\$COMMON	
PUT	\$(1)	017100	017115			
SCTZ				\$(0)	073705	074004
GET	\$(1)	017116	017137	\$(0)	074005	074006
IDF	\$(1)	017140	017215	\$(2)	IDINFO	
PACKZZ	\$(1)	017216	017360	\$(0)	074007	074045
	\$(3)	IDINFO		\$(2)	BLANK\$COMMON	
PLOTSS	\$(1)	017361	017370	\$(0)	074046	074051
BUFRZZ	\$(1)	017371	017625	\$(0)	074052	074143
				\$(2)	074144	074413
NOUTS/JSC-E3	\$(1)	017626	021341	\$(2)	074414	074455
IDINFO(COMMONBLOCK)					074456	074463
IDENT	\$(1)	021342	022506	\$(0)	074464	075753
				\$(2)	IDINFO	
ERRZZ	\$(1)	022507	022557	\$(0)	075754	076012
				\$(2)	BLANK\$COMMON	
NOSYMS/JSC-E3	\$(1)	022560	023024	\$(2)	076013	076014
EXITG	\$(1)	023025	023067	\$(0)	076015	076057
				\$(2)	BLANK\$COMMON	
GETSMG	\$(1)	023070	023170	\$(0)	076060	076071

NINTRS/JSC-E3	\$(1)	023171	023531	\$(2)	BLANK\$COMMON
KLEAR	\$(1)	023532	023534	\$(2)	076072 076141
TPERR	\$(1)	023535	023584	\$(0)	076142 076173
	\$(3)	TAPE		\$(2)	BLANK\$COMMON
SKFILE	\$(1)	023565	023640	\$(0)	076174 076205
				\$(2)	BLANK\$COMMON
RSRCK	\$(1)	023641	024075	\$(0)	076206 076366
	\$(3)	CCONST		\$(2)	BLANK\$COMMON
	\$(5)	TAPE		\$(4)	RSTRT
READHD	\$(1)	024076	024416	\$(0)	076367 076575
	\$(3)	CCONST		\$(2)	BLANK\$COMMON
	\$(5)	TITLE		\$(4)	TAPE
	\$(7)	ISTPDR		\$(6)	RSTRT
				\$(010)	ACCESS
STORE	\$(1)	024417	024553	\$(0)	076576 076653
	\$(3)	CCONST		\$(2)	BLANK\$COMMON
	\$(5)	DSTORE		\$(4)	TAPE
PDUMP	\$(1)	024554	025014	\$(0)	076654 076722
				\$(2)	BLANK\$COMMON
FINDST	\$(1)	025015	025303	\$(0)	076723 077081
	\$(3)	CCONST		\$(2)	BLANK\$COMMON
	\$(5)	DSTORE		\$(4)	TAPE
	\$(7)	ACCESS		\$(8)	ISTPDR
SETFLO	\$(1)	025304	025401	\$(0)	077082 077102
	\$(3)	CCONST		\$(2)	BLANK\$COMMON
	\$(5)	NMODIR		\$(4)	TITLE
SECOND	\$(1)	025402	025412	\$(0)	077103 077104
				\$(2)	077105 077105
SHIFT	\$(1)	025413	025422		077106 077107
LRIODM(COMMONBLOCK)					077108 077107
RIOFAC	\$(1)	025423	025546	\$(0)	077110 077123
	\$(3)	LRIODM		\$(2)	BLANK\$COMMON
ABT	\$(1)	025547	025564	\$(0)	077124 077131
				\$(2)	BLANK\$COMMON
PAGE	\$(1)	025565	025714	\$(0)	077132 077202
	\$(3)	TAPE		\$(2)	BLANK\$COMMON
				\$(4)	TITLE
RETRVE	\$(1)	025715	026151	\$(0)	077203 077241
	\$(3)	CCONST		\$(2)	BLANK\$COMMON
	\$(5)	TAPE		\$(4)	TITLE
	\$(7)	AREA		\$(6)	NODE
	\$(011)	ALPH		\$(010)	EMISS
	\$(013)	TRSO		\$(012)	TRIR
	\$(015)	SRSO		\$(014)	SRIR
	\$(017)	ODTEMP		\$(016)	NMODIR
WRITHD	\$(1)	026152	026317	\$(0)	077242 077263
	\$(3)	CCONST		\$(2)	BLANK\$COMMON
	\$(5)	RSTRT		\$(4)	TITLE
	\$(7)	ACCESS		\$(6)	ISTPDR
ARRAYS(COMMONBLOCK)					077264 077264
IGS(COMMONBLOCK)					077265 077574
WRAPUP	\$(1)	026320	026374	\$(0)	077575 077624
	\$(3)	TAPE		\$(2)	BLANK\$COMMON
	\$(5)	IGS		\$(4)	PLOTTR
MFPROG	\$(1)	026375	026404	\$(0)	077625 077630
				\$(2)	BLANK\$COMMON

FLPROG	\$ (1)	026405 026414	\$ (0)	077631 077634
			\$ (2)	BLANKSCOMMON
QSPROG	\$ (1)	026415 026424	\$ (0)	077635 077640
			\$ (2)	BLANKSCOMMON
ACPROG	\$ (1)	026425 026434	\$ (0)	077641 077644
			\$ (2)	BLANKSCOMMON
DRPROG	\$ (1)	026435 026444	\$ (0)	077645 077650
			\$ (2)	BLANKSCOMMON
DIPROG	\$ (1)	026445 026454	\$ (0)	077651 077654
			\$ (2)	BLANKSCOMMON
OPPROG	\$ (1)	026455 026464	\$ (0)	077655 077660
			\$ (2)	BLANKSCOMMON
CMPROG	\$ (1)	026465 026474	\$ (0)	077661 077664
			\$ (2)	BLANKSCOMMON
RBPROG	\$ (1)	026475 026504	\$ (0)	077665 077670
			\$ (2)	BLANKSCOMMON
ACCESS (COMMONBLOCK)	\$ (1)	026505 027242	\$ (0)	077671 077673
PRDUMP	\$ (3)	ALPH	\$ (2)	BLANKSCOMMON
	\$ (5)	CCONST	\$ (4)	AREA
	\$ (7)	NODE	\$ (6)	EMISS
	\$ (011)	TITLE	\$ (010)	TAPE
	\$ (013)	ACCESS	\$ (012)	RSTRT
	\$ (015)	SRIR	\$ (014)	ODTEMP
	\$ (017)	TRIR	\$ (016)	SRSO
			\$ (020)	TRSO
LNGSEG (COMMONBLOCK)			100056	100104
PLOTTR (COMMONBLOCK)			100105	100155
SREFLS (COMMONBLOCK)			100156	100156
SREFLI (COMMONBLOCK)			100157	100157
ISPEC (COMMONBLOCK)			100160	100160
NSPEC (COMMONBLOCK)			100161	100161
ISTDOR (COMMONBLOCK)			100162	100162
DSTORE (COMMONBLOCK)			100163	100226
ORBIT (COMMONBLOCK)			100227	100347
ODTEMP (COMMONBLOCK)			100350	100513
NODE (COMMONBLOCK)			100514	100536
TRSO (COMMONBLOCK)			100537	100561
TRIR (COMMONBLOCK)			100562	100604
SRSO (COMMONBLOCK)			100605	100627
SRIR (COMMONBLOCK)			100630	100652
EMISS (COMMONBLOCK)			100653	100675
AREA (COMMONBLOCK)			100676	100720
ALPH (COMMONBLOCK)			100721	100743
TSTR (COMMONBLOCK)			100744	101460
PSH (COMMONBLOCK)			101461	101704
PR (COMMONBLOCK)			101705	102016
IKS (COMMONBLOCK)			102017	102063
IFS (COMMONBLOCK)			102064	102130
DSTR (COMMONBLOCK)			102131	102421
DIMS (COMMONBLOCK)			102422	102600
INDXN (COMMONBLOCK)			102601	102623
INDXS (COMMONBLOCK)			102624	102646
NMODIR (COMMONBLOCK)			102647	102716
INDX (COMMONBLOCK)			102717	102717
BCSN (COMMONBLOCK)			102720	102727
BLKDIR (COMMONBLOCK)			102730	102767

PLOT (COMMONBLOCK)			102770	103223
TITLE (COMMONBLOCK)			103224	103262
RSTRT (COMMONBLOCK)			103263	103301
TAPE (COMMONBLOCK)			103302	103343
CCONST (COMMONBLOCK)			103344	103550

BLANK\$COMMON (COMMONBLOCK)				
TRASYS	\$ (1)	027243	027365	\$ (0) 103551 103551
	\$ (3)	CCONST		\$ (2) BLANK\$COMMON
	\$ (5)	RSTRT		\$ (4) TAPE
	\$ (7)	PLOT		\$ (6) TITLE
	\$ (011)	BCSN		\$ (010) BLKDIR
	\$ (013)	NHODIR		\$ (012) INDX
	\$ (015)	INDXN		\$ (014) INDXS
	\$ (017)	DSTR		\$ (016) OIMS
	\$ (021)	IKS		\$ (020) IFS
	\$ (023)	PSH		\$ (022) PR
	\$ (025)	ALPH		\$ (024) TSTR
	\$ (027)	EMISS		\$ (026) AREA
	\$ (031)	SRSO		\$ (030) SRIR
	\$ (033)	TRSO		\$ (032) TRIR
	\$ (035)	ODTEMP		\$ (034) NODE
	\$ (037)	DSTORE		\$ (036) ORBIT
	\$ (041)	NSPEC		\$ (040) ISTOPR
	\$ (043)	SREFLI		\$ (042) ISPEC
	\$ (045)	PLOTTR		\$ (044) SREFLS
				\$ (046) LNGSEQ
NTRANS/JSC	\$ (1)	027366	030660	\$ (2) 103552 104534
	\$ (037)	INFO-010-LC		

SEGMENT 00* 030661 032341 104535 105471
 FOLLOWS SEGMENT TR

GETPSR	\$ (1)	030661	031102	\$ (0) 104535 104616
AAAAAA	\$ (1)	031103	031122	\$ (0) 104617 104624
BANNLB	\$ (1)	031123	031217	\$ (2) BLANK\$COMMON
	\$ (3)	TAPE		\$ (0) 104625 105263
				\$ (2) BLANK\$COMMON
				\$ (4) TITLE
UCONST (COMMONBLOCK)				105264 105264
RDMAIN	\$ (1)	031220	032326	\$ (0) 105265 105465
	\$ (3)	CCONST		\$ (2) BLANK\$COMMON
	\$ (5)	ISTOPR		\$ (4) TAPE
	\$ (7)	PLOTTR		\$ (6) PLOT
	\$ (011)	LNGSEQ		\$ (010) TITLE
	\$ (013)	UCONST		\$ (012) RSTRT
	\$ (015)	BCSN		\$ (014) ARRAYS
	\$ (017)	INDX		\$ (016) BLKDIR
	\$ (021)	LRTODM		\$ (020) DSTORE
				\$ (022) ODTEMP
RDPROG	\$ (1)	032327	032341	\$ (0) 105466 105471
				\$ (2) BLANK\$COMMON

SEGMENT 00* 030661 034523 104535 105730
 FOLLOWS SEGMENT TR

I ACT	\$(1)	030681 030719	\$(0)	104535 104544
			\$(2)	BLANK\$COMMON
SORTS	\$(1)	030716 031224	\$(0)	104545 104627
			\$(2)	BLANK\$COMMON
TRS3	\$(1)	031225 031305	\$(0)	104630 104638
			\$(2)	BLANK\$COMMON
RCDATA	\$(1)	031308 031540	\$(0)	104637 104673
	\$(3)	CCONST	\$(2)	BLANK\$COMMON
	\$(5)	ISTPDR	\$(4)	TITLE
			\$(6)	ARRAYS
NDUPCK	\$(1)	031541 031617	\$(0)	104674 104712
	\$(3)	TAPE	\$(2)	BLANK\$COMMON
	\$(5)	NODE	\$(4)	CCONST
			\$(6)	ODTEMP
NPRNT	\$(1)	031620 031750	\$(0)	104713 105022
	\$(3)	CCONST	\$(2)	BLANK\$COMMON
			\$(4)	TAPE
TRANSF	\$(1)	031751 032134	\$(0)	105023 105046
			\$(2)	BLANK\$COMMON
DIRCOS	\$(1)	032135 032415	\$(0)	105047 105140
	\$(3)	CCONST	\$(2)	BLANK\$COMMON
RKDATA	\$(1)	032418 032473	\$(0)	105141 105145
			\$(2)	BLANK\$COMMON
GBDATA	\$(1)	032474 032614	\$(0)	105146 105233
	\$(3)	CCONST	\$(2)	BLANK\$COMMON
	\$(5)	TAPE	\$(4)	ISTPDR
			\$(6)	TITLE
NDATA	\$(1)	032615 033152	\$(0)	105234 105270
	\$(3)	ARRAYS	\$(2)	BLANK\$COMMON
	\$(5)	PLOT	\$(4)	CCONST
			\$(6)	TITLE
BUILD C	\$(1)	033153 034154	\$(0)	105271 105561
	\$(3)	BLKDIR	\$(2)	BLANK\$COMMON
	\$(5)	TAPE	\$(4)	DIRCT
	\$(7)	ALPH	\$(6)	AREA
	\$(011)	SRSO	\$(010)	SRIR
	\$(013)	TRSO	\$(012)	TRIR
	\$(015)	NODE	\$(014)	EMISS
	\$(017)	NSPEC	\$(016)	ISPEC
	\$(021)	TITLE	\$(020)	CCONST
	\$(023)	INDXS	\$(022)	NMODIR
			\$(024)	INDXN
INTOD	\$(1)	034155 034331	\$(0)	105562 105621
	\$(3)	CCONST	\$(2)	BLANK\$COMMON
	\$(5)	LNGSEQ	\$(4)	ISTPDR
			\$(6)	TITLE
DIRCT (COMMONBLOCK)				105622 105655
ODPROG	\$(1)	034332 034523	\$(0)	105656 105730
	\$(3)	CCONST	\$(2)	BLANK\$COMMON
	\$(5)	RSTRT	\$(4)	TAPE
	\$(7)	PLOT	\$(6)	TITLE
	\$(011)	BCSN	\$(010)	BLKDIR
	\$(013)	NMODIR	\$(012)	INDX
	\$(015)	INDXN	\$(014)	INDXS
	\$(017)	DSTR	\$(016)	DIMS
	\$(021)	IKS	\$(020)	IFS
	\$(023)	PSH	\$(022)	PR

\$(025)	ALPH	\$(024)	TSTR
\$(027)	ENISS	\$(026)	AREA
\$(031)	SR50	\$(030)	SRIR
\$(033)	TR50	\$(032)	TRIR
\$(035)	ODTEMP	\$(034)	NODE
\$(037)	DSTORE	\$(036)	ORBIT
\$(041)	NSPEC	\$(040)	ISTPDR
\$(043)	SREFLI	\$(042)	ISPEC
\$(045)	PLOTTR	\$(044)	SREFLS
\$(047)	DIRECT	\$(048)	LNQSEQ

SEGMENT FF* 030661 064120 104535 123007
FOLLOWS SEGMENT TR

FFGTST	\$(1)	030661	030725	\$(0)	104535	104545
				\$(2)	BLANK\$COMMON	
FFVMT	\$(1)	030726	031377	\$(0)	104546	105640
	\$(3)	CCONST		\$(2)	BLANK\$COMMON	
FFAREA	\$(1)	031400	031755	\$(0)	105641	105674
	\$(3)	CCONST		\$(2)	BLANK\$COMMON	
FFRPSN	\$(1)	031756	033025	\$(0)	105675	105760
	\$(3)	CCONST		\$(2)	BLANK\$COMMON	
FFCRSS	\$(1)	033026	033062	\$(0)	105761	105765
				\$(2)	BLANK\$COMMON	
FFTRS3	\$(1)	033063	033143	\$(0)	105766	105774
				\$(2)	BLANK\$COMMON	
FFPVW	\$(1)	033144	033674	\$(0)	105775	106103
	\$(3)	CCONST		\$(2)	BLANK\$COMMON	
FFXPHI	\$(1)	033675	035630	\$(0)	106104	106431
	\$(3)	CCONST		\$(2)	BLANK\$COMMON	
	\$(5)	RMASS2		\$(4)	FFDAT1	
				\$(6)	RMASS1	
FFUNTI	\$(1)	035631	036514	\$(0)	106432	106610
	\$(3)	CCONST		\$(2)	BLANK\$COMMON	
	\$(5)	TAPE		\$(4)	RMASS1	
FFSHD	\$(1)	036515	042155	\$(0)	106611	106726
	\$(3)	DIMS		\$(2)	BLANK\$COMMON	
	\$(5)	TSTR		\$(4)	DSTR	
	\$(7)	IKS		\$(6)	IFS	
	\$(011)	PSH		\$(010)	PR	
	\$(013)	FFSHDC		\$(012)	CCONST	
	\$(015)	FFVALI		\$(014)	FFVALS	
	\$(017)	BFA		\$(016)	BFE	
	\$(021)	FF2RSI		\$(020)	FF1RSI	
	\$(023)	FF4RSI		\$(022)	FF3RSI	
	\$(025)	FF5UNC		\$(024)	FF5RSI	
FFEXPN	\$(1)	042156	044111	\$(0)	106727	107254
	\$(3)	CCONST		\$(2)	BLANK\$COMMON	
	\$(5)	RMASS1		\$(4)	FFDAT1	
				\$(6)	RMASS2	
FFTHCK	\$(1)	044112	044121	\$(0)	107255	107260
				\$(2)	BLANK\$COMMON	
FFPSHD	\$(1)	044122	045066	\$(0)	107261	107411
	\$(3)	DIMS		\$(2)	BLANK\$COMMON	
	\$(5)	TSTR		\$(4)	DSTR	
	\$(7)	IKS		\$(6)	IFS	

	\$ (011)	PSH		\$ (010)	PR
	\$ (013)	FFVALS		\$ (012)	FFSHDC
	\$ (015)	BFE		\$ (014)	FFVALI
	\$ (017)	FF1RSI		\$ (016)	BFA
	\$ (021)	FF3RSI		\$ (020)	FF2RSI
	\$ (023)	FF5RSI		\$ (022)	FF4RSI
				\$ (024)	FFSUNC
FFUNIT	\$ (1)	045067	045752	\$ (0)	107412 107570
	\$ (3)	CCONST		\$ (2)	BLANKSCOMMON
	\$ (5)	TAPE		\$ (4)	RMASS2
FFVIEW	\$ (1)	045753	046442	\$ (0)	107571 110663
	\$ (3)	CCONST		\$ (2)	BLANKSCOMMON
FFELEM	\$ (1)	046443	050534	\$ (0)	110664 111004
	\$ (3)	CCONST		\$ (2)	BLANKSCOMMON
FFELSL	\$ (1)	050555	051266	\$ (0)	111005 111045
	\$ (3)	CCONST		\$ (2)	BLANKSCOMMON
FFESUM	\$ (1)	051267	051365	\$ (0)	111046 111111
	\$ (3)	CCONST		\$ (2)	BLANKSCOMMON
	\$ (5)	NODE		\$ (4)	FFDAT1
	\$ (7)	FFSHDC		\$ (6)	TAPE
	\$ (011)	FFVALI		\$ (010)	FFVALS
	\$ (013)	BFA		\$ (012)	BFE
	\$ (015)	FF2RSI		\$ (014)	FF1RSI
	\$ (017)	FF4RSI		\$ (016)	FF3RSI
	\$ (021)	FFSUNC		\$ (020)	FF5RSI
FFPCL	\$ (1)	051366	052331	\$ (0)	111112 111247
	\$ (3)	AREA		\$ (2)	BLANKSCOMMON
	\$ (5)	FFDAT1		\$ (4)	CCONST
	\$ (7)	RMASS1		\$ (6)	NODE
	\$ (011)	DIMS		\$ (010)	RMASS2
	\$ (013)	TSTR		\$ (012)	DSTR
	\$ (015)	IKS		\$ (014)	IFS
	\$ (017)	PSH		\$ (016)	PR
	\$ (021)	FFSHDC		\$ (020)	TAPE
	\$ (023)	FFVALI		\$ (022)	FFVALS
	\$ (025)	BFA		\$ (024)	BFE
	\$ (027)	FF2RSI		\$ (026)	FF1RSI
	\$ (031)	FF4RSI		\$ (030)	FF3RSI
	\$ (033)	FFSUNC		\$ (032)	FF5RSI
	\$ (035)	ELEM		\$ (034)	FFELCM
FFCALI	\$ (1)	052332	053601	\$ (0)	111250 111421
	\$ (3)	AREA		\$ (2)	BLANKSCOMMON
	\$ (5)	FFDAT1		\$ (4)	CCONST
	\$ (7)	RMASS2		\$ (6)	NODE
	\$ (011)	DIMS		\$ (010)	RMASS1
	\$ (013)	TSTR		\$ (012)	DSTR
	\$ (015)	IKS		\$ (014)	IFS
	\$ (017)	PSH		\$ (016)	PR
	\$ (021)	FFSHDC		\$ (020)	TAPE
	\$ (023)	FFVALI		\$ (022)	FFVALS
	\$ (025)	BFA		\$ (024)	BFE
	\$ (027)	FF2RSI		\$ (026)	FF1RSI
	\$ (031)	FF4RSI		\$ (030)	FF3RSI
	\$ (033)	FFSUNC		\$ (032)	FF5RSI
	\$ (035)	ELEM		\$ (034)	FFELCM
FFELCM (COMMON BLOCK)					111422 117311
FFCAL	\$ (1)	053602	055051	\$ (0)	117312 117463

FFMINR

\$(3) AREA
 \$(5) FFDATI
 \$(7) RMASS1
 \$(011) DIHS
 \$(013) TSTR
 \$(015) IKS
 \$(017) PSH
 \$(021) FFSHDC
 \$(023) FFVALI
 \$(025) BFA
 \$(027) FF2RSI
 \$(031) FF4RSI
 \$(033) FFSUMC
 \$(035) ELEM
 \$(1) 055052 055160
 \$(3) AREA
 \$(5) FFDATI
 \$(7) TAPE
 \$(011) FFVALS
 \$(013) BFE
 \$(015) FF1RSI
 \$(017) FF3RSI
 \$(021) FF5RSI

FFEQIV

\$(1) 055181 055316
 \$(3) CCONST
 \$(5) FFVALI
 \$(7) TAPE
 \$(011) ELEM
 \$(1) 055317 056167
 \$(3) CCONST
 \$(5) NODE
 \$(7) FFVALS
 \$(011) BFE
 \$(013) FF1RSI
 \$(015) FF3RSI
 \$(017) FF5RSI
 \$(021) FFDATI

FFGEQ

\$(1) 056170 056427
 \$(3) CCONST
 \$(5) TAPE
 \$(7) FFVALI
 \$(011) BFE
 \$(013) NODE

FFRTR

FFRSMR

\$(1) 056430 056547
 \$(3) CCONST
 \$(5) NODE
 \$(7) TAPE
 \$(011) FFVALS
 \$(013) BFE
 \$(015) FF1RSI
 \$(017) FF3RSI
 \$(021) FF5RSI
 \$(023) AREA

\$(2) BLANK\$COMMON
 \$(4) CCONST
 \$(6) NODE
 \$(010) RMASS2
 \$(012) DSTR
 \$(014) IFS
 \$(016) PR
 \$(020) TAPE
 \$(022) FFVALS
 \$(024) BFE
 \$(026) FF1RSI
 \$(030) FF3RSI
 \$(032) FF5RSI
 \$(034) FFELCH
 \$(0) 117464 117500
 \$(2) BLANK\$COMMON
 \$(4) CCONST
 \$(6) NODE
 \$(010) FFSHDC
 \$(012) FFVALI
 \$(014) BFA
 \$(016) FF2RSI
 \$(020) FF4RSI
 \$(022) FFSUMC
 \$(0) 117501 117540
 \$(2) BLANK\$COMMON
 \$(4) FFDATI
 \$(6) FFVALS
 \$(010) NODE
 \$(0) 117541 117626
 \$(2) BLANK\$COMMON
 \$(4) TAPE
 \$(6) FFSHDC
 \$(010) FFVALI
 \$(012) BFA
 \$(014) FF2RSI
 \$(016) FF4RSI
 \$(020) FFSUMC
 \$(022) ODTEMP
 \$(0) 117627 117705
 \$(2) BLANK\$COMMON
 \$(4) FFDATI
 \$(6) RSTR
 \$(010) FFVALS
 \$(012) BFA
 \$(014) TITLE
 \$(0) 117706 120115
 \$(2) BLANK\$COMMON
 \$(4) FFDATI
 \$(6) RMASS1
 \$(010) FFSHDC
 \$(012) FFVALI
 \$(014) BFA
 \$(016) FF2RSI
 \$(020) FF4RSI
 \$(022) FFSUMC
 \$(024) FFSHO

ELEM(COMMONBLOCK)

FFPRT	\$ (1)	058550 057210	\$ (0)	120118 120117
	\$ (3)	AREA	\$ (2)	120120 120346
	\$ (5)	FFDAT1	\$ (4)	BLANK\$COMMON
	\$ (7)	TAPE	\$ (6)	CCONST
	\$ (011)	FFVALS	\$ (010)	NODE
	\$ (013)	BFE	\$ (012)	FFSHDC
	\$ (015)	FF1RSI	\$ (014)	FFVALI
	\$ (017)	FF3RSI	\$ (018)	BFA
	\$ (021)	FF5RSI	\$ (020)	FF2RSI
	\$ (023)	ELEM	\$ (022)	FF4RSI
FFPCH	\$ (1)	057211 057506	\$ (0)	FFSUMC
	\$ (3)	CCONST	\$ (0)	120347 120430
	\$ (5)	FFDAT1	\$ (2)	BLANK\$COMMON
	\$ (7)	FFSHDC	\$ (4)	NODE
	\$ (011)	FFVALI	\$ (6)	TAPE
	\$ (013)	BFA	\$ (010)	FFVALS
	\$ (015)	FF2RSI	\$ (012)	BFE
	\$ (017)	FF4RSI	\$ (014)	FF1RSI
	\$ (021)	FFSUMC	\$ (016)	FF3RSI
	\$ (023)	TITLE	\$ (020)	FF5RSI
FFRIN	\$ (1)	057507 060404	\$ (022)	1STPDR
	\$ (3)	CCONST	\$ (0)	120431 120568
	\$ (5)	NODE	\$ (2)	BLANK\$COMMON
	\$ (7)	FFSHDC	\$ (4)	FFDAT1
	\$ (011)	FFVALI	\$ (6)	TAPE
	\$ (013)	BFA	\$ (010)	FFVALS
	\$ (015)	FF2RSI	\$ (012)	BFE
	\$ (017)	FF4RSI	\$ (014)	FF1RSI
	\$ (021)	FFSUMC	\$ (016)	FF3RSI
			\$ (020)	FF5RSI
			\$ (022)	ODTEMP
FFEND	\$ (1)	060405 060425	\$ (0)	120567 120572
	\$ (3)	CCONST	\$ (2)	BLANK\$COMMON
	\$ (5)	FFSHDC	\$ (4)	TAPE
	\$ (7)	FFVALI	\$ (6)	FFVALS
	\$ (011)	BFA	\$ (010)	BFE
	\$ (013)	FF2RSI	\$ (012)	FF1RSI
	\$ (015)	FF4RSI	\$ (014)	FF3RSI
	\$ (017)	FFSUMC	\$ (016)	FF5RSI
	\$ (021)	AREA	\$ (020)	NODE
FFROW	\$ (1)	060426 060875	\$ (0)	120573 120771
	\$ (3)	FFDAT1	\$ (2)	BLANK\$COMMON
	\$ (5)	FFVALS	\$ (4)	FFSHDC
	\$ (7)	BFE	\$ (6)	FFVALI
	\$ (011)	FF1RSI	\$ (010)	BFA
	\$ (013)	FF3RSI	\$ (012)	FF2RSI
	\$ (015)	FF5RSI	\$ (014)	FF4RSI
	\$ (017)	NODE	\$ (016)	FFSUMC
	\$ (021)	CCONST	\$ (020)	TITLE
	\$ (023)	AREA	\$ (022)	RMASS1
	\$ (025)	FFSHO	\$ (024)	TAPE
			\$ (026)	RSTRT
FFRSUM	\$ (1)	060676 061010	\$ (0)	120772 121206
	\$ (3)	CCONST	\$ (2)	BLANK\$COMMON
	\$ (5)	NODE	\$ (4)	FFDAT1
	\$ (7)	TAPE	\$ (6)	RMASS1
	\$ (011)	FFSHO	\$ (010)	AREA

	\$ (013)	FFVALS		\$ (012)	FFSHDC
	\$ (015)	BFE		\$ (014)	FFVALI
	\$ (017)	FF1RSI		\$ (016)	BFA
	\$ (021)	FF3RSI		\$ (020)	FF2RSI
	\$ (023)	FF5RSI		\$ (022)	FF4RSI
				\$ (024)	FFSUMC
FFSF	\$ (1)	061011	061043	\$ (0)	121207 121214
	\$ (3)	FFDATI		\$ (2)	BLANK\$COMMON
	\$ (5)	BFA		\$ (4)	BFE
	\$ (7)	FFVALI		\$ (6)	AREA
				\$ (010)	FFVALS
FFPRE	\$ (1)	061044	061105	\$ (0)	121215 121223
	\$ (3)	CCONST		\$ (2)	BLANK\$COMMON
	\$ (5)	FFSHDC		\$ (4)	FFDATI
	\$ (7)	FFVALI		\$ (6)	FFVALS
	\$ (011)	BFA		\$ (010)	BFE
	\$ (013)	FF2RSI		\$ (012)	FF1RSI
	\$ (015)	FF4RSI		\$ (014)	FF3RSI
	\$ (017)	FFSUMC		\$ (016)	FF5RSI
	\$ (021)	AREA		\$ (020)	NODE
	\$ (023)	RMASSI		\$ (022)	TAPE
FFOUT	\$ (1)	061106	061216	\$ (0)	121224 121242
	\$ (3)	FFEQ		\$ (2)	BLANK\$COMMON
	\$ (5)	CCONST		\$ (4)	AREA
	\$ (7)	NODE		\$ (6)	FFDATI
	\$ (011)	RSTRT		\$ (010)	TAPE
	\$ (013)	FFVALS		\$ (012)	FFSHDC
	\$ (015)	BFE		\$ (014)	FFVALI
	\$ (017)	FF1RSI		\$ (016)	BFA
	\$ (021)	FF3RSI		\$ (020)	FF2RSI
	\$ (023)	FF5RSI		\$ (022)	FF4RSI
				\$ (024)	FFSUMC
FFRDRQ	\$ (1)	061217	061707	\$ (0)	121243 121333
	\$ (3)	AREA		\$ (2)	BLANK\$COMMON
	\$ (5)	FFDATI		\$ (4)	CCONST
	\$ (7)	TAPE		\$ (6)	NODE
	\$ (011)	FFVALS		\$ (010)	FFSHDC
	\$ (013)	BFE		\$ (012)	FFVALI
	\$ (015)	FF1RSI		\$ (014)	BFA
	\$ (017)	FF3RSI		\$ (016)	FF2RSI
	\$ (021)	FF5RSI		\$ (020)	FF4RSI
	\$ (023)	RSTRT		\$ (022)	FFSUMC
FFRDIN	\$ (1)	061710	063242	\$ (0)	121334 121625
	\$ (3)	ALPH		\$ (2)	BLANK\$COMMON
	\$ (5)	CCONST		\$ (4)	AREA
	\$ (7)	FFDATI		\$ (6)	EMISS
	\$ (011)	INDXN		\$ (010)	INDXS
	\$ (013)	RMASSI		\$ (012)	NODE
	\$ (015)	DIMS		\$ (014)	TAPE
	\$ (017)	TSTR		\$ (016)	DSTR
	\$ (021)	IKS		\$ (020)	IFS
	\$ (023)	PSH		\$ (022)	PR
	\$ (025)	FFVALS		\$ (024)	FFSHDC
	\$ (027)	BFE		\$ (026)	FFVALI
	\$ (031)	FF1RSI		\$ (030)	BFA
	\$ (033)	FF3RSI		\$ (032)	FF2RSI
	\$ (035)	FF5RSI		\$ (034)	FF4RSI

	\$ (037) I STPDR	\$ (036) FFSUNC
	\$ (041) FFSHO	\$ (040) TITLE
FFHEAD	\$ (1) 063243 063341	\$ (042) RSTRT
	\$ (3) TAPE	\$ (0) 121626 122161
CHKACC	\$ (1) 063342 063502	\$ (2) BLANK\$COMMON
	\$ (3) CCONST	\$ (4) CCONST
	\$ (5) TITLE	\$ (0) 122162 122277
		\$ (2) BLANK\$COMMON
		\$ (4) TAPE
FFSHO (COMMONBLOCK)		\$ (6) NHODIR
FF5RS1 (COMMONBLOCK)		122300 122301
FF4RS1 (COMMONBLOCK)		122302 122302
FF3RS1 (COMMONBLOCK)		122303 122303
FF2RS1 (COMMONBLOCK)		122304 122304
FF1RS1 (COMMONBLOCK)		122305 122305
RMASS2 (COMMONBLOCK)		122306 122306
RMASS1 (COMMONBLOCK)		122307 122353
FFDAT1 (COMMONBLOCK)		122354 122420
FFMAIN	\$ (1) 063503 064105	122421 122435
	\$ (3) AREA	\$ (0) 122438 122571
	\$ (5) FFDAT1	\$ (2) BLANK\$COMMON
	\$ (7) INDXN	\$ (4) CCONST
	\$ (011) RMASS1	\$ (6) INDXS
	\$ (013) DIMS	\$ (010) NODE
	\$ (015) TSTR	\$ (012) RMASS2
	\$ (017) IKS	\$ (014) DSTR
	\$ (021) PSH	\$ (016) IFS
	\$ (023) FFSHDC	\$ (020) PR
	\$ (025) FFVALI	\$ (022) TAPE
	\$ (027) BFA	\$ (024) FFVALS
	\$ (031) FF2RS1	\$ (026) BFE
	\$ (033) FF4RS1	\$ (030) FF1RS1
	\$ (035) FFSUNC	\$ (032) FF3RS1
	\$ (037) RSTRT	\$ (034) FF5RS1
	\$ (041) FFSHO	\$ (036) TITLE
FFEQ (COMMONBLOCK)		\$ (040) FFEQ
FFSUMC (COMMONBLOCK)		122572 122614
FFSHDC (COMMONBLOCK)		122615 122637
FFRS15 (COMMONBLOCK)		122640 122662
FFRS14 (COMMONBLOCK)		122663 122683
FFRS13 (COMMONBLOCK)		122664 122664
FFRS12 (COMMONBLOCK)		122665 122665
FFRS11 (COMMONBLOCK)		122666 122666
BFA (COMMONBLOCK)		122667 122667
BFE (COMMONBLOCK)		122670 122712
FFVALS (COMMONBLOCK)		122713 122735
FFVALI (COMMONBLOCK)		122736 122760
FFPROG	\$ (1) 064108 064120	122761 123003
	\$ (3) FFVALI	\$ (0) 123004 123007
	\$ (5) BFE	\$ (2) BLANK\$COMMON
	\$ (7) FFRS11	\$ (4) FFVALS
	\$ (011) FFRS13	\$ (6) BFA
	\$ (013) FFRS15	\$ (010) FFRS12
	\$ (015) FFSUNC	\$ (012) FFRS14
		\$ (014) FFSHDC
		\$ (016) FFEQ

SEGMENT SF°
FOLLOWS SEGMENT TR

030661 043643

104335 116121

SFGTST	\$(1)	030661 030725	\$(0)	104535 104545
			\$(2)	BLANKSCOMMON
SFELSL	\$(1)	030726 031505	\$(0)	104546 104612
	\$(3)	CCONST	\$(2)	BLANKSCOMMON
SFTRS3	\$(1)	031506 031566	\$(0)	104613 104621
			\$(2)	BLANKSCOMMON
SFSHAD	\$(1)	031567 035141	\$(0)	104622 104762
	\$(3)	CCONST	\$(2)	BLANKSCOMMON
	\$(5)	SFQDS	\$(4)	SFSHDC
	\$(7)	SFQDP	\$(6)	SFQDR
	\$(011)	DSTR	\$(010)	DIMS
	\$(013)	IFS	\$(012)	TSTR
	\$(015)	PR	\$(014)	IKS
	\$(017)	SFVECC	\$(016)	PSH
SFSPHS	\$(1)	035142 035511	\$(0)	104763 105054
	\$(3)	DIMS	\$(2)	BLANKSCOMMON
	\$(5)	TSTR	\$(4)	DSTR
	\$(7)	IKS	\$(6)	IFS
	\$(011)	PSH	\$(010)	PR
	\$(013)	SFQDS	\$(012)	SFSHDC
	\$(015)	SFQDP	\$(014)	SFQDR
SFELEM	\$(1)	035512 037628	\$(0)	105055 105200
	\$(3)	SFVECC	\$(2)	BLANKSCOMMON
	\$(5)	TAPE	\$(4)	CCONST
SFELAV	\$(1)	037627 040366	\$(0)	105201 105257
	\$(3)	CCONST	\$(2)	BLANKSCOMMON
			\$(4)	SFVECC
SFELMT	\$(1)	040367 040546	\$(0)	105260 105276
	\$(3)	CCONST	\$(2)	BLANKSCOMMON
			\$(4)	SFSURI
SFRDRQ	\$(1)	040547 040712	\$(0)	105277 105603
	\$(3)	CCONST	\$(2)	BLANKSCOMMON
	\$(5)	ORBIT	\$(4)	NODE
			\$(6)	TAPE
SFPRTR	\$(1)	040713 041124	\$(0)	105604 105735
	\$(3)	CCONST	\$(2)	BLANKSCOMMON
	\$(5)	NODE	\$(4)	TAPE
			\$(6)	TITLE
SFRDIN	\$(1)	041125 042370	\$(0)	105736 106035
	\$(3)	NODE	\$(2)	BLANKSCOMMON
	\$(5)	SFQDS	\$(4)	SFSHDC
	\$(7)	SFQDP	\$(6)	SFQDR
	\$(011)	INOXN	\$(010)	INOXS
	\$(013)	CCONST	\$(012)	ORBIT
	\$(015)	DIMS	\$(014)	SFSURI
	\$(017)	TSTR	\$(016)	DSTR
	\$(021)	IKS	\$(020)	IFS
	\$(023)	PSH	\$(022)	PR
	\$(025)	TITLE	\$(024)	TAPE
	\$(027)	RSTR	\$(026)	ISTPDR
SFVECC (COMMONBLOCK)				106036 113732
SFSURI (COMMONBLOCK)				113733 113777
SFMAIN	\$(1)	042371 043630	\$(0)	114000 116001

	\$ (3)	RSTRY		\$ (2)	BLANK&COMMON
	\$ (5)	AREA		\$ (4)	ORBIT
	\$ (7)	INDXS		\$ (6)	CCONST
	\$ (011)	ISTPOR		\$ (010)	INDXM
	\$ (013)	SFSUR1		\$ (012)	MODE
	\$ (015)	TITLE		\$ (014)	TAPE
				\$ (016)	SFVECC
SFQDS (COMMONBLOCK)					116002 116024
SFQDR (COMMONBLOCK)					116025 116047
SFQDP (COMMONBLOCK)					116050 116072
SFSHDC (COMMONBLOCK)					116073 116115
SFPROG	\$ (1)	043631 043643		\$ (0)	116116 116121
	\$ (3)	SFSHDC		\$ (2)	BLANK&COMMON
	\$ (5)	SFQDR		\$ (4)	SFQDP
				\$ (6)	SFQDS

SEGMENT NP#	030661 051266	104535 111024
FOLLOWS SEGMENT TR		

ALOGS/FOR-E3	\$ (1)	030661 030777		\$ (2)	104535 104575
NVECZ	\$ (1)	031000 031025		\$ (0)	104576 104577
VECTZ	\$ (1)	031026 031571		\$ (0)	104600 104742
				\$ (2)	BLANK&COMMON
PUTCZZ	\$ (1)	031572 031610			
GETCZZ	\$ (1)	031611 031627			
SCALZZ	\$ (1)	031630 032124		\$ (0)	104743 104763
				\$ (2)	BLANK&COMMON
NFLNKS/LL1B11	\$ (1)	032125 032272		\$ (0)	104764 105004
	\$ (013)	DEPTH			
VECSZZ	\$ (1)	032273 033560		\$ (0)	105005 105161
				\$ (2)	BLANK&COMMON
YMODZ	\$ (1)	033561 033600		\$ (0)	105162 105170
				\$ (2)	BLANK&COMMON
XMODZ	\$ (1)	033601 033620		\$ (0)	105171 105177
				\$ (2)	BLANK&COMMON
UNSCZZ	\$ (1)	033621 034004		\$ (0)	105200 105214
				\$ (2)	BLANK&COMMON
UNYMDZ	\$ (1)	034005 034025		\$ (0)	105215 105224
				\$ (2)	BLANK&COMMON
UNXMDZ	\$ (1)	034026 034046		\$ (0)	105225 105234
				\$ (2)	BLANK&COMMON
METAZZ	\$ (1)	034047 035243		\$ (0)	105235 105401
				\$ (2)	BLANK&COMMON
OBJECTG	\$ (1)	035244 035620		\$ (0)	105402 105451
				\$ (2)	BLANK&COMMON
SUBJEG	\$ (1)	035621 036216		\$ (0)	105452 105505
				\$ (2)	BLANK&COMMON
PAGEG	\$ (1)	036217 036430		\$ (0)	105506 105565
				\$ (2)	BLANK&COMMON
TEXTG	\$ (1)	036431 036544		\$ (0)	105566 105603
				\$ (2)	BLANK&COMMON
LINESG	\$ (1)	036545 036704		\$ (0)	105604 105640
				\$ (2)	BLANK&COMMON
RSETMG	\$ (1)	036705 037075		\$ (0)	105641 106210
				\$ (2)	BLANK&COMMON
SETSMG	\$ (1)	037076 041241		\$ (0)	106211 106343

MODESG/NMC	\$(1)	041242	041302	\$(2)	BLANK\$COMMON
				\$(0)	106344 106353
LINE	\$(1)	041303	041333	\$(2)	BLANK\$COMMON
	\$(3)	IGS		\$(0)	106354 106368
LINEOP	\$(1)	041334	041363	\$(2)	BLANK\$COMMON
	\$(3)	IGS		\$(0)	106367 106375
NUMBER	\$(1)	041364	041421	\$(2)	BLANK\$COMMON
	\$(3)	IGS		\$(0)	106376 106415
MAP	\$(1)	041422	041506	\$(2)	BLANK\$COMMON
	\$(3)	IGS		\$(0)	106416 106434
NPDOTL	\$(1)	041507	042023	\$(2)	BLANK\$COMMON
	\$(3)	NCONST		\$(0)	106435 106505
	\$(5)	PLOT		\$(2)	BLANK\$COMMON
SETBEA	\$(1)	042024	042046	\$(4)	NPMASS
	\$(3)	IGS		\$(0)	106506 106512
NPFPLT	\$(1)	042047	042301	\$(2)	BLANK\$COMMON
	\$(3)	CAL280		\$(0)	106513 106522
NPSCAL	\$(1)	042302	042400	\$(2)	BLANK\$COMMON
	\$(3)	CAL280		\$(0)	106523 106542
NPINFO	\$(1)	042401	042702	\$(2)	BLANK\$COMMON
	\$(3)	CCONST		\$(0)	106543 106720
	\$(5)	TAPE		\$(2)	BLANK\$COMMON
NPTPLT	\$(1)	042703	043042	\$(4)	NCONST
	\$(3)	NCONST		\$(0)	106721 106735
				\$(2)	BLANK\$COMMON
NPAVEC	\$(1)	043043	043551	\$(4)	NPMASS
	\$(3)	CCONST		\$(0)	106736 106770
FRAME	\$(1)	043552	043570	\$(2)	BLANK\$COMMON
	\$(3)	IGS		\$(0)	106771 106776
SYMBOL	\$(1)	043571	043716	\$(2)	BLANK\$COMMON
	\$(3)	IGS		\$(0)	106777 107040
ABSBEA	\$(1)	043717	043762	\$(2)	BLANK\$COMMON
	\$(3)	IGS		\$(0)	107041 107053
CHAROP	\$(1)	043763	044057	\$(2)	BLANK\$COMMON
	\$(3)	IGS		\$(0)	107054 107071
ZNPMAX	\$(1)	044060	044305	\$(2)	BLANK\$COMMON
	\$(3)	HNP		\$(0)	107072 107223
	\$(5)	NODE		\$(2)	BLANK\$COMMON
	\$(7)	INDXS		\$(4)	NCONST
	\$(011)	CCONST		\$(6)	TAPE
NPPARA	\$(1)	044306	044755	\$(010)	INDXN
	\$(3)	CCONST		\$(0)	107224 107300
				\$(2)	BLANK\$COMMON
				\$(4)	NPMASS
NPSPHE	\$(1)	044756	045441	\$(0)	107301 107355
	\$(3)	CCONST		\$(2)	BLANK\$COMMON
				\$(4)	NPMASS
NPCONE	\$(1)	045442	045755	\$(0)	107356 107433
	\$(3)	CCONST		\$(2)	BLANK\$COMMON
	\$(5)	PLOT		\$(4)	NPMASS
NPCYLO	\$(1)	045756	046237	\$(0)	107434 107502
	\$(3)	CCONST		\$(2)	BLANK\$COMMON
	\$(5)	NPMASS		\$(4)	NCONST
NPTRAP	\$(1)	046240	046361	\$(0)	107503 107521
	\$(3)	NPMASS		\$(2)	BLANK\$COMMON
				\$(4)	CCONST
NPDISC	\$(1)	046362	046544	\$(0)	107522 107551

	\$ (3)	CCONST		\$ (2)	BLANKSCOMMON
				\$ (4)	NPHASS
NPRECT	\$ (1)	046945 046622		\$ (0)	107552 107584
	\$ (3)	NPHASS		\$ (2)	BLANKSCOMMON
NPAXES	\$ (1)	046623 047075		\$ (0)	107565 107631
	\$ (3)	NCONST		\$ (2)	BLANKSCOMMON
				\$ (4)	NPHASS
NPROTA	\$ (1)	047076 047403		\$ (0)	107632 107727
	\$ (3)	NCONST		\$ (2)	BLANKSCOMMON
				\$ (4)	CCONST
NPCONV	\$ (1)	047404 050130		\$ (0)	107730 110040
	\$ (3)	ARRAYS		\$ (2)	BLANKSCOMMON
	\$ (5)	PLOT		\$ (4)	MNP
	\$ (7)	CCONST		\$ (6)	NCONST
	\$ (011)	TITLE		\$ (010)	TAPE
INIT28	\$ (1)	050131 050225		\$ (0)	110041 110102
	\$ (3)	TAPE		\$ (2)	BLANKSCOMMON
	\$ (5)	IGS		\$ (4)	PLOTTR
CAL280 (COMMONBLOCK)					110103 110105
NPHASS (COMMONBLOCK)					110108 110142
NCONST (COMMONBLOCK)					110143 110201
NPMAIN	\$ (1)	050226 051253		\$ (0)	110202 110775
	\$ (3)	CCONST		\$ (2)	BLANKSCOMMON
	\$ (5)	NCONST		\$ (4)	MNP
	\$ (7)	TAPE		\$ (6)	NPHASS
	\$ (011)	AREA		\$ (010)	NODE
	\$ (013)	INXNS		\$ (012)	PLOT
	\$ (015)	TITLE		\$ (014)	INXN
				\$ (016)	CAL280
MNP (COMMONBLOCK)					110776 111020
NPPROG	\$ (1)	051254 051268		\$ (0)	111021 111024
	\$ (3)	MNP		\$ (2)	BLANKSCOMMON

SEGMENT GB*
FOLLOWS SEGMENT TR

030661 037606 104535 107314

WRITHT	\$ (1)	030661 031003		\$ (0)	104535 104556
	\$ (3)	CCONST		\$ (2)	BLANKSCOMMON
	\$ (5)	TITLE		\$ (4)	TAPE
	\$ (7)	ISTPDR		\$ (6)	RSTRT
				\$ (010)	ACCESS
GBRTI	\$ (1)	031004 031626		\$ (0)	104557 104741
	\$ (3)	CCONST		\$ (2)	BLANKSCOMMON
	\$ (5)	TITLE		\$ (4)	TAPE
	\$ (7)	ISTPDR		\$ (6)	RSTRT
GBINVG	\$ (1)	031627 034700		\$ (0)	104742 105123
	\$ (3)	CCONST		\$ (2)	BLANKSCOMMON
	\$ (5)	XSPACE		\$ (4)	TAPE
	\$ (7)	NOROLO		\$ (6)	NOROUP
	\$ (011)	FA		\$ (010)	BLOCK
	\$ (013)	ISTPDR		\$ (012)	SPACE
	\$ (015)	RSTRT		\$ (014)	TITLE
GBEND	\$ (1)	034701 034710		\$ (0)	105124 105127
				\$ (2)	BLANKSCOMMON
GBSCFA	\$ (1)	034711 035716		\$ (0)	105130 105365
	\$ (3)	AREA		\$ (2)	BLANKSCOMMON

	\$ (5)	EMISS		\$ (4)	ALPH
	\$ (7)	SRSO		\$ (6)	SRIR
	\$ (011)	TRSO		\$ (010)	TRIR
	\$ (013)	CCONST		\$ (012)	BLKGB
	\$ (015)	SPACE		\$ (014)	NODE
	\$ (017)	TITLE		\$ (016)	TAPE
	\$ (021)	ACCESS		\$ (020)	RSTRT
	\$ (023)	XSPACE		\$ (022)	ISTPDR
	\$ (025)	BLOCK		\$ (024)	FA
	\$ (027)	NOROLO		\$ (026)	NOROUP
GBFFTP	\$ (1)	035717 036165		\$ (0)	105366 105525
	\$ (3)	CCONST		\$ (2)	BLANK\$COMMON
	\$ (5)	TAPE		\$ (4)	TITLE
				\$ (6)	NHODIR
GBRSI	\$ (1)	036166 036727		\$ (0)	105526 105657
	\$ (3)	CCONST		\$ (2)	BLANK\$COMMON
	\$ (5)	NODE		\$ (4)	TAPE
	\$ (7)	RSTRT		\$ (6)	TITLE
	\$ (011)	FA		\$ (010)	ACCESS
GBPRE	\$ (1)	036730 036737		\$ (0)	105660 105663
				\$ (2)	BLANK\$COMMON
GBHEAD	\$ (1)	036740 036766		\$ (0)	105664 105740
	\$ (3)	CCONST		\$ (2)	BLANK\$COMMON
				\$ (4)	TAPE
NOROLO (COMMONBLOCK)					105741 106250
NOROUP (COMMONBLOCK)					106251 106360
BLOCK (COMMONBLOCK)					106561 106563
GBMAIN	\$ (1)	036767 037573		\$ (0)	106564 106721
	\$ (3)	AREA		\$ (2)	BLANK\$COMMON
	\$ (5)	CCONST		\$ (4)	ALPH
	\$ (7)	NOROUP		\$ (6)	BLOCK
	\$ (011)	EMISS		\$ (010)	NOROLO
	\$ (013)	SRIR		\$ (012)	NODE
	\$ (015)	TRIR		\$ (014)	SRSO
	\$ (017)	TAPE		\$ (016)	TRSO
	\$ (021)	NSPEC		\$ (020)	TITLE
	\$ (023)	ACCESS		\$ (022)	LN050
BLKGB (COMMONBLOCK)					106722 107217
XSPACE (COMMONBLOCK)					107220 107242
SPACE (COMMONBLOCK)					107243 107265
FA (COMMONBLOCK)					107266 107310
GBPROG	\$ (1)	037574 037606		\$ (0)	107311 107314
	\$ (3)	FA		\$ (2)	BLANK\$COMMON
	\$ (5)	XSPACE		\$ (4)	SPACE
				\$ (6)	BLKGB

SEGMENT RC* 030661 041331 104535 110752
FOLLOWS SEGMENT TR

BTAPE (COMMONBLOCK)					104535 104537
RCBTP	\$ (1)	030661 031013		\$ (0)	104540 105235
	\$ (3)	CCONST		\$ (2)	BLANK\$COMMON
	\$ (5)	ISTPDR		\$ (4)	TAPE
				\$ (6)	BTAPE
SORTDL	\$ (1)	031014 031422		\$ (0)	105236 105330
				\$ (2)	BLANK\$COMMON

CLEAR	\$ (1)	031423 031445	\$ (0)	105331 105335
RCEND	\$ (1)	031446 031453	\$ (2)	BLANK\$COMMON
	\$ (3)	CCONST	\$ (0)	105336 105341
	\$ (5)	SPCNO	\$ (2)	BLANK\$COMMON
RCPRT	\$ (1)	031456 031681	\$ (4)	NODE
	\$ (3)	RCSUM1	\$ (6)	TAPE
ENDTP	\$ (1)	031662 031764	\$ (0)	105342 105438
	\$ (3)	CCONST	\$ (2)	BLANK\$COMMON
RCPNCH	\$ (1)	031765 032434	\$ (4)	RCSUM2
	\$ (3)	CCONST	\$ (0)	105437 105532
	\$ (5)	RCEMIT	\$ (2)	BLANK\$COMMON
	\$ (7)	RCSUM1	\$ (4)	TAPE
RCPSS2	\$ (1)	032435 033547	\$ (6)	RCARET
	\$ (3)	CCONST	\$ (10)	RCSUM2
	\$ (5)	TITLE	\$ (0)	105716 106043
	\$ (7)	RCEMIT	\$ (2)	BLANK\$COMMON
	\$ (011)	MSND	\$ (4)	TAPE
	\$ (013)	SFS	\$ (6)	RCARET
	\$ (015)	RCVAR	\$ (010)	ISPN
	\$ (017)	RCSUM2	\$ (012)	NDS
RCPSS1	\$ (1)	033550 034447	\$ (014)	SPCNO
	\$ (3)	CCONST	\$ (018)	RCSUM1
	\$ (5)	SPCNO	\$ (0)	106044 106160
	\$ (7)	RCEMIT	\$ (2)	BLANK\$COMMON
	\$ (011)	ISPN	\$ (4)	TAPE
	\$ (013)	NDS	\$ (6)	ODTEMP
RCCMBN	\$ (1)	034450 035037	\$ (010)	RCARET
	\$ (3)	CCONST	\$ (012)	MSND
	\$ (5)	TITLE	\$ (0)	106161 106221
	\$ (7)	RCARET	\$ (2)	BLANK\$COMMON
	\$ (011)	MSND	\$ (4)	TAPE
	\$ (013)	ODTEMP	\$ (6)	RCEMIT
	\$ (015)	SPCNO	\$ (010)	ISPN
RCTRAN	\$ (1)	035040 037030	\$ (012)	NDS
	\$ (3)	TAPE	\$ (014)	SFS
	\$ (5)	NODE	\$ (016)	RCVAR
	\$ (7)	SPCNO	\$ (0)	106222 106443
RCINIT	\$ (1)	037031 037520	\$ (2)	BLANK\$COMMON
	\$ (3)	CCONST	\$ (4)	TITLE
	\$ (5)	TITLE	\$ (6)	NDS
	\$ (7)	RCARET	\$ (0)	106444 106540
	\$ (011)	MSND	\$ (2)	BLANK\$COMMON
	\$ (013)	NODE	\$ (4)	TAPE
	\$ (015)	EMISS	\$ (6)	RCEMIT
RCPRE	\$ (1)	037521 037530	\$ (010)	ISPN
	\$ (3)	CCONST	\$ (012)	NDS
	\$ (5)	SPCNO	\$ (014)	AREA
RCHEAD	\$ (1)	037531 037576	\$ (0)	106541 106544
	\$ (3)	TAPE	\$ (2)	BLANK\$COMMON
			\$ (4)	NODE
			\$ (6)	TAPE
			\$ (0)	106545 107057
			\$ (2)	BLANK\$COMMON
			\$ (4)	CCONST

RCVAR (COMMONBLOCK)
RCMAIN

\$ (1)	037577 041316	\$ (0)	107060 107060
\$ (3)	BLKRC	\$ (2)	107061 107430
\$ (5)	TAPE	\$ (4)	BLANKSCOMMON
\$ (7)	ALPH	\$ (6)	CCONST
\$ (011)	LNGSEG	\$ (10)	NODE
\$ (013)	MSND	\$ (012)	TITLE
\$ (015)	SFS	\$ (014)	ISPN
\$ (017)	NDS	\$ (016)	ARRAYS
\$ (021)	DIHS	\$ (018)	SPCNO
\$ (023)	RCARET	\$ (020)	ODTEMP
\$ (025)	RCSUM1	\$ (022)	RCEMIT
		\$ (024)	RCVAR
		\$ (026)	RCSUM2

BLKRC (COMMONBLOCK)
RCSUM2 (COMMONBLOCK)
RCSUM1 (COMMONBLOCK)
RCARET (COMMONBLOCK)
RCEMIT (COMMONBLOCK)
SPCNO (COMMONBLOCK)
SFS (COMMONBLOCK)
NDS (COMMONBLOCK)
MSND (COMMONBLOCK)
ISPN (COMMONBLOCK)
RCPROG

\$ (1)	041317 041331	\$ (0)	107431 110224
\$ (3)	ISPN	\$ (2)	110225 110247
\$ (5)	NDS	\$ (4)	110250 110272
\$ (7)	SPCNO	\$ (6)	110273 110316
\$ (011)	RCARET	\$ (10)	110317 110342
\$ (013)	RCSUM2	\$ (012)	110343 110368
		\$ (014)	110367 110412
		\$ (016)	110413 110436
		\$ (018)	110437 110602
		\$ (020)	110603 110748
		\$ (022)	110747 110752
		\$ (024)	BLANKSCOMMON
		\$ (026)	MSND
		\$ (028)	SFS
		\$ (030)	RCEMIT
		\$ (032)	RCSUM1
		\$ (034)	BLKRC

IBANK DRAWN TO SCALE: 300 WORDS DECIMAL PER DASH

TR (12209)

RC* (4393)

GB* (3542)

NP* (8454)

SF* (5619)

FF* (13984)

OD* (1955)

RD* (817)

DBANK DRAWN TO SCALE: 200 WORDS DECIMAL PER DASH

TR (7538)

RC° (2190)

OB° (1392)

NP° (2232)

SF° (4853)

FF° (7339)

OD° (636)

RD° (477)

SYSS°RLIBS. LEVEL 72-8
END MAP

@COPY,GM 15.RSO
FURPUR 27R1 RL72-8 06/22/78 20:30:00
3 BLOCKS COPIED.

@FREE 15

OUT,A TRASYSR.RSO.
FURPUR 27R1 RL72-8 06/22/78 20:30:01
1 ABS

@COPY,GM DIR.RSO
1 BLOCK COPIED.

@COPY,GM FFR.RSO
1 BLOCK COPIED.

@COPY,GM GBIRR.RSO
1 BLOCK COPIED.

@COPY,GM RIO.RSO
120 BLOCKS COPIED.

@COPY,GM SQNTL,R50
1 BLOCK COPIED.

@COPY,GM PLSR,R50
1 BLOCK COPIED.

@COPY,GM TQR,R50
1 BLOCK COPIED.

@TEST TE/0/S6
INTERVENING STATEMENTS SKIPPED

@TEST TE/1/S3
INTERVENING STATEMENTS SKIPPED

@JUMP L6
INTERVENING STATEMENTS SKIPPED

@L6;FREE ES3-TRASYS*LIBRYN.

@ASG.T DI.,F17/0/TRK/320

@ASG.T GB1R.,F17/0/TRK/320

@ASG.T GBS0.,F17/0/TRK/320

@ASG.T FF.,F17/0/POS/9

@ASG.T PLS.,F17/0/TRK/320

@ASG.T TQ.,F17/0/TRK/320

0ASG.T RARR..F17/0/TRK/320

0ASG.T SCRR..F17/0/POS/10

0USE 4,SCRR

0USE 9,FF

0USE 10,DI

0USE 11,G01R

0USE 12,G0S0

0USE 13,PLS

0USE 14,MASS2

0USE 15,RS0

0USE 17,RTI

0USE 18,RT0

0USE 19,USER1

0USE 20,USER2

0USE 24,RARR

0USE 27.TQ

0USE 28.TRAJ

0USE 29.BCDOU

0ENABLE.*RSS
FURPUR 27R1 RL72-B 06/22/78 20:30:57
ES3-N03711*RSS(1)
HAS NOT BEEN DISABLED

0XQT TRASYSP

NASA/MARTIN MARIETTA
THERMAL RADIATION ANALYSIS SYSTEM
UNIVAC 1110/EXEC 8

```

TTTTTTTTTTTT
TTTTTTTTTTTT
TT  TT  TT
  TTY
  TTY
  TTY
  TTY
  TTY
  TTY
TTTTTTT

```

```

RRRRRRRR
RRRRRRRR
RRR  RRR
RRR  RRR
RRRRRRRR
RRR  RRR
RRR  RRR
RRR  RRR
RRR  RRR

```

```

AAAAAA
AAAAAAAA
AAAAAAAAAA
AAA  AAA
AAA  AAA
AAAAAAAAAA
AAA  AAA
AAA  AAA
AAA  AAA
AAAA  AAAA

```

```

SSSSSSSS
SSSSSSSSSS
SSS  SS
SSS
SSSSSSSS
  SSS
SS  SSS
SSSSSSSSSS
SSSSSSSS

```

```

YYYY  YYYY
YYY  YYY
YYY  YYY
YY  YY
YYYYY
YYY
YYY
YYYYYYY

```

```

SSSSSSSS
SSSSSSSSSS
SSS  SS
SSS
SSSSSSSS
  SSS
SS  SSS
SSSSSSSSSS
SSSSSSSS

```

PROCESSOR EXECUTION

```

VERSION.MODIFICATION ... UL2E6
MODIFICATION DATE ..... 061978

DATE OF RUN ..... 062278
TIME OF RUN ..... 203529
JOB NUMBER ..... RVMH01

```

DATE 062270 TIME 203532

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 1

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
PROCESSING OPERATIONS DATA

SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

SEQUENCE	MODE	BOS	AREA	ALPH	EMISS	SURF. TYPE	ACTIVE	-----COMMENTS-----
1	1	BOXINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT FRONT
2	2	BOXINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT SIDE
3	3	BOXINR	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BACK
4	4	BOXINR	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BOTTOM
5	11	BOXINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT FRONT
6	12	BOXINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT SIDE
7	13	BOXINL	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BACK
8	14	BOXINL	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BOTTOM
9	5	LIDINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT LID
10	15	LIDINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER LEFT LID
11	21	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
12	22	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
13	23	BOXOUT	1.04040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
14	24	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
15	25	BOXOUT	1.04040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
16	26	LIDOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACE OF LID

MODE, AREA, AND PROPERTIES ARRAYS HAVE BEEN WRITTEN ON THE -RSO- TAPE.
BY -BUILDG- (ACCESS NUMBER = 1)

NODE PLOTTER

PARAMETER	DESCRIPTION	OPTION #.	DEFAULT
NV	VIEW NUMBER	1-6	1
IVU	VIEW	3HALL 3H3-D 1HX 1HY 1HZ 3HGEN	3HALL
SCL	SCALE FACTOR (3.15/LARGEST DISTANCE FROM CCS ORIGIN IN USER S UNITS)		AUTOMATIC SCALE
NACT	ACTIVE SIDE ARROW FLAG	YES , NO	NO
ISHO	SHADOWER-ONLY SURFACE PLOT FLAG	YES, NO	NO
ISELN	ARRAY NAME CONTAINING NUMBER OF NODES TO BE SELECTIVELY PLOTTED	ARRAY NAME	PLOTS ALL NODES
ITIT	ARRAY NAME OF PLOT TITLE	AY NAME	USES JOB TITLE
ROTX, ROTY, ROTZ.	VIEW ROTATIONS (FOR IVU = 3HGEN)	0 : ANG : 360	0.0 0.0 0.0
IROTX, IROTY, IROTZ	ORDER OF ROTATIONS (FOR IVU = 3HGEN)	1,2,3 (ANY ORDER)	1,2,3

*INPUT ZERO FOR DEFAULT ACTION

CALLING SEQUENCE-

CALL NDATA (NV, IVU, SCL, NACT, ISHO, ISELN, ITIT, ROTX, ROTY, ROTZ, IROTX, IROTY, IROTZ)

OR

CALL NDATAS (NV, IVU, SCL)

NOTE- IF NO CALLS TO NDATA/NDATAS ARE MADE, A CALL TO NPLLOT WILL RESULT IN ALL VIEWS AUTOMATICALLY SCALED GENERATED FOR NODES.

DATE 062278 TIME 203608

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 3

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
NODE PLOTTER DATA OUTPUT

SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

VIEW=3-D	SCALE= 1.2261	VIEW NUMBER=1
VIEW=Z-AXIS	SCALE= 1.2261	VIEW NUMBER=1
VIEW=X-AXIS	SCALE= 1.2261	VIEW NUMBER=1
VIEW=Y-AXIS	SCALE= 1.2261	VIEW NUMBER=1

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - W/PLOT/SFCAL/FFCAL/OBCAL/RKCAL - ORIGINAL RUN

NODE	CLOCK ANGLE																			CONE ANGLE
	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	
SOLAR SHADOW TABLE	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	.00	.00	.00	.00	.00	.81	.64	.33	.11	.00	.00	.17	.67	1.00	.00	.00	.00	.00	.00	22.5
	.00	.00	.00	.00	.00	.58	.42	.19	.08	.00	.00	.00	.03	1.00	.00	.00	.00	.00	.00	45.0
	.00	.00	.00	.00	.00	.19	.25	.17	.08	.00	.00	.00	.17	.61	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE
	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	
INFRA RED SHADOW TABLE	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	.00	.00	.00	.00	.00	.81	.64	.33	.11	.00	.00	.17	.67	1.00	.00	.00	.00	.00	.00	22.5
	.00	.00	.00	.00	.00	.58	.42	.19	.08	.00	.00	.00	.03	1.00	.00	.00	.00	.00	.00	45.0
	.00	.00	.00	.00	.00	.19	.25	.17	.08	.00	.00	.00	.17	.61	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

NODE	2	CLOCK ANGLE																		CONE ANGLE	
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE		.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
		.61	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.06	.17	.33	.44	.56	.58	.61	22.5
		.42	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.08	.42	.64	.61	.58	.42	45.0
		.19	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.17	.61	.42	.25	.22	.19	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	2	CLOCK ANGLE																		CONE ANGLE	
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE		.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
		.61	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.06	.17	.33	.44	.56	.58	.61	22.5
		.42	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.08	.42	.64	.61	.58	.42	45.0
		.19	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.17	.61	.42	.25	.22	.19	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

		CLOCK ANGLE																				
NODE		3	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE
SOLAR SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
		.00	.06	.08	.03	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
		1.00	.81	.53	.31	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.33	.83	1.00	1.00	1.00	45.0
		.33	.42	.31	.25	.08	.00	.00	.00	.00	.00	.00	.00	.00	.00	.25	.72	.50	.50	.33	.33	87.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

		CLOCK ANGLE																				
NODE		3	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE
INFRA RED SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
		.00	.06	.08	.03	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
		1.00	.81	.53	.31	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.33	.83	1.00	1.00	1.00	45.0
		.33	.42	.31	.25	.08	.00	.00	.00	.00	.00	.00	.00	.00	.00	.25	.72	.50	.50	.33	.33	87.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAHLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - M/PLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

		CLOCK ANGLE																			
NODE	4	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE
SOLAR SHADOW TABLE		.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
		.67	.56	.36	.39	.39	.28	.11	.00	.00	.00	.00	.00	.00	.17	.33	.50	.50	.67	.67	22.5
		.00	.00	.06	.08	.00	.00	.06	.00	.00	.00	.00	.00	.03	.28	.64	.50	.17	.00	.00	45.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

		CLOCK ANGLE																			
NODE	4	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE
INFRA RED SHADOW TABLE		.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
		.67	.56	.36	.39	.39	.28	.11	.00	.00	.00	.00	.00	.00	.17	.33	.50	.50	.67	.67	22.5
		.00	.00	.06	.08	.00	.00	.06	.00	.00	.00	.00	.00	.03	.28	.64	.50	.17	.00	.00	45.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAHPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
 SHADOW FACTOR GENERATOR LINK

CLOCK ANGLE

NODE 11 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

SOLAR SHADOW TABLE

	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
.00	.00	.00	.00	.00	1.00	.67	.17	.00	.00	.11	.33	.64	.81	.00	.00	.00	.00	.00	.00	.00	22.5
.00	.00	.00	.00	.00	1.00	.03	.00	.00	.00	.06	.19	.42	.59	.00	.00	.00	.00	.00	.00	.00	45.0
.00	.00	.00	.00	.00	.61	.17	.00	.00	.00	.08	.17	.25	.19	.00	.00	.00	.00	.00	.00	.00	67.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

CLOCK ANGLE

NODE 11 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

INFRA RED SHADOW TABLE

	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
.00	.00	.00	.00	.00	1.00	.67	.17	.00	.00	.11	.33	.64	.81	.00	.00	.00	.00	.00	.00	.00	22.5
.00	.00	.00	.00	.00	1.00	.03	.00	.00	.00	.06	.19	.42	.59	.00	.00	.00	.00	.00	.00	.00	45.0
.00	.00	.00	.00	.00	.61	.17	.00	.00	.00	.08	.17	.25	.19	.00	.00	.00	.00	.00	.00	.00	67.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
 SHADOW FACTOR GENERATOR LINK

NODE	CLOCK ANGLE																			CONE ANGLE	
	12	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
	.61	.58	.56	.44	.33	.17	.06	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.61	22.5
	.42	.58	.61	.64	.42	.08	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.42	45.0
	.19	.22	.25	.42	.61	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.19	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE	
	12	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
	.61	.58	.56	.44	.33	.17	.06	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.61	22.5
	.42	.58	.61	.64	.42	.08	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.42	45.0
	.19	.22	.25	.42	.61	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.19	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAHPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - M/PLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

NODE	13	CLOCK ANGLE																	CONE ANGLE		
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
SOLAR SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.03	.08	.06	.00	22.5
		1.00	1.00	.83	.33	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.17	.31	.53	.81	1.00	45.0
		.33	.50	.50	.72	.25	.00	.00	.00	.00	.00	.00	.00	.00	.00	.08	.25	.31	.42	.33	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	13	CLOCK ANGLE																	CONE ANGLE		
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
INFRA RED SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.03	.08	.06	.00	22.5
		1.00	1.00	.83	.33	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.17	.31	.53	.81	1.00	45.0
		.33	.50	.50	.72	.25	.00	.00	.00	.00	.00	.00	.00	.00	.00	.08	.25	.31	.42	.33	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
 SHADOW FACTOR GENERATOR LINK

		CLOCK ANGLE																				
NODE		14	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE
SOLAR SHADOW TABLE		.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
		.67	.67	.50	.50	.33	.17	.00	.00	.00	.00	.00	.00	.11	.28	.39	.39	.36	.56	.67	.87	22.5
		.00	.00	.17	.50	.64	.28	.03	.00	.00	.00	.00	.00	.06	.00	.00	.08	.06	.00	.00	.00	45.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

		CLOCK ANGLE																				
NODE		14	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE
INFRA RED SHADOW TABLE		.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
		.67	.67	.50	.50	.33	.17	.00	.00	.00	.00	.00	.00	.11	.28	.39	.39	.36	.56	.67	.87	22.5
		.00	.00	.17	.50	.64	.28	.03	.00	.00	.00	.00	.00	.06	.00	.00	.08	.06	.00	.00	.00	45.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - NSLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

NODE	CLOCK ANGLE																		CONE ANGLE		
	5	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
SOLAR SHADOW TABLE	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	90.0
	.67	.56	.67	.67	.72	.72	.00	.00	.00	.00	.00	.00	.00	.14	.14	.33	.50	.50	.67	.67	112.5
	.33	.39	.33	.31	.33	.33	.31	.22	.11	.00	.00	.00	.00	.00	.00	.17	.33	.33	.33	.33	135.0
	.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																		CONE ANGLE		
	5	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
INFRA RED SHADOW TABLE	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
	.67	.56	.67	.67	.72	.72	.00	.00	.00	.00	.00	.00	.00	.14	.14	.33	.50	.50	.67	.67	112.5
	.33	.39	.33	.31	.33	.33	.31	.22	.11	.00	.00	.00	.00	.00	.00	.17	.33	.33	.33	.33	135.0
	.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

		CLOCK ANGLE																				
NODE 15		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
SOLAR SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
		1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	67.5
		1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
		.67	.50	.50	.33	.14	.14	.00	.00	.00	.00	.00	.00	.00	.72	.72	.67	.67	.56	.67	.67	112.5
		.33	.33	.17	.00	.00	.00	.00	.00	.00	.00	.11	.22	.31	.33	.33	.31	.33	.39	.33	.33	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

		CLOCK ANGLE																				
NODE 15		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
INFRA RED SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
		1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	67.5
		1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
		.67	.50	.50	.33	.14	.14	.00	.00	.00	.00	.00	.00	.00	.72	.72	.67	.67	.56	.67	.67	112.5
		.33	.33	.17	.00	.00	.00	.00	.00	.00	.00	.11	.22	.31	.33	.33	.31	.33	.39	.33	.33	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

NODE	CLOCK ANGLE																			CONE ANGLE	
	21	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	45.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE	
	21	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	45.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG-CASE1 STEP=-1 SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
 SHADOW FACTOR GENERATOR LINK

CLOCK ANGLE

NODE 22 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

SOLAR SHADOW TABLE

CONE ANGLE

1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	67.5
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

CLOCK ANGLE

NODE 22 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

INFRA RED SHADOW TABLE

CONE ANGLE

1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	67.5
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAFPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
 SHADOW FACTOR GENERATOR LINK

		CLOCK ANGLE																				
NODE	23	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
SOLAR SHADOW TABLE		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	67.5
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

		CLOCK ANGLE																				
NODE	23	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
INFRA RED SHADOW TABLE		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	67.5
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

CLOCK ANGLE
 NODE 24 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

SOLAR SHADOW TABLE

CONE ANGLE

1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	22.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	45.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	90.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	112.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	135.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	157.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

CLOCK ANGLE
 NODE 24 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

INFRA RED SHADOW TABLE

CONE ANGLE

1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	22.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	45.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	90.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	112.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	135.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	157.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

NODE	CLOCK ANGLE																			CONE ANGLE	
	25	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	22.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	90.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	112.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	135.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE	
	25	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	22.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	90.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	112.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	135.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

THIS PAGE LEFT INTENTIONALLY BLANK.

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

CLOCK ANGLE
NODE 26 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

SOLAR SHADOW TABLE	CLOCK ANGLE																			CONE ANGLE
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	90.0
.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	112.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

CLOCK ANGLE
NODE 26 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

INFRA RED SHADOW TABLE	CLOCK ANGLE																			CONE ANGLE
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	90.0
.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	112.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

.....
SHADOW FACTORS FOR CONFIGURATION CASE1 HAVE BEEN STORED ON RSO.
LAST RECORD WRITTEN = 52

.....
TOTAL TIME FOR SHADOW FACTOR TABLES 46.4

MODEL=SAHLE CONFIG=CASE1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

FORM FACTORS AND COMBINED FORM FACTORS - USER INPUT AND DEFAULT PARAMETERS

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
FFACC	.0500	.0500	ORIENTATION ACCURACY PARAMETER	N/A
FFACCS	.1000	.1000	SHADOWING ACCURACY PARAMETER	N/A
FFMIN	.1-05	1.0E-06	PARAMETER TO ELIMINATE SMALL FORM FACTORS	N/A
FFNOSH	SHAD	SHAD	OVER RIDE SHADOWING PARAMETER	(SHAD,NOSH)
*FFPNCH	NO	NO	PARAMETER TO PUNCH FORM FACTORS	(YES,NO)
FFPRNT	YES	YES	FLAG FOR COMPREHENSIVE FF AND CM PRINT	(YES,NO,FF,CM,RB)
FFRATL	15.0	15.0	RATIO FOR USING SUB-NODE TECHNIQUE	N/A
FFCHB	NO	CORR	FLAG FOR COMBINING FORM FACTORS	(YES,NO,AUTO,CORR)

* -FFPNCH WILL DEFAULT TO -YES- ON CALCULATED VALUES IF THE -RSO- FILE IS NOT SPECIFIED IN THE OPTIONS DATA BLOCK

DATE 062278 TIME 203853

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC B VERSION

PAGE 21

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

SEQUENCE	NODE	AREA	ALPH	EMISS
1	1	1.00000	.900	.900
2	2	1.00000	.900	.900
3	3	1.00000	.800	.900
4	4	1.00000	.900	.900
5	11	1.00000	.900	.900
6	12	1.00000	.900	.900
7	13	1.00000	.900	.900
8	14	1.00000	.900	.900
9	5	1.00000	.900	.900
10	15	1.00000	.900	.900
11	21	2.06040	.200	.900
12	22	2.06040	.200	.900
13	23	1.04040	.200	.900
14	24	2.06040	.200	.900
15	25	1.04040	.200	.900
16	26	2.06040	.200	.900

NUMBER OF NODES = 16 NUMBER OF SURFACES = 10

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RXCAL - ORIGINAL RUN
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUSE OF RSI, RTI, OR CARD INPUT)
 (9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) W/SHAD	FIR(J,I) W/SHAD	FSOL(I,J) W/SHAD	FSOL(J,I) W/SHAD	FF(I,J) W/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ	
1	2	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	16.359	1108	1108	*
1	3	CAL	.201522	.201522	.201522	.201522	.201522	1.000000	1.000000	.417	36	36	
1	4	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	16.418	1108	1108	*
1	12	CAL	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.231	36	36	
1	13	CAL	.086058	.086058	.086058	.086058	.086058	1.000000	1.000000	.290	36	36	
1	14	CAL	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	16.627	1024	1024	*
1	5	CAL	.137203	.137203	.137203	.137203	.137203	1.000000	1.000000	.436	36	36	
1	15	CAL	.056006	.056006	.056006	.056006	.056006	1.000000	1.000000	.235	36	36	
1	FF SUM = .9690		ROW CP TIME = 51.084										
1	FORM FACTOR RESTART (RSO) RECORD = 56												
2	3	EQUIV	.207379	.207379	.207379	.207379	.000000	1.000000	1.000000	.005	0	0	
2	4	EQUIV	.207379	.207379	.207379	.207379	.000000	1.000000	1.000000	.001	0	0	
2	11	EQUIV	.032922	.032922	.032922	.032922	.000000	1.000000	1.000000	.001	0	0	
2	12	CAL	.068832	.068832	.068832	.068832	.068832	1.000000	1.000000	.265	36	36	
2	13	CAL	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.218	36	36	
2	14	CAL	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.234	36	36	
2	5	CAL	.096343	.096343	.096343	.096343	.096343	1.000000	1.000000	15.431	1024	1024	*
2	15	CAL	.034262	.034262	.034262	.034262	.034262	1.000000	1.000000	.223	36	36	
2	FF SUM = .9203		ROW CP TIME = 18.445										
2	FORM FACTOR RESTART (RSO) RECORD = 57												
3	4	EQUIV	.207379	.207379	.207379	.207379	.000000	1.000000	1.000000	.004	0	0	
3	11	EQUIV	.086058	.086058	.086058	.086058	.000000	1.000000	1.000000	.001	0	0	
3	12	EQUIV	.032922	.032922	.032922	.032922	.000000	1.000000	1.000000	.003	0	0	
3	14	CAL	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	16.246	1024	1024	*
3	5	CAL	.050426	.050426	.050426	.050426	.050426	1.000000	1.000000	15.560	1024	1024	*
3	15	CAL	.011660	.011660	.011660	.011660	.011660	1.000000	1.000000	15.634	1024	1024	*
3	FF SUM = .8378		ROW CP TIME = 47.510										

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
(UN-INDICATES UNKNOWN CALCULATION MODE BECAUSE OF RSI, RTI, OR CARD INPUT)
(9.99999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) N/SHAD	FIR(J,I) N/SHAD	FSOL(I,J) N/SHAD	FSOL(J,I) N/SHAD	FF(I,J) NO/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
FORM FACTOR RESTART (RSO) RECORD = 58												
4	11	EQUIV	.040501	.040501	.040501	.040501	.000000	.000000	.000000	.004	0	0
4	12	EQUIV	.032922	.032922	.032922	.032922	.000000	1.000000	1.000000	.004	0	0
4	13	EQUIV	.040501	.040501	.040501	.040501	.000000	1.000000	1.000000	.005	0	0
4	5	CAL	.107798	.107798	.107798	.107798	.107798	1.000000	1.000000	.290	36	36
4	15	CAL	.056851	.056851	.056851	.056851	.056851	1.000000	1.000000	.233	36	36
4	FF SUM = .8007		ROW CP TIME = .588									
FORM FACTOR RESTART (RSO) RECORD = 59												
11	12	EQUIV	.207379	.207379	.207379	.207379	.000000	1.000000	1.000000	.004	0	0
11	13	EQUIV	.201522	.201522	.201522	.201522	.000000	1.000000	1.000000	.001	0	0
11	14	EQUIV	.207379	.207379	.207379	.207379	.000000	1.000000	1.000000	.001	0	0
11	5	EQUIV	.056006	.056006	.056006	.056006	.000000	1.000000	1.000000	.001	0	0
11	15	EQUIV	.137203	.137203	.137203	.137203	.000000	1.000000	1.000000	.001	0	0
11	FF SUM = .9690		ROW CP TIME = .052									
FORM FACTOR RESTART (RSO) RECORD = 60												
12	13	EQUIV	.207379	.207379	.207379	.207379	.000000	1.000000	1.000000	.005	0	0
12	14	EQUIV	.207379	.207379	.207379	.207379	.000000	1.000000	1.000000	.001	0	0
12	5	EQUIV	.034262	.034262	.034262	.034262	.000000	1.000000	1.000000	.001	0	0
12	15	EQUIV	.096343	.096343	.096343	.096343	.000000	1.000000	1.000000	.001	0	0
12	FF SUM = .9203		ROW CP TIME = .049									
FORM FACTOR RESTART (RSO) RECORD = 61												
13	14	EQUIV	.207379	.207379	.207379	.207379	.000000	1.000000	1.000000	.003	0	0
13	5	EQUIV	.011660	.011660	.011660	.011660	.000000	1.000000	1.000000	.001	0	0
13	15	EQUIV	.050426	.050426	.050426	.050426	.000000	1.000000	1.000000	.001	0	0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)
 (9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) W/SHAD	FIR(J,I) W/SHAD	FSOL(I,J) W/SHAD	FSOL(J,I) W/SHAD	FF(I,J) W/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
13		FF SUM = .8378 FORM FACTOR RESTART										
			ROW CP TIME =	(RSO) RECORD =	.077	62						
14	5	EQUIV	.056851	.056851	.056851	.056851	.000000	1.000000	1.000000	.004	0	0
14	15	EQUIV	.107798	.107798	.107798	.107798	.000000	1.000000	1.000000	.002	0	0
14		FF SUM = .9007 FORM FACTOR RESTART										
			ROW CP TIME =	(RSO) RECORD =	.033	63						
5		FF SUM = .5505 FORM FACTOR RESTART										
			ROW CP TIME =	(RSO) RECORD =	.014	64						
15		FF SUM = .5505 FORM FACTOR RESTART										
			ROW CP TIME =	(RSO) RECORD =	.012	65						
21		FF SUM = .0000 FORM FACTOR RESTART										
			ROW CP TIME =	(RSO) RECORD =	.009	66						
22		FF SUM = .0000										
			ROW CP TIME =		.010							

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUSE OF RSI, RTI, OR CARD INPUT)
 (9.99999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) W/SHAD	FIR(J,I) W/SHAD	FSOL(I,J) W/SHAD	FSOL(J,I) W/SHAD	FF(I,J) W/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
		FORM FACTOR RESTART (RSO) RECORD =										
23		FF SUM = .0000 ROW CP TIME = .007										
		FORM FACTOR RESTART (RSO) RECORD = 68										
24		FF SUM = .0000 ROW CP TIME = .011										
		FORM FACTOR RESTART (RSO) RECORD = 69										
25		FF SUM = .0000 ROW CP TIME = .007										
		FORM FACTOR RESTART (RSO) RECORD = 70										
26		FF SUM = .0000 ROW CP TIME = .006										
		FORM FACTOR RESTART (RSO) RECORD = 71										

.....
 FF FORM FACTORS FOR CONFIGURATION CASE1 HAVE BEEN STORED ON RSO.
 LAST RESTART RECORD WRITTEN = 71

DATE 062270 TIME 204140

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION PAGE 26

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 1 - NPLOTT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

SUMMARY OF FORM FACTOR SUMS FOR ALL NODES

NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM
1- .9690	2- .9203	3- .8378	4- .9007	11- .9690	12- .9203
13- .8378	14- .9007	5- .5505	15- .5505	21- .0000	22- .0000
23- .0000	24- .0000	25- .0000	26- .0000		

TOTAL TIME FOR FORM FACTOR SEGMENT 116.634

TOTAL TIME SINCE START OF RUN 215.549

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 1 - N/PLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN
GRAY BODIES COMPUTATION LINK.

VARIABLE NAME	CURRENT VALUE	DEFAULT	GREY BODIES DEFINITION	OPTIONS
GBMBND	BOTH	BOTH	WAVEBAND DEFINITION PARAMETER	(2HIR.3HSOL.4HBOTH)

.....

IR GRAY BODIES FOR CONFIGURATION CASE1 HAVE BEEN COMPUTED AND STORED ON RSO.
LAST RESTART RECORD WRITTEN # 89

.....

.....

SOL GRAY BODIES FOR CONFIGURATION CASE1 HAVE BEEN COMPUTED AND STORED ON RSO.
LAST RESTART RECORD WRITTEN # 107

.....

TOTAL TIME TO COMPUTE GRAY BODIES .83

MODEL=SAFPLE CONFIG=CASE1 STEP=-1
 RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

VARIABLE NAME	CURRENT VALUE	DEFAULT	RADIATION CONDUCTORS DEFINITION	OPTIONS
RKPNCH	PUN	NO	PUNCH/NO PUNCH PARAMETER FOR RADKS	(YES,NO)
RKMIN	.0001	0.0001	PARAMETER TO ELIMINATE SMALL RADK S	N/A
IRKCN	1	1	INITIAL RADIATION CONDUCTOR ID NUMBER	N/A
RKSP	SPACE	NO	MNEHONIC FLAG FOR COMPUTATION OF RADKS TO SPACE	(SPACE,NO)
IRKNSP	999	32767	SPACE NODE ID NUMBER	N/A
SIGMA	.17-08	1.713E-9	STEFAN-BOLTZMANN CONSTANT	N/A
RKAMPF	1.00	1.0	AREA MULTIPLYING FACTOR	N/A
RKTAPE	NO	NO	PARAMETER TO OUTPUT TO BCD TAPE	(TAPE,NO)
RFRAC	.7+00	0.7	SIGNIFICANT RADIATION FRACTION	(0. TO 1.)
RTOL	.990	0.99	DECIMAL FRACTION OF LAST RADK SAVED	N/A
NERN	0	0	EFFECTIVE RADIATION NODE (ERN) NUMBER	N/A

DATE 062270 TIME 204140

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 29

MODEL=SAHPLE CONFIG=CASE1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 1 - MLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

SPECIAL RADIATION NODES

NONE

MESS SPECIAL NODES

PRIMARY SECONDARY

NONE

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

RADIATION CONDUCTOR (RADKS) CARDS

AREA UNITS = INPUT UNITS * AMPF. WHERE AMPF = 1.00000

PUNCHED AND/OR BCDOU RADKS -	-	1.	1.	2.	.30388-09\$
PUNCHED AND/OR BCDOU RADKS -	-	2.	1.	3.	.29434-09\$
PUNCHED AND/OR BCDOU RADKS -	-	3.	1.	4.	.30399-09\$
PUNCHED AND/OR BCDOU RADKS -	-	4.	1.	11.	.12030-10\$
PUNCHED AND/OR BCDOU RADKS -	-	5.	1.	12.	.55485-10\$
PUNCHED AND/OR BCDOU RADKS -	-	6.	1.	13.	.12522-09\$
PUNCHED AND/OR BCDOU RADKS -	-	7.	1.	14.	.64507-10\$
PUNCHED AND/OR BCDOU RADKS -	-	8.	1.	5.	.19915-09\$
PUNCHED AND/OR BCDOU RADKS -	-	9.	1.	15.	.82979-10\$
PUNCHED AND/OR BCDOU RADKS -	-	10.	2.	3.	.30243-09\$
PUNCHED AND/OR BCDOU RADKS -	-	11.	2.	4.	.30341-09\$
PUNCHED AND/OR BCDOU RADKS -	-	12.	2.	11.	.55485-10\$
PUNCHED AND/OR BCDOU RADKS -	-	13.	2.	12.	.10306-09\$
PUNCHED AND/OR BCDOU RADKS -	-	14.	2.	13.	.54412-10\$
PUNCHED AND/OR BCDOU RADKS -	-	15.	2.	14.	.54024-10\$
PUNCHED AND/OR BCDOU RADKS -	-	16.	2.	5.	.14389-09\$
PUNCHED AND/OR BCDOU RADKS -	-	17.	2.	15.	.54005-10\$
PUNCHED AND/OR BCDOU RADKS -	-	18.	3.	4.	.30228-09\$
PUNCHED AND/OR BCDOU RADKS -	-	19.	3.	11.	.12522-09\$
PUNCHED AND/OR BCDOU RADKS -	-	20.	3.	12.	.54412-10\$
PUNCHED AND/OR BCDOU RADKS -	-	21.	3.	13.	.89273-11\$
PUNCHED AND/OR BCDOU RADKS -	-	22.	3.	14.	.63116-10\$
PUNCHED AND/OR BCDOU RADKS -	-	23.	3.	5.	.81540-10\$
PUNCHED AND/OR BCDOU RADKS -	-	24.	3.	15.	.23578-10\$
PUNCHED AND/OR BCDOU RADKS -	-	25.	4.	11.	.64507-10\$
PUNCHED AND/OR BCDOU RADKS -	-	26.	4.	12.	.54024-10\$
PUNCHED AND/OR BCDOU RADKS -	-	27.	4.	13.	.63116-10\$
PUNCHED AND/OR BCDOU RADKS -	-	28.	4.	14.	.90305-11\$
PUNCHED AND/OR BCDOU RADKS -	-	29.	4.	5.	.15910-09\$
PUNCHED AND/OR BCDOU RADKS -	-	30.	4.	15.	.83921-10\$
PUNCHED AND/OR BCDOU RADKS -	-	31.	11.	12.	.30388-09\$
PUNCHED AND/OR BCDOU RADKS -	-	32.	11.	13.	.29434-09\$
PUNCHED AND/OR BCDOU RADKS -	-	33.	11.	14.	.30399-09\$
PUNCHED AND/OR BCDOU RADKS -	-	34.	11.	5.	.82979-10\$
PUNCHED AND/OR BCDOU RADKS -	-	35.	11.	15.	.19915-09\$
PUNCHED AND/OR BCDOU RADKS -	-	36.	12.	13.	.30243-09\$
PUNCHED AND/OR BCDOU RADKS -	-	37.	12.	14.	.30341-09\$
PUNCHED AND/OR BCDOU RADKS -	-	38.	12.	5.	.54005-10\$
PUNCHED AND/OR BCDOU RADKS -	-	39.	12.	15.	.14389-09\$
PUNCHED AND/OR BCDOU RADKS -	-	40.	13.	14.	.30228-09\$

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

RADIATION CONDUCTOR (RADK) CARDS

AREA UNITS = INPUT UNITS * AMPF, WHERE AMPF = 1.00000

PUNCHED AND/OR BCDOU RADKS -	-	41,	13,	5,	.23578-10\$
PUNCHED AND/OR BCDOU RADKS -	-	42,	13,	15,	.81540-10\$
PUNCHED AND/OR BCDOU RADKS -	-	43,	14,	5,	.03921-10\$
PUNCHED AND/OR BCDOU RADKS -	-	44,	14,	15,	.15910-09\$
PUNCHED AND/OR BCDOU RADKS -	-	45,	5,	15,	.52902-11\$
PUNCHED AND/OR BCDOU RADKS -	-	46,	1,	999,	.76855-10\$
PUNCHED AND/OR BCDOU RADKS -	-	47,	2,	999,	.14541-09\$
PUNCHED AND/OR BCDOU RADKS -	-	48,	3,	999,	.26442-09\$
PUNCHED AND/OR BCDOU RADKS -	-	49,	4,	999,	.17657-09\$
PUNCHED AND/OR BCDOU RADKS -	-	50,	11,	999,	.76855-10\$
PUNCHED AND/OR BCDOU RADKS -	-	51,	12,	999,	.14541-09\$
PUNCHED AND/OR BCDOU RADKS -	-	52,	13,	999,	.26442-09\$
PUNCHED AND/OR BCDOU RADKS -	-	53,	14,	999,	.17657-09\$
PUNCHED AND/OR BCDOU RADKS -	-	54,	5,	999,	.70085-09\$
PUNCHED AND/OR BCDOU RADKS -	-	55,	15,	999,	.70085-09\$
PUNCHED AND/OR BCDOU RADKS -	-	56,	21,	999,	.31765-08\$
PUNCHED AND/OR BCDOU RADKS -	-	57,	22,	999,	.31765-08\$
PUNCHED AND/OR BCDOU RADKS -	-	58,	23,	999,	.16040-08\$
PUNCHED AND/OR BCDOU RADKS -	-	59,	24,	999,	.31765-08\$
PUNCHED AND/OR BCDOU RADKS -	-	60,	25,	999,	.16040-08\$
PUNCHED AND/OR BCDOU RADKS -	-	61,	26,	999,	.31765-08\$

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 1 - M/PLOT/SFCAL/FFCAL/OBCAL/RKCAL - ORIGINAL RUN

CONSERVATION CHECKS
RADIATION SUMS FOR EACH NODE BEFORE RKHIN SCREENING

1 - .10000+01	2 - .10000+01	3 - .10000+01	4 - .10000+01	11 - .10000+01	12 - .10000+01
13 - .10000+01	14 - .10000+01	5 - .10000+01	15 - .10000+01	21 - .10000+01	22 - .10000+01
23 - .10000+01	24 - .10000+01	25 - .10000+01	26 - .10000+01		

DATE 062278 TIME 204149

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 33

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 1 - NPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

CONSERVATION CHECKS
RADIATION SUMS FOR EACH NODE AFTER RKM IN SCREENING

1 - .10000+01	2 - .10000+01	3 - .10000+01	4 - .10000+01	11 - .10000+01	12 - .10000+01
13 - .10000+01	14 - .10000+01	5 - .10000+01	15 - .10000+01	21 - .10000+01	22 - .10000+01
23 - .10000+01	24 - .10000+01	25 - .10000+01	26 - .10000+01		

TOTAL TIME TO COMPUTE AND CONDENSE RADKS = .65

IT HAS BEEN A PLEASURE SERVING YOU. I HOPE YOU ENJOY YOUR 4. FRAMES OF S-C 4060 OUTPUT.


←NOTE← TRASYS GENERATED 4 PLOT FRAMES

NORMAL TERMINATION BY PROCESSOR

OPHD,PLEB

BRKPT PRINTS


SAMPLE CASE 1 - WPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

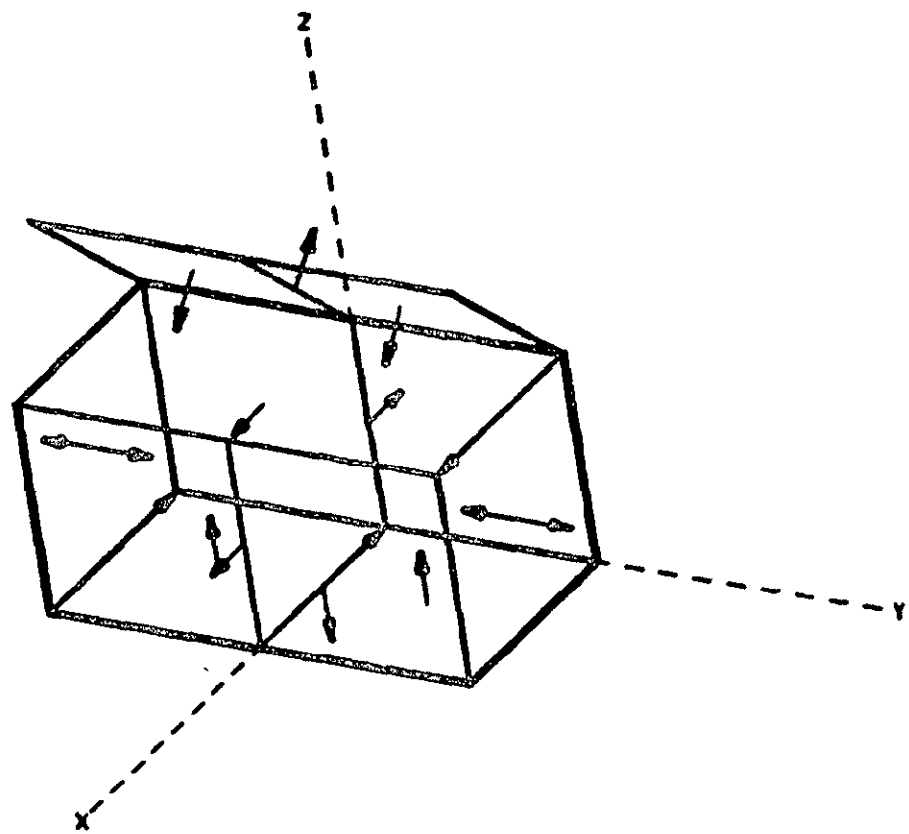

H-109

VIEW = 3-D
SCALE = 1.2261
VIEW NUMBER = 1

SAMPLE CASE 1 - HPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUN

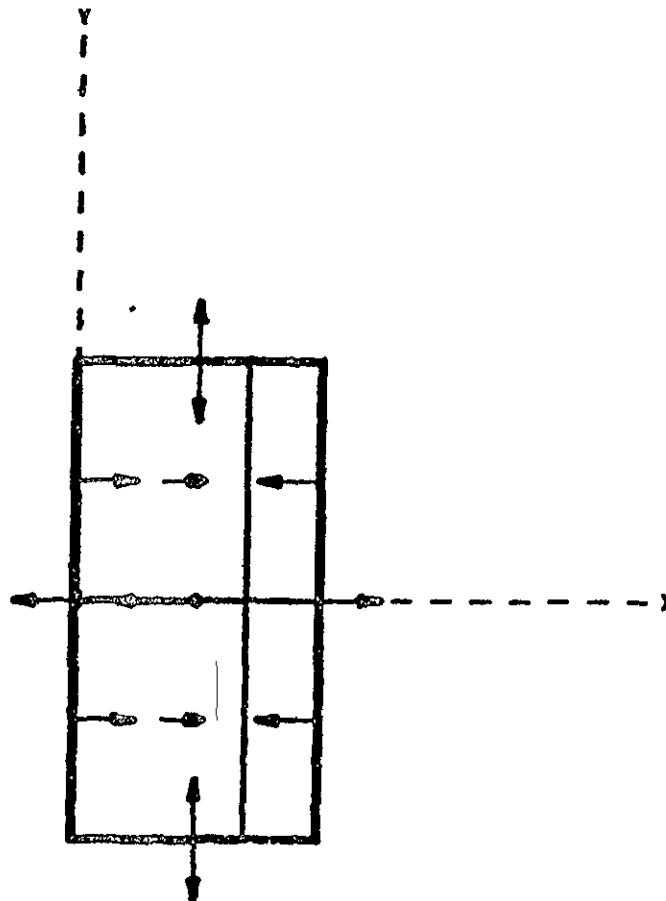


H-110

VIEW = Z-AXIS

SCALE = 1.2261


+ VIEW NUMBER = 1

SAMPLE CASE 1 - EPL0T/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUB

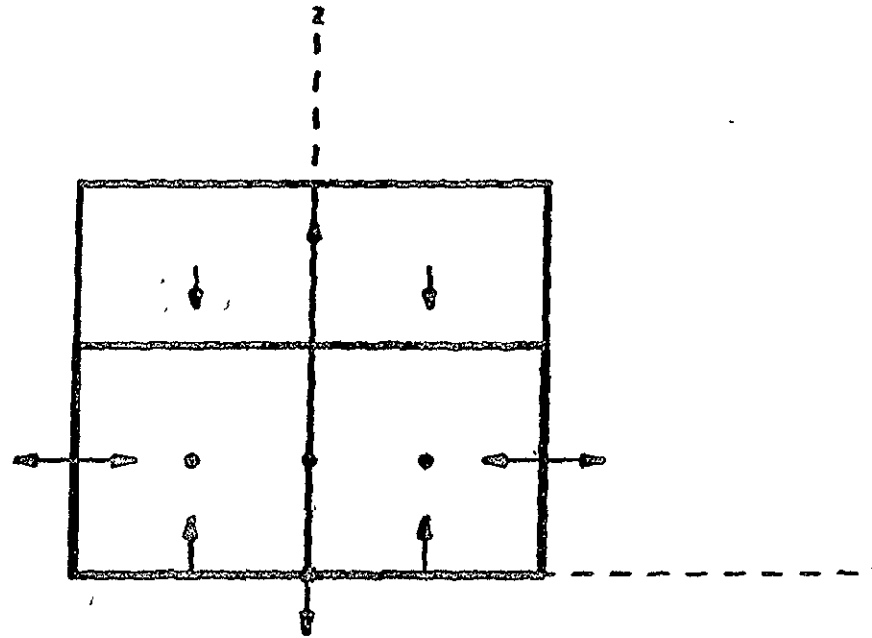

H-111
VIEW = X-AXIS
SCALE = 1.2261
VIEW NUMBER = 1

SAMPLE CASE 1 - NPLOT/SFCAL/FFCAL/GBCAL/RKCAL - ORIGINAL RUC

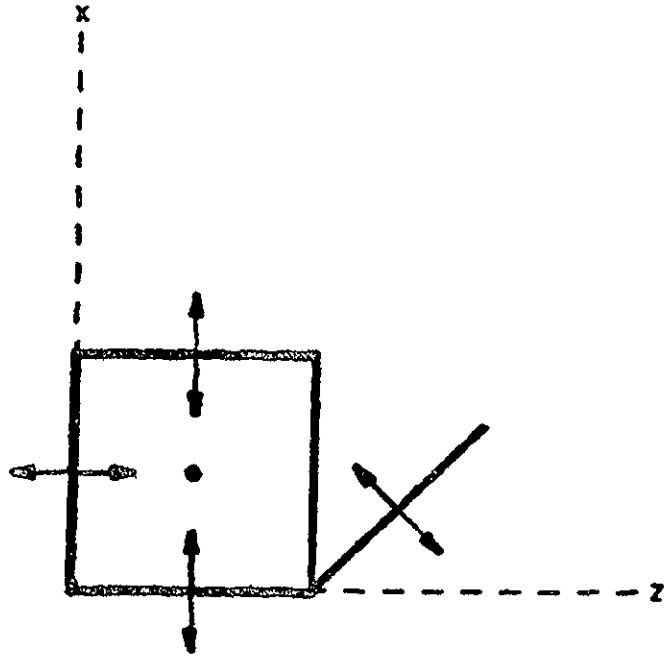

H-112

VIEW = Y-AXIS
SCALE = 1.2261
VIEW NUMBER = 1

SAMPLE CASE 2

SAMPLE CASE 2

0ED,R VOGTB.CASE2
FILE IN FIELD 1 DISABLED--ACCEPTED
FILE IN FIELD 1 IN USE BY ANOTHER RUN
READ-ONLY MODE
CASE UPPER ASSUMED
ED 14.02-06/27-00:50-10.)
EDIT

1:0RUN,R/R RVMH02,3248-F261-C,ES3-N03711,07,300 NO DECK VOGT
10:0ASG,T RSI.,0C,X04861
11:0ADD ES3-TRASYS*TRASYS.STARTM
12:0SETC 0100
13:0ADD PREPRO
14:HEADER OPTIONS DATA
15:TITLE SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
16:C RESTARTING SFCAL/FFCAL/GBCAL FROM SAMPLE CASE 1
17:C COMBINING NODES IN RCCAL
18:C CALCULATING DIRECT INCIDENT FLUXES USING SHADOW
19:C FACTOR TABLES FROM SAMPLE CASE 1.
20:C
21: MODEL = SAMPLE
22: RSI = RSTSAM
23: RSO = RSTSAM2
24:HEADER EDIT DATA
25:*0,127,171
26:*0,195
27:C-----BUILD THE CASE 1 CONFIGURATION FOR SFCAL/FFCAL/GBCAL RESTART
28:*0,198,203
29:*0,205
30:C-----READ AND PRINT THE SHADOW FACTOR TABLES FROM RSI FOR USE IN
31:*1,207
32: SFFRNT=YES
33:*0,210
34:C-----READ THE FORM FACTOR MATRIX FROM RSI
35:*0,214
36:C-----READ THE GRAY BODY MATRICES FROM RSI
37:*0,219,221
38:C-----CALCULATE AND PUNCH RADKS WITH COMBINED NODES
39:C
40: CALL RKDATA(0,0,0,0,SPACE,999,0,0,0,5HCASE2)
41:*1,222
42:C
43:C-----DEFINE ORBIT AND VEHICLE ORIENTATION (CIRCULAR - PLANET ORIENTED)
44:C
45: CALL ORBIT2(EAR,0,60.,0,0,0,100.*6080.,100.*6080.)
46: CALL ORIENT(4HPLAN,1,2,3,300.,270.,0.)
47:C
48:ORBGEN CIRP,0.,180.,2,A0
49:C
50:C-----THE CONFIGURATION NAME IS REDEFINED SO THE QC'S WILL USE
51:C-----THE DESIRED(CASE2) CORRESPONDENCE DATA.
52:C
53: MODELN=5HCASE2
54: CALL QODATA(5HALL,0,0,0,0,0,0,0)
55:L QOCAL
56:C
57:C-----MAKE ORBIT PLOTS
58:C

59: CALL ODATAS(1,0,0,0,0,0,0) -
60: CALL ODATAS(2,0,0,0,0,90,0,0)
61: CALL ODATAS(3,0,0,0,0,180,0,0)
62:L OPL0T
63:0PMD,0LEP
64:0ASG,T/S RSO,0C,R50,02,R50 APPENDIX H, CASE 2.
65:0ADD PROCSS
73:0FIN

NO CORRECTIONS APPLIED.

0ASG,T R51,0C,X04861

0FREE TPF\$.

0ASG,T TPF\$..F4/0/TRK/400

NASA/MARTIN MARIETTA
THERMAL RADIATION ANALYSIS SYSTEM
UNIVAC 1110/EXEC 6

```
TTTTTTTTTTTT
TTTTTTTTTTTT
TT  TTT  TT
   TTT
   TTT
   TTT
   TTT
   TTT
TTTTTTT
```

```
RRRRRRRR
RRRRRRRR
RRR  RRR
RRR  RRR
RRRRRRRR
RRR  RRR
RRR  RRR
RRR  RRR
RRR  RRR
RRR  RRR
```

```
AAAAAA
AAAAAAAA
AAAAAAAAAA
AAA  AAA
AAA  AAA
AAAAAAAAAA
AAA  AAA
AAA  AAA
AAA  AAA
AAAA  AAAA
```

```
SSSSSSSS
SSSSSSSSSS
SSS  SS
SSS
SSSSSSSS
   SSS
SS  SSS
SSSSSSSSSS
SSSSSSSS
```

T R A S Y S I I

```
YYYY  YYYY
YYY  YYY
YYY  YYY
YYY  YYY
YYYYY
YYY
YYY
YYY
YYYYYYY
```

```
SSSSSSSS
SSSSSSSSSS
SSS  SS
SSS
SSSSSSSS
   SSS
SS  SSS
SSSSSSSSSS
SSSSSSSS
```

PRE-PROCESSOR EXECUTION

```
VERSION.MODIFICATION ... UC2E3
MODIFICATION DATE ..... 052678

DATE OF RUN ..... 062778
TIME OF RUN ..... 005219
JOB NUMBER ..... RVHH02
```

MODEL = N/A
OPTION AND TITLE DATA BLOCKS

CARD ORGIN 12345670 1 2345670 2 2345670 3 2345670 4 2345670 5 2345670 6 2345670 7 2345670 8 EDIT NO. OLD EDIT NO. LABEL

INPUT	HEADER OPTIONS DATA
INPUT	TITLE SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
INPUT	C RESTARTING SFCAL/FFCAL/GBCAL FROM SAMPLE CASE 1
INPUT	C COMBINING NODES IN RCCAL
INPUT	C CALCULATING DIRECT INCIDENT FLUXES USING SHADOW
INPUT	C FACTOR TABLES FROM SAMPLE CASE 1.
INPUT	C
INPUT	MODEL = SAMPLE
INPUT	RSI = RSTSAM
INPUT	RSO = RSTSAM2

MODEL = SAMPLE SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
TRASYS INFORMATION TO USER

.....
* ATTENTION TRASYS USERS *
.....

THIS SECTION OF THE TRASYS PRINTOUT WAS DEvised TO INFORM THE TRASYS USERS OF THE STATUS OF THE TRASYS PROGRAM WITHOUT HAVING TO PRINTOUT ALL THE STATUS INFORMATION ON EVERY RUN. TO OBTAIN ADDITIONAL INFORMATION ON HOW TO USE THIS SECTION OF THE TRASYS PRINTOUT, PLACE A (INFO=INFO) IN THE OPTIONS DATA BLOCK.

FOR TRASYS ASSISTANCE AND/OR POSSIBLE TRASYS PROGRAM PROBLEMS, PLEASE CONTACT BOB VOGT AT JSC-2326.

NEHRL 08/29/77 DOCUMENTATION ADDITION

THE TRASYS -N- VERSION HAS BEEN UPDATED TO THE UC2E2 AND UL2E4 LEVEL.
SEE LATEST USERS MANUAL FOR INFORMATION ON USER-CALLED SUBROUTINE ARGUMENT CHANGES AND NEW CAPABILITIES.

END OF TRASYS INFORMATION FILE

DATE 062778 TIME 005226

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC B VERSION

PAGE 3

MODEL = SAMPLE
MODEL HISTORY

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLO

MODEL NAME SAMPLE

MODEL TITLE SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLO

MOD LABEL	RUN NUMBER	JOB	RUN DATA	RUN TIME	RSI TAPE	RSO TAPE	RTI TAPE	RTO TAPE	CMERG TAPE	EMERG TAPE	BCDOU TAPE	TRAJ TAPE	USER1 TAPE	USER2 TAPE
AA	RVMH01		062278	202625										RSTSAM
AB	RVMH02		062778	005225										RSTSAM

DATE 062776 TIME 005227

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION

PAGE 4

MODEL = SAMPLE
SOURCE DATA EDIT DIRECTIVES

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

HEADER EDIT DATA

40,127,171

HEADER FORM FACTOR DATA

C

C-----ENTER KNOWN ZERO FORM FACTORS AND EQUIVALENT FORM FACTORS FOR

C-----CASE1.

C

FIG CASE1

NODEA 1,2,3,4,11,12,13,14,5,15,21,22,23,24,25,26.END

BOTH 21,ZERO

22,ZERO

23,ZERO

24,ZERO

25,ZERO

26,ZERO

1,1,0.

11,12,1,2

11,13,1,3

11,14,1,4

11,15,1,5

1,11,0.

11,2,1,12

11,3,1,13

11,4,1,14

11,5,1,15

2,2,0.

2,3,1,2

2,4,1,4

12,13,2,3

12,14,2,4

12,15,2,5

12,3,2,13

12,4,2,14

12,5,2,15

3,3,0.

3,4,1,4

13,14,3,4

13,15,3,5

3,13,0.

13,4,3,14

13,5,3,15

4,4,0.

14,15,4,5

4,14,0.

14,5,4,15

5,5,0.

5,15,0.

OLD-	127	AA
OLD-	128	AA
OLD-	129	AA
OLD-	130	AA
OLD-	131	AA
OLD-	132	AA
OLD-	133	AA
OLD-	134	AA
OLD-	135	AA
OLD-	136	AA
OLD-	137	AA
OLD-	138	AA
OLD-	139	AA
OLD-	140	AA
OLD-	141	AA
OLD-	142	AA
OLD-	143	AA
OLD-	144	AA
OLD-	145	AA
OLD-	146	AA
OLD-	147	AA
OLD-	148	AA
OLD-	149	AA
OLD-	150	AA
OLD-	151	AA
OLD-	152	AA
OLD-	153	AA
OLD-	154	AA
OLD-	155	AA
OLD-	156	AA
OLD-	157	AA
OLD-	158	AA
OLD-	159	AA
OLD-	160	AA
OLD-	161	AA
OLD-	162	AA
OLD-	163	AA
OLD-	164	AA
OLD-	165	AA
OLD-	166	AA
OLD-	167	AA
OLD-	168	AA
OLD-	169	AA
OLD-	170	AA
OLD-	171	AA

MODEL = SAMPLE SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
 SURFACE DATA INPUT BLOCK

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

RSI	HEADER SURFACE DATA	1	OLD-	1	AA
RSI	C	2	OLD-	2	AA
RSI	C-----THIS SURFACE DATA BLOCK IS USED IN SAMPLE CASES 1 THROUGH 5	3	OLD-	3	AA
RSI	C-----WITH VARIOUS PORTIONS OF IT BEING ACTIVATED FOR THE DIFFERENT	4	OLD-	4	AA
RSI	C-----CASES.	5	OLD-	5	AA
RSI	C	6	OLD-	6	AA
RSI	BCS BOXINR	7	OLD-	7	AA
RSI	S SURFN = 1	8	OLD-	8	AA
RSI	TYPE = RECT	9	OLD-	9	AA
RSI	ACTIVE = BOTTOM	10	OLD-	10	AA
RSI	PROP = 0.9,0.9	11	OLD-	11	AA
RSI	P1 = 1.0, 0.0, 1.0	12	OLD-	12	AA
RSI	P2 = 1.0, 0.0, 0.0	13	OLD-	13	AA
RSI	P3 = 1.0, 1.0, 0.0	14	OLD-	14	AA
RSI	COM = * INNER RIGHT FRONT *	15	OLD-	15	AA
RSI	S SURFN = 2	16	OLD-	16	AA
RSI	TYPE = RECT	17	OLD-	17	AA
RSI	ACTIVE = BOTTOM	18	OLD-	18	AA
RSI	PROP = 0.9,0.9	19	OLD-	19	AA
RSI	P1 = 1.0, 1.0, 1.0	20	OLD-	20	AA
RSI	P2 = 1.0, 1.0, 0.0	21	OLD-	21	AA
RSI	P3 = 0.0, 1.0, 0.0	22	OLD-	22	AA
RSI	COM = * INNER RIGHT SIDE *	23	OLD-	23	AA
RSI	S SURFN = 3	24	OLD-	24	AA
RSI	TYPE = RECT	25	OLD-	25	AA
RSI	ACTIVE = TOP	26	OLD-	26	AA
RSI	PROP = 0.9,0.9	27	OLD-	27	AA
RSI	P1 = 0.0, 0.0, 1.0	28	OLD-	28	AA
RSI	P2 = 0.0, 0.0, 0.0	29	OLD-	29	AA
RSI	P3 = 0.0, 1.0, 0.0	30	OLD-	30	AA
RSI	COM = * INNER RIGHT BACK *	31	OLD-	31	AA
RSI	S SURFN = 4	32	OLD-	32	AA
RSI	TYPE = RECT	33	OLD-	33	AA
RSI	ACTIVE = TOP	34	OLD-	34	AA
RSI	PROP = 0.9,0.9	35	OLD-	35	AA
RSI	P1 = 1.0, 1.0, 0.0	36	OLD-	36	AA
RSI	COM = * INNER RIGHT BOTTOM *	37	OLD-	37	AA
RSI	BCS BOXINL,IMGBCS=BOXINR,NINC=10,IREFSF=1000	38	OLD-	38	AA
RSI	C	39	OLD-	39	AA
RSI	C-----THE FOREGOING CAPD IMAGES BCS BOXINR IN REFERENCE PLANE 1000	40	OLD-	40	AA
RSI	C-----TO CREATE BCS BOXINL. THE INTERIOR OF THE BOX WAS INPUT IN	41	OLD-	41	AA
RSI	C-----THIS MANNER TO FACILITATE THE INPUT OF SAMPLE CASE 4 TO SHOW	42	OLD-	42	AA
RSI	C-----THE USE OF 'MESS' AND 'ERN' NODES.	43	OLD-	43	AA
RSI	C	44	OLD-	44	AA

IMAGING SURFACE (1) BCS (BOXINR), GENERATING SURFACE (11) BCS (BOXINL)
 IMAGING SURFACE (2) BCS (BOXINR), GENERATING SURFACE (12) BCS (BOXINL)
 IMAGING SURFACE (3) BCS (BOXINR), GENERATING SURFACE (13) BCS (BOXINL)

MODEL = SAMPLE
SURFACE DATA INPUT BLOCK

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

RSI	BCS	PARAMETER	VALUE	EDIT NO.	OLD EDIT NO.	LABEL	
		IMAGING SURFACE (4) BCS (BOXINR), GENERATING SURFACE (14) BCS (BOXINL)					
RSI	R	REFNO	= 1000	45	OLD-	45 AA	
RSI		P1	= 1.0, 0.0, 1.0	46	OLD-	46 AA	
RSI		P2	= 1.0, 0.0, 0.0	47	OLD-	47 AA	
RSI		P3	= 0.0, 0.0, 0.0	48	OLD-	48 AA	
RSI		COM	= * IMAGING PLANE *	49	OLD-	49 AA	
RSI	BCS	LIDINR		50	OLD-	50 AA	
RSI	S	SURFN	= 5	51	OLD-	51 AA	
RSI		TYPE	= RECT	52	OLD-	52 AA	
RSI		ACTIVE	= BOTTOM	53	OLD-	53 AA	
RSI		PROP	= 0.9,0.9	54	OLD-	54 AA	
RSI		P1	= 1.0, 1.0, 0.0	55	OLD-	55 AA	
RSI		COM	= * INNER RIGHT LID *	56	OLD-	56 AA	
RSI	S	SURFN	= 15	57	OLD-	57 AA	
RSI		IMAGSF	= 5	58	OLD-	58 AA	
RSI		IREFSF	= 1000	59	OLD-	59 AA	
RSI		COM	= * INNER LEFT LID *	60	OLD-	60 AA	
RSI	BCS	BOXOUT		61	OLD-	61 AA	
RSI	S	SURFN	= 21	62	OLD-	62 AA	
RSI		TYPE	= BOX5	63	OLD-	63 AA	
RSI		ACTIVE	= OUT	64	OLD-	64 AA	
RSI		SHADE	= NO	65	OLD-	65 AA	
RSI		PROP	= 0.2,0.9	66	OLD-	66 AA	
RSI		P1	= 1.01,-1.01, 1.01	67	OLD-	67 AA	
RSI		P2	= 1.01, 1.01, 1.01	68	OLD-	68 AA	
RSI		P3	= -0.01, 1.01, 1.01	69	OLD-	69 AA	
RSI		P4	= -0.01, 1.01,-0.01	70	OLD-	70 AA	
RSI		COM	= * OUTER SURFACES *	71	OLD-	71 AA	
RSI	BCS	LIDOUT		72	OLD-	72 AA	
RSI	S	SURFN	= 26	73	OLD-	73 AA	
RSI		TYPE	= RECT	74	OLD-	74 AA	
RSI		ACTIVE	= TOP	75	OLD-	75 AA	
RSI		SHADE	= NO	76	OLD-	76 AA	
RSI		PROP	= 0.2,0.9	77	OLD-	77 AA	
RSI		P1	= 1.01,-1.01, 0.01	78	OLD-	78 AA	
RSI		P2	= 1.01, 1.01, 0.01	79	OLD-	79 AA	
RSI		P3	= -0.01, 1.01, 0.01	80	OLD-	80 AA	
RSI		COM	= * OUTER SURFACE OF LID *	81	OLD-	81 AA	
RSI	C			82	OLD-	82 AA	
RSI		C-----THE NEXT TWO BCS'S (HESSR AND HESSL) ARE ACTIVATED IN SAMPLE			83	OLD-	83 AA
RSI		C-----CASE 4 ONLY.			84	OLD-	84 AA
RSI	C			85	OLD-	85 AA	
RSI	BCS	HESSR		86	OLD-	86 AA	
RSI	S	SURFN	= 101	87	OLD-	87 AA	
RSI		TYPE	= RECT	88	OLD-	88 AA	
RSI		ACTIVE	= TOP	89	OLD-	89 AA	
RSI		PROP	= 1.0,1.0	90	OLD-	90 AA	

DATE 062778 TIME 005253

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION

PAGE 9

MODEL = SAMPLE
SURFACE DATA INPUT BLOCK

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

CARD	ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD	EDIT NO.	LABEL
RSI			P1	=	1.0, 0.0, 1.0													91	OLD-	91	AA
RSI			P2	=	1.0, 0.0, 0.0													92	OLD-	92	AA
RSI			P3	=	0.0, 0.0, 0.0													93	OLD-	93	AA
RSI			COM	=	* PRIMARY MESS NODE, RIGHT SIDE *													94	OLD-	94	AA
RSI	BCS		MESSL															95	OLD-	95	AA
RSI	S		SURFN	=	111													96	OLD-	96	AA
RSI			TYPE	=	RECT													97	OLD-	97	AA
RSI			ACTIVE	=	BOTTOM													98	OLD-	98	AA
RSI			PROP	=	1.0,1.0													99	OLD-	99	AA
RSI			P1	=	1.0, 0.0, 1.0													100	OLD-	100	AA
RSI			P2	=	1.0, 0.0, 0.0													101	OLD-	101	AA
RSI			P3	=	0.0, 0.0, 0.0													102	OLD-	102	AA
RSI			COM	=	* PRIMARY MESS NODE, LEFT SIDE *													103	OLD-	103	AA
RSI	C																	104	OLD-	104	AA
RSI			C-----THE FOLLOWING BCS (LIDSP) IS ACTIVATED IN SAMPLE CASE 5 ONLY.																		
RSI	C																	105	OLD-	105	AA
RSI	BCS		LIDSP															106	OLD-	106	AA
RSI	S		SURFN	=	200													107	OLD-	107	AA
RSI			TYPE	=	RECT													108	OLD-	108	AA
RSI			ACTIVE	=	BOTTOM													109	OLD-	109	AA
RSI			PROP	=	0.1,0.1													110	OLD-	110	AA
RSI			SPRI	=	0.8													111	OLD-	111	AA
RSI			SPRS	=	0.8													112	OLD-	112	AA
RSI			P1	=	1.0,-1.0, 0.0													113	OLD-	113	AA
RSI			P2	=	1.0, 1.0, 0.0													114	OLD-	114	AA
RSI			P3	=	0.0, 1.0, 0.0													115	OLD-	115	AA
RSI			COM	=	* SPECULAR LID *													116	OLD-	116	AA
RSI																		117	OLD-	117	AA

MODEL = SAMPLE SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
 BCS DATA INPUT BLOCK

CARD ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD EDIT NO.	LABEL	
RSI	HEADER	BCS DATA															118	OLD-	118	AA
RSI	BCS	BOXINR															119	OLD-	119	AA
RSI	BCS	BOXINL															120	OLD-	120	AA
RSI	BCS	LIDINR	.0.	.0.	.1.	.0.	.-	45.	.0.								121	OLD-	121	AA
RSI	BCS	BOXOUT															122	OLD-	122	AA
RSI	BCS	LIDOUT	.0.	.0.	.1.	.0.	.-	45.	.0.								123	OLD-	123	AA
RSI	BCS	MESSR															124	OLD-	124	AA
RSI	BCS	MESSL															125	OLD-	125	AA
RSI	BCS	LIDSP	.0.	.0.	.1.	.0.	.-	45.	.0.								126	OLD-	126	AA

MODEL = SAMPLE CORRESPONDENCE DATA INPUT BLOCK SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

CARD	ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD	EDIT NO.	LABEL
RSI																		127	OLD-	172	AA
RSI																		128	OLD-	173	AA
RSI																		129	OLD-	174	AA
RSI																		130	OLD-	175	AA
RSI																		131	OLD-	176	AA
RSI																		132	OLD-	177	AA
RSI																		133	OLD-	178	AA
RSI																		134	OLD-	179	AA
RSI																		135	OLD-	180	AA
RSI																		136	OLD-	181	AA
RSI																		137	OLD-	182	AA
RSI																		138	OLD-	183	AA
RSI																		139	OLD-	184	AA
RSI																		140	OLD-	185	AA
RSI																		141	OLD-	186	AA
RSI																		142	OLD-	187	AA
RSI																		143	OLD-	188	AA
RSI																		144	OLD-	189	AA
RSI																		145	OLD-	190	AA
RSI																		146	OLD-	191	AA
RSI																		147	OLD-	192	AA

DATE 062778 TIME 005307 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION PAGE 12

MODEL = SAMPLE SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
OPERATION DATA INPUT BLOCK (PASS 1)

CARD ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD EDIT NO.	LABEL	
RSI	HEADER	OPERATIONS	DATA														148	OLD-	193	AA

+++++ OPERATIONS DATA BLOCK (PASS 1) COMPLETE +++++

MODEL = SAMPLE OPERATION DATA INPUT BLOCK (PASS 2) SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

CARD ORGIN	12345678 1	2345678 2	2345678 3	2345678 4	2345678 5	2345678 6	2345678 7	2345678 8	EDIT NO.	OLD EDIT NO.	LABEL		
RSI	C								149	OLD-	194	AA	
INPUT	C	-----BUILD THE CASE 1 CONFIGURATION FOR SFCAL/FFCAL/GBCAL RESTART								150		AB	
RSI	C								151	OLD-	196	AA	
PROG	STEP	-1							0				
RSI	BUILD	CASE1,BOXINR,BOXINL,LIDINR,BOXOUT,LIDOUT							152	OLD-	197	AA	
PROG		CALL BUILD0 (BOXINR,6HCASE1)							0				
PROG		CALL ADD (BOXINL)							0				
PROG		CALL ADD (LIDINR)							0				
PROG		CALL ADD (BOXOUT)							0				
PROG		CALL ADD (LIDOUT)							0				
RSI	C								153	OLD-	204	AA	
INPUT	C	-----READ AND PRINT THE SHADOW FACTOR TABLES FROM RSI FOR USE IN								154		AB	
RSI	C	-----SAMPLE CASE 2 IN THE CALCULATION OF DIRECT FLUXES.								155	OLD-	206	AA
RSI	C								156	OLD-	207	AA	
INPUT		SFPRNT=YES							157			AB	
RSI	L	SFCAL							158	OLD-	208	AA	
RSI	C								159	OLD-	209	AA	
INPUT	C	-----READ THE FORM FACTOR MATRIX FROM RSI								160		AB	
RSI	C								161	OLD-	211	AA	
RSI	L	FFCAL							162	OLD-	212	AA	
RSI	C								163	OLD-	213	AA	
INPUT	C	-----READ THE GRAY BODY MATRICES FROM RSI								164		AB	
RSI	C								165	OLD-	215	AA	
RSI		CALL GBDATA(BOTH,0,FF)							166	OLD-	216	AA	
RSI	L	GBCAL							167	OLD-	217	AA	
RSI	C								168	OLD-	218	AA	
INPUT	C	-----CALCULATE AND PUNCH RADKS WITH COMBINED NODES								169		AB	
INPUT	C								170			AB	
INPUT		CALL RKDATA(0,0,0,0,SPACE,999,0,0,0,5HCASE2)							171			AB	
RSI	L	RKCAL							172	OLD-	222	AA	
INPUT	C								173			AB	
INPUT	C	-----DEFINE ORBIT AND VEHICLE ORIENTATION (CIRCULAR - PLANET ORIENTED)								174		AB	
INPUT	C								175			AB	
INPUT		CALL ORBIT2(EAR,0,60.,0,0,0,100.*6080.,100.*6080.)							176			AB	
INPUT		CALL ORIENT(4HPLAN,1,2,3,300.,270.,0.)							177			AB	
INPUT	C								178			AB	
PROG	C								0				
PROG	C	***** ORBIT GENERATION STARTS HERE *****								0			
INPUT	C	ORBGEN CIRP,0.,180.,2,AQ							179			AB	
PROG	C								0				
PROG	STEP	10000							0				
PROG		TRUEAN = .000							0				
PROG		TRUANF = 180.000							0				
PROG		TRUANI = .000							0				
PROG		IAI = 0							0				
PROG		IAS = 0							0				
PROG		PLTYPE = 6HPLSAVE							0				
PROG		CALL D1COMP(0,0,0)							0				
PROG	L	DICAL							0				

H-129

PROG	C***** ORBIT GENERATION ENDS HERE *****	0	
PROG	C	0	
INPUT	C	180	AB
INPUT	C-----THE CONFIGURATION NAME IS REDEFINED SO THE QO'S WILL USE	181	AB
INPUT	C-----THE DESIRED(CASE2) CORRESPONDENCE DATA.	182	AB
INPUT	C	183	AB
INPUT	MODELN=5HCASE2	184	AB
INPUT	CALL QODATA(3HALL,0.0,0.0,0.0,0)	185	AB
INPUT	L QOCAL	186	AB
INPUT	C	187	AB
INPUT	C-----MAKE ORBIT PLOTS	188	AB
INPUT	C	189	AB
INPUT	CALL ODATAS(1,0,0,0,0,0,0)	190	AB
INPUT	CALL ODATAS(2,0,0,0,0,90.,0,0)	191	AB
INPUT	CALL ODATAS(3,0,0,0,0,180.,0,0)	192	AB
INPUT	L OPLOTT	193	AB
RS1	END OF DATA	194	AA

MODEL = SAMPLE SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLT
 PROCESSOR CORE ALLOCATION

THE FOLLOWING IS THE PROCESSOR CORE ALLOCATION FOR THOSE SEGMENTS WHICH WILL BE LOADED IN THIS EXECUTION (APPROX.) ...

OCTAL/DECIMAL

TRASYS (0) SEGMENT	121213/ 41611		
OPERATIONS DATA (NOT KNOWN AT THIS TIME).....	175000/ 64000		
INITIALIZATION SEGMENT	122300/ 42176		
FORM FACTOR SEGMENT	136100/ 48192		
SHADOW FACTOR SEGMENT	136000/ 48128		
ORBITAL PLOTTER SEGMENT	125700/ 43968		
DIRECT FLUX SEGMENT	150500/ 53568		
GRAY BODY SEGMENT	124000/ 43008		
ABSORBED Q-S SEGMENT	122500/ 42304		
-QO- SEGMENT	130600/ 45440		
RADIATION CONDUCTOR SEGMENT	125500/ 43840		
GRAY BODY DYNAMIC COMMON	000276/ 190		
-QO- DYNAMIC COMMON	003554/ 1900		
RADIATION CONDUCTOR DYNAMIC COMMON	000574/ 380		
GRAY BODY MINIMUM - MAXIMUM CORE	123566/ 42870	-	123716/ 42958
-QO- MINIMUM - MAXIMUM CORE	125142/ 43618	-	130552/ 45418
RADIATION CONDUCTOR MINIMUM - MAXIMUM CORE	125221/ 43665	-	125465/ 43829
MINIMUM CORE NEEDED FOR PROCESSOR EXECUTION	150500/ 53568		
MAXIMUM CORE NEEDED FOR PROCESSOR EXECUTION	150500/ 53568		
AMOUNT OF CORE THAT WILL BE USED BY PROCESSOR .	150500/ 53568		

MODEL = SAMPLE SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLT
WRAP UP OF THE PRE-PROCESSOR

PRE-PROCESSOR ACCOUNTING INFORMATION	CP-SEC	DYM-STORAGE
SOURCE EDITING	2.251	676
DOCUMENTATION DATA PRE-PROCESSING000	0
QUANTITIES DATA PRE-PROCESSING039	266
ARRAY DATA PRE-PROCESSING000	0
SURFACE DATA PRE-PROCESSING (PASS 1) ...	2.009	64
SURFACE DATA PRE-PROCESSING (PASS 2)743	1141
BCS DATA PRE-PROCESSING269	106
FORM FACTOR DATA PRE-PROCESSING000	0
SHADOW DATA PRE-PROCESSING000	0
FLUX DATA PRE-PROCESSING000	0
CORRESPONDENCE DATA PRE-PROCESSING243	101
OPERATIONS DATA PRE-PROCESSING	4.114	879
SUBROUTINE DATA PRE-PROCESSING312	0
SEQUENTIAL TAPE INITIALIZATION027	0

TOTAL CP TIME FOR PRE-PROCESSOR 10.739 DECIMAL SECONDS OR 00013 OCTAL SECONDS

MINIMUM DYNAMIC STORAGE NEEDED BY PRE-PROCESSOR .. 1141 DECIMAL WORDS

DYNAMIC STORAGE AVAILABLE TO PRE-PROCESSOR 10000 DECIMAL WORDS

NORMAL TERMINATION BY PRE-PROCESSOR

@PHD,BLEP

@ASG,T/S R50,.8C,R50,92,R50 APPENDIX H, CASE 2.

@TEST TNE/1/S3

@JUMP L3
- INTERVENING STATEMENTS SKIPPED

@L3:FREE DATA.

@FREE 14

H-133

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
PROCESSING OPERATIONS DATA

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

SEQUENCE	NODE	BCS	AREA	ALPH	EMISS	SURF. TYPE	ACTIVE	-----COMMENTS-----
1	1	BOXINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT FRONT
2	2	BOXINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT SIDE
3	3	BOXINR	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BACK
4	4	BOXINR	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BOTTOM
5	11	BOXINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT FRONT
6	12	BOXINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT SIDE
7	13	BOXINL	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BACK
8	14	BOXINL	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BOTTOM
9	5	LIDINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT LID
10	15	LIDINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER LEFT LID
11	21	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
12	22	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
13	23	BOXOUT	1.04040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
14	24	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
15	25	BOXOUT	1.04040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
16	26	LIDOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACE OF LID

NODE, AREA, AND PROPERTIES ARRAYS HAVE BEEN WRITTEN ON THE -RSO- TAPE
BY -BUILD- (ACCESS NUMBER = 1)

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLLOT
 SHADOW FACTOR GENERATOR LINK

RESTARTING - SFCAL - DATA FOR CONFIGURATION- CASE1 -FROM UNIT - 14

		CLOCK ANGLE																				
NODE	1	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
SOLAR SHADOW TABLE		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		.00	.00	.00	.00	.00	.81	.64	.33	.11	.00	.00	.17	.67	1.00	.00	.00	.00	.00	.00	.00	22.5
		.00	.00	.00	.00	.00	.58	.42	.19	.06	.00	.00	.00	.03	1.00	.00	.00	.00	.00	.00	.00	45.0
		.00	.00	.00	.00	.00	.19	.25	.17	.08	.00	.00	.00	.17	.61	.00	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

		CLOCK ANGLE																				
NODE	1	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
INFRA RED SHADOW TABLE		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		.00	.00	.00	.00	.00	.81	.64	.33	.11	.00	.00	.17	.67	1.00	.00	.00	.00	.00	.00	.00	22.5
		.00	.00	.00	.00	.00	.58	.42	.19	.06	.00	.00	.00	.03	1.00	.00	.00	.00	.00	.00	.00	45.0
		.00	.00	.00	.00	.00	.19	.25	.17	.08	.00	.00	.00	.17	.61	.00	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORRGEN/OPLOT

NODE	CLOCK ANGLE																			CONE ANGLE	
	2	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
	.61	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.06	.17	.33	.44	.56	.58	.61	22.5
	.42	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.08	.42	.64	.61	.58	.42	45.0
	.19	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.17	.61	.42	.25	.22	.19	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE	
	2	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
	.61	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.06	.17	.33	.44	.56	.58	.61	22.5
	.42	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.08	.42	.64	.61	.58	.42	45.0
	.19	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.17	.61	.42	.25	.22	.19	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

		CLOCK ANGLE																				
NODE	3	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
SOLAR SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
		.00	.06	.08	.03	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
		1.00	.81	.53	.31	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.33	.83	1.00	1.00	.00	45.0
		.33	.42	.31	.25	.08	.00	.00	.00	.00	.00	.00	.00	.00	.00	.25	.72	.50	.50	.33	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

		CLOCK ANGLE																				
NODE	3	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
INFRA RED SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
		.00	.06	.08	.03	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
		1.00	.81	.53	.31	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.33	.83	1.00	1.00	.00	45.0
		.33	.42	.31	.25	.08	.00	.00	.00	.00	.00	.00	.00	.00	.00	.25	.72	.50	.50	.33	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLT
 SHADOW FACTOR GENERATOR LINK

NODE	4	CLOCK ANGLE																	CONE ANGLE		
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
SOLAR SHADOW TABLE		.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
		.67	.56	.36	.39	.39	.28	.11	.00	.00	.00	.00	.00	.00	.17	.33	.50	.50	.67	.67	22.5
		.00	.00	.06	.08	.00	.00	.06	.00	.00	.00	.00	.00	.03	.28	.64	.50	.17	.00	.00	45.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	4	CLOCK ANGLE																	CONE ANGLE		
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
INFRA RED SHADOW TABLE		.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
		.67	.56	.36	.39	.39	.28	.11	.00	.00	.00	.00	.00	.00	.17	.33	.50	.50	.67	.67	22.5
		.00	.00	.06	.08	.00	.00	.06	.00	.00	.00	.00	.00	.03	.28	.64	.50	.17	.00	.00	45.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLT
 SHADOW FACTOR GENERATOR LINK

		CLOCK ANGLE																		CONE ANGLE	
NODE	11	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		.00	.00	.00	.00	.00	1.00	.67	.17	.00	.00	.11	.33	.64	.91	.00	.00	.00	.00	.00	22.5
		.00	.00	.00	.00	.00	1.00	.03	.00	.00	.00	.06	.19	.42	.59	.00	.00	.00	.00	.00	45.0
		.00	.00	.00	.00	.00	.61	.17	.00	.00	.00	.08	.17	.25	.19	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

		CLOCK ANGLE																		CONE ANGLE	
NODE	11	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		.00	.00	.00	.00	.00	1.00	.67	.17	.00	.00	.11	.33	.64	.91	.00	.00	.00	.00	.00	22.5
		.00	.00	.00	.00	.00	1.00	.03	.00	.00	.00	.06	.19	.42	.59	.00	.00	.00	.00	.00	45.0
		.00	.00	.00	.00	.00	.61	.17	.00	.00	.00	.08	.17	.25	.19	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT

CLOCK ANGLE

NODE 12 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

SOLAR
 SHADOW TABLE

	12	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE		
	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0	
	.61	.58	.56	.44	.33	.17	.06	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.61	22.5
	.42	.58	.61	.64	.42	.08	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.42	45.0
	.19	.22	.25	.42	.61	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.19	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

CLOCK ANGLE

NODE 12 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

INFRA RED
 SHADOW TABLE

	12	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE		
	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0	
	.61	.58	.56	.44	.33	.17	.06	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.61	22.5
	.42	.58	.61	.64	.42	.08	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.42	45.0
	.19	.22	.25	.42	.61	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.19	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

NODE	CLOCK ANGLE																			CONE ANGLE		
	14	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.	
SOLAR SHADOW TABLE	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0	
	.67	.67	.50	.50	.33	.17	.00	.00	.00	.00	.00	.00	.00	.11	.28	.39	.39	.36	.56	.67	22.5	
	.00	.00	.17	.50	.64	.28	.03	.00	.00	.00	.00	.00	.00	.06	.00	.00	.08	.06	.00	.00	45.0	
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE		
	14	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.	
INFRA RED SHADOW TABLE	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0	
	.67	.67	.50	.50	.33	.17	.00	.00	.00	.00	.00	.00	.00	.11	.28	.39	.39	.36	.56	.67	22.5	
	.00	.00	.17	.50	.64	.28	.03	.00	.00	.00	.00	.00	.00	.06	.00	.00	.08	.06	.00	.00	45.0	
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOT
 SHADOW FACTOR GENERATOR LINK

NODE	5	CLOCK ANGLE																	CONE ANGLE		
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
SOLAR SHADOW TABLE																					
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
		1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	67.5
		1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	90.0
		.67	.56	.67	.67	.72	.72	.00	.00	.00	.00	.00	.00	.14	.14	.33	.50	.50	.67		112.5
		.33	.39	.33	.31	.33	.33	.31	.22	.11	.00	.00	.00	.00	.00	.00	.17	.33	.33		135.0
		.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00		157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00		180.0

NODE	5	CLOCK ANGLE																	CONE ANGLE		
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
INFRA RED SHADOW TABLE																					
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
		1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
		1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	67.5
		1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	90.0
		.67	.56	.67	.67	.72	.72	.00	.00	.00	.00	.00	.00	.14	.14	.33	.50	.50	.67		112.5
		.33	.39	.33	.31	.33	.33	.31	.22	.11	.00	.00	.00	.00	.00	.00	.17	.33	.33		135.0
		.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00		157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00		180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
 SHADOW FACTOR GENERATOR LINK

NODE	CLOCK ANGLE																		CONE ANGLE		
	15	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
SOLAR SHADOW TABLE																					
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	90.0
	.67	.50	.50	.33	.14	.14	.00	.00	.00	.00	.00	.00	.00	.72	.72	.67	.67	.56	.67	112.5	
	.33	.33	.17	.00	.00	.00	.00	.00	.00	.00	.11	.22	.31	.33	.33	.31	.33	.39	.33	135.0	
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	157.5	
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0	

NODE	CLOCK ANGLE																		CONE ANGLE		
	15	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
INFRA RED SHADOW TABLE																					
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
	.67	.50	.50	.33	.14	.14	.00	.00	.00	.00	.00	.00	.00	.72	.72	.67	.67	.56	.67	112.5	
	.33	.33	.17	.00	.00	.00	.00	.00	.00	.00	.11	.22	.31	.33	.33	.31	.33	.39	.33	135.0	
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	157.5	
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0	

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

		CLOCK ANGLE																				
NODE 21		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
SOLAR SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0	
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	45.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

		CLOCK ANGLE																				
NODE 21		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
INFRA RED SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0	
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	45.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLT
 SHADOW FACTOR GENERATOR LINK

NODE	23	CLOCK ANGLE																	CONE ANGLE		
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
SOLAR SHADOW TABLE																					
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	67.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

NODE	23	CLOCK ANGLE																	CONE ANGLE		
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.		340.	360.
INFRA RED SHADOW TABLE																					
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	67.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

CLOCK ANGLE

NODE 24 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

SOLAR
SHADOW TABLE

CONE
ANGLE

1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	22.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	45.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	90.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	112.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	135.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	157.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

CLOCK ANGLE

NODE 24 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

INFRA RED
SHADOW TABLE

CONE
ANGLE

1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	22.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	45.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	90.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	112.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	135.0
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	157.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOT
 SHADOW FACTOR GENERATOR LINK

		CLOCK ANGLE																		CONE ANGLE		
NODE	25	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.		
SOLAR SHADOW TABLE		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	22.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	67.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	90.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	112.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	135.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	157.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

		CLOCK ANGLE																		CONE ANGLE		
NODE	25	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.		
INFRA RED SHADOW TABLE		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	22.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	67.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	90.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	112.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	135.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	157.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLT
 SHADOW FACTOR GENERATOR LINK

CLOCK ANGLE

MODE 26 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

SOLAR SHADOW TABLE

CONE ANGLE

1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	90.0
.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	112.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

CLOCK ANGLE

MODE 26 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

INFRA RED SHADOW TABLE

CONE ANGLE

1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	90.0
.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	112.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

SHADOW FACTORS FOR CONFIGURATION CASE1 HAVE BEEN STORED ON RSO.
 LAST RECORD WRITTEN = 52

TOTAL TIME FOR SHADOW FACTOR TABLES 9.6

MODEL=SAHLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLO
 FORM FACTOR CALCULATION LINK.

FORM FACTORS AND COMBINED FORM FACTORS - USER INPUT AND DEFAULT PARAMETERS

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
FFACC	.0500	.0500	ORIENTATION ACCURACY PARAMETER	N/A
FFACCS	.1000	.1000	SHADOWING ACCURACY PARAMETER	N/A
FFMIN	.1-05	1.0E-06	PARAMETER TO ELIMINATE SMALL FORM FACTORS	N/A
FFNOSH	SHAD	SHAD	OVER RIDE SHADOWING PARAMETER	(SHAD,NOSH)
+FFPNCH	NO	NO	PARAMETER TO PUNCH FORM FACTORS	(YES,NO)
FFPRNT	YES	YES	FLAG FOR COMPREHENSIVE FF AND CM PRINT	(YES,NO,FF,CM,RB)
FFRATL	15.0	15.0	RATIO FOR USING SUB-NODE TECHNIQUE	N/A
FFCMB	NO	CORR	FLAG FOR COMBINING FORM FACTORS	(YES,NO,AUTO,CORR)

+ -FFPNCH WILL DEFAULT TO -YES- ON CALCULATED VALUES IF THE -RSO- FILE IS NOT SPECIFIED IN THE OPTIONS DATA BLOCK

RESTARTING - FFCAL - DATA FOR CONFIGURATION- CASE1 -FROM UNIT - 14

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
 FORM FACTOR CALCULATION LINK.

SEQUENCE	NODE	AREA	ALPH	EMISS
1	1	1.00000	.900	.900
2	2	1.00000	.900	.900
3	3	1.00000	.900	.900
4	4	1.00000	.900	.900
5	11	1.00000	.900	.900
6	12	1.00000	.900	.900
7	13	1.00000	.900	.900
8	14	1.00000	.900	.900
9	5	1.00000	.900	.900
10	15	1.00000	.900	.900
11	21	2.06040	.200	.900
12	22	2.06040	.200	.900
13	23	1.04040	.200	.900
14	24	2.06040	.200	.900
15	25	1.04040	.200	.900
16	26	2.06040	.200	.900

NUMBER OF NODES = 16 NUMBER OF SURFACES = 16
 (* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUSE OF RSI, RTI, OR CARD INPUT)
 (9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) W/SHAD	FIR(J,I) W/SHAD	FSOL(I,J) W/SHAD	FSOL(J,I) W/SHAD	FF(I,J) W0/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
1	2	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0 UN
1	3	RSI	.201522	.201522	.201522	.201522	.201522	1.000000	1.000000	.000	0	0 UN
1	4	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0 UN
1	12	RSI	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.000	0	0 UN
1	13	RSI	.086058	.086058	.086058	.086058	.086058	1.000000	1.000000	.000	0	0 UN
1	14	RSI	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	.000	0	0 UN
1	5	RSI	.137203	.137203	.137203	.137203	.137203	1.000000	1.000000	.000	0	0 UN
1	15	RSI	.056006	.056006	.056006	.056006	.056006	1.000000	1.000000	.000	0	0 UN
1	FFSUM = .9690		ROW CP TIME = .143									
1	FORM FACTOR RESTART (RSI) RECORD = 56											
2	3	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0 UN

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
(UN-INDICATES UNKNOWN CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)
(9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) W/SHAD	FIR(J,I) W/SHAD	FSOL(I,J) W/SHAD	FSOL(J,I) W/SHAD	FF(I,J) WO/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ	
2	4	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
2	11	RSI	.032922	.032922	.032922	.032922	.032922	.000000	.000000	.000	0	0	UN
2	12	RSI	.068832	.068832	.068832	.068832	.068832	1.000000	1.000000	.000	0	0	UN
2	13	RSI	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.000	0	0	UN
2	14	RSI	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.000	0	0	UN
2	5	RSI	.096343	.096343	.096343	.096343	.096343	1.000000	1.000000	.000	0	0	UN
2	15	RSI	.034262	.034262	.034262	.034262	.034262	1.000000	1.000000	.000	0	0	UN
2	FFSUM = .9203		ROW CP TIME = .153		FORM FACTOR RESTART (RSI) RECORD = 57								
3	4	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
3	11	RSI	.086059	.086059	.086059	.086059	.086059	.000000	.000000	.000	0	0	UN
3	12	RSI	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.000	0	0	UN
3	14	RSI	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	.000	0	0	UN
3	5	RSI	.050426	.050426	.050426	.050426	.050426	1.000000	1.000000	.000	0	0	UN
3	15	RSI	.011660	.011660	.011660	.011660	.011660	1.000000	1.000000	.000	0	0	UN
3	FFSUM = .8378		ROW CP TIME = .081		FORM FACTOR RESTART (RSI) RECORD = 58								
4	11	RSI	.040501	.040501	.040501	.040501	.040501	.000000	.000000	.000	0	0	UN
4	12	RSI	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.000	0	0	UN
4	13	RSI	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	.000	0	0	UN
4	5	RSI	.107798	.107798	.107798	.107798	.107798	1.000000	1.000000	.000	0	0	UN
4	15	RSI	.056851	.056851	.056851	.056851	.056851	1.000000	1.000000	.000	0	0	UN
4	FFSUM = .9007		ROW CP TIME = .069		FORM FACTOR RESTART (RSI) RECORD = 59								
11	12	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
11	13	RSI	.201522	.201522	.201522	.201522	.201522	1.000000	1.000000	.000	0	0	UN

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
(UN-INDICATES UNKNOWN CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)
(9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) W/SHAD	FIR(J,I) W/SHAD	FSOL(I,J) W/SHAD	FSOL(J,I) W/SHAD	FF(I,J) W/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ	
11	14	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
11	5	RSI	.056006	.056006	.056006	.056006	.056006	1.000000	1.000000	.000	0	0	UN
11	15	RSI	.137203	.137203	.137203	.137203	.137203	1.000000	1.000000	.000	0	0	UN
11	FFSUM = .9690		ROW CP TIME = .126										
	FORM FACTOR RESTART (RSO) RECORD = 60												
12	13	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
12	14	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
12	5	RSI	.034262	.034262	.034262	.034262	.034262	1.000000	1.000000	.000	0	0	UN
12	15	RSI	.096343	.096343	.096343	.096343	.096343	1.000000	1.000000	.000	0	0	UN
12	FFSUM = .9203		ROW CP TIME = .060										
	FORM FACTOR RESTART (RSO) RECORD = 61												
13	14	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
13	5	RSI	.011660	.011660	.011660	.011660	.011660	1.000000	1.000000	.000	0	0	UN
13	15	RSI	.050426	.050426	.050426	.050426	.050426	1.000000	1.000000	.000	0	0	UN
13	FFSUM = .8378		ROW CP TIME = .048										
	FORM FACTOR RESTART (RSO) RECORD = 62												
14	5	RSI	.056851	.056851	.056851	.056851	.056851	1.000000	1.000000	.000	0	0	UN
14	15	RSI	.107798	.107798	.107798	.107798	.107798	1.000000	1.000000	.000	0	0	UN
14	FFSUM = .9007		ROW CP TIME = .028										
	FORM FACTOR RESTART (RSO) RECORD = 63												

DATE 062770 TIME 010139

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 22

MODEL=SAMPLE CONFIG=CASE) STEP=1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPILOT

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)

(R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)

(UN-INDICATES UNKNOWN CALCULATION MODE BECAUSE OF RSI, RTI, OR CARD INPUT)

(9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) H/SHAD	FIR(J,I) H/SHAD	FSOL(I,J) H/SHAD	FSOL(J,I) H/SHAD	FF(I,J) NO/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
5		FFSUM = .5505 FORM FACTOR RESTART	ROW CP TIME = (RSO) RECORD =		.067 64							
15		FFSUM = .5505 FORM FACTOR RESTART	ROW CP TIME = (RSO) RECORD =		.004 65							
21		FFSUM = .0000 FORM FACTOR RESTART	ROW CP TIME = (RSO) RECORD =		.003 66							
22		FFSUM = .0000 FORM FACTOR RESTART	ROW CP TIME = (RSO) RECORD =		.004 67							
23		FFSUM = .0000 FORM FACTOR RESTART	ROW CP TIME = (RSO) RECORD =		.005 68							
24		FFSUM = .0000 FORM FACTOR RESTART	ROW CP TIME = (RSO) RECORD =		.004 69							

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)
 (9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) W/SHAD	FIR(J,I) W/SHAD	FSOL(I,J) W/SHAD	FSOL(J,I) W/SHAD	FF(I,J) W/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
25		FFSUM = .0000										
		FORM FACTOR RESTART										
26		FFSUM = .0000										
		FORM FACTOR RESTART										

FF FORM FACTORS FOR CONFIGURATION CASE1 HAVE BEEN STORED ON RSO.
 LAST RESTART RECORD WRITTEN = 71

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
FORM FACTOR CALCULATION LINK.

SUMMARY OF FORM FACTOR SUMS FOR ALL NODES

NODE I- FF SUM	NODE I- FF SUM	NODE I- FF SUM	NODE I- FF SUM	NODE I- FF SUM	NODE I- FF SUM
1- .9690	2- .9203	3- .8378	4- .9007	11- .9690	12- .9203
13- .8378	14- .9007	5- .5505	15- .5505	21- .0000	22- .0000
23- .0000	24- .0000	25- .0000	26- .0000		

TOTAL TIME FOR FORM FACTOR SEGMENT 1.557

TOTAL TIME SINCE START OF RUN 91.175

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
 GRAY BODIES COMPUTATION LINK.

VARIABLE NAME	CURRENT VALUE	DEFAULT	GREY BODIES DEFINITION	OPTIONS
GBWBND	BOTH	BOTH	HAVEBAND DEFINITION PARAMETER	(2H1R,3HSOL,4HBOTH)

 RESTARTING - GB1R - DATA FOR CONFIGURATION- CASE1 -FROM UNIT - 14

 RESTARTING - GB50 - DATA FOR CONFIGURATION- CASE1 -FROM UNIT - 14

IR GRAY BODIES STORED FOR CONFIG. CASE1 LAST RESTART RECORD WRITTEN = 89

SOL GRAY BODIES STORED FOR CONFIG. CASE1 LAST RESTART RECORD WRITTEN = 107

TOTAL TIME TO COMPUTE GRAY BODIES .73

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

VARIABLE NAME	CURRENT VALUE	DEFAULT	RADIATION CONDUCTORS DEFINITION	OPTIONS
RKPNCH	PUN	NO	PUNCH/NO PUNCH PARAMETER FOR RADKS	(YES,NO)
RKMIN	.0001	0.0001	PARAMETER TO ELIMINATE SMALL RADK S	N/A
IRKCN	I	I	INITIAL RADIATION CONDUCTOR ID NUMBER	N/A
RKSP	SPACE	NO	MNEMONIC FLAG FOR COMPUTATION OF RADKS TO SPACE	(SPACE,NO)
IRKNSP	999	32767	SPACE NODE ID NUMBER	N/A
SIGMA	.17-08	1.713E-9	STEFAN-BOLTZMANN CONSTANT	N/A
RKAMPF	1.00	1.0	AREA MULTIPLYING FACTOR	N/A
RKTAPE	NO	NO	PARAMETER TO OUTPUT TO BCD TAPE	(TAPE,NO)
RFRAC	.7+00	0.7	SIGNIFICANT RADIATION FRACTION	(0. TO 1.)
RTOL	.990	0.99	DECIMAL FRACTION OF LAST RADK SAVED	N/A
NERN	0	0	EFFECTIVE RADIATION NODE (ERN) NUMBER	N/A

DATE 062778 TIME 010151

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE

27

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

SPECIAL RADIATION NODES

NONE

MESS SPECIAL NODES

PRIMARY SECONDARY

NONE

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

RADIATION CONDUCTOR (RADKS) CARDS

AREA UNITS = INPUT UNITS * AMPF, WHERE AMPF = 1.0000

PUNCHED AND/OR BCDOU RADKS -	-	1.	1.	2.	.35937-09\$
PUNCHED AND/OR BCDOU RADKS -	-	2.	1.	3.	.83913-09\$
PUNCHED AND/OR BCDOU RADKS -	-	3.	1.	4.	.73699-09\$
PUNCHED AND/OR BCDOU RADKS -	-	4.	1.	12.	.35937-09\$
PUNCHED AND/OR BCDOU RADKS -	-	5.	1.	5.	.56426-09\$
PUNCHED AND/OR BCDOU RADKS -	-	6.	2.	3.	.35685-09\$
PUNCHED AND/OR BCDOU RADKS -	-	7.	2.	4.	.35743-09\$
PUNCHED AND/OR BCDOU RADKS -	-	8.	2.	12.	.10306-09\$
PUNCHED AND/OR BCDOU RADKS -	-	9.	2.	5.	.19789-09\$
PUNCHED AND/OR BCDOU RADKS -	-	10.	3.	4.	.73080-09\$
PUNCHED AND/OR BCDOU RADKS -	-	11.	3.	12.	.35685-09\$
PUNCHED AND/OR BCDOU RADKS -	-	12.	3.	5.	.21024-09\$
PUNCHED AND/OR BCDOU RADKS -	-	13.	4.	12.	.35743-09\$
PUNCHED AND/OR BCDOU RADKS -	-	14.	4.	5.	.48604-09\$
PUNCHED AND/OR BCDOU RADKS -	-	15.	12.	5.	.19789-09\$
PUNCHED AND/OR BCDOU RADKS -	-	16.	1.	999.	.33302-08\$
PUNCHED AND/OR BCDOU RADKS -	-	17.	2.	999.	.17494-08\$
PUNCHED AND/OR BCDOU RADKS -	-	18.	3.	999.	.37054-08\$
PUNCHED AND/OR BCDOU RADKS -	-	19.	4.	999.	.35297-08\$
PUNCHED AND/OR BCDOU RADKS -	-	20.	12.	999.	.17494-08\$
PUNCHED AND/OR BCDOU RADKS -	-	21.	5.	999.	.45782-08\$

DATE 062778 TIME 010152 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 29

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLO
RADIATION CONDUCTOR GENERATION LINK.

CONSERVATION CHECKS
RADIATION SUMS FOR EACH NODE BEFORE RKMIN SCREENING

1 - .10000+01 2 - .10000+01 3 - .10000+01 4 - .10000+01 12 - .10000+01 5 - .10000+01

DATE 062770 TIME 010152 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 30

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
RADIATION CONDUCTOR GENERATION LINK.

CONSERVATION CHECKS
RADIATION SUMS FOR EACH NODE AFTER RKM IN SCREENING

1 - .10000+01 2 - .10000+01 3 - .10000+01 4 - .10000+01 12 - .10000+01 5 - .10000+01

TOTAL TIME TO COMPUTE AND CONDENSE RADKS = .81

MODEL=SAMPLE CONFIG=CASE1 STEP=10000
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS +++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD,NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
0	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
.000	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA +++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA +++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROTY,IROTZ		1 2 3	
.300+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.300+02	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA +++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCH=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCH POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAMPLE CONFIG=CASE1 STEP=10000 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T
 DIRECT IRRADIATION CALCULATION LINK.

***** NSTEP NO = 10000

**** COMPUTED OR INPUT ORBIT DATA ****

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

**** PLANET --EARTH -- DATA ****

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	HDS
.20900+09	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	HSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAY CONSTANT	GRAY		.42900+03	SOLAR CONSTANT AT PSD	SOL

DIRECT INCIDENT FLUXES CALCULATED USING SHADOW FACTORS

DATE 062778 TIME 010156 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 33

MODEL=SAMPLE CONFIG=CASE1 STEP=10000
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOT

++NOTE++ AN EOF HAS BEEN ENCOUNTERED ON RSI. LAST RECORD NO. READ = 107

++NOTE++ INITIATING CALCULATIONS

-DICAL - RESTART DATA FOR CONFIGURATION -CASE1 - NOT FOUND ON UNIT-RSI-. INITIATING CALCULATIONS.

MODEL=SAMPLE CONFIG=CASE1 STEP=10000 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLT
 DIRECT IRRADIATION CALCULATION LINK.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10000 TRUE ANOMALY = .00000 TIME = .00000
 ++++ IN THE SUN ++++

NODE NUMBER	DIRECT FLUX (QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	SFTAPE	.001	9	0
2	.94028+02	.18576+03	.5062	CALC	.190	81	5
3	.00000	.10725+03	.0000	CALC	.307	64	9
4	.18576+03	.37152+03	.5000	SFTAPE	.372	81	0
11	.00000	.00000	.0000	SFTAPE	.420	9	0
12	.00000	.00000	.0000	SFTAPE	.469	9	0
13	.10055+02	.10725+03	.0938	CALC	.591	64	6
14	.10664+03	.37152+03	.2870	SFTAPE	.653	81	0
5	.00000	.00000	.0000	SFTAPE	.699	9	0
15	.00000	.00000	.0000	SFTAPE	.747	9	0
21	.00000	.00000	.0000	SFTAPE	.796	8	0
22	.10725+03	.10725+03	1.0000	CALC	.984	66	10
23	.18576+03	.18576+03	1.0000	CALC	1.159	81	8
24	.00000	.00000	.0000	SFTAPE	1.206	8	0
25	.00000	.00000	.0000	SFTAPE	1.255	9	0
26	.18687+03	.18687+03	1.0000	CALC	1.469	78	10

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM = 94.820 SECONDS

MODEL=SAMPLE CONFIG=CASE1 STEP=10000 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLLOT
 DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10000 TRUE ANOMALY = .00000 TIME = .00000
 ++++ IN THE SUN ++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		--SHADOW FACTORS--		CP TIME (SECONDS)	--ELEMENTS--		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	PLAN		PLAN	SURF	
1	SFTAPE	.000	.000	.391+02	.268+02	.000	.000	.001	66	9	9
2	SFTAPE	.000	.000	.400+02	.264+02	.000	.000	.309	66	9	9
3	SFTAPE	.000	.000	.402+02	.268+02	.000	.000	.556	61	9	9
4	SFTAPE	.000	.000	.000	.000	.000	.000	.670	52	9	9
11	SFTAPE	.000	.000	.391+02	.268+02	.000	.000	.935	66	9	9
12	SFTAPE	.000	.000	.382+02	.264+02	.000	.000	1.210	66	9	9
13	SFTAPE	.000	.000	.402+02	.268+02	.000	.000	1.463	61	9	9
14	SFTAPE	.000	.000	.000	.000	.000	.000	1.578	52	9	9
5	CALC	.231+02	.155+02	.834+02	.559+02	.277	.277	2.776	133	16	9
15	CALC	.233+02	.154+02	.834+02	.559+02	.279	.277	3.844	133	16	9
21	CALC	.110+03	.742+02	.110+03	.742+02	1.000	1.000	8.413	112	18	10
22	CALC	.402+02	.268+02	.402+02	.268+02	1.000	1.000	9.362	61	10	10
23	CALC	.400+02	.264+02	.400+02	.264+02	1.000	1.000	10.135	66	9	10
24	CALC	.391+02	.268+02	.391+02	.268+02	1.000	1.000	11.105	66	10	10
25	CALC	.382+02	.264+02	.382+02	.264+02	1.000	1.000	11.854	66	9	10
26	CALC	.659+01	.457+01	.659+01	.457+01	1.000	1.000	12.189	52	2	10

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOMP

TOTAL ELAPSED TIME IN PROBLEM = 107.302 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 120

DATE 062779 TIME 010230

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 36

MODEL=SAMPLE CONFIG=CASE1 STEP=10000
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10000	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10000	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10000	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

ABSORBED Q STORED IN STEP 10000

TOTAL TIME TO COMPUTE ABSORBED Q .26

MODEL=SAMPLE CONFIG=CASE1 STEP=10001
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS ++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD.NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
90.000	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA ++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA ++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX, IROTY, IROTZ		1 2 3	
.000	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.900+02	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA ++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCH=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCH POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAMPLE CONFIG=CASE1 STEP=10001 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLT
 DIRECT IRRADIATION CALCULATION LINK.

+++++ NSTEP NO = 10001

++++ COMPUTED OR INPUT ORBIT DATA +++++

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

++++ PLANET --EARTH -- DATA +++++

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	WDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	WSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

DIRECT INCIDENT FLUXES CALCULATED USING SHADOW FACTORS

MODEL=SAMPLE CONFIG=CASE1 STEP=10001 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T
 DIRECT IRRADIATION CALCULATION LINK.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10001 TRUE ANOMALY = 90.00000 TIME = .36701
 ++++ IN THE SUN ++++

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	SFTAPE	.001	9	0
2	.00000	.00000	.0000	SFTAPE	.101	9	0
3	.00000	.42900+03	.0000	SFTAPE	.157	81	0
4	.00000	.00000	.0000	SFTAPE	.211	9	0
11	.00000	.00000	.0000	SFTAPE	.263	9	0
12	.00000	.00000	.0000	SFTAPE	.313	9	0
13	.00000	.42900+03	.0000	SFTAPE	.368	81	0
14	.00000	.00000	.0000	SFTAPE	.418	9	0
5	.30335+03	.30335+03	1.0000	SFTAPE	.482	81	0
15	.30335+03	.30335+03	1.0000	SFTAPE	.546	81	0
21	.00000	.00000	.0000	SFTAPE	.594	8	0
22	.42900+03	.42900+03	1.0000	SFTAPE	.659	78	0
23	.00000	.00000	.0000	SFTAPE	.704	9	0
24	.00000	.00000	.0000	SFTAPE	.750	8	0
25	.00000	.00000	.0000	SFTAPE	.800	9	0
26	.00000	.00000	.0000	SFTAPE	.854	8	0

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM = 109.145 SECONDS

MODEL-SAMPLE CONFIG=CASE1 STEP=10001 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T
 DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10001 TRUE ANOMALY = 90.00000 TIME = .36701
 +++++ IN THE SUN +++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		--SHADOW FACTORS--		CP TIME (SECONDS)	--ELEMENTS--		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	PLAN		PLAN	SURF	
1	SFTAPE	.000	.000	.000	.000	.000	.000	.001	68	9	9
2	SFTAPE	.000	.000	.638+00	.000	.000	.000	.292	66	9	9
3	SFTAPE	.000	.000	.206+01	.000	.000	.000	.541	61	9	9
4	SFTAPE	.000	.000	.000	.000	.000	.000	.647	52	9	9
11	SFTAPE	.000	.000	.000	.000	.000	.000	.893	66	9	9
12	SFTAPE	.000	.000	.634+00	.000	.000	.000	1.138	66	9	9
13	SFTAPE	.000	.000	.206+01	.000	.000	.000	1.369	61	9	9
14	SFTAPE	.000	.000	.000	.000	.000	.000	1.475	52	9	9
5	CALC	.126+01	.155+02	.247+01	.000	.509	.000	2.652	133	16	9
15	CALC	.125+01	.154+02	.247+01	.000	.504	.000	3.706	133	16	9
21	CALC	.143+01	.742+02	.143+01	.000	1.000	.000	6.716	112	10	10
22	CALC	.206+01	.268+02	.206+01	.000	1.000	.000	7.326	61	10	10
23	CALC	.638+00	.264+02	.638+00	.000	1.000	.000	7.819	66	9	10
24	CALC	.000	.268+02	.000	.000	.000	.000	8.444	66	10	10
25	CALC	.634+00	.264+02	.634+00	.000	1.000	.000	8.895	66	9	10
26	CALC	.000	.457+01	.000	.000	.000	.000	9.109	52	2	10

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOMP

TOTAL ELAPSED TIME IN PROBLEM = 118.517 SECONDS
 S,A,P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 139

MODEL=SAMPLE CONFIG=CASE1 STEP=10001
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10001	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10001	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10001	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

ABSORBED Q STORED IN STEP 10001

TOTAL TIME TO COMPUTE ABSORBED Q .21

MODEL=SAMPLE CONFIG=CASE1 STEP=10002
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOT

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS ++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD.NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
180.000	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA ++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED. ORIENTATION DATA ++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX, IROTY, IROTZ		1 2 3	
.300+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.150+03	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.100+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA ++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCH=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE - CCM POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAMPLE CONFIG=CASE1 STEP=10002
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBCEN/OFLOT

***** NSTEP NO = 10002

**** COMPUTED OR INPUT ORBIT DATA ****

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

**** PLANET --EARTH -- DATA ****

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	WDS
.20900+00	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	WSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

DIRECT INCIDENT FLUXES CALCULATED USING SHADOW FACTORS

MODEL=SAMPLE CONFIG=CASE1 STEP=10002 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORIGEN/OPL0T
 DIRECT IRRADIATION CALCULATION LINK.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO. 10002 TRUE ANOMALY = 100.00000 TIME = .73402
 ***** IN THE SHADE *****

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	+++++	.001	0	0
2	.00000	.00000	.0000	+++++	.046	0	0
3	.00000	.00000	.0000	+++++	.065	0	0
4	.00000	.00000	.0000	+++++	.085	0	0
11	.00000	.00000	.0000	+++++	.106	0	0
12	.00000	.00000	.0000	+++++	.126	0	0
13	.00000	.00000	.0000	+++++	.147	0	0
14	.00000	.00000	.0000	+++++	.171	0	0
5	.00000	.00000	.0000	+++++	.189	0	0
15	.00000	.00000	.0000	+++++	.211	0	0
21	.00000	.00000	.0000	+++++	.232	0	0
22	.00000	.00000	.0000	+++++	.256	0	0
23	.00000	.00000	.0000	+++++	.277	0	0
24	.00000	.00000	.0000	+++++	.302	0	0
25	.00000	.00000	.0000	+++++	.324	0	0
26	.00000	.00000	.0000	+++++	.345	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM = 119.611 SECONDS

MODEL=SAMPLE CONFIG=CASE1 STEP=10002 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
 DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10002 TRUE ANOMALY = 180.00000 TIME = .73402
 ++++ IN THE SHADE ++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		--SHADOW FACTORS--		CP TIME (SECONDS)	--ELEMENTS--		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	PLAN		PLAN	SURF	
1	+++++	.000	.000	.000	.000	.000	.000	.001	0	0	0
2	+++++	.000	.000	.000	.000	.000	.000	.049	0	0	0
3	+++++	.000	.000	.000	.000	.000	.000	.071	0	0	0
4	+++++	.000	.000	.000	.000	.000	.000	.091	0	0	0
11	+++++	.000	.000	.000	.000	.000	.000	.112	0	0	0
12	+++++	.000	.000	.000	.000	.000	.000	.132	0	0	0
13	+++++	.000	.000	.000	.000	.000	.000	.156	0	0	0
14	+++++	.000	.000	.000	.000	.000	.000	.175	0	0	0
5	+++++	.000	.155+02	.000	.000	.000	.000	.195	0	0	0
15	+++++	.000	.154+02	.000	.000	.000	.000	.217	0	0	0
21	+++++	.000	.742+02	.000	.000	.000	.000	.237	0	0	0
22	+++++	.000	.268+02	.000	.000	.000	.000	.259	0	0	0
23	+++++	.000	.264+02	.000	.000	.000	.000	.277	0	0	0
24	+++++	.000	.268+02	.000	.000	.000	.000	.303	0	0	0
25	+++++	.000	.264+02	.000	.000	.000	.000	.328	0	0	0
26	+++++	.000	.457+01	.000	.000	.000	.000	.347	0	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOMP

TOTAL ELAPSED TIME IN PROBLEM = 119.991 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 158

MODEL=SAMPLE CONFIG=CASE1 STEP=10002 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOT
 ABSORBED Q COMPUTATION LINK.

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10002	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10002	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10002	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

ABSORBED Q STORED IN STEP 10002

TOTAL TIME TO COMPUTE ABSORBED Q .23

MODEL=SAMPLE CONFIG=CASE1 STEP=10003
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS +++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD,NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
105.720	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA +++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA +++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROTY,IROTZ		1 2 3	
.359+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.104+03	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA +++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCH=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCH POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAHPLE CONFIG=CASE1 STEP=10003
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

+++++ NSTEP NO = 10003

++++ COMPUTED OR INPUT ORBIT DATA +++++

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGHA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

++++ PLANET --EARTH -- DATA +++++

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	WDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	WSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

DIRECT INCIDENT FLUXES CALCULATED USING SHADOW FACTORS

MODEL=SAMPLE CONFIG=CASE1 STEP=10003
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10003 TRUE ANOMALY = 105.71977 TIME = .43111
 ++++ IN THE SUN ++++

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	SFTAPE	.000	9	0
2	.00000	.69478+01	.0000	SFTAPE	.059	9	0
3	.00000	.41697+03	.0000	SFTAPE	.092	81	0
4	.00000	.00000	.0000	SFTAPE	.127	9	0
11	.00000	.00000	.0000	SFTAPE	.155	9	0
12	.00000	.00000	.0000	SFTAPE	.186	9	0
13	.00000	.41697+03	.0000	SFTAPE	.220	81	0
14	.00000	.00000	.0000	SFTAPE	.250	9	0
5	.28468+03	.36602+03	.7778	CALC	.346	81	5
15	.28468+03	.36602+03	.7778	CALC	.445	81	5
21	.10066+03	.10066+03	1.0000	CALC	.558	55	10
22	.41696+03	.41696+03	1.0000	CALC	.683	78	10
23	.69478+01	.69478+01	1.0000	CALC	.721	9	5
24	.00000	.00000	.0000	SFTAPE	.759	8	0
25	.00000	.00000	.0000	SFTAPE	.793	9	0
26	.00000	.00000	.0000	SFTAPE	.827	8	0

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM = 121.615 SECONDS

MODEL=SAMPLE CONFIG=CASE1 STEP=10003 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLDT
 DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10003 TRUE ANOMALY = 105.71977 TIME = .43111
 ++++ IN THE SUN ++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		--SHADOW FACTORS--		CP TIME (SECONDS)	--ELEMENTS--		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	PLAN		PLAN	SURF	
1	+++++	.000	.000	.000	.000	.000	.000	.000	0	0	0
2	+++++	.000	.000	.000	.000	.000	.000	.054	0	0	0
3	+++++	.000	.000	.000	.000	.000	.000	.073	0	0	0
4	+++++	.000	.000	.000	.000	.000	.000	.096	0	0	0
11	+++++	.000	.000	.000	.000	.000	.000	.110	0	0	0
12	+++++	.000	.000	.000	.000	.000	.000	.139	0	0	0
13	+++++	.000	.000	.000	.000	.000	.000	.165	0	0	0
14	+++++	.000	.000	.000	.000	.000	.000	.185	0	0	0
5	+++++	.000	.155+02	.000	.000	.000	.000	.206	0	0	0
15	+++++	.000	.154+02	.000	.000	.000	.000	.232	0	0	0
21	+++++	.000	.742+02	.000	.000	.000	.000	.257	0	0	0
22	+++++	.000	.268+02	.000	.000	.000	.000	.278	0	0	0
23	+++++	.000	.264+02	.000	.000	.000	.000	.299	0	0	0
24	+++++	.000	.268+02	.000	.000	.000	.000	.320	0	0	0
25	+++++	.000	.264+02	.000	.000	.000	.000	.340	0	0	0
26	+++++	.000	.457+01	.000	.000	.000	.000	.363	0	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOMP

TOTAL ELAPSED TIME IN PROBLEM = 122.011 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 177

MODEL=SAMPLE CONFIG=CASE1 STEP=10003
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10003	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10003	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10003	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

ABSORBED Q STORED IN STEP 10003

TOTAL TIME TO COMPUTE ABSORBED Q .17

MODEL=SAMPLE CONFIG=CASE1 STEP=10004
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS ++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD,NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
105.920	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA ++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA ++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROTY,IROTZ		1 2 3	
.359+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.104+03	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA ++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCH=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCH POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAMPLE CONFIG=CASE1 STEP=10004
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT

+++++ NSTEP NO = 10004

++++ COMPUTED OR INPUT ORBIT DATA ++++

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

++++ PLANET --EARTH -- DATA ++++

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	HDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	HSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

DIRECT INCIDENT FLUXES CALCULATED USING SHADOW FACTORS

MODEL=SAMPLE CONFIG=CASE1 STEP=10004 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
 DIRECT IRRADIATION CALCULATION LINK.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10004 TRUE ANOMALY = 105.91977 TIME = .43193
 ***** IN THE SHADE *****

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	*****	.000	0	0
2	.00000	.00000	.0000	*****	.049	0	0
3	.00000	.00000	.0000	*****	.071	0	0
4	.00000	.00000	.0000	*****	.091	0	0
11	.00000	.00000	.0000	*****	.110	0	0
12	.00000	.00000	.0000	*****	.130	0	0
13	.00000	.00000	.0000	*****	.149	0	0
14	.00000	.00000	.0000	*****	.176	0	0
5	.00000	.00000	.0000	*****	.197	0	0
15	.00000	.00000	.0000	*****	.217	0	0
21	.00000	.00000	.0000	*****	.230	0	0
22	.00000	.00000	.0000	*****	.258	0	0
23	.00000	.00000	.0000	*****	.275	0	0
24	.00000	.00000	.0000	*****	.296	0	0
25	.00000	.00000	.0000	*****	.319	0	0
26	.00000	.00000	.0000	*****	.343	0	0

NOTE--

FLUX VALUES FLAGGED (*****) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM = 123.070 SECONDS

MODEL=SAHIPLE CONFIG=CASE1 STEP=10004 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPILOT
 DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10004 TRUE ANOMALY = 105.91977 TIME = .43193
 ++++ IN THE SHADE ++++

NODE NUMBER	COMPUT	---DIRECT ALBEDO	INCID. FLUX-- PLANETARY	---UNSHADOWED ALBEDO	FLUX--- PLANETARY	---SHADOW FACTORS-- ALBEDO	PLAN	CP TIME (SECONDS)	---ELEMENTS-- PLAN	SURF	SHAD SURF
1	++++++	.000	.000	.000	.000	.000	.000	.001	0	0	0
2	++++++	.000	.000	.000	.000	.000	.000	.048	0	0	0
3	++++++	.000	.000	.000	.000	.000	.000	.069	0	0	0
4	++++++	.000	.000	.000	.000	.000	.000	.094	0	0	0
11	++++++	.000	.000	.000	.000	.000	.000	.116	0	0	0
12	++++++	.000	.000	.000	.000	.000	.000	.141	0	0	0
13	++++++	.000	.000	.000	.000	.000	.000	.162	0	0	0
14	++++++	.000	.000	.000	.000	.000	.000	.182	0	0	0
5	++++++	.000	.155+02	.000	.000	.000	.000	.199	0	0	0
15	++++++	.000	.154+02	.000	.000	.000	.000	.223	0	0	0
21	++++++	.000	.742+02	.000	.000	.000	.000	.244	0	0	0
22	++++++	.000	.268+02	.000	.000	.000	.000	.286	0	0	0
23	++++++	.000	.264+02	.000	.000	.000	.000	.286	0	0	0
24	++++++	.000	.268+02	.000	.000	.000	.000	.306	0	0	0
25	++++++	.000	.264+02	.000	.000	.000	.000	.326	0	0	0
26	++++++	.000	.457+01	.000	.000	.000	.000	.349	0	0	0

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOMP

TOTAL ELAPSED TIME IN PROBLEM = 123.457 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 196

MODEL=SAMPLE CONFIG=CASE1 STEP=10004 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
 ABSORBED Q COMPUTATION LINK.

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10004	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10004	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10004	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

ABSORBED Q STORED IN STEP 10004

TOTAL TIME TO COMPUTE ABSORBED Q .26

MODEL=SAMPLE CONFIG=CASE1 STEP=10006
 ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
IQOTME	1	1	TIME ARRAY ID NUMBER FLUX TABLES START AT IQOTME + 1	N/A
QOTAPE	NO	2HNO	PARAMETER TO OUTPUT TO BCD TAPE	(4HTAPE,2HNO)
QOPNCH	NO	2HNO	PUNCH/NO PUNCH PARAMETER FOR OUTPUT	(3HPUN,2HNO)
QOAMPF	1.0000	1.0	AREA MULTIPLYING FACTOR	N/A
QOFMPF	1.0000	1.0	FLUX MULTIPLYING FACTOR	N/A
QOTMPF	1.0000	1.0	TIME MULTIPLYING FACTOR	N/A
QOTYPE	BOTH	NONE	PARAMETER TO DETERMINE TYPE OF OUTPUT	(3HTAB,2HAV,4HBOTH)
IQOARY	ALL	NONE	STEP NO. ARRAY DIRECTIVE	(3HALL,ARRAY NAME)

MODEL=SAMPLE CONFIG=CASE1 STEP=10006
 ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

ABSORBED HEAT RATE TABLES PUNCHED

Q = INPUT * RMPF WHERE RMPF = .10000+01
 TIME = INPUT * TMPF WHERE TMPF = .10000+01
 AREA IS ON SUBROUTINE CALL CARDS

1\$ TIME ARRAY	.000	.367+00.	.431+00.	.432+00.	.734+00
END\$					
2\$ HEAT RATE ARRAY	.675+01.	.586+01.	.549+01.	.283+00.	.283+00
END\$					
3\$ HEAT RATE ARRAY	.893+02.	.411+01.	.385+01.	.199+00.	.199+00
END\$					
4\$ HEAT RATE ARRAY	.619+01.	.218+01.	.205+01.	.105+00.	.105+00
END\$					
5\$ HEAT RATE ARRAY	.170+03.	.505+01.	.473+01.	.244+00.	.244+00
END\$					
6\$ HEAT RATE ARRAY	.412+01.	.586+01.	.549+01.	.283+00.	.283+00
END\$					
7\$ HEAT RATE ARRAY	.407+01.	.411+01.	.385+01.	.198+00.	.198+00
END\$					
8\$ HEAT RATE ARRAY	.125+02.	.218+01.	.205+01.	.105+00.	.105+00
END\$					
9\$ HEAT RATE ARRAY	.974+02.	.505+01.	.473+01.	.244+00.	.244+00
END\$					
10\$ HEAT RATE ARRAY	.381+02.	.288+03.	.270+03.	.139+02.	.139+02
END\$					
11\$ HEAT RATE ARRAY	.374+02.	.288+03.	.270+03.	.139+02.	.139+02
END\$					
12\$ HEAT RATE ARRAY	.183+03.	.138+03.	.179+03.	.138+03.	.138+03
END\$					
13\$ HEAT RATE ARRAY	.111+03.	.227+03.	.222+03.	.497+02.	.497+02
END\$					

MODEL=SAMPLE CONFIG=CASE1 STEP=10006 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T
ABSORBED Q OUTPUT COMPUTATION LINK.

ABSORBED HEAT RATE TABLES PUNCHED

Q = INPUT * RMPF WHERE RMPF = .10000+01
TIME = INPUT * TMPF WHERE TMPF = .10000+01
AREA IS ON SUBROUTINE CALL CARDS

14\$ HEAT RATE ARRAY
.717+02, .249+02, .262+02, .247+02, .247+02
END\$
15\$ HEAT RATE ARRAY
.658+02, .497+02, .497+02, .497+02, .497+02
END\$
16\$ HEAT RATE ARRAY
.327+02, .249+02, .247+02, .247+02, .247+02
END\$
17\$ HEAT RATE ARRAY
.882+02, .847+01, .847+01, .847+01, .847+01
END\$

MODEL=SAMPLE CONFIG=CASE1 STEP=10008
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/DRBGEN/DPLOT

DA11NC SUBROUTINE CALL CARDS

	AREA =	INPUT	(UNITS) *	ANPF	WHERE	ANPF =	.10000+01
DA11NC(1.46792175E 0,TIMEN,A1		.A2	.1.00000000E	0,Q1)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A3	.1.00000000E	0,Q2)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A4	.1.00000000E	0,Q3)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A5	.1.00000000E	0,Q4)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A6	.1.00000000E	0,Q11)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A7	.1.00000000E	0,Q12)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A8	.1.00000000E	0,Q13)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A9	.1.00000000E	0,Q14)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A10	.1.00000000E	0,Q5)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A11	.1.00000000E	0,Q15)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A12	.1.00000000E	0,Q21)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A13	.1.00000000E	0,Q22)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A14	.1.00000000E	0,Q23)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A15	.1.00000000E	0,Q24)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A16	.1.00000000E	0,Q25)\$		
DA11NC(1.46792175E 0,TIMEN,A1		.A17	.1.00000000E	0,Q26)\$		

MODEL=SAMPLE CONFIG=CASE1 STEP=10006 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
ABSORBED Q OUTPUT COMPUTATION LINK.

AVERAGE ORBITAL HEATING RATE AND AREA CARDS PUNCHED

VALUES ARE RATE = INPUT (UNITS) * RMPF WHERE RMPF = .10000+01
VALUES ARE AREA = INPUT (UNITS) * AMPF WHERE AMPF = .10000+01

Q1	=3.76739010E	0
Q2	=2.37882507E	1
Q3	=2.32315344E	0
Q4	=4.42941165E	1
Q11	=3.10908234E	0
Q12	=2.47663051E	0
Q13	=3.90220493E	0
Q14	=2.61343932E	1
Q5	=1.11914322E	2
Q15	=1.11704981E	2
Q21	=1.51001154E	2
Q22	=1.24700665E	2
Q23	=3.65944815E	1
Q24	=5.37007308E	1
Q25	=2.67737952E	1
Q26	=2.84040403E	1

TOTAL TIME TO COMPUTE ABSORBED Q OUT .59

MODEL=SAMPLE CONFIG=CASE2 STEP=10006
 ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
IQOTNE	1	1	TIME ARRAY ID NUMBER FLUX TABLES START AT IQOTNE + 1	N/A
QOTAPE	NO	2HNO	PARAMETER TO OUTPUT TO BCD TAPE	(4HTAPE,2HNO)
QOPNCH	NO	2HNO	PUNCH/NO PUNCH PARAMETER FOR OUTPUT	(3HPUN,2HNO)
QOANPF	1.0000	1.0	AREA MULTIPLYING FACTOR	N/A
QOFMPF	1.0000	1.0	FLUX MULTIPLYING FACTOR	N/A
QOTMPF	1.0000	1.0	TIME MULTIPLYING FACTOR	N/A
QOTYPE	BOTH	NONE	PARAMETER TO DETERMINE TYPE OF OUTPUT	(3HTAB,2HAV,4HBOTH)
IQOARY	ALL	NONE	STEP NO. ARRAY DIRECTIVE	(3HALL,ARRAY NAME)

MODEL=SAMPLE CONFIG=CASE2 STEP=10008

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT

ABSORBED Q OUTPUT COMPUTATION LINK.

ABSORBED HEAT RATE TABLES PUNCHED

Q = INPUT ° RMPF WHERE RMPF = .10000+01
 TIME = INPUT ° TMPF WHERE TMPF = .10000+01
 AREA IS ON SUBROUTINE CALL CARDS

```

1$ TIME ARRAY
.000 , .367+00, .431+00, .432+00, .734+00
END$
2$ HEAT RATE ARRAY
.121+03, .239+03, .233+03, .503+02, .503+02
END$
3$ HEAT RATE ARRAY
.122+03, .290+02, .286+02, .249+02, .249+02
END$
4$ HEAT RATE ARRAY
.845+02, .540+02, .538+02, .499+02, .499+02
END$
5$ HEAT RATE ARRAY
.450+03, .148+03, .189+03, .139+03, .139+03
END$
6$ HEAT RATE ARRAY
.759+02, .290+02, .300+02, .249+02, .249+02
END$
7$ HEAT RATE ARRAY
.164+03, .585+03, .549+03, .363+02, .363+02
END$

```

MODEL=SAMPLE CONFIG=CASE2 STEP=10006 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOT
ABSORBED Q OUTPUT COMPUTATION LINK.

DA11KC SUBROUTINE CALL CARDS

	AREA	=	INPUT	(UNITS)	*	AMPF	WHERE	AMPF	=	.10000+01
DA11MC	(1.46792175E	0.	TIMEM,A1	,A2	,1.00000000E	0.01)\$			
DA11MC	(1.46792175E	0.	TIMEM,A1	,A3	,1.00000000E	0.02)\$			
DA11MC	(1.46792175E	0.	TIMEM,A1	,A4	,1.00000000E	0.03)\$			
DA11MC	(1.46792175E	0.	TIMEM,A1	,A5	,1.00000000E	0.04)\$			
DA11MC	(1.46792175E	0.	TIMEM,A1	,A6	,1.00000000E	0.012)\$			
DA11MC	(1.46792175E	0.	TIMEM,A1	,A7	,1.00000000E	0.05)\$			

MODEL=SAMPLE CONFIG=CASE2 STEP=10006 SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOTT
ABSORBED Q OUTPUT COMPUTATION LINK.

AVERAGE ORBITAL HEATING RATE AND AREA CARDS PUNCHED

	VALUES ARE	RATE = INPUT (UNITS) * RMPF	WHERE RMPF =	.10000*01
	VALUES ARE	AREA = INPUT (UNITS) * ANPF	WHERE ANPF =	.10000*01
Q1	=1.31577134E	2		
Q2	=5.05620456E	1		
Q3	=5.99260890E	1		
Q4	=2.21429661E	2		
Q12	=3.90711117E	1		
Q5	=2.52023339E	2		

TOTAL TIME TO COMPUTE ABSORBED Q OUT .40

ODATA. ODATAS INPUT

PARAMETER	DESCRIPTION	OPTION °.	DEFAULT
NV	VIEW NUMBER	1-6	1
VU	VIEW	3HALL 3H3-D 4HBETA 5HCIGMA 3HSUN 3HGEN	3HALL
SCL	VEHICLE SURFACE SCALING FACTOR INPUT IN INCHES (MAX VALUE = (3.15-SCLR)/2.)	REAL NO.	(3.15-SCLR)/2.
SCLR	ORBIT RADIUS INPUT IN INCHES FROM CENTER OF PLOT (RECOMMENDED VALUE = 1.6)	REAL NO.	8.*RPLN/7.
RPLN	PLANET RADIUS INPUT IN INCHES FROM CENTER OF PLOT (RECOMMENDED VALUE = 1.4)	REAL NO.	1.4
TRUEAN	TRUE ANOMALY (PRESENT VEHICLE POSITION IN DEGREES FROM PERIAPSIS)	REAL NO.	COMPUTED IF TIME Δ 0.
TIMEST	TIME OF PERIAPSIS PASSAGE	REAL NO.	NONE
TIME	TIME AT PRESENT VEHICLE POSITION	REAL NO.	COMPUTED IF TRUEAN Δ 0.
ISELN	ARRAY NAME CONTAINING NUMBER OF SURFACES TO BE SELECTIVELY PLOTTED	ARRAY NAME	PLOTS ALL SURFACES
ITIT	ARRAY NAME OF PLOT TITLE	ARRAY NAME	USES JOB TITLE
IROTX, IROTY, IROTZ	ORDER OF ROTATIONS (FOR IVU = 3HGEN)	1,2,3 (ANY ORDER)	1,2,3
ROTX, ROTY, ROTZ	VIEW ROTATIONS (FOR IVU = 3HGEN)	0 : ANG : 360	0.0 0.0 0.0

*INPUT ZERO FOR DEFAULT ACTION

CALLING SEQUENCE.

CALL ODATA (INV, VU, SCL, SCLR, RPLN, TRUEAN, TIMEST, TIME, ISELN, IYIY, IROTX, IROTY, IROTZ, ROTX, ROTY, ROTZ)

OR

CALL ODATAS (INV, VU, SCL, SCLR, RPLN, TRUEAN, TIMEST, TIME)

NOTE: IF NO CALLS TO ODATA/ODATAS ARE MADE, A CALL TO OPLOT WILL
RESULT IN ALL VIEWS BEING AUTOMATICALLY SCALED AND GENERATED.

DATE 062770 TIME 010351

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 67

MODEL=SAMPLE CONFIG=CASE2 STEP=10006
ORBIT PLOTTER DATA OUTPUT

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OLOT

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS ++++				
.000	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA ++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.00000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA ++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX, IROTY, IROTZ.		1 2 3	
++++ SPIN DATA ++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CW=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCM POSITIVE		0.0	RATE

DATE 062778 TIME 010352

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 69

MODEL=SAMPLE CONFIG=CASE2 STEP=10006
ORBIT PLOTTER DATA OUTPUT

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPL0T

++++ COMPUTED OR INPUT ORBIT DATA +++++

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

++++ PLANET --EARTH -- DATA +++++

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	HDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	HSS
.10000+16	PLANET-SUN DISTANCE	PSD		.14679+01	ORBIT PERIOD	PERIOD
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

VIEW=3-D	SCALE= .3037	VIEW NUMBER=1
VIEW=BETA	SCALE= .3037	VIEW NUMBER=1
VIEW=CIGMA	SCALE= .3037	VIEW NUMBER=1
VIEW=SUN VIEW	SCALE= .3037	VIEW NUMBER=1
VIEW=3-D	SCALE= .3037	VIEW NUMBER=2
VIEW=BETA	SCALE= .3037	VIEW NUMBER=2
VIEW=CIGMA	SCALE= .3037	VIEW NUMBER=2
VIEW=SUN VIEW	SCALE= .3037	VIEW NUMBER=2
VIEW=3-D	SCALE= .3037	VIEW NUMBER=3
VIEW=BETA	SCALE= .3037	VIEW NUMBER=3
VIEW=CIGMA	SCALE= .3037	VIEW NUMBER=3
VIEW=SUN VIEW	SCALE= .3037	VIEW NUMBER=3

IT HAS BEEN A PLEASURE SERVING YOU. I HOPE YOU ENJOY YOUR 12. FRAMES OF S-C 4060 OUTPUT.


++NOTE++ TRASYS GENERATED 12 PLOT FRAMES

NORMAL TERMINATION BY PROCESSOR

0PHD.PLED


0BRKPT PRINTS

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/BCCAL/ORBGER/OPLOD

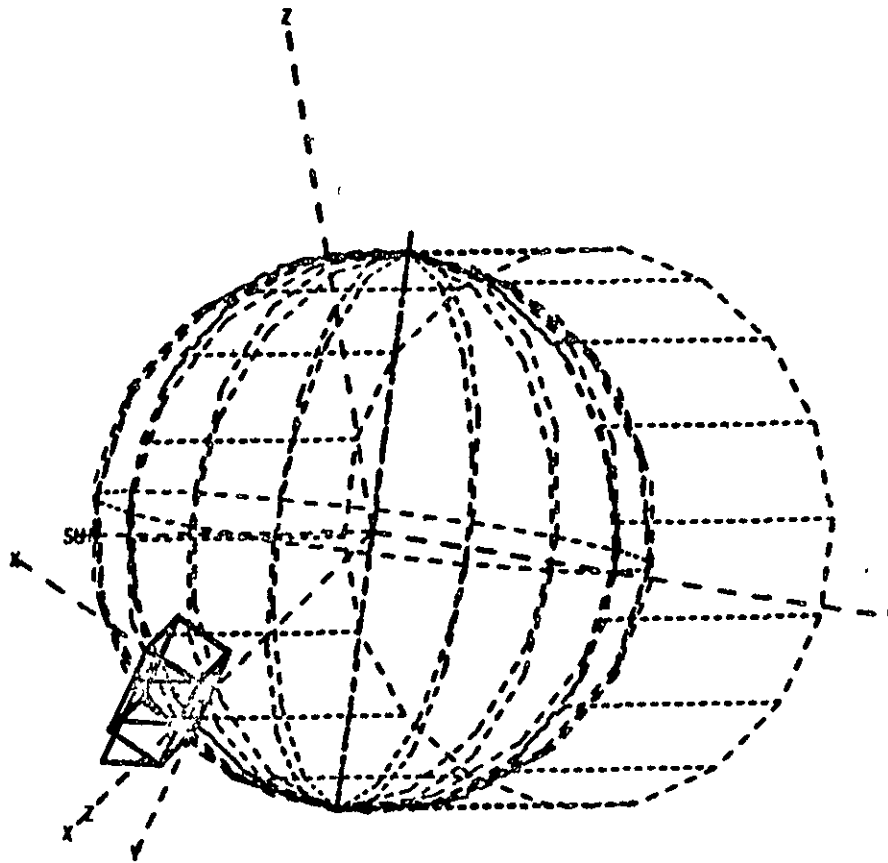

H-207
VIEW = 3-D
SCALE = .3037
TIME = .000


SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/DR36EN/DPLO7

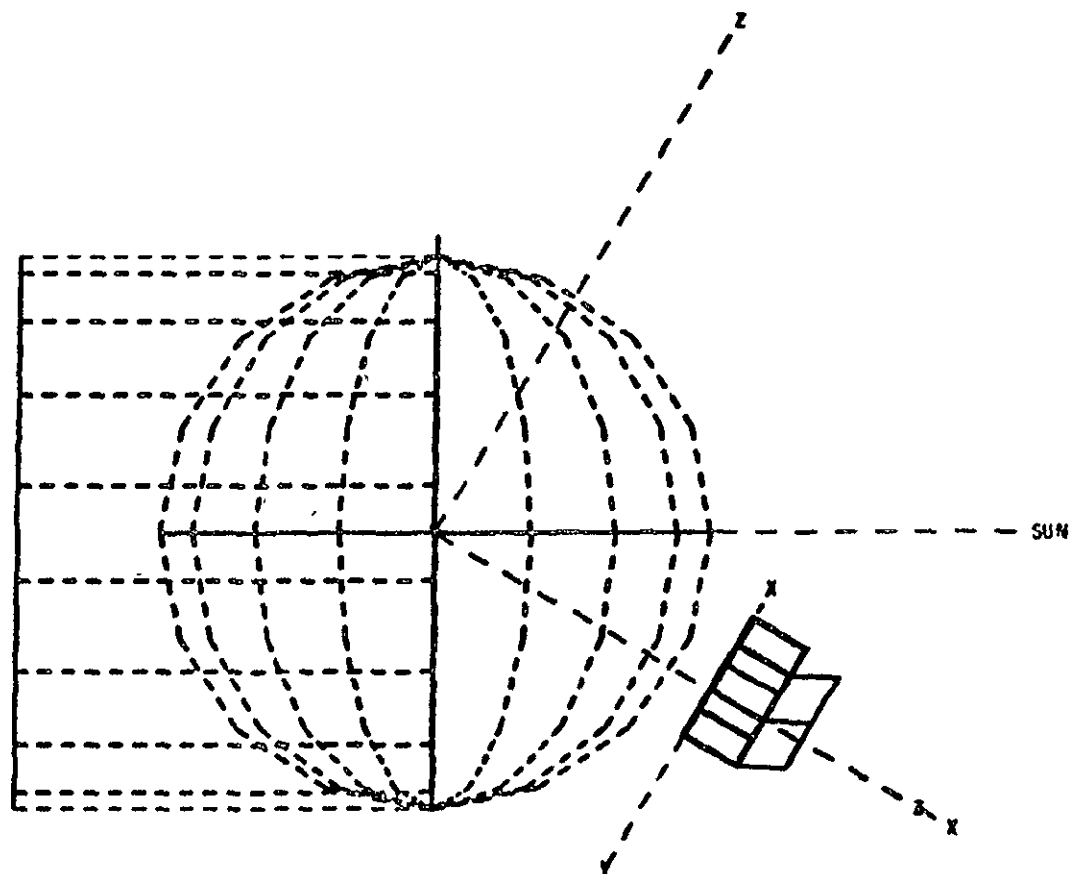

H-208

VIEW = BETA
SCALE = .3037
TIME = .000


SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORDGEN/OPLOTT

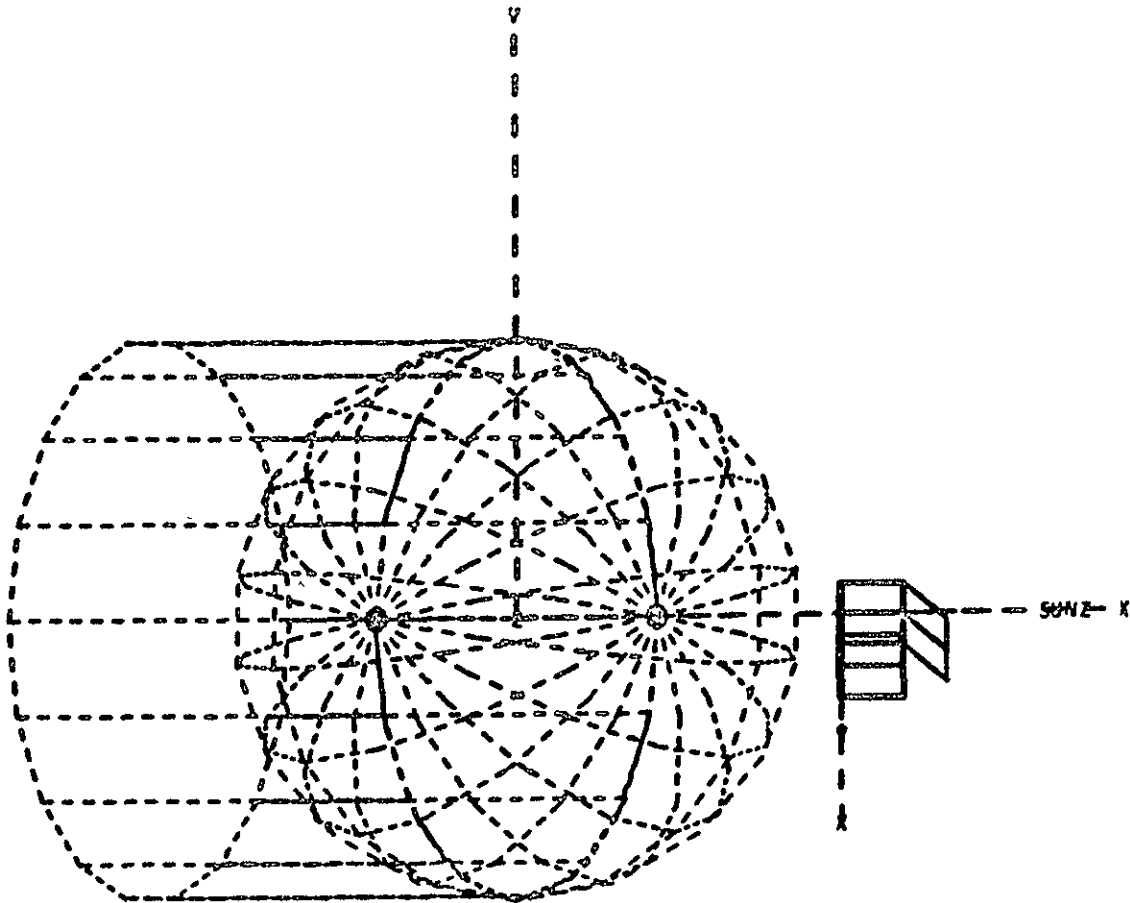

H-209

VIEW = CIGMA
SCALE = .3037
TIME = .000


SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/BCAL/ORBGEN/OPILOT

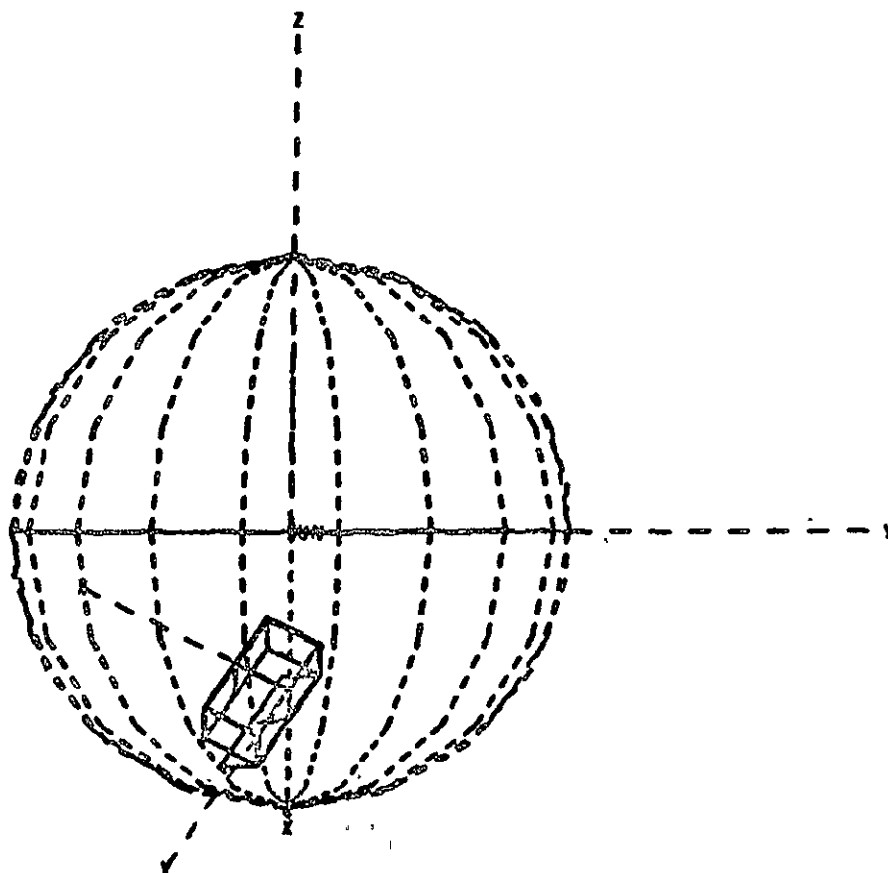

H-210

VIEW = SUN VIEW
SCALE = .3037
TIME = .000


SAMPLE CASE 2 - /SFCAL/FFCAL/BBCAL/RCCAL/ORBGEN/OPLDT

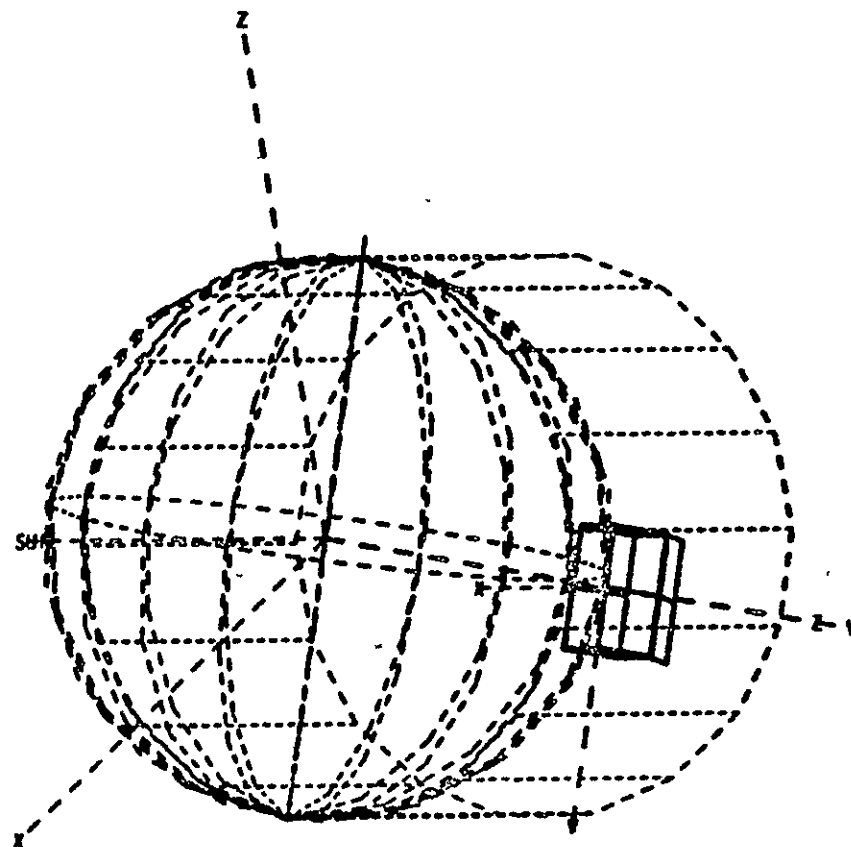

H-211

VIEW = 3-D
SCALE = .3037
TIME = .000


SAMPLE CASE 2 - /SFCAL/FFCAL/GDCAL/BCCAL/DRBGEN/DPLDY

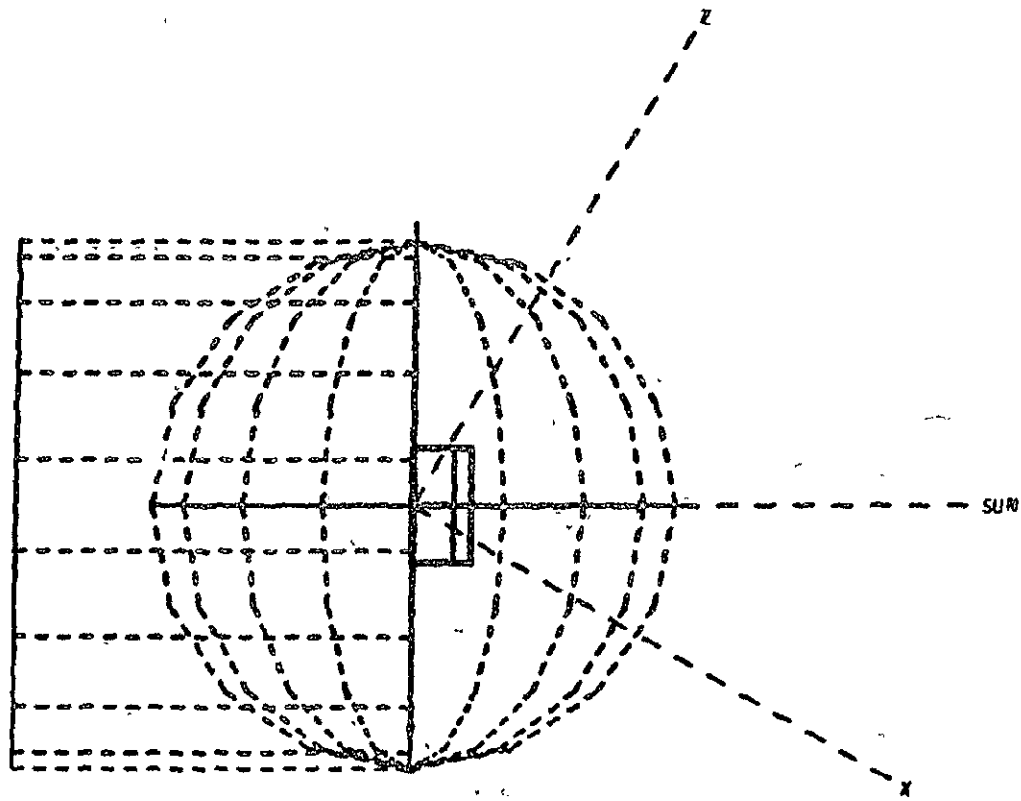

H-212

VIEW = BETA
SCALE = .3037
TIME = .000


SAMPLE CASE 2 - /SFCAL/FFCAL/6BCAL/RCCAL/ORBGEN/DPLOT

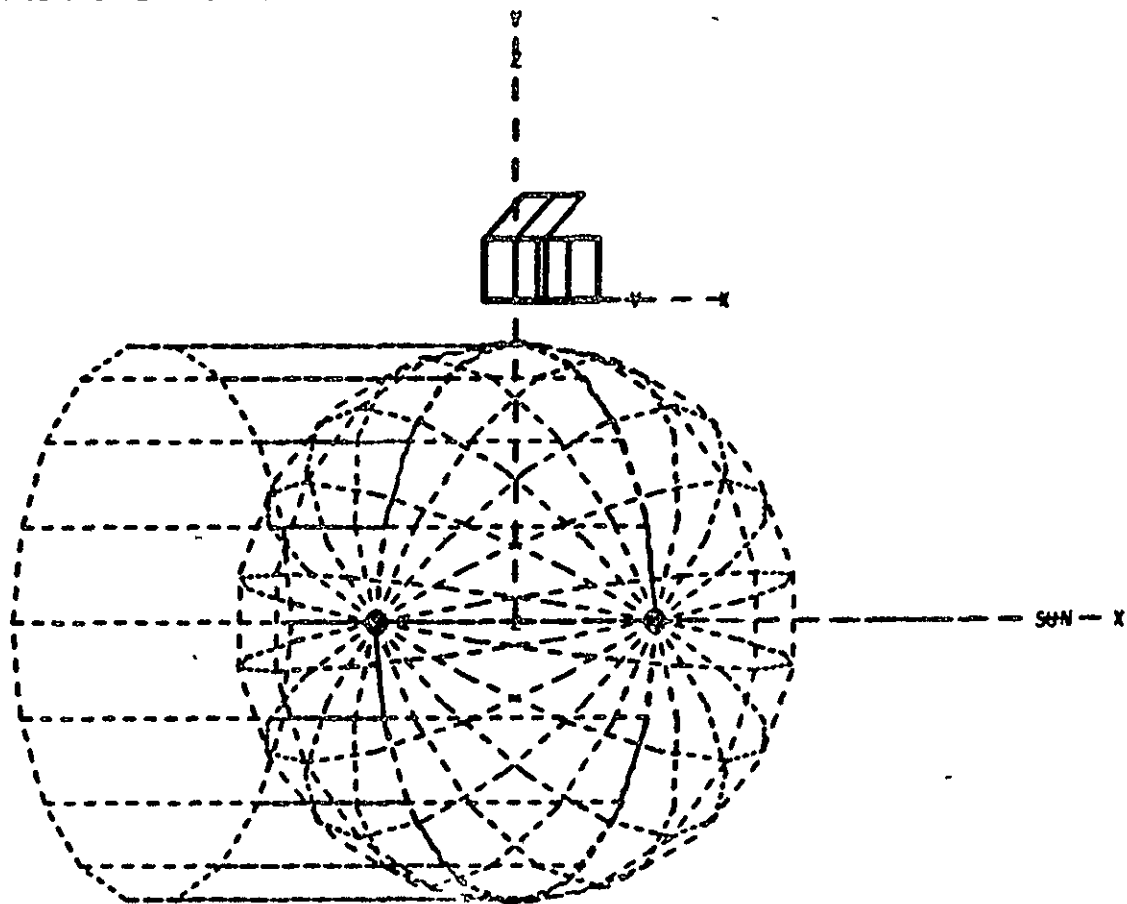

H-213


VIEW = SIGMA
SCALE = .3037
TIME = .000

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLO7

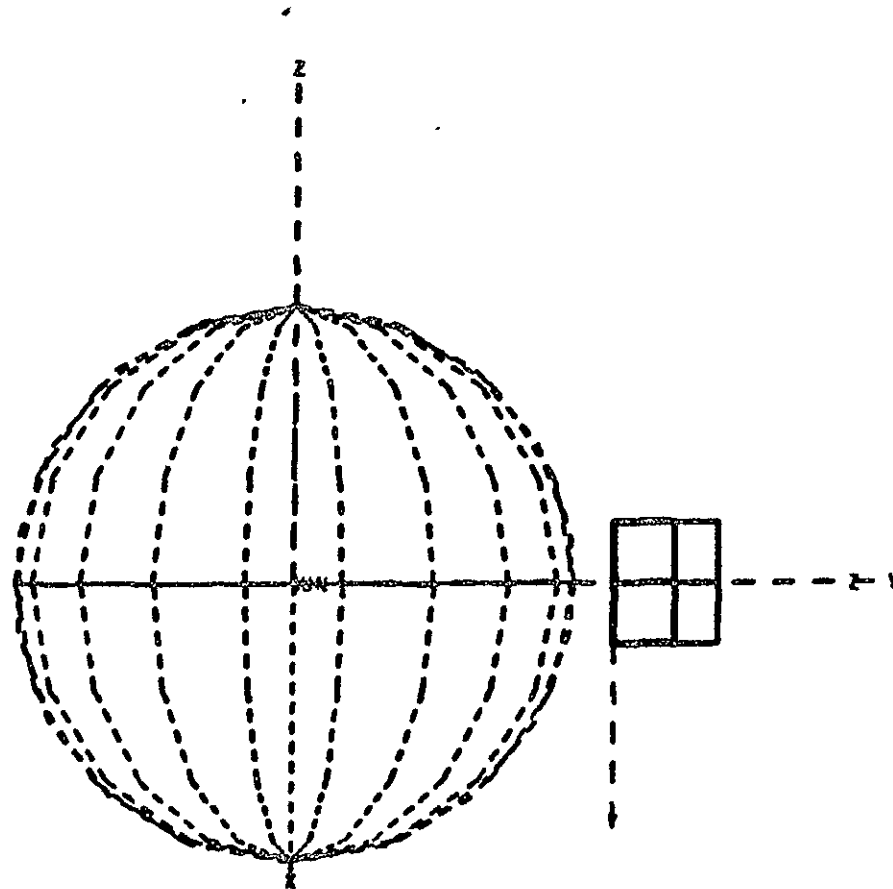


H-214
VIEW = SUN VIEW
SCALE = .3037
TIME = .000

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ODSGEN/OPLOD

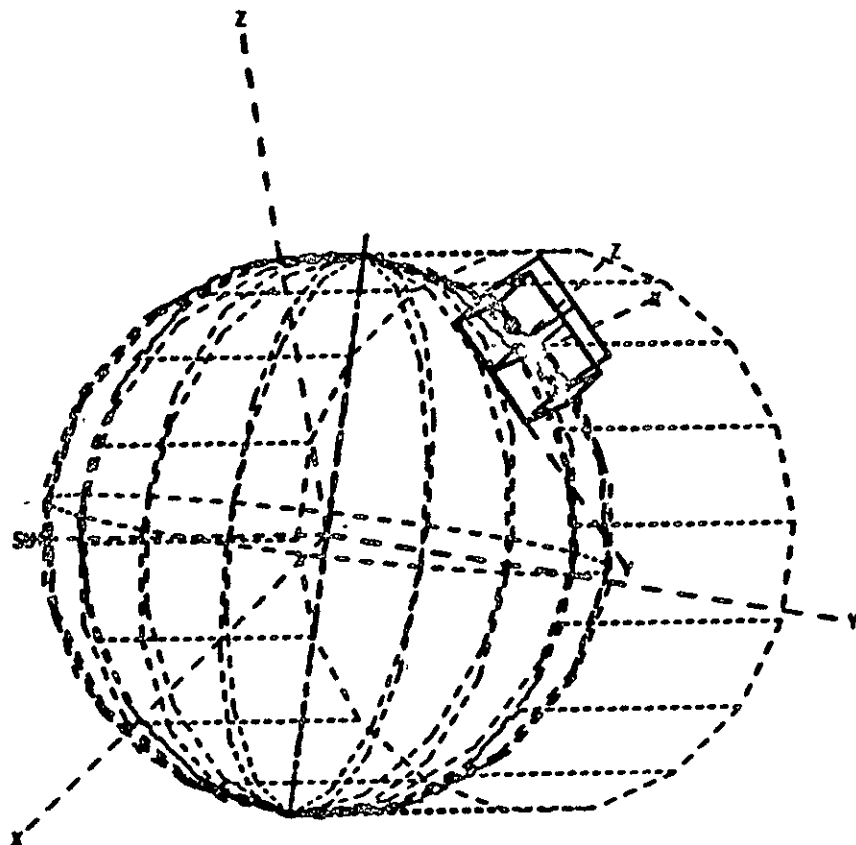


H-215
VIEW = 3-D
SCALE = .3037
TIME = .000

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORBGEN/OPLOD

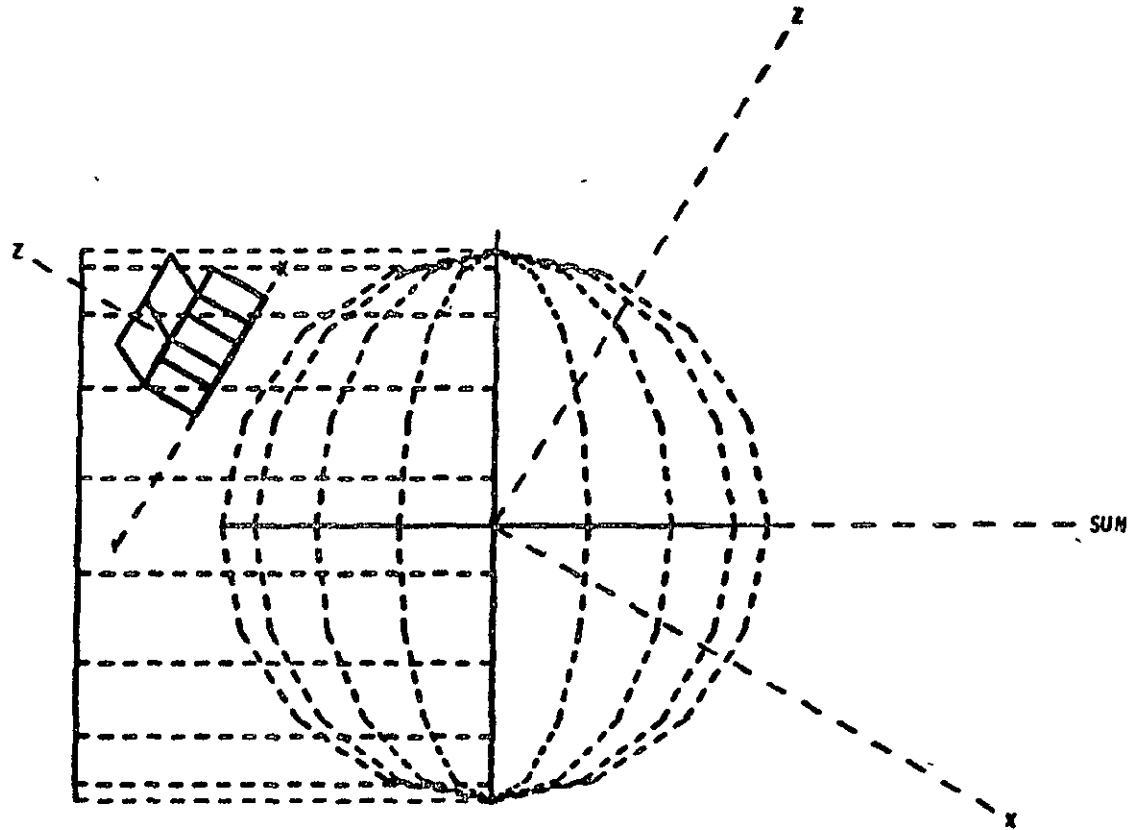

H-216
VIEW = BETA,
SCALE = .3037
TIME = .000


SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/ORIGEN/OPLO7

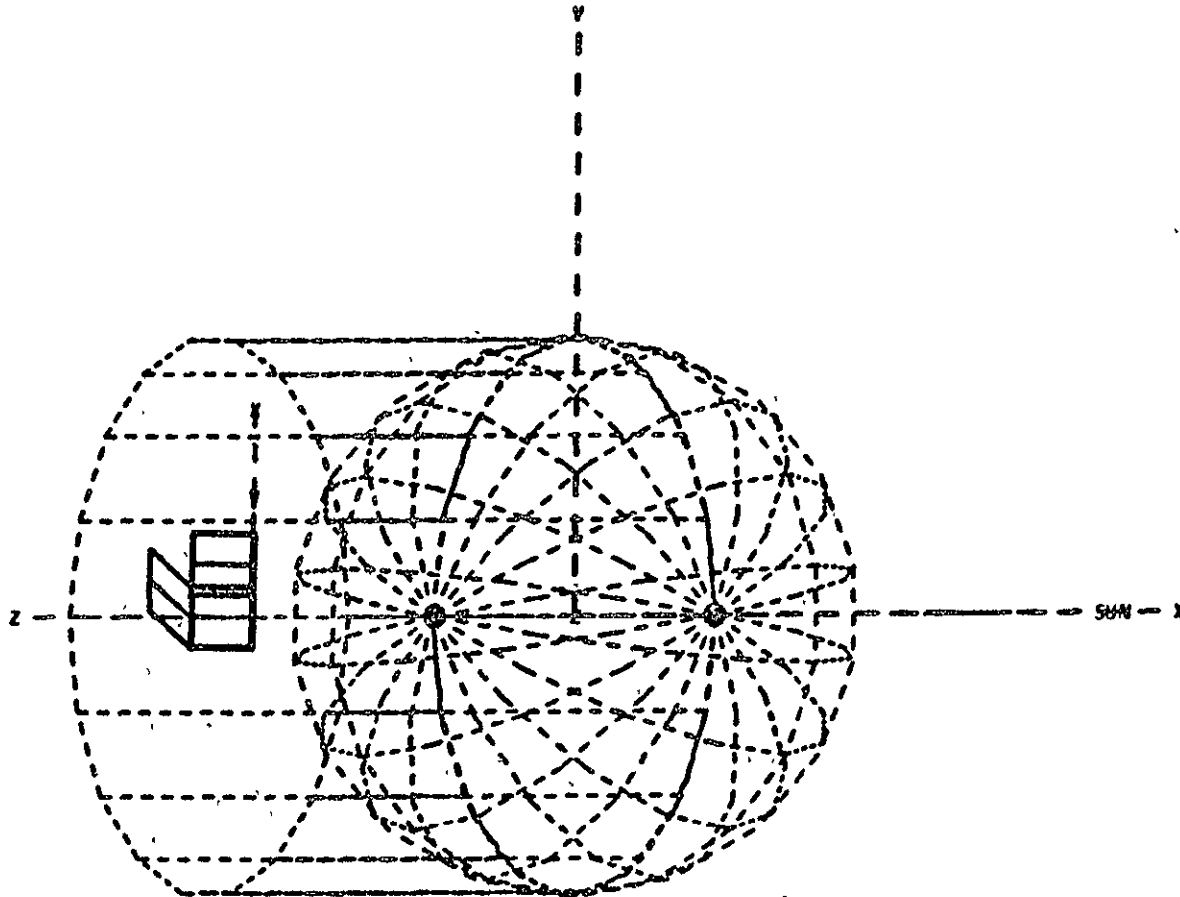

H-217

VIEW = CIGMA
SCALE = .3037
TIME = .000

SAMPLE CASE 2 - /SFCAL/FFCAL/GBCAL/RCCAL/DRGGEN/OPLDT

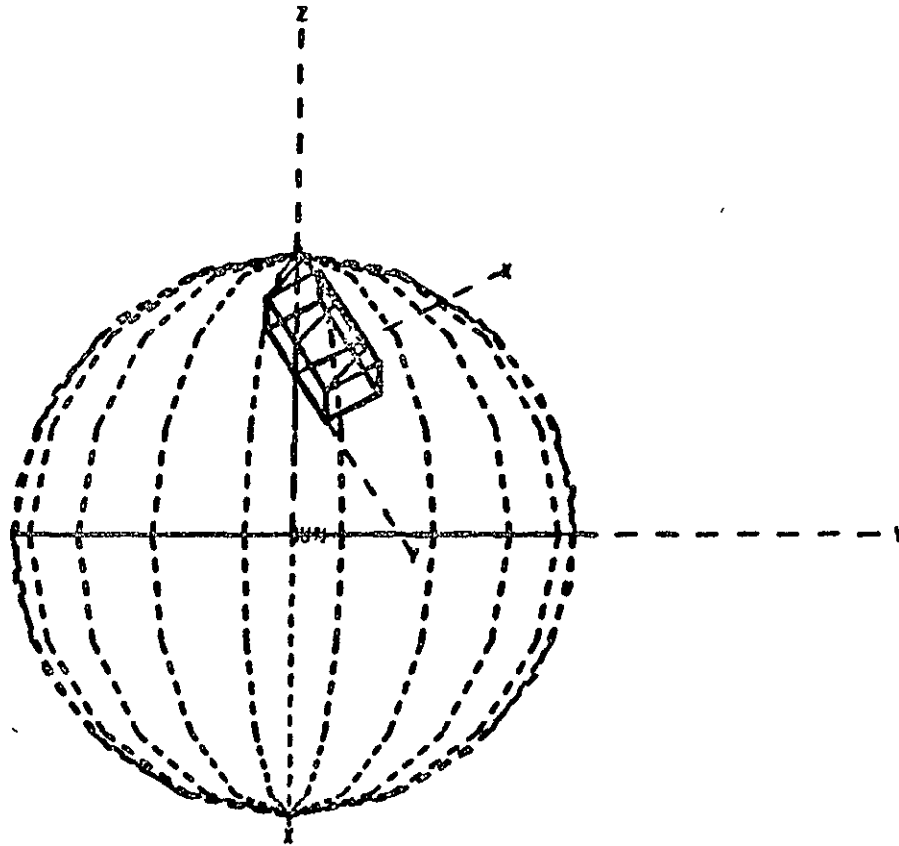

H-218
VIEW = SUN VIEW
SCALE = .3037
TIME = .000

SAMPLE CASE 3

SAMPLE CASE 3

QED,R VOGTB.CASE3
FILE IN FIELD 1 DISABLED--ACCEPTED
FILE IN FIELD 1 IN USE BY ANOTHER RUN
READ-ONLY MODE
CASE UPPER ASSUMED
ED 14.02-06/20-20:39-(0.)
EDIT

NO DECK VOGT

1:ORUN,R/R RVNH03,3240-F261-C,ES3-N03711.06.300
10:OASG,T RSI.,BC,X03562
11:OADD ES3-TRASYS*TRASYS.STARTM
12:OSETC 0100
13:OADD PREPRO
14:HEADER OPTIONS DATA
15:TITLE SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN
16:C SKIPPING SHADOW FACTOR TABLES ON RSI.
17:C RESTARTING FORM FACTORS.
18:C COMBINING FORM FACTORS.
19:C CALCULATING DIRECT INCIDENT FLUXES WITHOUT THE USE OF
20:C SHADOW FACTOR TABLES.
21:C
22: MODEL = SAMPLE
23: RSI = RSTSAM2
24: RSO = RSTSAM3
25:HEADER EDIT DATA
26:°D,153,156
27:C
28:C-----SKIP THE SHADOW FACTOR TABLES ON RSI. THIS IS ACCOMPLISHED
29:C-----BY REPLACING THE #L SFCAL# CARD WITH A #CALL RSTON# CARD
30:C-----TO SET THE SKIP FLAG
31:C
32: CALL RSTON
33:°D,163,166
34:C
35:C-----COMBINE FORM FACTORS
36:C
37: CALL RSTOFF
38: CALL CMDATA(0.5HCASE3,2HFF,0,0)
39:L CMCAL
40:C
41:C-----CALCULATE GRAY BODY MATRICES USING COMBINED FORM FACTORS.
42:C
43: CALL GBDATA(BOTH,0,CM)
44:°D,171
45: CALL RKDATA(0,0,0,0,SPACE,999,0,0,0,0)
46:°D,187,193
47:OAPHD,BLEP
48:OASG,T/S RSO.,BC,RSO,92,RSO APPENDIX H, CASE 3.
49:OADD PROCSS
50:OBRKPT PRINTS
57:OFIN
NO CORRECTIONS APPLIED.

OASG,T RSI.,BC,X03562

MODEL = N/A

OPTION AND TITLE DATA BLOCKS

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

INPUT	HEADER OPTIONS DATA
INPUT	TITLE SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORDGEN
INPUT	C SKIPPING SHADOW FACTOR TABLES ON RSI.
INPUT	C RESTARTING FORM FACTORS.
INPUT	C COMBINING FORM FACTORS.
INPUT	C CALCULATING DIRECT INCIDENT FLUXES WITHOUT THE USE OF
INPUT	C SHADOW FACTOR TABLES.
INPUT	C
INPUT	MODEL ▫ SAMPLE
INPUT	RSI ▫ RSTSAM2
INPUT	RSO ▫ RSTSAM3

DATE 062070 TIME 205230

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION

PAGE 2

MODEL = SAMPLE
TRASYS INFORMATION TO USER

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN

```
*****  
*  
*   A T T E N T I O N   T R A S Y S   U S E R S   *  
*  
*****
```

THIS SECTION OF THE TRASYS PRINTOUT WAS DEvised TO INFORM THE TRASYS USERS OF THE STATUS OF THE TRASYS PROGRAM WITHOUT HAVING TO PRINTOUT ALL THE STATUS INFORMATION ON EVERY RUN. TO OBTAIN ADDITIONAL INFORMATION ON HOW TO USE THIS SECTION OF THE TRASYS PRINTOUT, PLACE A (INFO=INFO) IN THE OPTIONS DATA BLOCK.

FOR TRASYS ASSISTANCE AND/OR POSSIBLE TRASYS PROGRAM PROBLEMS, PLEASE CONTACT BOB VOGT AT JSC-2326.

NEHRL 08/29/77 DOCUMENTATION ADDITION

THE TRASYS -N- VERSION HAS BEEN UPDATED TO THE UC2E2 AND UL2E4 LEVEL.
SEE LATEST USERS MANUAL FOR INFORMATION ON USER-CALLED SUBROUTINE ARGUMENT CHANGES AND NEW CAPABILITIES.

END OF TRASYS INFORMATION FILE

MODEL = SAMPLE SAMPLE CASE 3 - FFCAL/CHCAL/GDCAL/RCCAL/ORDGEN
MODEL HISTORY

MODEL NAME SAMPLE

MODEL TITLE SAMPLE CASE 3 - FFCAL/CHCAL/GDCAL/RCCAL/ORDGEN

MOD LABEL	RUN JOB NUMBER	RUN DATA	RUN TIME	RS1 TAPE	RS0 TAPE	RT1 TAPE	RT0 TAPE	CHERG TAPE	EMERG TAPE	BCDOU TAPE	TRAJ TAPE	USER1 TAPE	USER2 TAPE
AA	RVMH01	062278	202625										RSTSAM
AB	RVMH02	062778	005225	RSTSAM	RSTSAM								
AC	RVMH03	062878	205238	RSTSAM	RSTSAM								

MODEL = SAMPLE SOURCE DATA EDIT DIRECTIVES SAMPLE CASE 3 - FFCAL/CHCAL/GDCAL/RCCAL/DRGEN

CARD	ORGIN	12345670	1	2345670	2	2345670	3	2345670	4	2345670	5	2345670	6	2345670	7	2345670	8	EDIT NO.	OLD EDIT NO.	LABEL					
				HEADER EDIT DATA																					
****				*D,153,156																					
D				C															OLD-	153	AA				
D				C-----READ AND PRINT THE SHADOW FACTOR TABLES FROM RSI FOR USE IN															OLD-	154	AB				
D				C-----SAMPLE CASE 2 IN THE CALCULATION OF DIRECT FLUXES.															OLD-	155	AA				
D				C															OLD-	156	AA				
I				C																	153	AC			
I				C-----SKIP THE SHADOW FACTOR TABLES ON RSI. THIS IS ACCOMPLISHED																		154	AC		
I				C-----BY REPLACING THE PL SFCALR CARD WITH A RCALL RSTONR CARD																		155	AC		
I				C-----TO SET THE SKIP FLAG																		156	AC		
I				C																		157	AC		
I				CALL RSTON																		158	AC		
****				*D,163,166																					
D				C																					
D				C-----READ THE GRAY BODY MATRICES FROM RSI																					
D				C																					
D				CALL GBDATA(BOTH,0,FF)																					
I				C																			165	AC	
I				C-----COMBINE FORM FACTORS																				166	AC
I				C																				167	AC
I				CALL RSTOFF																				168	AC
I				CALL CHDATA(0,5HCASE3,2HFF,0,0)																				169	AC
I				L CHCAL																				170	AC
I				C																				171	AC
I				C-----CALCULATE GRAY BODY MATRICES USING COMBINED FORM FACTORS.																				172	AC
I				C																				173	AC
I				CALL GBDATA(BOTH,0,CH)																				174	AC
****				*D,171																					
D				CALL RKDATA(0,0,0,0,SPACE,999,0,0,0,5HCASE2)																					
I				CALL RKDATA(0,0,0,0,SPACE,999,0,0,0,0)																					
****				*D,187,193																					
D				C																					
D				C-----MAKE ORBIT PLOTS																					
D				C																					
D				CALL ODATAS(1,0,0,0,0,0,0,0)																					
D				CALL ODATAS(2,0,0,0,0,90,0,0)																					
D				CALL ODATAS(3,0,0,0,0,180,0,0)																					
D				L OPLOTT																					

MODEL = SAMPLE SURFACE DATA INPUT BLOCK SAMPLE CASE 3 - FFCAL/CNCAL/GBCAL/RCCAL/ORSGEN

CARD ORGIN 12345670 1 2345670 2 2345670 3 2345670 4 2345670 5 2345670 6 2345670 7 2345670 8 EDIT NO. OLD EDIT NO. LABEL

```

RSI          HEADER SURFACE DATA
RSI          C
RSI          C-----THIS SURFACE DATA BLOCK IS USED IN SAMPLE CASES 1 THROUGH 5
RSI          C-----WITH VARIOUS PORTIONS OF IT BEING ACTIVATED FOR THE DIFFERENT
RSI          C-----CASES.
RSI          C
RSI          BCS   BOXINR
RSI          S     SURFN      = 1
RSI          S     TYPE       = RECT
RSI          S     ACTIVE     = BOTTOM
RSI          S     PROP       = 0.9,0.9
RSI          S     P1        = 1.0, 0.0, 1.0
RSI          S     P2        = 1.0, 0.0, 0.0
RSI          S     P3        = 1.0, 1.0, 0.0
RSI          S     COH       = ° INNER RIGHT FRONT °
RSI          S     SURFN      = 2
RSI          S     TYPE       = RECT
RSI          S     ACTIVE     = BOTTOM
RSI          S     PROP       = 0.9,0.9
RSI          S     P1        = 1.0, 1.0, 1.0
RSI          S     P2        = 1.0, 1.0, 0.0
RSI          S     P3        = 0.0, 1.0, 0.0
RSI          S     COH       = ° INNER RIGHT SIDE °
RSI          S     SURFN      = 3
RSI          S     TYPE       = RECT
RSI          S     ACTIVE     = TOP
RSI          S     PROP       = 0.9,0.9
RSI          S     P1        = 0.0, 0.0, 1.0
RSI          S     P2        = 0.0, 0.0, 0.0
RSI          S     P3        = 0.0, 1.0, 0.0
RSI          S     COH       = ° INNER RIGHT BACK °
RSI          S     SURFN      = 4
RSI          S     TYPE       = RECT
RSI          S     ACTIVE     = TOP
RSI          S     PROP       = 0.9,0.9
RSI          S     P1        = 1.0, 1.0, 0.0
RSI          S     COH       = ° INNER RIGHT BOTTOM °
RSI          BCS   BOXINL,IMGBCS=BOXINR,NINC=10,IREFSF=1000
RSI          C
RSI          C-----THE FOREGOING CARD IMAGES BCS BOXINR IN REFERENCE PLANE 1000
RSI          C-----TO CREATE BCS BOXINL. THE INTERIOR OF THE BOX WAS INPUT IN
RSI          C-----THIS MANNER TO FACILITATE THE INPUT OF SAMPLE CASE 4 TO SHOW
RSI          C-----THE USE OF 'MESS' AND 'ERN' NODES.
RSI          C

```

IMAGING SURFACE (1) BCS (BOXINR), GENERATING SURFACE (11) BCS (BOXINL)
 IMAGING SURFACE (2) BCS (BOXINR), GENERATING SURFACE (12) BCS (BOXINL)
 IMAGING SURFACE (3) BCS (BOXINR), GENERATING SURFACE (13) BCS (BOXINL)

MODEL = SAMPLE SURFACE DATA INPUT BLOCK SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

CARD	ORGIN	12345670	1	2345670	2	2345670	3	2345670	4	2345670	5	2345670	6	2345670	7	2345670	8	EDIT NO.	OLD EDIT NO.	LABEL				
RSI				P1														91	OLD-	91	AA			
RSI				P2														92	OLD-	92	AA			
RSI				P3														93	OLD-	93	AA			
RSI				COM														94	OLD-	94	AA			
RSI				° ° PRIMARY MESS NODE, RIGHT SIDE °																				
RSI	BCS			MESSL														95	OLD-	95	AA			
RSI	S			SURFN														96	OLD-	96	AA			
RSI				TYPE														97	OLD-	97	AA			
RSI				ACTIVE														98	OLD-	98	AA			
RSI				PROP														99	OLD-	99	AA			
RSI				P1														100	OLD-	100	AA			
RSI				P2														101	OLD-	101	AA			
RSI				P3														102	OLD-	102	AA			
RSI				COM														103	OLD-	103	AA			
RSI				° ° PRIMARY MESS NODE, LEFT SIDE °																				
RSI	C			C-----THE FOLLOWING BCS (LIDSP) IS ACTIVATED IN SAMPLE CASE 5 ONLY.																				
RSI	C																							
RSI	BCS			LIDSP														107	OLD-	107	AA			
RSI	S			SURFN														108	OLD-	108	AA			
RSI				TYPE														109	OLD-	109	AA			
RSI				ACTIVE														110	OLD-	110	AA			
RSI				PROP														111	OLD-	111	AA			
RSI				SPRI														112	OLD-	112	AA			
RSI				SPRS														113	OLD-	113	AA			
RSI				P1														114	OLD-	114	AA			
RSI				P2														115	OLD-	115	AA			
RSI				P3														116	OLD-	116	AA			
RSI				COM														117	OLD-	117	AA			
				° ° SPECULAR LID °																				

MODEL = SAMPLE
BCS DATA INPUT BLOCK

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORDGEN

CARD	ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD	EDIT NO.	LABEL
RSI		HEADER	BCS	DATA														118	OLD-	118	AA
RSI		BCS	BOXINR															119	OLD-	119	AA
RSI		BCS	BOXINL															120	OLD-	120	AA
RSI		BCS	LIDINR	.0..0..1..0..-45..0.														121	OLD-	121	AA
RSI		BCS	BOXOUT															122	OLD-	122	AA
RSI		BCS	LIDOUT	.0..0..1..0..-45..0.														123	OLD-	123	AA
RSI		BCS	HESSR															124	OLD-	124	AA
RSI		BCS	HESSL															125	OLD-	125	AA
RSI		BCS	LIDSP	.0..0..1..0..-45..0.														126	OLD-	126	AA

MODEL = SAMPLE CORRESPONDENCE DATA INPUT BLOCK SAMPLE CASE 3 - FFCAL/CNCAL/GBCAL/RCCAL/OROGEN

CARD	ORGIN	1	2	3	4	5	6	7	8	9	EDIT NO.	OLD	EDIT NO.	LABEL
RSI	HEADER CORRESPONDENCE DATA										127	OLD-	127	AA
RSI	C										128	OLD-	128	AA
RSI	C-----ENTER CORRESPONDENCE DATA FOR CASE 2										129	OLD-	129	AA
RSI	C										130	OLD-	130	AA
RSI	FIG CASE2										131	OLD-	131	AA
RSI	1	=	1,11,22								132	OLD-	132	AA
RSI	2	=	2,25								133	OLD-	133	AA
RSI	3	=	3,13,24								134	OLD-	134	AA
RSI	4	=	4,14,21								135	OLD-	135	AA
RSI	5	=	5,15,26								136	OLD-	136	AA
RSI	12	=	12,23								137	OLD-	137	AA
RSI	C										138	OLD-	138	AA
RSI	C-----ENTER CORRESPONDENCE DATA FOR CASE 3 TO COMBINE FORM FACTORS										139	OLD-	139	AA
RSI	C										140	OLD-	140	AA
RSI	FIG CASE3,FF										141	OLD-	141	AA
RSI	1	=	1,11,22								142	OLD-	142	AA
RSI	2	=	2,25								143	OLD-	143	AA
RSI	3	=	3,13,24								144	OLD-	144	AA
RSI	4	=	4,14,21								145	OLD-	145	AA
RSI	5	=	5,15,26								146	OLD-	146	AA
RSI	12	=	12,23								147	OLD-	147	AA

DATE 062878 TIME 205319 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION PAGE 10
MODEL = SAMPLE SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBCEN
OPERATION DATA INPUT BLOCK (PASS 1)
CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL
RSI HEADER OPERATIONS DATA 148 OLD- 148 AA

***** OPERATIONS DATA BLOCK (PASS 1) COMPLETE *****

MODEL = SAMPLE SAMPLE CASE 3 - FFCAL/CNCAL/GBCAL/RCCAL/ORBGEN
 OPERATION DATA INPUT BLOCK (PASS 2)

CARD	ORGIN	12345670	1	2345670	2	2345670	3	2345670	4	2345670	5	2345670	6	2345670	7	2345670	8	EDIT NO.	OLD	EDIT NO.	NEW	LABEL
RSI	C																	149	OLD-	149		AA
RSI	C	-----BUILD THE CASE 1 CONFIGURATION FOR SFCAL/FFCAL/GBCAL RESTART																150	OLD-	150		AB
RSI	C																	151	OLD-	151		AA
PROG	STEP																	0				
RSI	BUILD	CASE1,BOXINR,BOXINL,LIDINR,BOXOUT,LIDOUT																152	OLD-	152		AA
PROG	CALL	BUILD (BOXINR,6HCASE1)																0				
PROG	CALL	ADD (BOXINL)																0				
PROG	CALL	ADD (LIDINR)																0				
PROG	CALL	ADD (BOXOUT)																0				
PROG	CALL	ADD (LIDOUT)																0				
INPUT	C																	153				AC
INPUT	C	-----SKIP THE SHADOW FACTOR TABLES ON RSI. THIS IS ACCOMPLISHED																154				AC
INPUT	C	-----BY REPLACING THE "L SFCAL" CARD WITH A "CALL RSTON" CARD																155				AC
INPUT	C	-----TO SET THE SKIP FLAG																156				AC
INPUT	C																	157				AC
INPUT		CALL RSTON																158				AC
RSI		SFPRNT=YES																159	OLD-	157		AB
RSI	L	SFCAL																160	OLD-	158		AA
RSI	C																	161	OLD-	159		AA
RSI	C	-----READ THE FORM FACTOR MATRIX FROM RSI																162	OLD-	160		AB
RSI	C																	163	OLD-	161		AA
RSI	L	FFCAL																164	OLD-	162		AA
INPUT	C																	165				AC
INPUT	C	-----COMBINE FORM FACTORS.																166				AC
INPUT	C																	167				AC
INPUT		CALL RSTOFF																168				AC
INPUT		CALL CHDATA(0,5HCASE3,2HFF,0,0)																169				AC
INPUT	L	CNCAL																170				AC
INPUT	C																	171				AC
INPUT	C	-----CALCULATE GRAY BODY MATRICES USING COMBINED FORM FACTORS.																172				AC
INPUT	C																	173				AC
INPUT		CALL GBDATA(BOTH,0,CM)																174				AC
RSI	L	GBCAL																175	OLD-	167		AA
RSI	C																	176	OLD-	168		AA
RSI	C	-----CALCULATE AND PUNCH RADKS WITH COMBINED NODES																177	OLD-	169		AB
RSI	C																	178	OLD-	170		AB
INPUT		CALL RKDATA(0,0,0,0,SPACE,999,0,0,0,0)																179				AC
RSI	L	RKCAL																180	OLD-	172		AA
RSI	C																	181	OLD-	173		AB
RSI	C	-----DEFINE ORBIT AND VEHICLE ORIENTATION (CIRCULAR - PLANET ORIENTED)																182	OLD-	174		AB
RSI	C																	183	OLD-	175		AB
RSI		CALL ORBIT2(EAR,0,60,0,0,0,100,0,6000,100,0,6000,)																184	OLD-	176		AB
RSI		CALL ORIENT(4HPLAN,1,2,3,300,270,0,)																185	OLD-	177		AB
RSI	C																	186	OLD-	178		AB
PROG	C																	0				
PROG	C	***** ORBIT GENERATION STARTS HERE *****																0				
RSI	C	CORBGEN CIRP,0,180,2,AQ																187	OLD-	179		AB
PROG	C																	0				
PROG	STEP	10000																0				

H-232

```

PROG      TRUEAN      =      .000
PROG      TRUANF      =     180.000
PROG      TRUANI      =      .000
PROG      IAI         =      0
PROG      IAS         =      0
PROG      PLTYPE      =     6HPLSAVE
PROG      CALL DICOMP(0.0,0)
PROG      L          DICAL
PROG      NSPFF       =     10000
PROG      PLTYPE      =     6HPLREAD
PROG      CALL AQDATA(IAI,IAS,0.0,0)
PROG      L          AQCAL
PROG      STEP 10001
PROG      TRUEAN      =      90.000
PROG      CALL DICOMP(0.0,10000)
PROG      L          DICAL
PROG      CALL AQDATA(IAI,IAS,0.0,0)
PROG      L          AQCAL
PROG      STEP 10002
PROG      TRUEAN      =     180.000
PROG      CALL DICOMP(0.0,10000)
PROG      L          DICAL
PROG      CALL AQDATA(IAI,IAS,0.0,0)
PROG      L          AQCAL
PROG      STEP 10003
PROG      IF(SHADIN.LT.0.)          GO TO 90400
PROG      TRUEAN      = SHADIN-0.1
PROG      IF(TRUEAN.LT.TRUANI.OR.
PROG      I      TRUEAN.GT.TRUANF)    GO TO 90000
PROG      CALL DICOMP(0.4HZERO,10000)
PROG      L          DICAL
PROG      CALL AQDATA(IAI,IAS,0.0,0)
PROG      L          AQCAL
PROG      90000 CONTINUE
PROG      STEP 10004
PROG      TRUEAN      = SHADIN+0.1
PROG      IF(TRUEAN.LT.TRUANI.OR.
PROG      I      TRUEAN.GT.TRUANF)    GO TO 90100
PROG      CALL DICOMP(0.0,10000)
PROG      L          DICAL
PROG      CALL AQDATA(IAI,IAS,0.0,0)
PROG      L          AQCAL
PROG      90100 CONTINUE
PROG      STEP 10005
PROG      TRUEAN      = SHAOUT+0.1
PROG      IF(TRUEAN.LT.TRUANI.OR.
PROG      I      TRUEAN.GT.TRUANF)    GO TO 90200
PROG      CALL DICOMP(0.4HZERO,10000)
PROG      L          DICAL
PROG      CALL AQDATA(IAI,IAS,0.0,0)
PROG      L          AQCAL
PROG      90200 CONTINUE
PROG      STEP 10006
PROG      TRUEAN      = SHAOUT-0.1
PROG      IF(TRUEAN.LT.TRUANI.OR.
PROG      I      TRUEAN.GT.TRUANF)    GO TO 90300
PROG      CALL DICOMP(0.0,10000)

```

PROG	L	QICAL	.	0		
PROG		CALL QODATA(1A1,1AS,0,0,0)	.	0		
PROG	L	QOCAL	.	0		
PROG	90300	CONTINUE	.	0		
PROG	90400	CONTINUE	.	0		
PROG		CALL QODATA(3HALL,0,0,0,0,0,0)	.	0		
PROG	L	QOCAL	.	0		
PROG	C		.	0		
PROG	C	***** ORBIT GENERATION ENDS HERE *****	.	0		
PROG	C		.	0		
RSI				100	OLD-	100 AB
RSI		C-----THE CONFIGURATION NAME IS REDEFINED SO THE QO'S WILL USE		109	OLD-	101 AB
RSI		C-----THE DESIRED(CASE2) CORRESPONDENCE DATA.		190	OLD-	102 AB
RSI		C		191	OLD-	103 AB
RSI		MODELN=5HCASE2		192	OLD-	104 AB
RSI		CALL QODATA(3HALL,0,0,0,0,0,0)		193	OLD-	105 AB
RSI	L	QOCAL		194	OLD-	106 AB
RSI		END OF DATA		195	OLD-	106 AA

MODEL = SAMPLE SAMPLE CASE 3 - FFCAL/CMCAL/GSCAL/RCCAL/ORBGEN
 PROCESSOR CORE ALLOCATION

THE FOLLOWING IS THE PROCESSOR CORE ALLOCATION FOR THOSE SEGMENTS WHICH WILL BE LOADED IN THIS EXECUTION (APPROX.) ...

OCTAL/DECIMAL

TRASYS (0) SEGMENT	121213/ 41611		
OPERATIONS DATA (NOT KNOWN AT THIS TIME).....	175000/ 64000		
INITIALIZATION SEGMENT	122300/ 42176		
FORM FACTOR SEGMENT	136100/ 48192		
SHADOW FACTOR SEGMENT	136000/ 48128		
DIRECT FLUX SEGMENT	150500/ 53568		
GRAY BODY SEGMENT	124000/ 43008		
ABSORBED Q-S SEGMENT	122500/ 42304		
-QO- SEGMENT	130600/ 45440		
RADIATION CONDUCTOR SEGMENT	125500/ 43840		
FORM FACTOR COMBINING SEGMENT	124500/ 43320		
GRAY BODY DYNAMIC COMMON	000276/ 190		
-QO- DYNAMIC COMMON	003554/ 1900		
RADIATION CONDUCTOR DYNAMIC COMMON	000574/ 380		
FORM FACTOR COMBINING DYNAMIC COMMON	000574/ 380		
GRAY BODY MINIMUM - MAXIMUM CORE	123566/ 42870	-	123716/ 42958
-QO- MINIMUM - MAXIMUM CORE	125142/ 43618	-	130552/ 45418
RADIATION CONDUCTOR MINIMUM - MAXIMUM CORE	125221/ 43665	-	125465/ 43829
FORM FACTOR COMBINING MINIMUM - MAXIMUM CORE ...	124230/ 43160	-	124426/ 43286
MINIMUM CORE NEEDED FOR PROCESSOR EXECUTION	150500/ 53568		
MAXIMUM CORE NEEDED FOR PROCESSOR EXECUTION	150500/ 53568		
AMOUNT OF CORE THAT WILL BE USED BY PROCESSOR .	150500/ 53568		

DATE 062878 TIME 205339

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION

PAGE 13

MODEL = SAMPLE
WRAP UP OF THE PRE-PROCESSOR

SAMPLE CASE 3 - FFCAL/CNCAL/GBCAL/RCCAL/ORDGEN

PRE-PROCESSOR ACCOUNTING INFORMATION	CP-SEC	DYN-STORAGE
SOURCE EDITING	1.449	676
DOCUMENTATION DATA PRE-PROCESSING000	0
QUANTITIES DATA PRE-PROCESSING038	266
ARRAY DATA PRE-PROCESSING000	0
SURFACE DATA PRE-PROCESSING (PASS 1) ...	1.766	64
SURFACE DATA PRE-PROCESSING (PASS 2)660	1141
BCS DATA PRE-PROCESSING309	186
FORM FACTOR DATA PRE-PROCESSING000	0
SHADOW DATA PRE-PROCESSING000	0
FLUX DATA PRE-PROCESSING000	0
CORRESPONDENCE DATA PRE-PROCESSING268	101
OPERATIONS DATA PRE-PROCESSING	4.802	879
SUBROUTINE DATA PRE-PROCESSING368	0
SEQUENTIAL TAPE INITIALIZATION822	0

TOTAL CP TIME FOR PRE-PROCESSOR 10.392 DECIMAL SECONDS OR 000013 OCTAL SECONDS

MINIMUM DYNAMIC STORAGE NEEDED BY PRE-PROCESSOR .. 1141 DECIMAL WORDS

DYNAMIC STORAGE AVAILABLE TO PRE-PROCESSOR 10000 DECIMAL WORDS

NORMAL TERMINATION BY PRE-PROCESSOR

#PHD.8LEP

#ASG.T/S RSO.,BC.RSO.92.RSO APPENDIX H, CASE 3.

#TEST TNE/1/53

#JUMP L3
INTERVENING STATEMENTS SKIPPED

#L3:FREE DATA1.

H-236
#FREE 14

NASA/MARTIN MARIETTA
THERMAL RADIATION ANALYSIS SYSTEM
UNIVAC 1110/EXEC 8

```

TTTTTTTTTTT
TTTTTTTTTTT
TT  TTT  TT
   TTT
   TTT
   TTT
   TTT
   TTT
TTTTTTT
    
```

```

RRRRRRRRR
RRRRRRRRR
RRR  RRR
RRR  RRR
RRRRRRRRR
RRR  RRR
RRR  RRR
RRR  RRR
RRR  RRR
RRR  RRR
    
```

```

AAAAAAA
AAAAAAAAA
AAAAAAAAA
AAA  AAA
AAA  AAA
AAAAAAAAA
AAA  AAA
AAA  AAA
AAA  AAA
AAAAA  AAAA
    
```

```

SSSSSSSSSS
SSSSSSSSSSSS
SSS  SS
SSS
SSSSSSSSSS
          SSS
SS  SSS
SSSSSSSSSSSS
SSSSSSSSSS
    
```

```

YYYY  YYYY
YYY  YYY
YYY  YYY
YYY  YYY
YYYYY
YYY
YYY
YYY
YYYYYYY
    
```

```

SSSSSSSSSS
SSSSSSSSSSSS
SSS  SS
SSS
SSSSSSSSSS
          SSS
SS  SSS
SSSSSSSSSSSS
SSSSSSSSSS
    
```

PROCESSOR EXECUTION

```

VERSION.MODIFICATION ... UL2E6
MODIFICATION DATE ..... 061978

DATE OF RUN ..... 062878
TIME OF RUN ..... 210523
JOB NUMBER ..... RVMH03
    
```

MODEL-SAMPLE CONFIG-CASE1 STEP--1
 PROCESSING OPERATIONS DATA

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN

SEQUENCE	NODE	BCS	AREA	ALPH	EMISS	SURF. TYPE	ACTIVE	-----COMMENTS-----
1	1	BOXINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT FRONT
2	2	BOXINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT SIDE
3	3	BOXINR	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BACK
4	4	BOXINR	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BOTTOM
5	11	BOXINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT FRONT
6	12	BOXINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT SIDE
7	13	BOXINL	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BACK
8	14	BOXINL	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BOTTOM
9	5	LIDINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT LID
10	15	LIDINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER LEFT LID
11	21	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
12	22	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
13	23	BOXOUT	1.04040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
14	24	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
15	25	BOXOUT	1.04040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
16	26	LIDOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACE OF LID

NODE, AREA, AND PROPERTIES ARRAYS HAVE BEEN WRITTEN ON THE -RSO- TAPE
 BY -BUILD- (ACCESS NUMBER = 1)

MODEL=SAHPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 3 - FFCAL/CRCAL/GBCAL/RCCAL/ORDGEN

RESTARTING - SFCAL - DATA FOR CONFIGURATION- CASE1 -FROM UNIT - 14

NODE	CLOCK ANGLE																			CONE ANGLE	
	1	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	.00	.00	.00	.00	.00	.01	.64	.33	.11	.00	.00	.17	.67	1.00	.00	.00	.00	.00	.00	.00	22.5
	.00	.00	.00	.00	.00	.59	.42	.19	.06	.00	.00	.00	.03	1.00	.00	.00	.00	.00	.00	.00	45.0
	.00	.00	.00	.00	.00	.19	.25	.17	.08	.00	.00	.00	.17	.61	.00	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE	
	1	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	.00	.00	.00	.00	.00	.01	.64	.33	.11	.00	.00	.17	.67	1.00	.00	.00	.00	.00	.00	.00	22.5
	.00	.00	.00	.00	.00	.59	.42	.19	.06	.00	.00	.00	.03	1.00	.00	.00	.00	.00	.00	.00	45.0
	.00	.00	.00	.00	.00	.19	.25	.17	.08	.00	.00	.00	.17	.61	.00	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 3 - FFCAL/CNCAL/GBCAL/RCCAL/ORBGEN
 SHADOW FACTOR GENERATOR LINK

NODE	CLOCK ANGLE																			CONE ANGLE	
	2	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE																					
	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
	.61	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.06	.17	.33	.44	.56	.59	.61	22.5
	.42	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.08	.42	.64	.61	.59	.42	45.0
	.19	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.17	.61	.42	.25	.22	.19	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE	
	2	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE																					
	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
	.61	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.06	.17	.33	.44	.56	.59	.61	22.5
	.42	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.08	.42	.64	.61	.59	.42	45.0
	.19	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.17	.61	.42	.25	.22	.19	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 3 - PFCAL/CNCAL/GBCAL/RCCAL/ORBGEM

		CLOCK ANGLE																		CONE ANGLE	
NODE 3		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
		.00	.06	.09	.03	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	1.00	.01	.53	.31	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.33	.03	1.00	1.00		45.0
	.33	.42	.31	.25	.09	.00	.00	.00	.00	.00	.00	.00	.00	.00	.25	.72	.50	.50	.33		67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

		CLOCK ANGLE																		CONE ANGLE	
NODE 3		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
		.00	.06	.09	.03	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	1.00	.01	.53	.31	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.33	.03	1.00	1.00		45.0
	.33	.42	.31	.25	.09	.00	.00	.00	.00	.00	.00	.00	.00	.00	.25	.72	.50	.50	.33		67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 3 - FFCAL/CWCAL/GBCAL/RCCAL/ORBCEN

NODE	CLOCK ANGLE																			CONE ANGLE	
	4	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
	.67	.56	.36	.39	.39	.20	.11	.00	.00	.00	.00	.00	.00	.17	.33	.50	.50	.67	.67	.67	22.5
	.00	.00	.06	.08	.00	.00	.06	.00	.00	.00	.00	.00	.00	.03	.20	.64	.50	.17	.00	.00	45.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE	
	4	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
	.67	.56	.36	.39	.39	.20	.11	.00	.00	.00	.00	.00	.00	.17	.33	.50	.50	.67	.67	.67	22.5
	.00	.00	.06	.08	.00	.00	.06	.00	.00	.00	.00	.00	.00	.03	.20	.64	.50	.17	.00	.00	45.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAHPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAHPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN

		CLOCK ANGLE																		CONE	
NODE 11		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	ANGLE
SOLAR SHADOW TABLE		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		.00	.00	.00	.00	.00	1.00	.67	.17	.00	.00	.11	.33	.64	.81	.00	.00	.00	.00	.00	22.5
		.00	.00	.00	.00	.00	1.00	.03	.00	.00	.00	.06	.19	.42	.58	.00	.00	.00	.00	.00	45.0
		.00	.00	.00	.00	.00	.61	.17	.00	.00	.00	.08	.17	.25	.19	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

		CLOCK ANGLE																		CONE	
NODE 11		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	ANGLE
INFRA RED SHADOW TABLE		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		.00	.00	.00	.00	.00	1.00	.67	.17	.00	.00	.11	.33	.64	.81	.00	.00	.00	.00	.00	22.5
		.00	.00	.00	.00	.00	1.00	.03	.00	.00	.00	.06	.19	.42	.58	.00	.00	.00	.00	.00	45.0
		.00	.00	.00	.00	.00	.61	.17	.00	.00	.00	.08	.17	.25	.19	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORDGEN

		CLOCK ANGLE																					
NODE		12	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
SOLAR SHADOW TABLE		.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0	
		.61	.58	.56	.44	.33	.17	.06	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.61	22.5
		.42	.58	.61	.64	.42	.08	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.42	45.0
		.19	.22	.25	.42	.61	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.19	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

		CLOCK ANGLE																					
NODE		12	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
INFRA RED SHADOW TABLE		.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0	
		.61	.58	.58	.44	.33	.17	.06	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.61	22.5
		.42	.58	.61	.64	.42	.08	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.42	45.0
		.19	.22	.25	.42	.61	.17	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.19	67.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 3 - FFCAL/CHCAL/GDCAL/RCCAL/ORBGEN

NODE	CLOCK ANGLE																			CONE ANGLE	
	14	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
	.67	.67	.50	.50	.33	.17	.00	.00	.00	.00	.00	.00	.00	.11	.28	.39	.39	.36	.56	.67	22.5
	.00	.00	.17	.50	.64	.28	.03	.00	.00	.00	.00	.00	.00	.06	.00	.00	.08	.06	.00	.00	45.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE	
	14	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.33	.0
	.67	.67	.50	.50	.33	.17	.00	.00	.00	.00	.00	.00	.00	.11	.28	.39	.39	.36	.56	.67	22.5
	.00	.00	.17	.50	.64	.28	.03	.00	.00	.00	.00	.00	.00	.06	.00	.00	.08	.06	.00	.00	45.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

NODE	CLOCK ANGLE																			CONE ANGLE		
	5	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.	
SOLAR SHADOW TABLE	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	.00	45.0
	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
	.67	.56	.67	.67	.72	.72	.00	.00	.00	.00	.00	.00	.00	.14	.14	.33	.50	.50	.67	.67	.67	112.5
	.33	.39	.33	.31	.33	.33	.31	.22	.11	.00	.00	.00	.00	.00	.00	.00	.17	.33	.33	.33	.33	135.0
	.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE		
	5	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.	
INFRA RED SHADOW TABLE	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	.00	45.0
	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
	.67	.56	.67	.67	.72	.72	.00	.00	.00	.00	.00	.00	.00	.14	.14	.33	.50	.50	.67	.67	.67	112.5
	.33	.39	.33	.31	.33	.33	.31	.22	.11	.00	.00	.00	.00	.00	.00	.00	.17	.33	.33	.33	.33	135.0
	.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAHPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAHPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

NODE	CLOCK ANGLE																			CONE ANGLE	
	15	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	90.0
	.67	.50	.50	.33	.14	.14	.00	.00	.00	.00	.00	.00	.00	.00	.72	.72	.67	.67	.56	.67	112.5
	.33	.33	.17	.00	.00	.00	.00	.00	.00	.00	.11	.22	.31	.33	.33	.31	.33	.39	.33	.33	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE	
	15	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	90.0
	.67	.50	.50	.33	.14	.14	.00	.00	.00	.00	.00	.00	.00	.00	.72	.72	.67	.67	.56	.67	112.5
	.33	.33	.17	.00	.00	.00	.00	.00	.00	.00	.11	.22	.31	.33	.33	.31	.33	.39	.33	.33	135.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.03	.08	.11	.14	.14	.11	.08	.03	.00	.00	157.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

MODEL=SAWPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN
 SHADOW FACTOR GENERATOR LINK

NODE	CLOCK ANGLE																			CONE ANGLE		
	21	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.	
SOLAR SHADOW TABLE	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	45.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE		
	21	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.	
INFRA RED SHADOW TABLE	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	22.5
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	45.0
	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	67.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAHPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN
 SHADOW FACTOR GENERATOR LINK

NODE	CLOCK ANGLE																			CONE ANGLE		
	22	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.	
SOLAR SHADOW TABLE	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0	
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	22.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	45.0
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	90.0
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	112.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	135.0
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE		
	22	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.	
INFRA RED SHADOW TABLE	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	22.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	45.0
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	67.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	90.0
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	112.5
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	135.0
	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

CLOCK ANGLE
 NODE 23 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

SOLAR SHADOW TABLE

	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	67.5
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

CLOCK ANGLE
 NODE 23 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

INFRA RED SHADOW TABLE

	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.	360.	CONE ANGLE	
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	67.5
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	90.0
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	112.5
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	135.0
1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	157.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 3 - FFCAL/CHCAL/GSCAL/RCCAL/ORBGEN

NODE	CLOCK ANGLE																			CONE ANGLE	
	24	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	22.5
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	45.0
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

NODE	CLOCK ANGLE																			CONE ANGLE	
	24	0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	22.5
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	45.0
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	90.0
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	112.5
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	135.0
	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	157.5
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
SHADOW FACTOR GENERATOR LINK

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

CLOCK ANGLE
NODE 25 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

SOLAR
SHADOW TABLE

CONE
ANGLE

1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	22.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	67.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	90.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	112.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	135.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	157.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

CLOCK ANGLE
NODE 25 0. 20. 40. 60. 80. 100. 120. 140. 160. 180. 200. 220. 240. 260. 280. 300. 320. 340. 360.

INFRA RED
SHADOW TABLE

CONE
ANGLE

1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	22.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	45.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	67.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	90.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	112.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	135.0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	1.00	157.5
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	180.0

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 3 - PFCAL/CNCAL/GSCAL/RCCAL/ORBGEM
 SHADOW FACTOR GENERATOR LINK

NODE	26	CLOCK ANGLE																		CONE ANGLE	
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
SOLAR SHADOW TABLE																					
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
		.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

NODE	26	CLOCK ANGLE																		CONE ANGLE	
		0.	20.	40.	60.	80.	100.	120.	140.	160.	180.	200.	220.	240.	260.	280.	300.	320.	340.		360.
INFRA RED SHADOW TABLE																					
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.0
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	22.5
		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	45.0
		.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	67.5
		.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	90.0
		.00	.00	.00	.00	.00	.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	.00	.00	.00	.00	.00	.00	112.5
		.00	.00	.00	.00	.00	.00	.00	.00	1.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	135.0
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	157.5
		.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	.00	180.0

.....

SHADOW FACTORS FOR CONFIGURATION CASE1 HAVE BEEN STORED ON RSO.
 LAST RECORD WRITTEN = 52

.....

TOTAL TIME FOR SHADOW FACTOR TABLES 9.1

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORDGEN
 FORM FACTOR CALCULATION LINK.

FORM FACTORS AND COMBINED FORM FACTORS - USER INPUT AND DEFAULT PARAMETERS

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
FFACC	.0500	.0500	ORIENTATION ACCURACY PARAMETER	N/A
FFACCS	.1000	.1000	SHADOWING ACCURACY PARAMETER	N/A
FFHIN	.1-05	1.0E-06	PARAMETER TO ELIMINATE SMALL FORM FACTORS	N/A
FFNOSH	SHAD	SHAD	OVER RIDE SHADOWING PARAMETER	(SHAD,NOSH)
+FFPNCH	NO	NO	PARAMETER TO PUNCH FORM FACTORS	(YES,NO)
FFPRNT	YES	YES	FLAG FOR COMPREHENSIVE FF AND CM PRINT	(YES,NO,FF,CM,RP)
FFRATL	15.0	15.0	RATIO FOR USING SUB-NODE TECHNIQUE	N/A
FFCHB	NO	CORR	FLAG FOR COMBINING FORM FACTORS	(YES,NO,AUTO,CORR)

+ -FFPNCH WILL DEFAULT TO -YES- ON CALCULATED VALUES IF THE -RSO- FILE IS NOT SPECIFIED IN THE OPTIONS DATA BLOCK

 .RESTARTING - FFCAL - DATA FOR CONFIGURATION- CASE1 -FROM UNIT - 14

DATE 062078 TIME 210630

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 19

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN

SEQUENCE	NODE	AREA	ALPH	EMISS
1	1	1.00000	.900	.900
2	2	1.00000	.900	.900
3	3	1.00000	.900	.900
4	4	1.00000	.900	.900
5	11	1.00000	.900	.900
6	12	1.00000	.900	.900
7	13	1.00000	.900	.900
8	14	1.00000	.900	.900
9	5	1.00000	.900	.900
10	15	1.00000	.900	.900
11	21	2.06040	.200	.900
12	22	2.06040	.200	.900
13	23	1.04040	.200	.900
14	24	2.06040	.200	.900
15	25	1.04040	.200	.900
16	26	2.06040	.200	.900

NUMBER OF NODES = 16 NUMBER OF SURFACES = 16

(1 -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)

(R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)

(UN-INDICATES UNKNOWN CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)

(9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) M/SHAD	FIR(J,I) M/SHAD	FSOL(I,J) M/SHAD	FSOL(J,I) M/SHAD	FF(I,J) M/SHAD	SHAD:IR FACTOR	SHAD:SOL FACTOR	CP TIME (SEC)	NEI	NEJ	
1	2	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
1	3	RSI	.201522	.201522	.201522	.201522	.201522	1.000000	1.000000	.000	0	0	UN
1	4	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
1	12	RSI	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.000	0	0	UN
1	13	RSI	.086058	.086058	.086058	.086058	.086058	1.000000	1.000000	.000	0	0	UN
1	14	RSI	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	.000	0	0	UN
1	5	RSI	.137203	.137203	.137203	.137203	.137203	1.000000	1.000000	.000	0	0	UN
1	15	RSI	.056006	.056006	.056006	.056006	.056006	1.000000	1.000000	.000	0	0	UN
1	FFSUM = .9690		ROW CP TIME = .137										
FORM FACTOR RESTART (RSO) RECORD = 56													
2	3	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
(UN-INDICATES UNKNOWN CALCULATION MODE BECAUSE OF RSI, RTI, OR CARD INPUT)
(9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) W/SHAD	FIR(J,I) W/SHAD	FSOL(I,J) W/SHAD	FSOL(J,I) W/SHAD	FF(I,J) W/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ	
2	4	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
2	11	RSI	.032922	.032922	.032922	.032922	.032922	.000000	.000000	.000	0	0	UN
2	12	RSI	.068832	.068832	.068832	.068832	.068832	1.000000	1.000000	.000	0	0	UN
2	13	RSI	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.000	0	0	UN
2	14	RSI	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.000	0	0	UN
2	5	RSI	.096343	.096343	.096343	.096343	.096343	1.000000	1.000000	.000	0	0	UN
2	15	RSI	.034262	.034262	.034262	.034262	.034262	1.000000	1.000000	.000	0	0	UN
2	FFSUM = .9203		ROW CP TIME = .157										
	FORM FACTOR RESTART (RSI) RECORD = 57												
3	4	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
3	11	RSI	.086059	.086059	.086059	.086059	.086059	.000000	.000000	.000	0	0	UN
3	12	RSI	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.000	0	0	UN
3	14	RSI	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	.000	0	0	UN
3	5	RSI	.050426	.050426	.050426	.050426	.050426	1.000000	1.000000	.000	0	0	UN
3	15	RSI	.011660	.011660	.011660	.011660	.011660	1.000000	1.000000	.000	0	0	UN
3	FFSUM = .8378		ROW CP TIME = .080										
	FORM FACTOR RESTART (RSI) RECORD = 58												
4	11	RSI	.040501	.040501	.040501	.040501	.040501	.000000	.000000	.000	0	0	UN
4	12	RSI	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.000	0	0	UN
4	13	RSI	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	.000	0	0	UN
4	5	RSI	.107799	.107799	.107799	.107799	.107799	1.000000	1.000000	.000	0	0	UN
4	15	RSI	.056851	.056851	.056851	.056851	.056851	1.000000	1.000000	.000	0	0	UN
4	FFSUM = .9007		ROW CP TIME = .066										
	FORM FACTOR RESTART (RSI) RECORD = 59												
11	12	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
11	13	RSI	.201522	.201522	.201522	.201522	.201522	1.000000	1.000000	.000	0	0	UN

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 3 - FFCAL/CNCAL/GBCAL/RCCAL/ORBGEN
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUSE OF RSI, RTI, OR CARD INPUT)
 (9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) M/SHAD	FIR(J,I) M/SHAD	FSOL(I,J) M/SHAD	FSOL(J,I) M/SHAD	FF(I,J) M/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ	
11	14	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
11	5	RSI	.056006	.056006	.056006	.056006	.056006	1.000000	1.000000	.000	0	0	UN
11	15	RSI	.137203	.137203	.137203	.137203	.137203	1.000000	1.000000	.000	0	0	UN
11	FFSUM = .9690		ROW CP TIME = .119										
	FORM FACTOR RESTART (RSI) RECORD = 60												
12	13	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
12	14	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
12	5	RSI	.034262	.034262	.034262	.034262	.034262	1.000000	1.000000	.000	0	0	UN
12	15	RSI	.096343	.096343	.096343	.096343	.096343	1.000000	1.000000	.000	0	0	UN
12	FFSUM = .9203		ROW CP TIME = .052										
	FORM FACTOR RESTART (RSI) RECORD = 61												
13	14	RSI	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	.000	0	0	UN
13	5	RSI	.011660	.011660	.011660	.011660	.011660	1.000000	1.000000	.000	0	0	UN
13	15	RSI	.050426	.050426	.050426	.050426	.050426	1.000000	1.000000	.000	0	0	UN
13	FFSUM = .8378		ROW CP TIME = .047										
	FORM FACTOR RESTART (RSI) RECORD = 62												
14	5	RSI	.056051	.056051	.056051	.056051	.056051	1.000000	1.000000	.000	0	0	UN
14	15	RSI	.107799	.107799	.107799	.107799	.107799	1.000000	1.000000	.000	0	0	UN
14	FFSUM = .9007		ROW CP TIME = .029										
	FORM FACTOR RESTART (RSI) RECORD = 63												

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 3 - FFCAL/CNCAL/GBCAL/RCCAL/ORBGEN
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUSE OF RS1, RT1, OR CARD INPUT)
 (9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) M/SHAD	FIR(J,I) M/SHAD	FSOL(I,J) M/SHAD	FSOL(J,I) M/SHAD	FF(I,J) M/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
5		FFSUM = .5505 FORM FACTOR RESTART								ROW CP TIME = .066 (RS0) RECORD = 64		
15		FFSUM = .5505 FORM FACTOR RESTART								ROW CP TIME = .004 (RS0) RECORD = 65		
21		FFSUM = .0000 FORM FACTOR RESTART								ROW CP TIME = .006 (RS0) RECORD = 66		
22		FFSUM = .0000 FORM FACTOR RESTART								ROW CP TIME = .005 (RS0) RECORD = 67		
23		FFSUM = .0000 FORM FACTOR RESTART								ROW CP TIME = .006 (RS0) RECORD = 68		
24		FFSUM = .0000 FORM FACTOR RESTART								ROW CP TIME = .002 (RS0) RECORD = 69		

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)
 (9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) M/SHAD	FIR(J,I) M/SHAD	FSOL(I,J) M/SHAD	FSOL(J,I) M/SHAD	FF(I,J) M0/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
25		FFSUH = .0000										
		FORM FACTOR RESTART (RSO) RECORD =										
26		FFSUH = .0000										
		FORM FACTOR RESTART (RSO) RECORD =										

.....

FF FORM FACTORS FOR CONFIGURATION CASE1 HAVE BEEN STORED ON RSO.
 LAST RESTART RECORD WRITTEN = 71

.....

DATE 062870 TIME 210644

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION

PAGE 24

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CNCAL/GBCAL/RCCAL/ORBCEN

SUNHARY OF FORM FACTOR SUMS FOR ALL NODES

NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM
1- .9690	2- .9203	3- .8378	4- .9007	11- .9690	12- .9203
13- .8378	14- .9007	5- .5505	15- .5505	21- .0000	22- .0000
23- .0000	24- .0000	25- .0000	26- .0000		

TOTAL TIME FOR FORM FACTOR SEGMENT 1.517

TOTAL TIME SINCE START OF RUN 77.437

DATE 062979 TIME 210549

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 25

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
FORM FACTOR COMBINING LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/OBCAL/RCCAL/ORBGEM

NODE	AREA	ALPH	EMISS	TRANS(UV)	TRANS(IR)	SPECULAR REFL(UV)	SPECULAR REFL(IR)
1	4.06040	.545+00	.900+00	.000	.000	.000	.000
2	2.04040	.543+00	.900+00	.000	.000	.000	.000
3	4.06040	.545+00	.900+00	.000	.000	.000	.000
4	4.06040	.545+00	.900+00	.000	.000	.000	.000
12	2.04040	.543+00	.900+00	.000	.000	.000	.000
5	4.06040	.545+00	.900+00	.000	.000	.000	.000

NUMBER OF NODES AFTER COMBINING = 6

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
FORM FACTOR COMBINING LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN

NODE I	NODE J	COMPUTATION	FE(I,J) H/SHAD	FE(J,I) H/SHAD	FA(I,J) H/SHAD
1	2	COMB	.059102	.117772	.059102
1	3	COMB	.141651	.141651	.141651
1	4	COMB	.122096	.122096	.122096
1	12	COMB	.059102	.117772	.059102
1	5	COMB	.095167	.095167	.095167
1	FF SUM =		.4773		
2	3	COMB	.117772	.059102	.117772
2	4	COMB	.117772	.059102	.117772
2	12	COMB	.033734	.033734	.033734
2	5	COMB	.064010	.032166	.064010
2	FF SUM =		.4511		
3	4	COMB	.122096	.122096	.122096
3	12	COMB	.059102	.117772	.059102
3	5	COMB	.030501	.030501	.030501
3	FF SUM =		.4127		
4	12	COMB	.059102	.117772	.059102
4	5	COMB	.081100	.081100	.081100
4	FF SUM =		.4437		
12	5	COMB	.064010	.032166	.064010
12	FF SUM =		.4511		
5	FF SUM =		.2712		

MODEL=SAMPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN
FORM FACTOR COMBINING LINK.

COMBINED FORM FACTOR SUMS FROM NODE 1

NODE 1 -	FFSUM NODE 1 -	FFSUM NODE 1 -	FFSUM NODE 1 -	FFSUM NODE 1 -	FFSUM NODE 1 -	FFSUM NODE 1 -	FFSUM				
1-	.4772783	2-	.4510580	3-	.4126925	4-	.4436561	12-	.4510580	5-	.2711795

COMBINED NODE, AREA, AND PROPERTIES ARRAYS HAVE BEEN WRITTEN ON THE -RSO- TAPE
BY THE FORM FACTOR COMBINING LINK. (ACCESS NUMBER = 2)

.....

CH FORM FACTORS FOR CONFIGURATION CASE1 HAVE BEEN STORED ON RSO.
LAST RESTART RECORD WRITTEN = 91

.....

MODEL=SANPLE CONFIG=CASE1 STEP=-1 SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBCEN
 GRAY BODIES COMPUTATION LINK.

VARIABLE NAME	CURRENT VALUE	DEFAULT	GREY BODIES DEFINITION	OPTIONS
GBWBND	BOTH	BOTH	HAVEBAND DEFINITION PARAMETER	(2HIR,3HSOL,4HBOTH)

.....

IR GRAY BODIES FOR CONFIGURATION CASE1 HAVE BEEN COMPUTED AND STORED ON RSO.
~~LAST RESTART RECORD WRITTEN =~~ 99

.....

.....

SOL GRAY BODIES FOR CONFIGURATION CASE1 HAVE BEEN COMPUTED AND STORED ON RSO.
 LAST RESTART RECORD WRITTEN = 107

.....

TOTAL TIME TO COMPUTE GRAY BODIES .49

MODEL=SAHPLE CONFIG=CASE1 STEP=-1
 RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 3 - FFCAL/CWCAL/GBCAL/RCCAL/DRBGEN

VARIABLE NAME	CURRENT VALUE	DEFAULT	RADIATION CONDUCTORS DEFINITION	OPTIONS
RKPNCH	PUN	NO	PUNCH/NO PUNCH PARAMETER FOR RADKS	(YES,NO)
RKMIN	.0001	0.0001	PARAMETER TO ELIMINATE SMALL RADK S	N/A
IRKCN	1	1	INITIAL RADIATION CONDUCTOR ID NUMBER	N/A
RKSP	SPACE	NO	MNEMONIC FLAG FOR COMPUTATION OF RADKS TO SPACE	(SPACE,NO)
IRKNSP	999	32767	SPACE NODE ID NUMBER	N/A
SIGMA	.17-08	1.713E-9	STEFAN-BOLTZMANN CONSTANT	N/A
RKAMPF	1.00	1.0	AREA MULTIPLYING FACTOR	N/A
RKTAPE	NO	NO	PARAMETER TO OUTPUT TO BCD TAPE	(TAPE,NO)
RFRAC	.7+00	0.7	SIGNIFICANT RADIATION FRACTION	(0. TO 1.)
RTOL	.990	0.99	DECIMAL FRACTION OF LAST RADK SAVED	N/A
KERN	0	0	EFFECTIVE RADIATION NODE (ERN) NUMBER	N/A

DATE 062070 TIME 210657

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 30

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

SPECIAL RADIATION NODES

NONE

MESS SPECIAL NODES

PRIMARY SECONDARY

NONE

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
 RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

RADIATION CONDUCTOR (RADKS) CARDS

AREA UNITS = INPUT UNITS * ANPF, WHERE ANPF = 1.00000

PUNCHED AND/OR BCDOU RADKS -	-	1.	1.	2.	.34560-09\$
PUNCHED AND/OR BCDOU RADKS -	-	2.	1.	3.	.81703-09\$
PUNCHED AND/OR BCDOU RADKS -	-	3.	1.	4.	.71086-09\$
PUNCHED AND/OR BCDOU RADKS -	-	4.	1.	12.	.34560-09\$
PUNCHED AND/OR BCDOU RADKS -	-	5.	1.	5.	.54917-09\$
PUNCHED AND/OR BCDOU RADKS -	-	6.	2.	3.	.34439-09\$
PUNCHED AND/OR BCDOU RADKS -	-	7.	2.	4.	.34467-09\$
PUNCHED AND/OR BCDOU RADKS -	-	8.	2.	12.	.10226-08\$
PUNCHED AND/OR BCDOU RADKS -	-	9.	2.	5.	.18906-09\$
PUNCHED AND/OR BCDOU RADKS -	-	10.	3.	4.	.70787-09\$
PUNCHED AND/OR BCDOU RADKS -	-	11.	3.	12.	.34439-09\$
PUNCHED AND/OR BCDOU RADKS -	-	12.	3.	5.	.19031-09\$
PUNCHED AND/OR BCDOU RADKS -	-	13.	4.	12.	.34467-09\$
PUNCHED AND/OR BCDOU RADKS -	-	14.	4.	5.	.47849-09\$
PUNCHED AND/OR BCDOU RADKS -	-	15.	12.	5.	.18906-09\$
PUNCHED AND/OR BCDOU RADKS -	-	16.	1.	999.	.34580-08\$
PUNCHED AND/OR BCDOU RADKS -	-	17.	2.	999.	.18126-08\$
PUNCHED AND/OR BCDOU RADKS -	-	18.	3.	999.	.38270-08\$
PUNCHED AND/OR BCDOU RADKS -	-	19.	4.	999.	.36521-08\$
PUNCHED AND/OR BCDOU RADKS -	-	20.	12.	999.	.18126-08\$
PUNCHED AND/OR BCDOU RADKS -	-	21.	5.	999.	.46598-08\$

DATE 062070 TIME 210703

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 32

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GSCAL/RCCAL/ORDGEN

CONSERVATION CHECKS
RADIATION SUNS FOR EACH NODE BEFORE RKMIN SCREENING

1 - .10000+01 2 - .10000+01 3 - .10000+01 4 - .10000+01 12 - .10000+01 5 - .10000+01

DATE 062878 TIME 210703

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 33

MODEL=SAMPLE CONFIG=CASE1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

CONSERVATION CHECKS
RADIATION SUNS FOR EACH NODE AFTER RKHIN SCREENING

1 - .10000+01 2 - .10000+01 3 - .10000+01 4 - .10000+01 12 - .10000+01 5 - .10000+01

TOTAL TIME TO COMPUTE AND CONDENSE RADKS = .51

MODEL=SAMPLE CONFIG=CASE1 STEP=10000
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORRGEN

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
♦♦♦♦ BASIC CONTROL PARAMETERS ♦♦♦♦				
SHAD	SHADOWING OVERRIDE FLAG	SHAD.NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
0	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
.000	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
♦♦♦♦ BASIC ORBIT DATA ♦♦♦♦				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.50800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.50800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
♦♦♦♦ PLANET-ORIENTED, ORIENTATION DATA ♦♦♦♦				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX, IROTY, IROTZ		1 2 3	
.300+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.300+02	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
♦♦♦♦ SPIN DATA ♦♦♦♦				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCH=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCH POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

DATE 062870 TIME 210708

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 35

MODEL=SAMPLE CONFIG=CASE1 STEP=10000
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 3 - PFCAL/CMCAL/GBCAL/RCCAL/ORBCEN

+++++ NSTEP NO = 10000

++++ COMPUTED OR INPUT ORBIT DATA ++++

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES	.	.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES	.	.000	STAR CIGMAS ANGLE, DEGREES

++++ PLANET --EARTH -- DATA ++++

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB	.	.75073+02	PLANET DS EMISS POWER	HDS
.20900+08	PLANET RADIUS	PRAO	.	.75073+02	PLANET SS EMISS POWER	HSS
.14679+01	ORBIT PERIOD	PERIOD	.			
.41731+09	PLANET GRAV CONSTANT	GRAV	.	.42900+03	SOLAR CONSTANT AT PSD	SOL

DIRECT INCIDENT FLUXES CALCULATED USING SHADOW FACTORS

MODEL=SANPLE CONFIG=CASE1 STEP=10000 SAMPLE CASE 3 - FFCAL/CNCAL/GCCAL/RCCAL/ORDGEN
 DIRECT IRRADIATION CALCULATION LINK.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10000 TRUE ANOMALY = .00000 TIME = .00000
 ++++ IN THE SUN ++++

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	SFTAPE	.001	9	0
2	.94029+02	.18576+03	.5062	CALC	.183	81	5
3	.00000	.10725+03	.0000	CALC	.294	64	0
4	.18576+03	.37152+03	.5000	SFTAPE	.352	81	0
11	.00000	.00000	.0000	SFTAPE	.394	9	0
12	.00000	.00000	.0000	SFTAPE	.447	9	0
13	.10055+02	.10725+03	.0938	CALC	.566	64	6
14	.10664+03	.37152+03	.2870	SFTAPE	.620	81	0
5	.00000	.00000	.0000	SFTAPE	.677	9	0
15	.00000	.00000	.0000	SFTAPE	.725	9	0
21	.00000	.00000	.0000	SFTAPE	.774	8	0
22	.10725+03	.10725+03	1.0000	CALC	.948	66	10
23	.18576+03	.18576+03	1.0000	CALC	1.114	81	6
24	.00000	.00000	.0000	SFTAPE	1.160	8	0
25	.00000	.00000	.0000	SFTAPE	1.207	9	0
26	.18687+03	.18687+03	1.0000	CALC	1.411	78	10

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DIC

TOTAL ELAPSED TIME IN PROBLEM = 81.593 SECONDS

MODEL=SAMPLE CONFIG=CASE1 STEP=10000 SAMPLE CASE 3 - PFCAL/CMCAL/GBCAL/RCCAL/ORDGEN
 DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10000 TRUE ANOMALY = .00000 TIME = .00000
 ***** IN THE SUN *****

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		---SHADOW FACTORS---		CP TIME (SECONDS)	---ELEMENTS---		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	PLAN		PLAN	SURF	
1	SFTAPE	.000	.000	.391+02	.268+02	.000	.000	.000	66	9	9
2	SFTAPE	.000	.000	.400+02	.264+02	.000	.000	.289	66	9	9
3	SFTAPE	.000	.000	.402+02	.268+02	.000	.000	.523	61	9	9
4	SFTAPE	.000	.000	.000	.000	.000	.000	.623	52	9	9
11	SFTAPE	.000	.000	.391+02	.268+02	.000	.000	.848	66	9	9
12	SFTAPE	.000	.000	.382+02	.264+02	.000	.000	1.082	66	9	9
13	SFTAPE	.000	.000	.402+02	.268+02	.000	.000	1.313	61	9	9
14	SFTAPE	.000	.000	.000	.000	.000	.000	1.413	52	9	9
5	CALC	.231+02	.155+02	.834+02	.559+02	.277	.277	2.508	133	16	9
15	CALC	.233+02	.154+02	.834+02	.559+02	.279	.277	3.490	133	16	9
21	CALC	.110+03	.742+02	.110+03	.742+02	1.000	1.000	7.728	112	18	10
22	CALC	.402+02	.268+02	.402+02	.268+02	1.000	1.000	8.618	61	10	10
23	CALC	.400+02	.264+02	.400+02	.264+02	1.000	1.000	9.343	66	9	10
24	CALC	.391+02	.268+02	.391+02	.268+02	1.000	1.000	10.266	66	10	10
25	CALC	.382+02	.264+02	.382+02	.264+02	1.000	1.000	10.856	66	9	10
26	CALC	.659+01	.457+01	.659+01	.457+01	1.000	1.000	11.137	52	2	10

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RTI. THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DIC

TOTAL ELAPSED TIME IN PROBLEM = 92.987 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 120

DATE 062070 TIME 210017

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION

PAGE 30

MODEL=SAMPLE CONFIG=CASE1 STEP=10000
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/OROGEN

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSOS	10000	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10000	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10000	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

ABSORBED Q STORED IN STEP 10000

TOTAL TIME TO COMPUTE ABSORBED Q .14

MODEL=SAHPLE CONFIG=CASE1 STEP=10001 SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN
 DIRECT IRRADIATION CALCULATION LINK.

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS +++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD,NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
90.000	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA +++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED. ORIENTATION DATA +++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROTY,IROTZ		1 2 3	
.000	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.900+02	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA +++++				
.000	CLOCK ANGLE, DEGREES(AABOUT CCS Z-AXIS CCH=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCH POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAMPLE CONFIG=CASE1 STEP=10001 SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBCEN
 DIRECT IRRADIATION CALCULATION LINK.

***** NSTEP NO = 10001

**** COMPUTED OR INPUT ORBIT DATA ****

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
50.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

**** PLANET --EARTH -- DATA ****

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	WDS
.20900+00	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	WSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

DIRECT INCIDENT FLUXES CALCULATED USING SHADOW FACTORS

MODEL=SAMPLE CONFIG=CASE1 STEP=10001 SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORRGEN
 DIRECT IRRADIATION CALCULATION LINK.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10001 TRUE ANOMALY = 90.00000 TIME = .36701
 ++++ IN THE SUN ++++

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	SFTAPE	.001	9	0
2	.00000	.00000	.0000	SFTAPE	.065	9	0
3	.00000	.42900+03	.0000	SFTAPE	.104	81	0
4	.00000	.00000	.0000	SFTAPE	.139	9	0
11	.00000	.00000	.0000	SFTAPE	.172	9	0
12	.00000	.00000	.0000	SFTAPE	.206	9	0
13	.00000	.42900+03	.0000	SFTAPE	.250	81	0
14	.00000	.00000	.0000	SFTAPE	.285	9	0
5	.30335+03	.30335+03	1.0000	SFTAPE	.329	81	0
15	.30335+03	.30335+03	1.0000	SFTAPE	.375	81	0
21	.00000	.00000	.0000	SFTAPE	.409	8	0
22	.42900+03	.42900+03	1.0000	SFTAPE	.457	78	0
23	.00000	.00000	.0000	SFTAPE	.492	9	0
24	.00000	.00000	.0000	SFTAPE	.526	8	0
25	.00000	.00000	.0000	SFTAPE	.561	9	0
26	.00000	.00000	.0000	SFTAPE	.596	8	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DIC

TOTAL ELAPSED TIME IN PROBLEM = 94.280 SECONDS

MODEL=SAMPLE CONFIG=CASE1 STEP=10001 SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN
 DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10001 TRUE ANOMALY = 90.00000 TIME = .36701
 +++++ IN THE SUN +++++

MODE NUMBER	COMPUT	---DIRECT ALBEDO	INCID. FLUX-- PLANETARY	---UNSHADOWED ALBEDO	FLUX--- PLANETARY	---SHADOW FACTORS-- ALBEDO	PLAN	CP TIME (SECONDS)	---ELEMENTS-- PLAN	SURF	SHAD SURF
1	SFTAPE	.000	.000	.000	.000	.000	.000	.001	66	9	9
2	SFTAPE	.000	.000	.638+00	.000	.000	.000	.235	66	9	9
3	SFTAPE	.000	.000	.206+01	.000	.000	.000	.432	61	9	9
4	SFTAPE	.000	.000	.000	.000	.000	.000	.520	52	9	9
11	SFTAPE	.000	.000	.000	.000	.000	.000	.714	66	9	9
12	SFTAPE	.000	.000	.634+00	.000	.000	.000	.913	66	9	9
13	SFTAPE	.000	.000	.206+01	.000	.000	.000	1.101	61	9	9
14	SFTAPE	.000	.000	.000	.000	.000	.000	1.187	52	9	9
5	CALC	.126+01	.155+02	.247+01	.000	.509	.000	2.034	133	16	9
15	CALC	.125+01	.154+02	.247+01	.000	.504	.000	2.802	133	16	9
21	CALC	.143+01	.742+02	.143+01	.000	1.000	.000	6.112	112	18	10
22	CALC	.206+01	.268+02	.206+01	.000	1.000	.000	6.818	61	10	10
23	CALC	.638+00	.264+02	.638+00	.000	1.000	.000	7.378	66	9	10
24	CALC	.000	.268+02	.000	.000	1.000	.000	8.110	66	10	10
25	CALC	.634+00	.264+02	.634+00	.000	1.000	.000	8.670	66	9	10
26	CALC	.000	.457+01	.000	.000	.000	.000	8.938	52	2	10

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICO

TOTAL ELAPSED TIME IN PROBLEM = 103.420 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 139

MODEL=SAMPLE CONFIG=CASE1 STEP=10001 SAMPLE CASE 3 - FFCAL/CMCAL/GDCAL/RCCAL/ORBCEN
 ABSORBED Q COMPUTATION LINK.

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10001	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10001	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10001	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

ABSORBED Q STORED IN STEP 10001

TOTAL TIME TO COMPUTE ABSORBED Q .15

MODEL=SANPLE CONFIG=CASE1 STEP=10002
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS ++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD,NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
100.000	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA ++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA ++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX, IROTY, IROTZ		1 2 3	
.300+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.150+03	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA ++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCH=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE - CCH POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAHPLE CONFIG=CASE1 STEP=10002 SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORDGEN
 DIRECT IRRADIATION CALCULATION LINK.

+++++ NSTEP NO = 10002

++++ COMPUTED OR INPUT ORBIT DATA +++++

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN SIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

++++ PLANET --EARTH -- DATA +++++

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	WDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	WSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAY CONSTANT	GRAY		.42900+03	SOLAR CONSTANT AT PSD	SOL

DIRECT INCIDENT FLUXES CALCULATED USING SHADOW FACTORS

MODEL=SAHPLE CONFIG=CASE1 STEP=10002
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GDCAL/RCCAL/ORBGEN

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10002 TRUE ANOMALY = 100.0000 TIME = .73402
 ***** IN THE SHADE *****

NODE NUMBER	DIRECT FLUX (QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	+++++	.001	0	0
2	.00000	.00000	.0000	+++++	.053	0	0
3	.00000	.00000	.0000	+++++	.082	0	0
4	.00000	.00000	.0000	+++++	.106	0	0
11	.00000	.00000	.0000	+++++	.129	0	0
12	.00000	.00000	.0000	+++++	.156	0	0
13	.00000	.00000	.0000	+++++	.181	0	0
14	.00000	.00000	.0000	+++++	.206	0	0
5	.00000	.00000	.0000	+++++	.229	0	0
15	.00000	.00000	.0000	+++++	.258	0	0
21	.00000	.00000	.0000	+++++	.284	0	0
22	.00000	.00000	.0000	+++++	.308	0	0
23	.00000	.00000	.0000	+++++	.331	0	0
24	.00000	.00000	.0000	+++++	.356	0	0
25	.00000	.00000	.0000	+++++	.385	0	0
26	.00000	.00000	.0000	+++++	.411	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DIC

TOTAL ELAPSED TIME IN PROBLEM = 104.550 SECONDS

MODEL=SAMPLE CONFIG=CASE1 STEP=10002 SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN
 DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10002 TRUE ANOMALY = 180.00000 TIME = .73402
 ***** IN THE SHADE *****

NODE NUMBER	COMPUT	---DIRECT INCID. ALBEDO	FLUX-- PLANETARY	---UNSHADOWED ALBEDO	FLUX--- PLANETARY	---SHADOW FACTORS-- ALBEDO	PLAN	CP TIME (SECONDS)	---ELEMENTS-- PLAN	SURF	SHAD SURF
1	+++++	.000	.000	.000	.000	.000	.000	.000	0	0	0
2	+++++	.000	.000	.000	.000	.000	.000	.059	0	0	0
3	+++++	.000	.000	.000	.000	.000	.000	.086	0	0	0
4	+++++	.000	.000	.000	.000	.000	.000	.114	0	0	0
11	+++++	.000	.000	.000	.000	.000	.000	.138	0	0	0
12	+++++	.000	.000	.000	.000	.000	.000	.164	0	0	0
13	+++++	.000	.000	.000	.000	.000	.000	.191	0	0	0
14	+++++	.000	.000	.000	.000	.000	.000	.216	0	0	0
5	+++++	.000	.155+02	.000	.000	.000	.000	.239	0	0	0
15	+++++	.000	.154+02	.000	.000	.000	.000	.266	0	0	0
21	+++++	.000	.742+02	.000	.000	.000	.000	.292	0	0	0
22	+++++	.000	.268+02	.000	.000	.000	.000	.317	0	0	0
23	+++++	.000	.264+02	.000	.000	.000	.000	.341	0	0	0
24	+++++	.000	.268+02	.000	.000	.000	.000	.370	0	0	0
25	+++++	.000	.264+02	.000	.000	.000	.000	.401	0	0	0
26	+++++	.000	.457+01	.000	.000	.000	.000	.427	0	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM = 105.017 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 158

DATE 062878 TIME 210949

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 40

MODEL=SAMPLE CONFIG=CASE1 STEP=10002
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEM

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10002	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10002	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10002	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

ABSORBED Q STORED IN STEP 10002

TOTAL TIME TO COMPUTE ABSORBED Q .16

MODEL=SAMPLE CONFIG=CASE1 STEP=10003
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS +++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD,NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
105.720	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TINEST
++++ BASIC ORBIT DATA +++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60000+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60000+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES,		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA +++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROY,IROTZ		1 2 3	
.359+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.104+03	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA +++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCH=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCM POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

***** NSTEP NO = 10003

**** COMPUTED OR INPUT ORBIT DATA ****

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

**** PLANET --EARTH -- DATA ****

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	WDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	WSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

DIRECT INCIDENT FLUXES CALCULATED USING SHADOW FACTORS

DATE 062070 TIME 210054

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC'D VERSION

PAGE 51

MODEL=SAMPLE CONFIG=CASE1 STEP=10003
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CNCAL/GBCAL/RCCAL/ORBGEN

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10003 TRUE ANOMALY = 105.71977 TIME = .43111
++++ IN THE SUN +++++

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	SFTAPE	.001	9	0
2	.00000	.69478+01	.0000	SFTAPE	.068	9	0
3	.00000	.41697+03	.0000	SFTAPE	.109	01	0
4	.00000	.00000	.0000	SFTAPE	.146	9	0
11	.00000	.00000	.0000	SFTAPE	.180	9	0
12	.00000	.00000	.0000	SFTAPE	.216	9	0
13	.00000	.41697+03	.0000	SFTAPE	.258	01	0
14	.00000	.00000	.0000	SFTAPE	.298	9	0
5	.28468+03	.36602+03	.7778	CALC	.418	01	5
15	.28468+03	.36602+03	.7778	CALC	.542	01	5
21	.10066+03	.10066+03	1.0000	CALC	.670	55	10
22	.41696+03	.41696+03	1.0000	CALC	.834	78	10
23	.69478+01	.69478+01	1.0000	CALC	.884	9	5
24	.00000	.00000	.0000	SFTAPE	.919	9	0
25	.00000	.00000	.0000	SFTAPE	.955	9	0
26	.00000	.00000	.0000	SFTAPE	.990	9	0

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DI

TOTAL ELAPSED TIME IN PROBLEM = 106.779 SECONDS

MODEL=SAMPLE CONFIG=CASE1 STEP=10003
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GSCAL/RCCAL/ORBGEN

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10003 TRUE ANOMALY = 105.71977 TIME = .43111
 +---+ IN THE SUN +---+

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		--SHADOW FACTORS--		CP TIME (SECONDS)	--ELEMENTS--		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	PLAN		PLAN	SURF	
1	+++++	.000	.000	.000	.000	.000	.000	.001	0	0	0
2	+++++	.000	.000	.000	.000	.000	.000	.050	0	0	0
3	+++++	.000	.000	.000	.000	.000	.000	.087	0	0	0
4	+++++	.000	.000	.000	.000	.000	.000	.115	0	0	0
11	+++++	.000	.000	.000	.000	.000	.000	.140	0	0	0
12	+++++	.000	.000	.000	.000	.000	.000	.160	0	0	0
13	+++++	.000	.000	.000	.000	.000	.000	.194	0	0	0
14	+++++	.000	.000	.000	.000	.000	.000	.222	0	0	0
5	+++++	.000	.155+02	.000	.000	.000	.000	.247	0	0	0
15	+++++	.000	.154+02	.000	.000	.000	.000	.276	0	0	0
21	+++++	.000	.742+02	.000	.000	.000	.000	.311	0	0	0
22	+++++	.000	.260+02	.000	.000	.000	.000	.341	0	0	0
23	+++++	.000	.264+02	.000	.000	.000	.000	.367	0	0	0
24	+++++	.000	.268+02	.000	.000	.000	.000	.402	0	0	0
25	+++++	.000	.264+02	.000	.000	.000	.000	.430	0	0	0
26	+++++	.000	.457+01	.000	.000	.000	.000	.457	0	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DIC

TOTAL ELAPSED TIME IN PROBLEM = 107.270 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 177

DATE 062878 TIME 210900

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 53

MODEL=SANPLE CONFIG=CASE1 STEP=10003
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CWCAL/GBCAL/RCCAL/ORBGEN

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10003	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10003	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSOP	10003	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

ABSORBED.Q STORED IN STEP 10003

TOTAL TIME TO COMPUTE ABSORBED Q .15

MODEL=SAMPLE CONFIG=CASE1 STEP=10004
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CMCAL/GECAL/RCCAL/ORDGEN

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS ++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD.NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
105.920	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA ++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES.		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA ++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROTY,IROTZ		1 2 3	
.359+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.104+03	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA ++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCM=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCM POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAMPLE CONFIG=CASE1 STEP=10004 SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORBGEN
 DIRECT IRRADIATION CALCULATION LINK.

+++++ NSTEP NO = 10004

++++ COMPUTED OR INPUT ORBIT DATA +++++

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

++++ PLANET --EARTH -- DATA +++++

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	MDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	MSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAY CONSTANT	GRAY		.42900+03	SOLAR CONSTANT AT PSD	SOL

DIRECT INCIDENT FLUXES CALCULATED USING SHADOW FACTORS

DATE 062070 TIME 210904

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 56

MODEL=SAMPLE CONFIG=CASE1 STEP=10004
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GDCAL/RCCAL/ORBGEN

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10004 TRUE ANOMALY = 105.91977 TIME = .43193
++++ IN THE SHADE ++++

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	+++++	.001	0	0
2	.00000	.00000	.0000	+++++	.056	0	0
3	.00000	.00000	.0000	+++++	.085	0	0
4	.00000	.00000	.0000	+++++	.110	0	0
11	.00000	.00000	.0000	+++++	.138	0	0
12	.00000	.00000	.0000	+++++	.164	0	0
13	.00000	.00000	.0000	+++++	.190	0	0
14	.00000	.00000	.0000	+++++	.220	0	0
5	.00000	.00000	.0000	+++++	.244	0	0
15	.00000	.00000	.0000	+++++	.270	0	0
21	.00000	.00000	.0000	+++++	.297	0	0
22	.00000	.00000	.0000	+++++	.322	0	0
23	.00000	.00000	.0000	+++++	.347	0	0
24	.00000	.00000	.0000	+++++	.372	0	0
25	.00000	.00000	.0000	+++++	.399	0	0
26	.00000	.00000	.0000	+++++	.429	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DIC

TOTAL ELAPSED TIME IN PROBLEM = 100.482 SECONDS

DATE 062070 TIME 210905

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 57

MODEL=SAHPLE CONFIG=CASE1 STEP=10004
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/CNCAL/CBCAL/RCCAL/ORBOEN

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10004 TRUE ANOMALY = 105.91977 TIME = .43193
***** IN THE SHADE *****

MODE NUMBER	COMPUT	---DIRECT INCID. ALBEDO	FLUX-- PLANETARY	---UNSHADOWED ALBEDO	FLUX--- PLANETARY	---SHADON FACTORS-- ALBEDO	PLAN	CP TIME (SECONDS)	---ELEMENTS-- PLAN	SURF	SHAD SURF
1	+++++	.000	.000	.000	.000	.000	.000	.001	0	0	0
2	+++++	.000	.000	.000	.000	.000	.000	.058	0	0	0
3	+++++	.000	.000	.000	.000	.000	.000	.087	0	0	0
4	+++++	.000	.000	.000	.000	.000	.000	.115	0	0	0
11	+++++	.000	.000	.000	.000	.000	.000	.138	0	0	0
12	+++++	.000	.000	.000	.000	.000	.000	.166	0	0	0
13	+++++	.000	.000	.000	.000	.000	.000	.194	0	0	0
14	+++++	.000	.000	.000	.000	.000	.000	.223	0	0	0
5	+++++	.000	.155+02	.000	.000	.000	.000	.246	0	0	0
15	+++++	.000	.154+02	.000	.000	.000	.000	.272	0	0	0
21	+++++	.000	.742+02	.000	.000	.000	.000	.298	0	0	0
22	+++++	.000	.268+02	.000	.000	.000	.000	.326	0	0	0
23	+++++	.000	.264+02	.000	.000	.000	.000	.352	0	0	0
24	+++++	.000	.268+02	.000	.000	.000	.000	.380	0	0	0
25	+++++	.000	.264+02	.000	.000	.000	.000	.409	0	0	0
26	+++++	.000	.457+01	.000	.000	.000	.000	.437	0	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DIC

TOTAL ELAPSED TIME IN PROBLEM = 109.961 SECONDS
S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 196

DATE 062070 TIME 210909

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 50

MODEL=SAMPLE CONFIG=CASE1 STEP=10004
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORDGEN

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10004	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10004	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10004	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

ABSORBED Q STORED IN STEP 10004

TOTAL TIME TO COMPUTE ABSORBED Q .20

DATE 062070 TIME 210911

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 59

MODEL=SAMPLE CONFIG=CASE1 STEP=10006 ,
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORIGEN

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
IQOTHE	1	1	TIME ARRAY ID NUMBER FLUX TABLES START AT IQOTHE + 1	N/A
QOTAPE	NO	2HNO	PARAMETER TO OUTPUT TO BCD TAPE	(4HTAPE,2HNO)
QOPNCH	NO	2HNO	PUNCH/NO PUNCH PARAMETER FOR OUTPUT	(3HPUN,2HNO)
QOAMPF	1.0000	1.0	AREA MULTIPLYING FACTOR	N/A
QOFMPF	1.0000	1.0	FLUX MULTIPLYING FACTOR	N/A
QOTHPF	1.0000	1.0	TIME MULTIPLYING FACTOR	N/A
QOTYPE	BOTH	NONE	PARAMETER TO DETERMINE TYPE OF OUTPUT	(3HTAB,2HAV,4HNBOTH)
IQOARY	ALL	NONE	STEP NO. ARRAY DIRECTIVE	(3HALL,ARRAY NAME)

MODEL=SAMPLE CONFIG=CASE1 STEP=10006
 ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCAL/ORBCEN

ABSORBED HEAT RATE TABLES PUNCHED

Q = INPUT * RMPF WHERE RMPF = .10000+01
 TIME = INPUT * TMPF WHERE TMPF = .10000+01
 AREA IS ON SUBROUTINE CALL CARDS

	1\$ TIME ARRAY				
	.000	.367+00.	.431+00.	.432+00.	.734+00
END\$					
	2\$ HEAT RATE ARRAY				
	.268+03.	.560+03.	.551+03.	.532+02.	.532+02
END\$					
	3\$ HEAT RATE ARRAY				
	.122+03.	.484+02.	.507+02.	.264+02.	.264+02
END\$					
	4\$ HEAT RATE ARRAY				
	.151+03.	.958+02.	.101+03.	.529+02.	.529+02
END\$					
	5\$ HEAT RATE ARRAY				
	.464+03.	.188+03.	.299+03.	.140+03.	.140+03
END\$					
	6\$ HEAT RATE ARRAY				
	.177+03.	.484+02.	.546+02.	.264+02.	.264+02
END\$					
	7\$ HEAT RATE ARRAY				
	.311+03.	.396+03.	.378+03.	.384+02.	.384+02
END\$					

DATE 062070 TIME 210913

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION

PAGE 61

MODEL=SAMPLE CONFIG=CASE1 STEP=10006
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CRCAL/GBCAL/RCCAL/ORBGEM

DAIINC SUBROUTINE CALL CARDS

AREA = INPUT (UNITS) * AMPF WHERE AMPF = .10000*01

DAIINC(1.46792175E 0.TIHEM,A1	.A2	.1.00000000E 0.01)\$
DAIINC(1.46792175E 0.TIHEM,A1	.A3	.1.00000000E 0.02)\$
DAIINC(1.46792175E 0.TIHEM,A1	.A4	.1.00000000E 0.03)\$
DAIINC(1.46792175E 0.TIHEM,A1	.A5	.1.00000000E 0.04)\$
DAIINC(1.46792175E 0.TIHEM,A1	.A6	.1.00000000E 0.012)\$
DAIINC(1.46792175E 0.TIHEM,A1	.A7	.1.00000000E 0.05)\$

DATE 062070 TIME 210913

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 62

MODEL=SAMPLE CONFIG=CASE1 STEP=10006
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CHCAL/GBCAL/RCCAL/ORSGEN

AVERAGE ORBITAL HEATING RATE AND AREA CARDS PUNCHED

VALUES ARE RATE = INPUT (UNITS) * RHPF WHERE RHPF = .10000+01
VALUES ARE AREA = INPUT (UNITS) * ANPF WHERE ANPF = .10000+01

Q1 =2.77859285E 2
Q2 =5.79530262E 1
Q3 =9.21390224E 1
Q4 =2.41824245E 2
Q12 =7.16434819E 1
Q5 =2.26533908E 2

TOTAL TIME TO COMPUTE ABSORBED Q OUT .39

DATE 062878 TIME 210913

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 63

MODEL=SAFPLE CONFIG=CASE2 STEP=10006
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
IQOTME	1	1	TIME ARRAY ID NUMBER FLUX TABLES START AT IQOTME + 1	N/A
QOTAPE	NO	2HNO	PARAMETER TO OUTPUT TO BCD TAPE	(4HTAPE,2HNO)
QOPNCH	NO	2HNO	PUNCH/NO PUNCH PARAMETER FOR OUTPUT	(3NPUN,2HNO)
QOAHPF	1.0000	1.0	AREA MULTIPLYING FACTOR	N/A
QOFMPF	1.0000	1.0	FLUX MULTIPLYING FACTOR	N/A
QOTHPF	1.0000	1.0	TIME MULTIPLYING FACTOR	N/A
QOTYPE	BOTH	NONE	PARAMETER TO DETERMINE TYPE OF OUTPUT	(3HTAB,2HAV,4HBOH)
IQOARY	ALL	NONE	STEP NO. ARRAY DIRECTIVE	(3HALL,ARRAY NAME)

DATE 062078 TIME 210915

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC B VERSION PAGE 64

MODEL=SAMPLE CONFIG=CASE2 STEP=10008
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CNCAL/GSCAL/RCCAL/ORBGEN

ABSORBED HEAT RATE TABLES PUNCHED

Q = INPUT * RHPF WHERE RHPF = .10000+01
TIME = INPUT * THPF WHERE THPF = .10000+01
AREA IS ON SUBROUTINE CALL CARDS

1\$ TIME ARRAY					
.000	.367+00.	.431+00.	.432+00.	.734+00	
END\$					
2\$ HEAT RATE ARRAY					
.268+03.	.560+03.	.551+03.	.532+02.	.532+02	
END\$					
3\$ HEAT RATE ARRAY					
.122+03.	.484+02.	.507+02.	.264+02.	.264+02	
END\$					
4\$ HEAT RATE ARRAY					
.151+03.	.956+02.	.101+03.	.529+02.	.529+02	
END\$					
5\$ HEAT RATE ARRAY					
.464+03.	.188+03.	.299+03.	.140+03.	.140+03	
END\$					
6\$ HEAT RATE ARRAY					
.177+03.	.484+02.	.546+02.	.264+02.	.264+02	
END\$					
7\$ HEAT RATE ARRAY					
.311+03.	.396+03.	.378+03.	.384+02.	.384+02	
END\$					

RRRRRRRRRR	VV	VV	PP	PP	MM	MM	0000	222222
RRRRRRRRRR	VV	VV	PPPP	PPPP	MM	MM	00000000	2222222222
RR	VV	VV	PPPPPP	PPPPPP	MM	MM	000	000
RR	VV	VV	PPPPPPPP	PPPPPPPP	MM	MM	000	000
RR	VV	VV	PPPPPPPPPP	PPPPPPPPPP	MM	MM	00	00
RRRRRRRRRRRR	VV	VV	PPPPPPPPPPPP	PPPPPPPPPPPP	MM	MM	00	00
RRRRRRRRRRRR	VV	VV	PPPP	PPPP	MM	MM	00	00
RR	VV	VV	PPPP	PPPP	MM	MM	00	00
RR	VVVV	VVVV	PPPP	PPPP	MM	MM	000	000
RR	VVVV	VVVV	PPPP	PPPP	MM	MM	000	000
RR	VV	VV	PPPP	PPPP	MM	MM	00000000	222222222222
RR	VV	VV	PPPP	PPPP	MM	MM	0000	222222222222

BBB8888888	00000000	XX	XX	PP	PP	MM	MM	0000
BBB88888888	0000000000	XX	XX	PPPP	PPPP	MM	MM	00000000
BB	00	00	00	PPPPPP	PPPPPP	MM	MM	000
BB	00	00	00	PPPPPPPP	PPPPPPPP	MM	MM	000
BB	00	00	00	PPPPPPPPPP	PPPPPPPPPP	MM	MM	00
BBB88888888	00	00	00	PPPPPPPPPPPP	PPPPPPPPPPPP	MM	MM	00
BBB88888888	00	00	00	PPPP	PPPP	MM	MM	00
BB	00	00	00	PPPP	PPPP	MM	MM	000
BB	00	00	00	PPPP	PPPP	MM	MM	000
BBB88888888	0000000000	XX	XX	PPPP	PPPP	MM	MM	00000000
BBB88888888	00000000	XX	XX	PPPP	PPPP	MM	MM	0000

0000	666666	222222	TTTTTTTTTTTT	TTTTTTTTTTTT	888888
00000000	6666666666	2222222222	TTTTTTTTTTTT	TTTTTTTTTTTT	88888888
000	666	222	777	777	88
000	66	22	777	777	88
00	66	222	777	777	88
00	66 666666	222	777	777	888888
00	6666666666	222	777	777	88888888
00	66	222	777	777	888
000	66	222	777	777	88
000	66	222	777	777	888
00000000	6666666666	222222222222	777	777	8888888888
0000	666666	222222222222	777	777	88888888

MODEL=SAMPLE CONFIG=CASE2 STEP=10000
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CNCAL/GBCAL/RCCAL/ORBGEN

DA11NC SUBROUTINE CALL CARDS

	AREA =	INPUT (UNITS)	* AMPF	WHERE AMPF =	.10000*01
DA11NC(1.46792175E 0.TIMEH.A1	.A2	.1.00000000E	0.01	1\$	
DA11NC(1.46792175E 0.TIMEH.A1	.A3	.1.00000000E	0.02	1\$	
DA11NC(1.46792175E 0.TIMEH.A1	.A4	.1.00000000E	0.03	1\$	
DA11NC(1.46792175E 0.TIMEH.A1	.A5	.1.00000000E	0.04	1\$	
DA11NC(1.46792175E 0.TIMEH.A1	.A6	.1.00000000E	0.012	1\$	
DA11NC(1.46792175E 0.TIMEH.A1	.A7	.1.00000000E	0.05	1\$	

DATE 062070 TIME 210915

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 66

MODEL=SAMPLE CONFIG=CASE2 STEP=10006
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 3 - FFCAL/CMCAL/GBCAL/RCCAL/ORBGEN

AVERAGE ORBITAL HEATING RATE AND AREA CARDS PUNCHED

VALUES ARE RATE = INPUT (UNITS) * RMPF WHERE RMPF = .10000+01
VALUES ARE AREA = INPUT (UNITS) * AMPF WHERE AMPF = .10000+01

Q1	=2.77859205E	2
Q2	=5.79538262E	1
Q3	=9.21390224E	1
Q4	=2.41824245E	2
Q12	=7.16434819E	1
Q5	=2.26533908E	2

TOTAL TIME TO COMPUTE ABSORBED Q OUT .39

NORMAL TERMINATION BY PROCESSOR

BPND,PLEB

QBRKPT PRINTS

SAMPLE CASE 4

SAMPLE CASE 4

GED,R VOGTB.CASE4
FILE IN FIELD 1 DISABLED--ACCEPTED
FILE IN FIELD 1 IN USE BY ANOTHER RUM
READ-ONLY MODE
CASE UPPER ASSUMED
ED 14.02-06/28-20:44-(0.)
EDIT

NO DECK VOGT

1:BRUN.R/R RVMH04.3248-F261-C.E53-N03711.05.150
10:0ADD E53-TRASYS*TRASYS.STARTM
11:0ASG.T RSI..0C.X04061
12:0SETC 0100
13:0ADD PREPRO
14:HEADER OPTIONS DATA
15:TITLE SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
16:C-----FORM TWO ENCLOSURES INSIDE THE BOX BY THE USE OF #MESS# NODES.
17:C-----CLOSE THE BOX LID AND CALCULATE FORM FACTORS, GRAY BODY FACTORS,
18:C-----AND RADK'S FOR EACH OF THE ENCLOSURES UTILIZING AN #ERN# NODE.
19:C-----IN ENCLOSURE 2.
20:C
21: MODEL = SAMPLE
22: RSI = RSTSAH
23: RSD = RSTSAH4
24:HEADER EDIT DATA
25:*D.1
26:HEADER ARRAY DATA
27: IPRIN1 = 101
28: ISEC1 = 111
29: IPRIN2 = 111
30: ISEC2 = 101
31:HEADER SURFACE DATA
32:*1,56
33:BCS LIDINL
34:*1,121
35:BCS LIDINL,0.,0.,1.,0.,-45.,0.
36:*1,171
37:C
38:C-----SPECIFY CALCULATION OF FORM FACTORS FOR ENCLOSURE 1 BY
39:C-----THE USE OF UNIT-SPHERE LOGIC. (NO SHADOWING)
40:C
41:FIG ENCL1
42:UNIT
43:C
44:C-----SPECIFY CALCULATION OF FORM FACTORS FOR ENCLOSURE 2 BY
45:C-----THE USE OF UNIT SPHERE LOGIC. (NO SHADOWING)
46:C
47:FIG ENCL2
48:UNIT
49:*1,193
50:C
51:C-----FINISHED WITH RSI, RELEASE TAPE DRIVE.
52:C
53: CALL RSTOFF
54:*D,194,222
55:C
56:C-----CLOSE BOX LID
57:C
58: CALL CHGBLK(LIDINR,0.,0.,1.,1,2,3,0.,0.,0.)

116:C
117:C-----CALCULATE RADK'S FOR ENCLOSURE 2 UTILIZING AN #ERN# NODE
118:C
119: CALL RCDATA(0.0.0.0.0.0.0.0.0.0.5.1.555.(PRIM2,1SEC2)
120:L RCCAL
121:OPND,BLEP
122:QASG,T/S RSO..BC.RSO.92.RSO APPENDIX H, CASE 4.
123:QADD PROCSS
131:QFIN

NO CORRECTIONS APPLIED.

#FREE TPF\$.

#ASG,T TPF\$.F4/D/TRK/400

GED ES3-TRASYS°TRASYS.PREPROH.TPFS.PREPRO
CASE UPPER ASSUMED
ED 14.02-06/26-20:44-(0,)
EDIT
LINES:57 FIELDATA

0ED ES3-TRASYS*TRASYS.PROCSSH,TPFS.PROCSS
CASE UPPER ASSUMED
ED 14.02-06/28-20:44-(1.)
EDIT
LINES:103 FIELDATA

0ASG,T RSI.,8C,X04061

0SETC 0100

0SETC,1

0ASG,AQ ES3-TRASYS*LIBRYN.
FAC WARNING 040200004000

0ASG,T 1.,F4/0/TRK/600

0ASG,T 2.,F4/0/TRK/600

0ASG,T 3.,F4/0/TRK/600

0ASG,T DIR.,F17/0/POS/5

0ASG,T FFR.,F17/0/POS/9

0ASG,T GBIRR.,F17/0/POS/5

0ASG,T RIO.,F17/0/POS/9

0ASG,T SQNTL.,F17/0/TRK/10

@ASG.T PLSR..F17/0/TRK/320

@ASG.T TQR..F17/0/TRK/320

@USE 0.R10

@USE 14.R51

@USE 16.SQNTL

@USE 21.FFR

@USE 22.D1R

@USE 23.G01RR

@USE 25.PLSR

@USE 26.TQR

@XQT ES3-TRASYS*LIBRYN.CHECK

@TEST TNE/1/S3

@JUMP L1
INTERVENING STATEMENTS SKIPPED

@L1:ASG.T R102..F17/0/POS/9

0ASG,T RIOS..F17/0/POS/20

0ASG,T DATA1..F17/0/POS/9

0ASG,T CMPL..F17/0/TRK/20

0ASG,T INFO

0ASG,T MAP.

0ASG,T MASS.F17/0/POS/20

0TEST TE/1/56
INTERVENING STATEMENTS SKIPPED

0ASG,T MASS1.F/0/POS/20

0USE 15,MASS1

0COPY.G 14.15
FURPUR 27R1 RL72-9 06/29/78 20:44:55
ES3-NO*MASS(0) COPIED ON 06/22/78 AT 20:30:00
3 BLOCKS COPIED.
EOF ENCOUNTERED ON INPUT TAPE

0ASG,T MASS2.F/0/POS/20

0MOVE RSI.7
FURPUR 27R1 RL72-9 06/29/78 20:46:08

0USE 4,MASS2

@XQT ES3-TRASYS*LIBRYM.LOAD
END OF FILE AFTER PHYSICAL RECORD 187

@L15:FREE 14

@USE 4,DATA1

@USE 9,R105

@USE 10,R102

@USE 11,INFO

@USE 12,CHERG

@USE 13,EMERG

@USE 14,MASS1

@USE 15,MASS

@USE 20,CHPL

@USE 27,MAP

@ASG,AQ ES3-TRASYS*COMPLRN.
FAC WARNING 040200004000

H-313

SDATA.1 INFO.
DATA T7 RL76-S 06/28-20:47:36
END DATA. IMAGE COUNT: 20

0XQT ES3-TRASYS°COMPLRN.ABS :

NASA/MARTIN MARIETTA
 THERMAL RADIATION ANALYSIS SYSTEM
 UNIVAC 1110/EXEC 0

```

TTTTTTTTTTTT
TTTTTTTTTTTT
TT  TTT  TT
   TTT
   TTT
   TTT
   TTT
   TTT
TTTTTTT
  
```

```

RRRRRRRR
RRRRRRRR
RRR   RRR
RRR   RRR
RRRRRRRR
RRR  RRR
RRR   RRR
RRR   RRR
RRR   RRR
  
```

```

AAAAAA
AAAAAAAA
AAAAAAAAAAAA
AAA   AAA
AAA   AAA
AAAAAAAAAAAA
AAA   AAA
AAA   AAA
AAA   AAA
AAAAA  AAAA
  
```

```

SSSSSSSSSS
SSSSSSSSSSSS
SSS   SS
SSS
SSSSSSSSSS
      SSS
SS   SSS
SSSSSSSSSSSS
SSSSSSSSSS
  
```

TRASY I I

```

YYYY   YYYY
YYY   YYY
YYY   YYY
YYY YYY
YYYYY
YYY
YYY
YYY
YYYYYYY
  
```

```

SSSSSSSSSS
SSSSSSSSSSSS
SSS   SS
SSS
SSSSSSSSSS
      SSS
SS   SSS
SSSSSSSSSSSS
SSSSSSSSSS
  
```

PRE-PROCESSOR EXECUTION

```

VERSION.MODIFICATION ... UC2E3
MODIFICATION DATE ..... 052678

DATE OF RUN ..... 062878
TIME OF RUN ..... 205211
JOB NUMBER ..... RVMH04
  
```

MODEL = N/A
OPTION AND TITLE DATA BLOCKS

CARD ORGIN 12345670 1 2345670 2 2345670 3 2345670 4 2345670 5 2345670 6 2345670 7 2345670 8 EDIT NO. OLD EDIT NO. LAB

INPUT HEADER OPTIONS DATA
INPUT TITLE SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
INPUT C-----FORM TWO ENCLOSURES INSIDE THE BOX BY THE USE OF #MESS# NODES.
INPUT C-----CLOSE THE BOX LID AND CALCULATE FORM FACTORS, GRAY BODY FACTORS,
INPUT C-----AND RADK'S FOR EACH OF THE ENCLOSURES UTILIZING AN #ERN# NODE.
INPUT C-----IN ENCLOSURE 2.
INPUT C
INPUT MODEL = SAMPLE
INPUT RSI = RSTSAH
INPUT RSD = RSTSAH4

DATE 062670 TIME 205212

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION

PAGE 2

MODEL = SAMPLE
TRASYS INFORMATION TO USER

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

```

*****
*
*   A T T E N T I O N   T R A S Y S   U S E R S   *
*
*****

```

THIS SECTION OF THE TRASYS PRINTOUT WAS DEVISED TO INFORM THE TRASYS USERS OF THE STATUS OF THE TRASYS PROGRAM WITHOUT HAVING TO PRINTOUT ALL THE STATUS INFORMATION ON EVERY RUN. TO OBTAIN ADDITIONAL INFORMATION ON HOW TO USE THIS SECTION OF THE TRASYS PRINTOUT, PLACE A (INFO=INFO) IN THE OPTIONS DATA BLOCK.

FOR TRASYS ASSISTANCE AND/OR POSSIBLE TRASYS PROGRAM PROBLEMS, PLEASE CONTACT BOB VOGT AT JSC-2326.

NEWRL 08/29/77 DOCUMENTATION ADDITION

THE TRASYS -N- VERSION HAS BEEN UPDATED TO THE UC2E2 AND UL2E4 LEVEL.
SEE LATEST USERS MANUAL FOR INFORMATION ON USER-CALLED SUBROUTINE ARGUMENT CHANGES AND NEW CAPABILITIES.

END OF TRASYS INFORMATION FILE

DATE 062878 TIME 205213

INTERNAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC @ VERSION

PAGE 3

MODEL = SAMPLE
MODEL HISTORY

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

MODEL NAME SAMPLE

MODEL TITLE SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

MOD LABEL	RUN JOB NUMBER	RUN DATA	RUN TIME	RSI TAPE	RSO TAPE	RTI TAPE	RTO TAPE	CHERG TAPE	EMERG TAPE	BCDOU TAPE	TRAJ TAPE	USER1 TAPE	USER2 TAPE
AA	RVMH01	062278	202625										
AB	RVMH04	062878	205212	RSTSAH	RSTSAH								

MODEL = SAMPLE SOURCE DATA EDIT DIRECTIVES SAMPLE CASE 4 - FFCAL/GDCAL/RCCAL

CARD ORGIN 12345670 1 2345670 2 2345670 3 2345670 4 2345670 5 2345670 6 2345670 7 2345670 0 EDIT NO. OLD EDIT NO. LABEL

EDIT NO.	DESCRIPTION	OLD EDIT NO.	LABEL
0000	HEADER EDIT DATA		
D	*D,1		
I	HEADER SURFACE DATA	1	AA
I	HEADER ARRAY DATA	2	AB
I	IPRIM1 = 101	3	AB
I	ISEC1 = 111	4	AB
I	IPRIM2 = 111	5	AB
I	ISEC2 = 101	6	AB
0000	HEADER SURFACE DATA		
I	*I,56		
I	BCS LIDINL	62	AB
0000	*I,121		
I	BCS LIDINL,0..0..1..0..-45..0.	120	AB
0000	*I,171		
I	C	179	AB
I	C-----SPECIFY CALCULATION OF FORM FACTORS FOR ENCLOSURE 1 BY	180	AB
I	C-----THE USE OF UNIT-SPHERE LOGIC. (NO SHADOWING)	181	AB
I	C	182	AB
I	FIG ENCL1	183	AB
I	UNIT	184	AB
I	C	185	AB
I	C-----SPECIFY CALCULATION OF FORM FACTORS FOR ENCLOSURE 2 BY	186	AB
I	C-----THE USE OF UNIT SPHERE LOGIC. (NO SHADOWING)	187	AB
I	C	188	AB
I	FIG ENCL2	189	AB
I	UNIT	190	AB
0000	*I,193		
I	C	213	AB
I	C-----FINISHED WITH RSI, RELEASE TAPE DRIVE.	214	AB
I	C	215	AB
I	CALL RSTOFF	216	AB
0000	*D,194,222		
D	C	OLD-	194 AA
D	C-----BUILD THE CASE 1 CONFIGURATION	OLD-	195 AA
D	C	OLD-	196 AA
D	BUILD CASE1,BOXINR,BOXINL,LIDINR,BOXOUT,LIDOUT	OLD-	197 AA
D	C	OLD-	198 AA
D	C-----PLOT THE CASE 1 CONFIGURATION INDICATING THE ACTIVE	OLD-	199 AA
D	C-----SIDES OF THE NODES.	OLD-	200 AA
D	C	OLD-	201 AA
D	CALL NDATAS(0,0,0,YES,0)	OLD-	202 AA
D	L NPLOT	OLD-	203 AA
D	C	OLD-	204 AA
D	C-----CALCULATE SHADOW FACTOR TABLES FOR SUBSEQUENT USE	OLD-	205 AA
D	C-----SAMPLE CASE 2 IN THE CALCULATION OF DIRECT FLUXES.	OLD-	206 AA
D	C	OLD-	207 AA
D	L SFCAL	OLD-	208 AA

H-319

MODEL = SAMPLE SOURCE DATA EDIT DIRECTIVES SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

CARD ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD EDIT NO.	LABEL
D	C																	209	AA
D	C	----	CALCULATE THE FORM FACTOR MATRIX.															210	AA
D	C																	211	AA
D	L		FFCAL															212	AA
D	C	----	CALCULATE THE GRAY BODY MATRIX.															213	AA
D	C																	214	AA
D	C		CALL GBDATA(BOTH,0,FF)															215	AA
D	L		GBCAL															216	AA
D	C																	217	AA
D	C	----	CALCULATE AND PUNCH RADIATION CONDUCTORS.															218	AA
D	C																	219	AA
D	C		CALL RKDATA(0,0,0,0,SPACE,999,0,0,0,0)															220	AA
D	L		RKCAL															221	AA
D	C																	222	AA
I	C	----	CLOSE BOX LID															217	AB
I	C																	218	AB
I	C		CALL CHGBLK(LIDINR,0,0,1,1,2,3,0,0,0,0)															219	AB
I	C		CALL CHGBLK(LIDINL,0,0,1,1,2,3,0,0,0,0)															220	AB
I	C																	221	AB
I	C	----	BUILD ENCL1 CONFIGURATION															222	AB
I	C																	223	AB
I	C	BUILD	ENCL1,BOXINR,LIDINR,MESSR															224	AB
I	C																	225	AB
I	C	----	CALCULATE FORM FACTORS FOR ENCLOSURE 1															226	AB
I	C																	227	AB
I	C		CALL RSTOFF															228	AB
I	L		FFCAL															229	AB
I	C																	230	AB
I	C	----	CHANGE EMITTANCES OF SURFACES FOR ENCL1															231	AB
I	C																	232	AB
I	C		CALL MODPR(1,.9,.5)															233	AB
I	C		CALL MODPR(2,.9,.5)															234	AB
I	C		CALL MODPR(3,.9,.5)															235	AB
I	C		CALL MODPR(4,.9,.5)															236	AB
I	C		CALL MODPR(5,.9,.5)															237	AB
I	C																	238	AB
I	C	----	PRINTOUT NODE DATA.															239	AB
I	C																	240	AB
I	C		CALL NODDAT															241	AB
I	C																	242	AB
I	C	----	CALCULATE GRAY BODY FACTORS FOR ENCLOSURE 1															243	AB
I	C																	244	AB
I	C		CALL GBDATA(IR,0,FF)															245	AB
I	L		GBCAL															246	AB
I	C																	247	AB
I	C	----	CALCULATE RADK'S FOR ENCLOSURE 1															248	AB
I	C																	249	AB

DATE 062878 TIME 205220 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION PAGE 7

MODEL = SAMPLE SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
ARRAY DATA INPUT BLOCK

CARD ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD EDIT NO.	LABEL	
INPUT	HEADER	ARRAY	DATA																	
INPUT		IPRIN1	=	101																AD
INPUT		ISEC1	=	111																AD
INPUT		IPRIN2	=	111																AD
INPUT		ISEC2	=	101																AD

MODEL = SAMPLE SURFACE DATA INPUT BLOCK SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

INPUT	HEADER SURFACE DATA			
RSI	C		6	AD
RSI	C-----THIS SURFACE DATA BLOCK IS USED IN SAMPLE CASES 1 THROUGH 5		7 OLD-	2 AA
RSI	C-----WITH VARIOUS PORTIONS OF IT BEING ACTIVATED FOR THE DIFFERENT		8 OLD-	3 AA
RSI	C-----CASES.		9 OLD-	4 AA
RSI	C		10 OLD-	5 AA
RSI	BCS BOXINR		11 OLD-	6 AA
RSI	S SURFN = 1		12 OLD-	7 AA
RSI	TYPE = RECT		13 OLD-	8 AA
RSI	ACTIVE = BOTTOM		14 OLD-	9 AA
RSI	PROP = 0.9,0.9		15 OLD-	10 AA
RSI	P1 = 1.0, 0.0, 1.0		16 OLD-	11 AA
RSI	P2 = 1.0, 0.0, 0.0		17 OLD-	12 AA
RSI	P3 = 1.0, 1.0, 0.0		18 OLD-	13 AA
RSI	COM = * INNER RIGHT FRONT *		19 OLD-	14 AA
RSI	S SURFN = 2		20 OLD-	15 AA
RSI	TYPE = RECT		21 OLD-	16 AA
RSI	ACTIVE = BOTTOM		22 OLD-	17 AA
RSI	PROP = 0.9,0.9		23 OLD-	18 AA
RSI	P1 = 1.0, 1.0, 1.0		24 OLD-	19 AA
RSI	P2 = 1.0, 1.0, 0.0		25 OLD-	20 AA
RSI	P3 = 0.0, 1.0, 0.0		26 OLD-	21 AA
RSI	COM = * INNER RIGHT SIDE *		27 OLD-	22 AA
RSI	S SURFN = 3		28 OLD-	23 AA
RSI	TYPE = RECT		29 OLD-	24 AA
RSI	ACTIVE = TOP		30 OLD-	25 AA
RSI	PROP = 0.9,0.9		31 OLD-	26 AA
RSI	P1 = 0.0, 0.0, 1.0		32 OLD-	27 AA
RSI	P2 = 0.0, 0.0, 0.0		33 OLD-	28 AA
RSI	P3 = 0.0, 1.0, 0.0		34 OLD-	29 AA
RSI	COM = * INNER RIGHT BACK *		35 OLD-	30 AA
RSI	S SURFN = 4		36 OLD-	31 AA
RSI	TYPE = RECT		37 OLD-	32 AA
RSI	ACTIVE = TOP		38 OLD-	33 AA
RSI	PROP = 0.9,0.9		39 OLD-	34 AA
RSI	P1 = 1.0, 1.0, 0.0		40 OLD-	35 AA
RSI	COM = * INNER RIGHT BOTTOM *		41 OLD-	36 AA
RSI	BCS BOXINL, INGBCS=BOXINR, NINC=10, IREFSF=1000		42 OLD-	37 AA
RSI	C		43 OLD-	38 AA
RSI	C-----THE FOREGOING CARD IMAGES BCS BOXINR IN REFERENCE PLANE 1000		44 OLD-	39 AA
RSI	C-----TO CREATE BCS BOXINL. THE INTERIOR OF THE BOX WAS INPUT IN		45 OLD-	40 AA
RSI	C-----THIS MANNER TO FACILITATE THE INPUT OF SAMPLE CASE 4 TO SHOW		46 OLD-	41 AA
RSI	C-----THE USE OF 'MESS' AND 'ERN' NODES.		47 OLD-	42 AA
RSI	C		48 OLD-	43 AA
	IMAGING SURFACE (1) BCS (BOXINR), GENERATING SURFACE (11) BCS (BOXINL)		49 OLD-	44 AA
	IMAGING SURFACE (2) BCS (BOXINR), GENERATING SURFACE (12) BCS (BOXINL)			
	IMAGING SURFACE (3) BCS (BOXINR), GENERATING SURFACE (13) BCS (BOXINL)			

MODEL = SAMPLE SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
 SURFACE DATA INPUT BLOCK

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

RSI	BCS	DESCRIPTION	PARAMETER	VALUE	OLD	EDIT NO.	LABEL
RSI	R	IMAGING SURFACE (4) BCS (BOXINR), GENERATING SURFACE (14) BCS (BOXINL)	REFNO	= 1000	50	OLD-	45 AA
RSI			P1	= 1.0, 0.0, 1.0	51	OLD-	46 AA
RSI			P2	= 1.0, 0.0, 0.0	52	OLD-	47 AA
RSI			P3	= 0.0, 0.0, 0.0	53	OLD-	48 AA
RSI			COM	= * IMAGING PLANE *	54	OLD-	49 AA
RSI	BCS	LIDINR			55	OLD-	50 AA
RSI	S	SURFN		= 5	56	OLD-	51 AA
RSI		TYPE		= RECT	57	OLD-	52 AA
RSI		ACTIVE		= BOTTOM	58	OLD-	53 AA
RSI		PROP		= 0.9,0.9	59	OLD-	54 AA
RSI		P1		= 1.0, 1.0, 0.0	60	OLD-	55 AA
RSI		COM		= * INNER RIGHT LID *	61	OLD-	56 AA
INPUT	BCS	LIDINL			62		57 AA
RSI	S	SURFN		= 15	63	OLD-	58 AA
RSI		IMAGSF		= 5	64	OLD-	59 AA
RSI		IREFSF		= 1000	65	OLD-	60 AA
RSI		COM		= * INNER LEFT LID *	66	OLD-	61 AA
RSI	BCS	BOXOUT			67	OLD-	62 AA
RSI	S	SURFN		= 21	68	OLD-	63 AA
RSI		TYPE		= BOX5	69	OLD-	64 AA
RSI		ACTIVE		= OUT	70	OLD-	65 AA
RSI		SHADE		= NO	71	OLD-	66 AA
RSI		PROP		= 0.2,0.9	72	OLD-	67 AA
RSI		P1		= 1.01,-1.01, 1.01	73	OLD-	68 AA
RSI		P2		= 1.01, 1.01, 1.01	74	OLD-	69 AA
RSI		P3		= -0.01, 1.01, 1.01	75	OLD-	70 AA
RSI		P4		= -0.01, 1.01,-0.01	76	OLD-	71 AA
RSI		COM		= * OUTER SURFACES *	77	OLD-	72 AA
RSI	BCS	LIDOUT			78	OLD-	73 AA
RSI	S	SURFN		= 28	79	OLD-	74 AA
RSI		TYPE		= RECT	80	OLD-	75 AA
RSI		ACTIVE		= TOP	81	OLD-	76 AA
RSI		SHADE		= NO	82	OLD-	77 AA
RSI		PROP		= 0.2,0.9	83	OLD-	78 AA
RSI		P1		= 1.01,-1.01, 0.01	84	OLD-	79 AA
RSI		P2		= 1.01, 1.01, 0.01	85	OLD-	80 AA
RSI		P3		= -0.01, 1.01, 0.01	86	OLD-	81 AA
RSI		COM		= * OUTER SURFACE OF LID *	87	OLD-	82 AA
RSI	C	C-----THE NEXT TWO BCS'S (MESSR AND MESSL) ARE ACTIVATED IN SAMPLE			88	OLD-	83 AA
RSI	C	C-----CASE 4 ONLY.			89	OLD-	84 AA
RSI	BCS	MESSR			90	OLD-	85 AA
RSI	S	SURFN		= 101	91	OLD-	86 AA
RSI		TYPE		= RECT	92	OLD-	87 AA
RSI		ACTIVE		= TOP	93	OLD-	88 AA
RSI					94	OLD-	89 AA

MODEL = SAMPLE
SURFACE DATA INPUT BLOCK

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

CARD	ORGIN	12345670	1	2345670	2	2345670	3	2345670	4	2345670	5	2345670	6	2345670	7	2345670	8	EDIT NO.	OLD	EDIT NO.	LABEL		
RSI				PROP	=	1.0,1.0												96	OLD-	90	AA		
RSI				P1	=	1.0, 0.0, 1.0												97	OLD-	91	AA		
RSI				P2	=	1.0, 0.0, 0.0												98	OLD-	92	AA		
RSI				P3	=	0.0, 0.0, 0.0												99	OLD-	93	AA		
RSI				COM	=	* PRIMARY MESS NODE, RIGHT SIDE *												100	OLD-	94	AA		
RSI	BCS			MESSL														101	OLD-	95	AA		
RSI	S			SURFN	=	111												102	OLD-	96	AA		
RSI				TYPE	=	RECT												103	OLD-	97	AA		
RSI				ACTIVE	=	BOTTOM												104	OLD-	98	AA		
RSI				PROP	=	1.0,1.0												105	OLD-	99	AA		
RSI				P1	=	1.0, 0.0, 1.0												106	OLD-	100	AA		
RSI				P2	=	1.0, 0.0, 0.0												107	OLD-	101	AA		
RSI				P3	=	0.0, 0.0, 0.0												108	OLD-	102	AA		
RSI				COM	=	* PRIMARY MESS NODE, LEFT SIDE *												109	OLD-	103	AA		
RSI				C														110	OLD-	104	AA		
RSI				C	-----THE FOLLOWING BCS (LIDSP) IS ACTIVATED IN SAMPLE CASE 3 ONLY.															111	OLD-	105	AA
RSI				C															112	OLD-	106	AA	
RSI	BCS			LIDSP															113	OLD-	107	AA	
RSI	S			SURFN	=	200													114	OLD-	108	AA	
RSI				TYPE	=	RECT													115	OLD-	109	AA	
RSI				ACTIVE	=	BOTTOM													116	OLD-	110	AA	
RSI				PROP	=	0.1,0.1													117	OLD-	111	AA	
RSI				SPR1	=	0.8													118	OLD-	112	AA	
RSI				SPRS	=	0.8													119	OLD-	113	AA	
RSI				P1	=	1.0,-1.0, 0.0													120	OLD-	114	AA	
RSI				P2	=	1.0, 1.0, 0.0													121	OLD-	115	AA	
RSI				P3	=	0.0, 1.0, 0.0													122	OLD-	116	AA	
RSI				COM	=	* SPECULAR LID *													123	OLD-	117	AA	

MODEL = SAMPLE SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
 BCS DATA INPUT BLOCK

CARD ORGIN	12345670	1	2345670	2	2345670	3	2345670	4	2345670	5	2345670	6	2345670	7	2345670	8	EDIT NO.	OLD EDIT NO.	LABEL	
RSI	HEADER	BCS	DATA														124	OLD-	118	AA
RSI	BCS	BOXINR															125	OLD-	119	AA
RSI	BCS	BOXINL															126	OLD-	120	AA
RSI	BCS	LIDINR	.0..0..1..0..-45..0.														127	OLD-	121	AA
INPUT	BCS	LIDINL	.0..0..1..0..-45..0.														128			AB
RSI	BCS	BOXOUT															129	OLD-	122	AA
RSI	BCS	LIDOUT	.0..0..1..0..-45..0.														130	OLD-	123	AA
RSI	BCS	MESSR															131	OLD-	124	AA
RSI	BCS	MESSL															132	OLD-	125	AA
RSI	BCS	LIDSP	.0..0..1..0..-45..0.														133	OLD-	126	AA

MODEL = SAMPLE SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
 FORM FACTOR DATA INPUT BLOCK

CARD	ORGIN	1	2	3	4	5	6	7	8	EDIT NO.	OLD	EDIT NO.	LABEL
RSI	HEADER FORM FACTOR DATA									134	OLD-	127	AA
RSI	C									135	OLD-	128	AA
RSI	C-----ENTER KNOWN ZERO FORM FACTORS AND EQUIVALENT FORM FACTORS FOR									136	OLD-	129	AA
RSI	C-----CASE1.									137	OLD-	130	AA
RSI	C									138	OLD-	131	AA
RSI	FIG CASE1									139	OLD-	132	AA
RSI	NODEA 1,2,3,4,11,12,13,14,5,15,21,22,23,24,25,26.END									140	OLD-	133	AA
RSI	BOTH 21,ZERO									141	OLD-	134	AA
RSI	22,ZERO									142	OLD-	135	AA
RSI	23,ZERO									143	OLD-	136	AA
RSI	24,ZERO									144	OLD-	137	AA
RSI	25,ZERO									145	OLD-	138	AA
RSI	26,ZERO									146	OLD-	139	AA
RSI	1,1,0.									147	OLD-	140	AA
RSI	11,12,1,2									148	OLD-	141	AA
RSI	11,13,1,3									149	OLD-	142	AA
RSI	11,14,1,4									150	OLD-	143	AA
RSI	11,15,1,5									151	OLD-	144	AA
RSI	1,11,0.									152	OLD-	145	AA
RSI	11,2,1,12									153	OLD-	146	AA
RSI	11,3,1,13									154	OLD-	147	AA
RSI	11,4,1,14									155	OLD-	148	AA
RSI	11,5,1,15									156	OLD-	149	AA
RSI	2,2,0.									157	OLD-	150	AA
RSI	2,3,1,2									158	OLD-	151	AA
RSI	2,4,1,4									159	OLD-	152	AA
RSI	12,13,2,3									160	OLD-	153	AA
RSI	12,14,2,4									161	OLD-	154	AA
RSI	12,15,2,5									162	OLD-	155	AA
RSI	12,3,2,13									163	OLD-	156	AA
RSI	12,4,2,14									164	OLD-	157	AA
RSI	12,5,2,15									165	OLD-	158	AA
RSI	3,3,0.									166	OLD-	159	AA
RSI	3,4,1,4									167	OLD-	160	AA
RSI	13,14,3,4									168	OLD-	161	AA
RSI	13,15,3,5									169	OLD-	162	AA
RSI	3,13,0.									170	OLD-	163	AA
RSI	13,4,3,14									171	OLD-	164	AA
RSI	13,5,3,15									172	OLD-	165	AA
RSI	4,4,0.									173	OLD-	166	AA
RSI	14,15,4,5									174	OLD-	167	AA
RSI	4,14,0.									175	OLD-	168	AA
RSI	14,5,4,15									176	OLD-	169	AA
RSI	5,5,0.									177	OLD-	170	AA
RSI	5,15,0.									178	OLD-	171	AA
INPUT	C									179			AB
INPUT	C-----SPECIFY CALCULATION OF FORM FACTORS FOR ENCLOSURE 1 BY									180			AB

H-327

MODEL = SAMPLE SAMPLE CASE 4 - FFCAL/8DCAL/RCCAL
 FORM FACTOR DATA INPUT BLOCK

CARD ORGIN	12345670 1	2345670 2	2345670 3	2345670 4	2345670 5	2345670 6	2345670 7	2345670 8	EDIT NO.	OLD EDIT NO.	LABEL
INPUT	C-----THE USE OF UNIT-SPHERE LOGIC. (NO SHADOWING)								181		AB
INPUT	C								182		AB
INPUT	FIG	ENCL1							183		AB
INPUT	UNIT								184		AB
INPUT	C								185		AB
INPUT	C-----SPECIFY CALCULATION OF FORM FACTORS FOR ENCLOSURE 2 BY								186		AB
INPUT	C-----THE USE OF UNIT SPHERE LOGIC. (NO SHADOWING)								187		AB
INPUT	C								188		AB
INPUT	FIG	ENCL2							189		AB
INPUT	UNIT								190		AB

MODEL = SAMPLE CORRESPONDENCE DATA INPUT BLOCK SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

CARD	ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD	EDIT NO.	LABEL	
RSI		HEADER CORRESPONDENCE DATA																				
RSI		C																				
RSI		C-----ENTER CORRESPONDENCE DATA FOR CASE 2																				
RSI		C																				
RSI		FIG	CASE2																			
RSI			1		=	1,11,22													191	OLD-	172	AA
RSI			2		=	2,25													192	OLD-	173	AA
RSI			3		=	3,13,24													193	OLD-	174	AA
RSI			4		=	4,14,21													194	OLD-	175	AA
RSI			5		=	5,15,26													195	OLD-	176	AA
RSI			12		=	12,23													196	OLD-	177	AA
RSI																			197	OLD-	178	AA
RSI																			198	OLD-	179	AA
RSI																			199	OLD-	180	AA
RSI																			200	OLD-	181	AA
RSI																			201	OLD-	182	AA
RSI																			202	OLD-	183	AA
RSI																			203	OLD-	184	AA
RSI																			204	OLD-	185	AA
RSI																			205	OLD-	186	AA
RSI																			206	OLD-	187	AA
RSI																			207	OLD-	188	AA
RSI																			208	OLD-	189	AA
RSI																			209	OLD-	190	AA
RSI																			210	OLD-	191	AA
RSI																			211	OLD-	192	AA

DATE 062878 TIME 205249 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION PAGE 15

MODEL = SAMPLE SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
OPERATION DATA INPUT BLOCK (PASS 1)

CARD ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD EDIT NO.	LABEL	
RSI																	212	OLD-	193	AA

+++++ OPERATIONS DATA BLOCK (PASS 1) COMPLETE +++++

MODEL = SAMPLE
PROCESSOR CORE ALLOCATION

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

THE FOLLOWING IS THE PROCESSOR CORE ALLOCATION FOR THOSE SEGMENTS WHICH WILL BE LOADED IN THIS EXECUTION (APPROX.) ...

OCTAL/DECIMAL

TRASYS (D) SEGMENT	121222/ 41618	
OPERATIONS DATA (NOT KNOWN AT THIS TIME).....	175000/ 64000	
INITIALIZATION SEGMENT	122300/ 42176	
FORM FACTOR SEGMENT	136100/ 48192	
GRAY BODY SEGMENT	124000/ 43008	
RADIATION CONDUCTOR SEGMENT	125500/ 43840	
GRAY BODY DYNAMIC COMMON	000276/ 190	
RADIATION CONDUCTOR DYNAMIC COMMON	000574/ 380	
GRAY BODY MINIMUM - MAXIMUM CORE	123575/ 42877 - 123725/ 42965	
RADIATION CONDUCTOR MINIMUM - MAXIMUM CORE	125230/ 43672 - 125474/ 43836	
MINIMUM CORE NEEDED FOR PROCESSOR EXECUTION	136100/ 48192	
MAXIMUM CORE NEEDED FOR PROCESSOR EXECUTION	136100/ 48192	
AMOUNT OF CORE THAT WILL BE USED BY PROCESSOR .	136100/ 48192	

MODEL = SAMPLE SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
 WRAP UP OF THE PRE-PROCESSOR

PRE-PROCESSOR ACCOUNTING INFORMATION	CP-SEC	DYN-STORAGE
SOURCE EDITING	1.534	676
DOCUMENTATION DATA PRE-PROCESSING000	0
QUANTITIES DATA PRE-PROCESSING027	266
ARRAY DATA PRE-PROCESSING082	20
SURFACE DATA PRE-PROCESSING (PASS 1) ...	1.090	64
SURFACE DATA PRE-PROCESSING (PASS 2)489	1141
BCS DATA PRE-PROCESSING172	201
FORM FACTOR DATA PRE-PROCESSING763	1169
SHADOW DATA PRE-PROCESSING000	0
FLUX DATA PRE-PROCESSING000	0
CORRESPONDENCE DATA PRE-PROCESSING211	101
OPERATIONS DATA PRE-PROCESSING	2.038	892
SUBROUTINE DATA PRE-PROCESSING147	0
SEQUENTIAL TAPE INITIALIZATION022	0
TOTAL CP TIME FOR PRE-PROCESSOR	6.963 DECIMAL SECONDS OR 000007 OCTAL SECONDS	
MINIMUM DYNAMIC STORAGE NEEDED BY PRE-PROCESSOR ..	1169 DECIMAL WORDS	
DYNAMIC STORAGE AVAILABLE TO PRE-PROCESSOR	10000 DECIMAL WORDS	

NORMAL TERMINATION BY PRE-PROCESSOR

@PHD,BLEP

@ASG.T/S R50.,BC.R50.92.R50 APPENDIX H, CASE 4.

@TEST TNE/1/53

@JUMP L3
 INTERVENING STATEMENTS SKIPPED

@L3:FREE DATA.

@FREE 14

M A S A / M A R T I N M A R I E T T A
 T H E R M A L R A D I A T I O N A N A L Y S I S S Y S T E M
 U N I V A C 1 1 1 0 / E X E C 0

TTTTTTTTTTTT
 TTTTTTTTTTTT
 TT TTT TT
 TTT
 TTT
 TTT
 TTT
 TTT
 TTT
 TTTTTT

RRRRRRRRR
 RRRRRRRRR
 RRR RRR
 RRR RRR
 RRRRRRRRR
 RRR RRR
 RRR RRR
 RRR RRR
 RRR RRR
 RRR RRR

AAAAAAA
 AAAAAAAAAA
 AAAAAAAAAAA
 AAA AAA
 AAA AAA
 AAAAAAAAAAA
 AAA AAA
 AAA AAA
 AAA AAA
 AAAAA AAAAA

SSSSSSSSS
 SSSSSSSSSS
 SSS SS
 SSS
 SSSSSSSSSS
 SSS
 SS SSS
 SSSSSSSSSSSS
 SSSSSSSSSS

YYYY YYYY
 YYY YYY
 YYY YYY
 YYY YYY
 YYYYY
 YYY
 YYY
 YYY
 YYYYYY

SSSSSSSSSS
 SSSSSSSSSSSS
 SSS SS
 SSS
 SSSSSSSSSS
 SSS
 SS SSS
 SSSSSSSSSSSS
 SSSSSSSSSS

P R O C E S S O R E X E C U T I O N

VERSION.MODIFICATION ... UL2E6
 MODIFICATION DATE 061970
 DATE OF RUN 062070
 TIME OF RUN 205915
 JOB NUMBER RVMH04

DATE 062878 TIME 205919

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 1

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1
PROCESSING OPERATIONS DATA

SAMPLE CASE 4 - FFCAL/GBCAL/BCCAL

SEQUENCE	NODE	BCS	AREA	ALPH	EMISS	SURF. TYPE	ACTIVE	-----COMMENTS-----
1	1	BOXINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT FRONT
2	2	BOXINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT SIDE
3	3	BOXINR	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BACK
4	4	BOXINR	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BOTTOM
5	5	LIDINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT LID
6	101	MESSR	1.00000	1.000	1.000	RECTANGLE	TOP	PRIMARY MESS NODE, RIGHT SIDE

NODE, AREA, AND PROPERTIES ARRAYS HAVE BEEN WRITTEN ON THE -RSO- TAPE
BY -BUILD- (ACCESS NUMBER = 1)

MODEL=SAFPLE CONFIG=ENCL1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

FORM FACTORS AND COMBINED FORM FACTORS - USER INPUT AND DEFAULT PARAMETERS

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
FFACC	.0500	.0500	ORIENTATION ACCURACY PARAMETER	N/A
FFACCS	.1000	.1000	SHADOWING ACCURACY PARAMETER	N/A
FFHIN	.1-05	1.0E-06	PARAMETER TO ELIMINATE SMALL FORM FACTORS	N/A
FFNOSH	SHAD	SHAD	OVER RIDE SHADOWING PARAMETER	(SHAD.NOSH)
*FFPNCH	NO	NO	PARAMETER TO PUNCH FORM FACTORS	(YES,NO)
FFPRNT	YES	YES	FLAG FOR COMPREHENSIVE FF AND CH PRINT	(YES,NO,FF,CH,RR)
FFRATL	15.0	15.0	RATIO FOR USING SUB-NODE TECHNIQUE	N/A
FFCHB	CORR	CORR	FLAG FOR COMBINING FORM FACTORS	(YES,NO,AUTO,CORR)

* -FFPNCH WILL DEFAULT TO -YES- ON CALCULATED VALUES IF THE -RSD- FILE IS NOT SPECIFIED IN THE OPTIONS DATA BLOCK

DATE 062878 TIME 205924

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 3

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

SEQUENCE	NODE	AREA	ALPH	EMISS
1	1	1.00000	.900	.900
2	2	1.00000	.900	.900
3	3	1.00000	.900	.900
4	4	1.00000	.900	.900
5	5	1.00000	.900	.900
6	101	1.00000	1.000	1.000

NUMBER OF NODES = 6 NUMBER OF SURFACES = 6

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
(UN-INDICATES UNKNOWN CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)
(9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) H/SHAD	FIR(J,I) H/SHAD	FSOL(I,J) H/SHAD	FSOL(J,I) H/SHAD	FF(I,J) H0/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
1	2	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.109	36	1
1	3	CAL	.200672	.200672	.200672	.200672	.200672	1.000000	1.000000	.066	36	1
1	4	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.064	36	1
1	5	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.067	36	1
1	101	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.065	36	1
1	FF SUM = 1.0000		ROW CP TIME =		.437							
1	FORM FACTOR RESTART (RSO) RECORD =		21									
2	3	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.065	36	1
2	4	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.064	36	1
2	5	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.064	36	1
2	101	CAL	.200672	.200672	.200672	.200672	.200672	1.000000	1.000000	.067	36	1
2	FF SUM = 1.0000		ROW CP TIME =		.311							
2	FORM FACTOR RESTART (RSO) RECORD =		22									
3	4	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.066	36	1
3	5	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.066	36	1
3	101	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.065	36	1
3	FF SUM = 1.0000		ROW CP TIME =		.232							
3	FORM FACTOR RESTART (RSO) RECORD =		23									
4	5	CAL	.200672	.200672	.200672	.200672	.200672	1.000000	1.000000	.062	36	1
4	101	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.062	36	1
4	FF SUM = 1.0000		ROW CP TIME =		.151							
4	FORM FACTOR RESTART (RSO) RECORD =		24									

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1 SAMPLE CASE 4 - FFCAL/OBCAL/RCCAL
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)
 (9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) M/SHAD	FIR(J,I) M/SHAD	FSOL(I,J) M/SHAD	FSOL(J,I) M/SHAD	FF(I,J) M0/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
5	101	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.064	36	1
5		FF SUM = 1.0000	ROW CP TIME = .128		FORM FACTOR RESTART (RSO) RECORD = 25							
101		FF SUM = 1.0000	ROW CP TIME = .009		FORM FACTOR RESTART (RSO) RECORD = 26							

.....

FF FORM FACTORS FOR CONFIGURATION ENCL1 HAVE BEEN STORED ON RSO.
 LAST RESTART RECORD WRITTEN = 26

.....

DATE 062878 TIME 205930

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 6

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 4 - FFCAL/OBCAL/RCCAL

SUMMARY OF FORM FACTOR SUMS FOR ALL NODES

NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM
1- 1.0000	2- 1.0000	3- 1.0000	4- 1.0000	5- 1.0000	101- 1.0000
TOTAL TIME FOR FORM FACTOR SEGMENT		1.640			
TOTAL TIME SINCE START OF RUN		35.717			

DATE 062078 TIME 205931

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 7

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1
PROCESSING OPERATIONS DATA

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

NODE DATA--

NODE	AREA	ALPH	EMISS	TRAN(SOL)	TRAN(IR)	SPECULAR REFL(SOL)	SPECULAR REFL(IR)
1	1.00000	.900+00	.500+00	.000	.000	.000	.000
2	1.00000	.900+00	.500+00	.000	.000	.000	.000
3	1.00000	.900+00	.500+00	.000	.000	.000	.000
4	1.00000	.900+00	.500+00	.000	.000	.000	.000
5	1.00000	.900+00	.500+00	.000	.000	.000	.000
101	1.00000	.100+01	.100+01	.000	.000	.000	.000

NODE, AREA, AND PROPERTIES ARRAYS HAVE BEEN WRITTEN ON THE -RSO- TAPE
BY -TRASYS- FOLLOWING MODIFICATION(S). (ACCESS NUMBER = 2)

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1 SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
GRAY BODIES COMPUTATION LINK.

VARIABLE NAME	CURRENT VALUE	DEFAULT	GREY BODIES DEFINITION	OPTIONS
GBBAND	IR	BOTH	HAVEBAND DEFINITION PARAMETER	(2HIR.3HSOL.4HBOTH)

.....

IR GRAY BODIES FOR CONFIGURATION ENCL1 HAVE BEEN COMPUTED AND STORED ON RSO.
LAST RESTART RECORD WRITTEN = 44

.....

TOTAL TIME TO COMPUTE GRAY BODIES .21

DATE 062070 TIME 205934

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION

PAGE 9

MODEL=SAFPLE CONFIG=ENCL1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
RKPNCH	PUN	NO	PUNCH/NO PUNCH PARAMETER FOR RADKS	(YES,NO)
RKHIN	.0001	0.0001	PARAMETER TO ELIMINATE SMALL RADK S	N/A
IRKCN	1	1	INITIAL RADIATION CONDUCTOR ID NUHBER	N/A
RKSP	NO	NO	MNEHONIC FLAG FOR COMPUTATION OF RADKS TO SPACE	(SPACE,NO)
IRKNSP	32767	32767	SPACE NODE ID NUMBER	N/A
SIGMA	.17-08	1.713E-9	STEFAN-BOLTZHANN CONSTANT	N/A
RKAMPF	1.00	1.0	AREA MULTIPLYING FACTOR	N/A
RKTAPE	NO	NO	PARAMETER TO OUTPUT TO BCD TAPE	(TAPE,NO)
RFRAC	.7+00	0.7	SIGNIFICANT RADIATION FRACTION	(0. TO 1.)
RTOL	.990	0.99	DECIMAL FRACTION OF LAST RADK SAVED	N/A
NERN	0	0	EFFECTIVE RADIATION NODE (ERN) NUMBER	N/A

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

SPECIAL RADIATION NODES

NONE

MESS SPECIAL NODES

PRIMARY SECONDARY

101 111

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1
 RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

RADIATION CONDUCTOR (RADKS) CARDS

AREA UNITS = INPUT UNITS * AMPF. WHERE AMPF = 1.00000

PUNCHED AND/OR BCDOU RADKS -	-	1.	1.	2.	.12969-09\$
PUNCHED AND/OR BCDOU RADKS -	-	2.	1.	3.	.13003-09\$
PUNCHED AND/OR BCDOU RADKS -	-	3.	1.	4.	.12974-09\$
PUNCHED AND/OR BCDOU RADKS -	-	4.	1.	5.	.12974-09\$
PUNCHED AND/OR BCDOU RADKS -	-	5.	-1.	101.	.28540-09\$
PUNCHED AND/OR BCDOU RADKS -	-	6.	-111.	1.	.28540-09\$
PUNCHED AND/OR BCDOU RADKS -	-	7.	2.	3.	.12969-09\$
PUNCHED AND/OR BCDOU RADKS -	-	8.	2.	4.	.12969-09\$
PUNCHED AND/OR BCDOU RADKS -	-	9.	2.	5.	.12969-09\$
PUNCHED AND/OR BCDOU RADKS -	-	10.	-2.	101.	.28594-09\$
PUNCHED AND/OR BCDOU RADKS -	-	11.	-111.	2.	.28594-09\$
PUNCHED AND/OR BCDOU RADKS -	-	12.	3.	4.	.12974-09\$
PUNCHED AND/OR BCDOU RADKS -	-	13.	3.	5.	.12974-09\$
PUNCHED AND/OR BCDOU RADKS -	-	14.	-3.	101.	.28540-09\$
PUNCHED AND/OR BCDOU RADKS -	-	15.	-111.	3.	.28540-09\$
PUNCHED AND/OR BCDOU RADKS -	-	16.	4.	5.	.13003-09\$
PUNCHED AND/OR BCDOU RADKS -	-	17.	-4.	101.	.28540-09\$
PUNCHED AND/OR BCDOU RADKS -	-	18.	-111.	4.	.28540-09\$
PUNCHED AND/OR BCDOU RADKS -	-	19.	-5.	101.	.28540-09\$
PUNCHED AND/OR BCDOU RADKS -	-	20.	-111.	5.	.28540-09\$
PUNCHED AND/OR BCDOU RADKS -	-	21.	-101.	111.	.17868-09\$

DATE 062970 TIME 205941

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 9 VERSION PAGE 12

MODEL=SAMPLE CONFIG=ENCL1 STEP=1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 4 - FFCAL/GSCAL/RCCAL

CONSERVATION CHECKS
RADIATION SUMS FOR EACH NODE BEFORE RKNIN SCREENING

1 - .10000+01 2 - .10000+01 3 - .10000+01 4 - .10000+01 5 - .10000+01 -101 - .93767+00

DATE 052070 TIME 205042

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION PAGE 13

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

CONSERVATION CHECKS
RADIATION SUMS FOR EACH NODE AFTER RKHIN SCREENING

1 - .10000+01 2 - .10000+01 3 - .10000+01 4 - .10000+01 5 - .10000+01 -101 - .93767+00

DATE 062070 TIME 205943

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION

PAGE 14

MODEL=SAMPLE CONFIG=ENCL1 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

THE INPUT SIGNIFICANT RADIATION FRACTION = .700

THE NUMBER OF CONDUCTORS INPUT = 21

THE NUMBER OF CONDUCTORS OUTPUT = 21

WHICH IS A .0 PERCENT REDUCTION IN THE NUMBER OF CONDUCTORS.

100.0 PERCENT OF THE TOTAL EMISSIVE POWER IS EXACTLY COUPLED.

TOTAL TIME TO COMPUTE AND CONDENSE RADKS = .51

DATE 062070 TIME 205945

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 15

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2
PROCESSING OPERATIONS DATA

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

SEQUENCE	NODE	BCS	AREA	ALPH	EMISS	SURF. TYPE	ACTIVE	-----COMMENTS-----
1	11	BOXINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT FRONT
2	12	BOXINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT SIDE
3	13	BOXINL	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BACK
4	14	BOXINL	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BOTTOM
5	15	LIDINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER LEFT LID
6	111	HESSL	1.00000	1.000	1.000	RECTANGLE	BOTTOM	PRIMARY HESS NODE. LEFT SIDE

NODE, AREA, AND PROPERTIES ARRAYS HAVE BEEN WRITTEN ON THE -RSO- TAPE
BY -BUILD- (ACCESS NUMBER = 3)

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

FORM FACTORS AND COMBINED FORM FACTORS - USER INPUT AND DEFAULT PARAMETERS

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
FFACC	.0500	.0500	ORIENTATION ACCURACY PARAMETER	N/A
FFACCS	.1000	.1000	SHADOWING ACCURACY PARAMETER	N/A
FFMIN	.1-05	1.0E-06	PARAMETER TO ELIMINATE SMALL FORM FACTORS	N/A
FFNOSH	SHAD	SHAD	OVER RIDE SHADOWING PARAMETER	(SHAD,NOSH)
+FFPNCH	NO	NO	PARAMETER TO PUNCH FORM FACTORS	(YES,NO)
FFPRNT	YES	YES	FLAG FOR COMPREHENSIVE FF AND CM PRINT	(YES,NO,FF,CM,RB)
FFRATL	15.0	15.0	RATIO FOR USING SUB-NODE TECHNIQUE	N/A
FFCMB	NO	CORR	FLAG FOR COMBINING FORM FACTORS	(YES,NO,AUTO,CORR)

* -FFPNCH WILL DEFAULT TO -YES- ON CALCULATED VALUES IF THE -RSD- FILE IS NOT SPECIFIED IN THE OPTIONS DATA BLOCK

DATE 062070 TIME 205950

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC B VERSION PAGE 17

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 4 - FFCAL/GCCAL/RCCAL

SEQUENCE	NODE	AREA	ALPH	EMISS
1	11	1.00000	.900	.900
2	12	1.00000	.900	.900
3	13	1.00000	.900	.900
4	14	1.00000	.900	.900
5	15	1.00000	.900	.900
6	111	1.00000	1.000	1.000

NUMBER OF NODES = 6 NUMBER OF SURFACES = 6

MODEL=SAHPLE CONFIG=ENCL2 STEP=-2
FORM FACTOR CALCULATION LINK:

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
(UN-INDICATES UNKNOWN CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)
(9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) H/SHAD	FIR(J,I) H/SHAD	FSOL(I,J) H/SHAD	FSOL(J,I) H/SHAD	FF(I,J) H0/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
11	12	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.116	36	1
11	13	CAL	.200672	.200672	.200672	.200672	.200672	1.000000	1.000000	.065	36	1
11	14	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.070	36	1
11	15	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.072	36	1
11	111	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.070	36	1
11	FF SUM = 1.0000		ROW CP TIME =		.464							
	FORM FACTOR RESTART (RSO) RECORD =		58									
12	13	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.071	36	1
12	14	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.071	36	1
12	15	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.070	36	1
12	111	CAL	.200672	.200672	.200672	.200672	.200672	1.000000	1.000000	.071	36	1
12	FF SUM = 1.0000		ROW CP TIME =		.330							
	FORM FACTOR RESTART (RSO) RECORD =		59									
13	14	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.069	36	1
13	15	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.070	36	1
13	111	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.072	36	1
13	FF SUM = 1.0000		ROW CP TIME =		.251							
	FORM FACTOR RESTART (RSO) RECORD =		60									
14	15	CAL	.200672	.200672	.200672	.200672	.200672	1.000000	1.000000	.066	36	1
14	111	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.066	36	1
14	FF SUM = 1.0000		ROW CP TIME =		.160							
	FORM FACTOR RESTART (RSO) RECORD =		61									

MODEL=SANPLE CONFIG=ENCL2 STEP=2 SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWNM CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)
 (9.999999 -INDICATES UNKNOWNM DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) M/SHAD	FIR(J,I) M/SHAD	FSOL(I,J) M/SHAD	FSOL(J,I) M/SHAD	FF(I,J) M0/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
15	111	CAL	.199837	.199837	.199837	.199837	.199837	1.000000	1.000000	.063	36	1
15		FF SUM = 1.0000	ROW CP TIME = .127									
		FORM FACTOR RESTART (RSO) RECORD =	62									
111		FF SUM = 1.0000	ROW CP TIME = .009									
		FORM FACTOR RESTART (RSO) RECORD =	63									

.....

FF FORM FACTORS FOR CONFIGURATION ENCL2 HAVE BEEN STORED ON RSO.
 LAST RESTART RECORD WRITTEN = 63

.....

DATE 062070 TIME 205955

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION

PAGE 20

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

SUMMARY OF FORM FACTOR SUMS FOR ALL NODES

NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM	NODE 1- FF SUM
11- 1.0000	12- 1.0000	13- 1.0000	14- 1.0000	15- 1.0000	111- 1.0000
TOTAL TIME FOR FORM FACTOR SEGMENT		1.731			
TOTAL TIME SINCE START OF RUN		39.778			

H-355

DATE 062070 TIME 205956

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 21

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2
PROCESSING OPERATIONS DATA

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

NODE DATA--

NODE	AREA	ALPH	EMISS	TRAN(SOL)	TRAN(IR)	SPECULAR REFL(SOL)	SPECULAR REFL(IR)
11	1.00000	.900+00	.500+00	.000	.000	.000	.000
12	1.00000	.900+00	.500+00	.000	.000	.000	.000
13	1.00000	.900+00	.500+00	.000	.000	.000	.000
14	1.00000	.900+00	.500+00	.000	.000	.000	.000
15	1.00000	.900+00	.500+00	.000	.000	.000	.000
111	1.00000	.100+01	.100+01	.000	.000	.000	.000

NODE, AREA, AND PROPERTIES ARRAYS HAVE BEEN WRITTEN ON THE -RSO- TAPE
BY -TRASYS- FOLLOWING MODIFICATION(S). (ACCESS NUMBER = 4)

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2
GRAY BODIES COMPUTATION LINK.

SAMPLE CASE 4 - FFCAL/GDCAL/RCCAL

VARIABLE NAME	CURRENT VALUE	DEFAULT	GREY BODIES DEFINITION	OPTIONS
G9HBND	IR	BOTH	WAVEBAND DEFINITION PARAMETER	(2HIR,3HSOL,4HBOTH)

.....

IR GRAY BODIES FOR CONFIGURATION ENCL2 HAVE BEEN COMPUTED AND STORED ON RSO.
LAST RESTART RECORD WRITTEN = 01

.....

TOTAL TIME TO COMPUTE GRAY BODIES .22

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2
 RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

RADIATION CONDUCTORS				
VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
RKPNCM	PUN	NO	PUNCH/NO PUNCH PARAMETER FOR RADKS	(YES,NO)
RKHIN	.0001	0.0001	PARAMETER TO ELIMINATE SMALL RADK S	N/A
IRKCN	1	1	INITIAL RADIATION CONDUCTOR ID NUMBER	N/A
RKSP	NO	NO	MNEMONIC FLAG FOR COMPUTATION OF RADKS TO SPACE	(SPACE,NO)
IRKNSP	32767	32767	SPACE NODE ID NUMBER	N/A
SIGMA	.17-08	1.713E-9	STEFAN-BOLTZMANN CONSTANT	N/A
RKAMPF	1.00	1.0	AREA MULTIPLYING FACTOR	N/A
RKTAPE	NO	NO	PARAMETER TO OUTPUT TO BCD TAPE	(TAPE,NO)
RFRAC	.5+00	0.7	SIGNIFICANT RADIATION FRACTION	(0. TO 1.)
RTOL	1.00	0.99	DECIMAL FRACTION OF LAST RADK SAVED	N/A
NERN	555	0	EFFECTIVE RADIATION NODE (ERN) NUMBER	N/A

DATE 062070 TIME 210000

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 24

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 4 - FFCAL/GCCAL/RCCAL

SPECIAL RADIATION NODES

NONE

MESS SPECIAL NODES

PRIMARY SECONDARY

111 101

MODEL=SAHPLC CONFIG=ENCL2 STEP=-2
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

RADIATION CONDUCTOR (RADKS) CARDS

AREA UNITS = INPUT UNITS * AMPF, WHERE AMPF = 1.00000

	****	11.	11.	.1713000-00*	.3031613-01
PUNCHED AND/OR BCDU RADKS -	-	1.	11.	.13003-09\$	
PUNCHED AND/OR BCDU RADKS -	-	2.	-11.	.20540-09\$	
PUNCHED AND/OR BCDU RADKS -	-	3.	-101.	.20540-09\$	
		11.	12.	.1713000-00*	.7570016-01
		11.	14.	.1713000-00*	.7573692-01
		11.	15.	.1713000-00*	.7573692-01

PUNCHED AND/OR BCDU RADKS -	-	4.	11.	.555.	.38916-09\$
	****	12.	12.	.1713000-00*	.3025055-01
PUNCHED AND/OR BCDU RADKS -	-	5.	12.	.12969-09\$	
PUNCHED AND/OR BCDU RADKS -	-	6.	-12.	.20594-09\$	
PUNCHED AND/OR BCDU RADKS -	-	7.	-101.	.20594-09\$	
		12.	11.	.1713000-00*	.7570016-01
		12.	13.	.1713000-00*	.7570016-01
		12.	14.	.1713000-00*	.7570015-01

PUNCHED AND/OR BCDU RADKS -	-	8.	12.	.555.	.38906-09\$
	****	13.	13.	.1713000-00*	.3031613-01
PUNCHED AND/OR BCDU RADKS -	-	9.	-13.	.20540-09\$	
PUNCHED AND/OR BCDU RADKS -	-	10.	-101.	.20540-09\$	
		13.	12.	.1713000-00*	.7570016-01
		13.	14.	.1713000-00*	.7573692-01
		13.	15.	.1713000-00*	.7573692-01

PUNCHED AND/OR BCDU RADKS -	-	11.	13.	.555.	.38916-09\$
	****	14.	14.	.1713000-00*	.3031613-01
PUNCHED AND/OR BCDU RADKS -	-	12.	14.	.13003-09\$	
PUNCHED AND/OR BCDU RADKS -	-	13.	-14.	.20540-09\$	

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2)SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
 RADIATION CONDUCTOR GENERATION LINK.

RADIATION CONDUCTOR (RADK) CARDS

AREA UNITS = INPUT UNITS * AMPF. WHERE AMPF = 1.00000

PUNCHED AND/OR BCDOU RADKS -	-	14,	-101,	14,	.28540-09\$	
		14,	11,	.1713000-08*	.7573692-01	
		14,	12,	.1713000-08*	.7570815-01	
		14,	13,	.1713000-08*	.7573692-01	

PUNCHED AND/OR BCDOU RADKS -	-	15,	14,	555,	.38916-09\$	
		15,	15,	.1713000-08*	.3031614-01	
PUNCHED AND/OR BCDOU RADKS -	-	16,	-15,	111,	.28540-09\$	
PUNCHED AND/OR BCDOU RADKS -	-	17,	-101,	15,	.28540-09\$	
		15,	11,	.1713000-08*	.7573692-01	
		15,	13,	.1713000-08*	.7573692-01	

PUNCHED AND/OR BCDOU RADKS -	-	18,	15,	555,	.25947-09\$	
PUNCHED AND/OR BCDOU RADKS -	-	19,	-111,	101,	.17868-09\$	

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL

CONSERVATION CHECKS
RADIATION SUMS FOR EACH NODE BEFORE RKHN SCREENING

11 - .10000+01 12 - .10000+01 13 - .10000+01 14 - .10000+01 15 - .10000+01 -111 - .93767+00

MODEL=SAMPLE CONFIG=ENCL2 STEP=-2 SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
RADIATION CONDUCTOR GENERATION LINK.

CONSERVATION CHECKS
RADIATION SUMS FOR EACH NODE AFTER RKNIN SCREENING

11 - .10000+01 12 - .10000+01 13 - .10000+01 14 - .10000+01 15 - .10000+01 -111 - .93767+00

DATE 062878 TIME 210014 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION, PAGE 29

MODEL=SAFPLE CONFIG=ENCL2 STEP=-2 SAMPLE CASE 4 - FFCAL/GBCAL/RCCAL
RADIATION CONDUCTOR GENERATION LINK.

THE INPUT SIGNIFICANT RADIATION FRACTION = .500

THE NUMBER OF CONDUCTORS INPUT = 21
THE NUMBER OF CONDUCTORS OUTPUT = 19
WHICH IS A 9.5 PERCENT REDUCTION IN THE NUMBER OF CONDUCTORS.

69.7 PERCENT OF THE TOTAL EMISSIVE POWER IS EXACTLY COUPLED.

TOTAL TIME TO COMPUTE AND CONDENSE RADKS = .69

NORMAL TERMINATION BY PROCESSOR

8PMD.PLEB

8BRKPT PRINTS

SAMPLE CASE 5

@ED,R VOOVB.CASES
 FILE IN FIELD 1 DISABLED--ACCEPTED
 FILE IN FIELD 1 IN USE BY ANOTHER RUN
 READ-ONLY MODE
 CASE UPPER ASSUMED
 ED 14.02-06/28-01:48-(0.)
 EDIT

NO DECK VOOT

1:8RUN,R/R RVHM05.3240-F261-C,ES3-N03711.09.150
 10:8ASG,A ES3-TRASYS*TRASYS.
 11:8ADD ES3-TRASYS*TRASYS.STARTH
 12:8SETC 0100
 13:8ADD PREPRO
 14:8HEADER OPTIONS DATA
 15:TITLE SAMPLE CASE 5 - FFCAL/RBCAL/OBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 16: MODEL = SAMPLE
 17: RSO = RSTSAM5
 18:8HEADER SURFACE DATA
 19:C
 20:C-----THIS SURFACE DATA BLOCK IS USED IN SAMPLE CASES 1 THROUGH 5
 21:C-----WITH VARIOUS PORTIONS OF IT BEING ACTIVATED FOR THE DIFFERENT
 22:C-----CASES.
 23:C
 24:BCS BOXINR
 25:S SURFN = 1
 26: TYPE = RECT
 27: ACTIVE = BOTTOM
 28: PROP = 0.9,0.9
 29: P1 = 1.0, 0.0, 1.0
 30: P2 = 1.0, 0.0, 0.0
 31: P3 = 1.0, 1.0, 0.0
 32: COM = * INNER RIGHT FRONT *
 33:S SURFN = 2
 34: TYPE = RECT
 35: ACTIVE = BOTTOM
 36: PROP = 0.9,0.9
 37: P1 = 1.0, 1.0, 1.0
 38: P2 = 1.0, 1.0, 0.0
 39: P3 = 0.0, 1.0, 0.0
 40: COM = * INNER RIGHT SIDE *
 41:S SURFN = 3
 42: TYPE = RECT
 43: ACTIVE = TOP
 44: PROP = 0.9,0.9
 45: P1 = 0.0, 0.0, 1.0
 46: P2 = 0.0, 0.0, 0.0
 47: P3 = 0.0, 1.0, 0.0
 48: COM = * INNER RIGHT BACK *
 49:S SURFN = 4
 50: TYPE = RECT
 51: ACTIVE = TOP
 52: PROP = 0.9,0.9
 53: P1 = 1.0, 1.0, 0.0
 54: COM = * INNER RIGHT BOTTOM *
 55:BCS BOXINL,IMBCS=BOXINR,NINC=10,IREFSF=1000
 56:C
 57:C-----THE FOREGOING CARD IMAGES BCS BOXINR IN REFERENCE PLANE 1000
 58:C-----TO CREATE BCS BOXINL. THE INTERIOR OF THE BOX WAS INPUT IN

59:C-----THIS MANNER TO FACILITATE THE INPUT OF SAMPLE CASE 4 TO SHOW -

60:C-----THE USE OF 'MESS' AND 'ERN' NODES.

61:C

62:R REFNO = 1000
63: P1 = 1.0, 0.0, 1.0
64: P2 = 1.0, 0.0, 0.0
65: P3 = 0.0, 0.0, 0.0
66: COM = * IMAGING PLANE *
67:BCS LIDINR
68:S SURFN = 5
69: TYPE = RECT
70: ACTIVE = BOTTOM
71: PROP = 0.9,0.9
72: P1 = 1.0, 1.0, 0.0
73: COM = * INNER RIGHT LID *
74:S SURFN = 15
75: IMAGSF = 5
76: IREFSF = 1000
77: COM = * INNER LEFT LID *
78:BCS BOXOUT
79:S SURFN = 21
80: TYPE = BOXS
81: ACTIVE = OUT
82: SHADE = NO
83: PROP = 0.2,0.9
84: P1 = 1.01,-1.01, 1.01
85: P2 = 1.01, 1.01, 1.01
86: P3 = -0.01, 1.01, 1.01
87: P4 = -0.01, 1.01,-0.01
88: COM = * OUTER SURFACES *
89:BCS LIDOUT
90:S SURFN = 28
91: TYPE = RECT
92: ACTIVE = TOP
93: SHADE = NO
94: PROP = 0.2,0.9
95: P1 = 1.01,-1.01, 0.01
96: P2 = 1.01, 1.01, 0.01
97: P3 = -0.01, 1.01, 0.01
98: COM = * OUTER SURFACE OF LID *
99:C

100:C-----THE NEXT TWO BCSIS (MESSR AND MESSL) ARE ACTIVATED IN SAMPLE

101:C-----CASE 4 ONLY.

102:C

103:BCS MESSR
104:S SURFN = 101
105: TYPE = RECT
106: ACTIVE = TOP
107: PROP = 1.0,1.0
108: P1 = 1.0, 0.0, 1.0
109: P2 = 1.0, 0.0, 0.0
110: P3 = 0.0, 0.0, 0.0
111: COM = * PRIMARY MESS NODE, RIGHT SIDE *
112:BCS MESSL
113:S SURFN = 111
114: TYPE = RECT
115: ACTIVE = BOTTOM

```

116:      PROP      = 1.0.1.0
117:      P1         = 1.0. 0.0. 1.0
118:      P2         = 1.0. 0.0. 0.0
119:      P3         = 0.0. 0.0. 0.0
120:      COM        = * PRIMARY MESS NODE. LEFT SIDE *
121:C
122:C-----THE FOLLOWING BCS (LIDSP) IS ACTIVATED IN SAMPLE CASE 5 ONLY.
123:C
124:BCS   LIDSP
125:S     SURFM      = 200
126:      TYPE       = RECT
127:      ACTIVE     = BOTTON
128:      PROP       = 0.1,0.1
129:      SPRI       = 0.8
130:      SPRS       = 0.8
131:      P1         = 1.0,-1.0, 0.0
132:      P2         = 1.0, 1.0, 0.0
133:      P3         = 0.0, 1.0, 0.0
134:      COM        = * SPECULAR LID *
135:HEADER BCS DATA
136:BCS   BOXINR
137:BCS   BOXIML
138:BCS   LIDINR .0..0..1..0..-45..0.
139:BCS   BOXOUT
140:BCS   LIDOUT .0..0..1..0..-45..0.
141:BCS   MESSR
142:BCS   MESSL
143:BCS   LIDSP .0..0..1..0..-45..0.
144:HEADER FORM FACTOR DATA
145:C
146:C-----ENTER KNOWN ZERO FORM FACTORS AND EQUIVALENT FORM FACTORS FOR
147:C-----CASES.
148:C
149:F10  CASE1
150:NODEA 1.2,3,4,11,12,13,14,200,21,22,23,24,25,26,END
151:BOTH  21,ZERO
152:      22,ZERO
153:      23,ZERO
154:      24,ZERO
155:      25,ZERO
156:      26,ZERO
157:      1,1,0.
158:      11,12,1,2
159:      11,13,1,3
160:      11,14,1,4
161:      11,200,1,200
162:      1,11,0.
163:      11,2,1,12
164:      11,3,1,13
165:      11,4,1,14
166:      2,2,0.
167:      2,3,1,2
168:      2,4,1,4
169:      12,13,2,3
170:      12,14,2,4
171:      12,200,2,200
172:      12,3,2,13

```

```

173:      12,4,2,14
174:      3,3,0.
175:      3,4,1,4
176:      13,14,3,4
177:      13,200,3,200
178:      3,13,0.
179:      13,4,3,14
180:      4,4,0.
181:      14,200,4,200
182:      4,14,0.
183:      200,200,0.
184:HEADER CORRESPONDENCE DATA
185:C
186:C-----ENTER CORRESPONDENCE DATA FOR CASE 2
187:C
188:F10    CASE2
189:      1          = 1,11,22
190:      2          = 2,25
191:      3          = 3,13,24
192:      4          = 4,14,21
193:      5          = 5,15,26
194:      12         = 12,23
195:C
196:C-----ENTER CORRESPONDENCE DATA FOR CASE 3 TO COMBINE FORM FACTORS
197:C
198:F10    CASE3,FF
199:      1          = 1,11,22
200:      2          = 2,25
201:      3          = 3,13,24
202:      4          = 4,14,21
203:      5          = 5,15,26
204:      12         = 12,23
205:HEADER OPERATIONS DATA
206:C
207:C-----BUILD THE CASE 5 CONFIGURATION
208:C
209:BUILD CASE5,BOXINR,BOXINL,LIDSP,BOXOUT,LIDOUT
210:C
211:C-----CALCULATE THE FORM FACTOR MATRIX.
212:C
213:L      FFCAL
214:C
215:C-----CALCULATE IMAGE FACTORS
216:C
217:      CALL RBDATA(0,0,0,0,0)
218:L      RBCAL
219:C
220:C-----CALCULATE THE GRAY BODY MATRIX USING IMAGE FACTORS.
221:C
222:      CALL GBDATA(BOTH,0,RB)
223:L      GBCAL
224:C
225:C-----CALCULATE AND PUNCH RADIATION CONDUCTORS.
226:C
227:      CALL RKDATA(0,0,0,0,SPACE.999,0,0,0,0)
228:L      RKCAL
229:C

```

```

230:C-----DEFINE ORBIT AND VEHICLE ORIENTATION (CIRCULAR-PLANET-ORIENTED)
231:C
232:      CALL ORBIT2(EAR,0.00,0.0,0.100,0000,100,0000.)
233:      CALL ORIENT(4MPLAN,1.2,3,300,270,0.)
234:C
235:C-----SET #AOPRINT# TO PRINT THE COMPONENT VALUES OF ABSORBED Q'S.
236:C
237:      AOPRINT      =YES
238:C
239:C-----CALCULATE INCIDENT FLUXES PLUS SPECULAR REFLECTIONS.
240:C
241:ORBGEN CIRP,0,180,2,DI
242:STEP  10010
243:      CALL DRDATA(10000,0)
244:L      DRCAL
245:      CALL AQDATA(0,0,0,0,0)
246:L      AQCAL
247:C
248:STEP  10011
249:      CALL DRDATA(10001,0)
250:L      DRCAL
251:      CALL AQDATA(0,0,0,0,0)
252:L      AQCAL
253:C
254:STEP  10012
255:      CALL DRDATA(10002,0)
256:L      DRCAL
257:      CALL AQDATA(0,0,0,0,0)
258:L      AQCAL
259:C
260:STEP  10013
261:      CALL DRDATA(10003,0)
262:L      DRCAL
263:      CALL AQDATA(0,0,0,0,0)
264:L      AQCAL
265:C
266:STEP  10014
267:      CALL DRDATA(10004,0)
268:L      DRCAL
269:      CALL AQDATA(0,0,0,0,0)
270:L      AQCAL
271:C
272:      CALL QODATA(3HALL,0,0,0,0,0,0,0)
273:L      QOCAL
274:END OF DATA
275:#PHD,8LEP
276:#ASQ,T/S R50,8C,R50,92,R50 APPENDIX H, CASE 5.
277:#ADD PROCSS
285:#FIN
NO CORRECTIONS APPLIED.

```

H-370

```

#ASQ,A ES3-TRASYS*TRASYS.
FAC WARNING      040000100200

```


NASA / MARTIN MARIETTA
THERMAL RADIATION ANALYSIS SYSTEM
UNIVAC 1110 / EXEC 8

```

TTTTTTTTTTTT
TTTTTTTTTTTT
TT  YTT  TT
    YTT
    YTT
    YTT
    YTT
    YTT
    TTTTTT
  
```

```

RRRRRRRRR
RRRRRRRRR
RRR      RRR
RRR      RRR
RRRRRRRRR
RRR  RRR
RRR      RRR
RRR      RRR
RRR      RRR
  
```

```

AAAAAAA
AAAAAAAAA
AAAAAAAAA
AAA      AAA
AAA      AAA
AAAAAAAAA
AAA      AAA
AAA      AAA
AAA      AAA
AAAAA    AAAA
  
```

```

SSSSSSSSS
SSSSSSSSSS
SSS      SS
SSS
SSSSSSSSS
      SSS
SS      SSS
SSSSSSSSSS
SSSSSSSSS
  
```

T R A S Y S I I

```

YYYY      YYYY
YYY      YYY
YYY      YYY
YYY  YYY
  YYYYY
   YYY
   YYY
  YYYYYY
  
```

```

SSSSSSSSS
SSSSSSSSSS
SSS      SS
SSS
SSSSSSSSS
      SSS
SS      SSS
SSSSSSSSSS
SSSSSSSSS
  
```

PRE - PROCESSOR EXECUTION

```

VERSION.MODIFICATION ... UC2E3
MODIFICATION DATE ..... 052678

DATE OF RUN ..... 062878
TIME OF RUN ..... 014922
JOB NUMBER ..... RVMH05
  
```

DATE 082878 TIME 014924 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION PAGE 1

MODEL = N/A
OPTION AND TITLE DATA BLOCKS

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

INPUT HEADER OPTIONS DATA
INPUT TITLE SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
INPUT MODEL = SAMPLE
INPUT RSO = RSTSAH5

MODEL = SAMPLE SAMPLE CASE 5 - FFCAL/RBCAL/OBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
TRASYS INFORMATION TO USER

* ATTENTION TRASYS USERS *
*

THIS SECTION OF THE TRASYS PRINTOUT WAS DEVISED TO INFORM THE TRASYS USERS OF THE STATUS OF THE TRASYS PROGRAM WITHOUT HAVING TO PRINTOUT ALL THE STATUS INFORMATION ON EVERY RUN. TO OBTAIN ADDITIONAL INFORMATION ON HOW TO USE THIS SECTION OF THE TRASYS PRINTOUT, PLACE A (INFO=INFO) IN THE OPTIONS DATA BLOCK.

FOR TRASYS ASSISTANCE AND/OR POSSIBLE TRASYS PROGRAM PROBLEMS, PLEASE CONTACT BOB VOOT AT JSC-2326.

NEHRL 08/29/77 DOCUMENTATION ADDITION

THE TRASYS -N- VERSION HAS BEEN UPDATED TO THE UC2E2 AND UL2E4 LEVEL.
SEE LATEST USERS MANUAL FOR INFORMATION ON USER-CALLED SUBROUTINE ARGUMENT CHANGES AND NEW CAPABILITIES.

END OF TRASYS INFORMATION FILE

++NOTE++ DATA ORIGINATION FROM INPUT FILE. NO -RSI- SOURCE EDITING

DATE 062878 TIME 014827 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC @ VERSION PAGE 3

MODEL = SAMPLE SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
MODEL HISTORY

MODEL NAME SAMPLE

MODEL TITLE SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

MOD	RUN	JOB	RUN	RUN	RSI	RSO	RTI	RTO	CMERG	EMERG	BCDOU	TRAJ	USER1	USER2
LABEL	NUMBER		DATA	TIME	TAPE	TAPE	TAPE	TAPE	TAPE	TAPE	TAPE	TAPE	TAPE	TAPE
AA	RVMH05		062878	014924					RSTSAH					

DATE 062878 TIME 014827 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 8 VERSION PAGE 4

MODEL = SAMPLE SOURCE DATA EDIT DIRECTIVES SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORSGEN/DRCAL/AQCAL/QOCAL

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

MODEL = SAMPLE SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 SURFACE DATA INPUT BLOCK

CARD ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD EDIT NO.	LABEL	
INPUT			HEADER SURFACE DATA																1	AA
INPUT			C																2	AA
INPUT			C-----THIS SURFACE DATA BLOCK IS USED IN SAMPLE CASES 1 THROUGH 5																3	AA
INPUT			C-----WITH VARIOUS PORTIONS OF IT BEING ACTIVATED FOR THE DIFFERENT																4	AA
INPUT			C-----CASES.																5	AA
INPUT			C																6	AA
INPUT	BCS		BOXINR																7	AA
INPUT	S		SURFN				= 1												8	AA
INPUT			TYPE				= RECT												9	AA
INPUT			ACTIVE				= BOTTOM												10	AA
INPUT			PROP				= 0.9,0.9												11	AA
INPUT			P1				= 1.0, 0.0, 1.0												12	AA
INPUT			P2				= 1.0, 0.0, 0.0												13	AA
INPUT			P3				= 1.0, 1.0, 0.0												14	AA
INPUT			COM				= * INNER RIGHT FRONT *												15	AA
INPUT	S		SURFN				= 2												16	AA
INPUT			TYPE				= RECT												17	AA
INPUT			ACTIVE				= BOTTOM												18	AA
INPUT			PROP				= 0.9,0.9												19	AA
INPUT			P1				= 1.0, 1.0, 1.0												20	AA
INPUT			P2				= 1.0, 1.0, 0.0												21	AA
INPUT			P3				= 0.0, 1.0, 0.0												22	AA
INPUT			COM				= * INNER RIGHT SIDE *												23	AA
INPUT	S		SURFN				= 3												24	AA
INPUT			TYPE				= RECT												25	AA
INPUT			ACTIVE				= TOP												26	AA
INPUT			PROP				= 0.9,0.9												27	AA
INPUT			P1				= 0.0, 0.0, 1.0												28	AA
INPUT			P2				= 0.0, 0.0, 0.0												29	AA
INPUT			P3				= 0.0, 1.0, 0.0												30	AA
INPUT			COM				= * INNER RIGHT BACK *												31	AA
INPUT	S		SURFN				= 4												32	AA
INPUT			TYPE				= RECT												33	AA
INPUT			ACTIVE				= TOP												34	AA
INPUT			PROP				= 0.9,0.9												35	AA
INPUT			P1				= 1.0, 1.0, 0.0												36	AA
INPUT			COM				= * INNER RIGHT BOTTOM *												37	AA
INPUT	BCS		BOXINL,IMGBCS=BOXINR,NINC=10,IREFSF=1000																38	AA
INPUT	C																		39	AA
INPUT			C-----THE FOREGOING CARD IMACES BCS BOXINR IN REFERENCE PLANE 1000																40	AA
INPUT			C-----TO CREATE BCS BOXINL. THE INTERIOR OF THE BOX WAS INPUT IN																41	AA
INPUT			C-----THIS MANNER TO FACILITATE THE INPUT OF SAMPLE CASE 4 TO SHOW																42	AA
INPUT			C-----THE USE OF 'MESS' AND 'ERN' NODES.																43	AA
INPUT	C																		44	AA
			IMAGING SURFACE (1)	BCS (BOXINR), GENERATING SURFACE (11)	BCS (BOXINL)							
			IMAGING SURFACE (2)	BCS (BOXINR), GENERATING SURFACE (12)	BCS (BOXINL)							
			IMAGING SURFACE (3)	BCS (BOXINR), GENERATING SURFACE (13)	BCS (BOXINL)							

MODEL = SAMPLE SURFACE DATA INPUT BLOCK SAMPLE CASE 5 - FFCAL/RBCAL/QBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

INPUT	BCS	DESCRIPTION	VALUE	LINE NO.	LABEL
		IMAGING SURFACE (4) BCS (BOXINR), GENERATING SURFACE (14) BCS (BOXINL)			
INPUT	R	REFNO	= 1000	45	AA
INPUT		P1	= 1.0, 0.0, 1.0	46	AA
INPUT		P2	= 1.0, 0.0, 0.0	47	AA
INPUT		P3	= 0.0, 0.0, 0.0	48	AA
INPUT		COM	= * IMAGING PLANE *	49	AA
INPUT	BCS	LIDINR		50	AA
INPUT	S	SURFN	= 5	51	AA
INPUT		TYPE	= RECT	52	AA
INPUT		ACTIVE	= BOTTOM	53	AA
INPUT		PROP	= 0.9,0.9	54	AA
INPUT		P1	= 1.0, 1.0, 0.0	55	AA
INPUT		COM	= * INNER RIGHT LID *	56	AA
INPUT	S	SURFN	= 15	57	AA
INPUT		IMAGSF	= 5	58	AA
INPUT		IREFSF	= 1000	59	AA
INPUT		COM	= * INNER LEFT LID *	60	AA
INPUT	BCS	BOXOUT		61	AA
INPUT	S	SURFN	= 21	62	AA
INPUT		TYPE	= BOXS	63	AA
INPUT		ACTIVE	= OUT	64	AA
INPUT		SHADE	= NO	65	AA
INPUT		PROP	= 0.2,0.9	66	AA
INPUT		P1	= 1.01,-1.01, 1.01	67	AA
INPUT		P2	= 1.01, 1.01, 1.01	68	AA
INPUT		P3	=-0.01, 1.01, 1.01	69	AA
INPUT		P4	=-0.01, 1.01,-0.01	70	AA
INPUT		COM	= * OUTER SURFACES *	71	AA
INPUT	BCS	LIDOUT		72	AA
INPUT	S	SURFN	= 26	73	AA
INPUT		TYPE	= RECT	74	AA
INPUT		ACTIVE	= TOP	75	AA
INPUT		SHADE	= NO	76	AA
INPUT		PROP	= 0.2,0.9	77	AA
INPUT		P1	= 1.01,-1.01, 0.01	78	AA
INPUT		P2	= 1.01, 1.01, 0.01	79	AA
INPUT		P3	=-0.01, 1.01, 0.01	80	AA
INPUT		COM	= * OUTER SURFACE OF LID *	81	AA
INPUT	C			82	AA
INPUT		C-----THE NEXT TWO BCSIS (MESSR AND MESSL) ARE ACTIVATED IN SAMPLE		83	AA
INPUT		C-----CASE 4 ONLY.		84	AA
INPUT	C			85	AA
INPUT	BCS	MESSR		86	AA
INPUT	S	SURFN	= 101	87	AA
INPUT		TYPE	= RECT	88	AA
INPUT		ACTIVE	= TOP	89	AA
INPUT		PROP	= 1.0,1.0	90	AA

H-377

MODEL = SAMPLE SURFACE DATA INPUT BLOCK SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/DRBCEN/DRCAL/AGCAL/QOCAL

CARD	ORGIN	1	2	3	4	5	6	7	8	9	0	EDIT NO.	OLD EDIT NO.	LABEL
INPUT		P1	=	1.0, 0.0, 1.0								91		AA
INPUT		P2	=	1.0, 0.0, 0.0								92		AA
INPUT		P3	=	0.0, 0.0, 0.0								93		AA
INPUT		COM	=	* PRIMARY MESS NODE, RIGHT SIDE *								94		AA
INPUT	BCS	MESSL										95		AA
INPUT	S	SURFN	=	111								96		AA
INPUT		TYPE	=	RECT								97		AA
INPUT		ACTIVE	=	BOTTOM								98		AA
INPUT		PROP	=	1.0, 1.0								99		AA
INPUT		P1	=	1.0, 0.0, 1.0								100		AA
INPUT		P2	=	1.0, 0.0, 0.0								101		AA
INPUT		P3	=	0.0, 0.0, 0.0								102		AA
INPUT		COM	=	* PRIMARY MESS NODE, LEFT SIDE *								103		AA
INPUT	C											104		AA
INPUT	C	-----THE FOLLOWING BCS (LIDSP) IS ACTIVATED IN SAMPLE CASE 5 ONLY.										105		AA
INPUT	C											106		AA
INPUT	BCS	LIDSP										107		AA
INPUT	S	SURFN	=	200								108		AA
INPUT		TYPE	=	RECT								109		AA
INPUT		ACTIVE	=	BOTTOM								110		AA
INPUT		PROP	=	0.1, 0.1								111		AA
INPUT		SPRI	=	0.8								112		AA
INPUT		SPRS	=	0.8								113		AA
INPUT		P1	=	1.0, -1.0, 0.0								114		AA
INPUT		P2	=	1.0, 1.0, 0.0								115		AA
INPUT		P3	=	0.0, 1.0, 0.0								116		AA
INPUT		COM	=	* SPECULAR LID *								117		AA

MODEL = SAMPLE
 BCS DATA INPUT BLOCK

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

CARD	ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD EDIT NO.	LABEL
INPUT		HEADER	BCS	DATA														118		AA
INPUT		BCS	BOXINR															119		AA
INPUT		BCS	BOXIML															120		AA
INPUT		BCS	LIDIMR	.0..0..1..0..-49..0.														121		AA
INPUT		BCS	BOXOUT															122		AA
INPUT		BCS	LIDOUT	.0..0..1..0..-45..0.														123		AA
INPUT		BCS	MESSR															124		AA
INPUT		BCS	MESSL															125		AA
INPUT		BCS	LIDSP	.0..0..1..0..-45..0.														126		AA

MODEL = SAMPLE SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 FORM FACTOR DATA INPUT BLOCK

CARD ORGIN 12345678 1 2345678 2 2345678 3 2345678 4 2345678 5 2345678 6 2345678 7 2345678 8 EDIT NO. OLD EDIT NO. LABEL

INPUT	HEADER FORM FACTOR DATA		
INPUT	C	127	AA
INPUT	C-----ENTER KNOWN ZERO FORM FACTORS AND EQUIVALENT FORM FACTORS FOR	128	AA
INPUT	C-----CASES.	129	AA
INPUT	C	130	AA
INPUT	FIG CASE1	131	AA
INPUT	NODEA 1,2,3,4,11,12,13,14,200,21,22,23,24,25,26,END	132	AA
INPUT	BOTH 21,ZERO	133	AA
INPUT	22,ZERO	134	AA
INPUT	23,ZERO	135	AA
INPUT	24,ZERO	136	AA
INPUT	25,ZERO	137	AA
INPUT	26,ZERO	138	AA
INPUT	1,1,0.	139	AA
INPUT	11,12,1,2	140	AA
INPUT	11,13,1,3	141	AA
INPUT	11,14,1,4	142	AA
INPUT	11,200,1,200	143	AA
INPUT	1,11,0.	144	AA
INPUT	11,2,1,12	145	AA
INPUT	11,3,1,13	146	AA
INPUT	11,4,1,14	147	AA
INPUT	2,2,0.	148	AA
INPUT	2,3,1,2	149	AA
INPUT	2,4,1,4	150	AA
INPUT	12,13,2,3	151	AA
INPUT	12,14,2,4	152	AA
INPUT	12,200,2,200	153	AA
INPUT	12,3,2,13	154	AA
INPUT	12,4,2,14	155	AA
INPUT	3,3,0.	156	AA
INPUT	3,4,1,4	157	AA
INPUT	13,14,3,4	158	AA
INPUT	13,200,3,200	159	AA
INPUT	3,13,0.	160	AA
INPUT	13,4,3,14	161	AA
INPUT	4,4,0.	162	AA
INPUT	14,200,4,200	163	AA
INPUT	4,14,0.	164	AA
INPUT	200,200,0.	165	AA
		166	AA

MODEL = SAMPLE CORRESPONDENCE DATA INPUT BLOCK SAMPLE CASE 5 - FFCAL/RBCAL/QBCAL/RKCAL/ORDGEN/DRCAL/QOCAL/QOCAL

CARD ORIGIN	12345670 1	2345670 2	2345670 3	2345670 4	2345670 5	2345670 6	2345670 7	2345670 8	EDIT NO.	OLD EDIT NO.	LABEL	
INPUT	HEADER CORRESPONDENCE DATA										167	AA
INPUT	C										168	AA
INPUT	C-----ENTER CORRESPONDENCE DATA FOR CASE 2										169	AA
INPUT	C										170	AA
INPUT	FIG	CASE2									171	AA
INPUT		1	=	1,11,22							172	AA
INPUT		2	=	2,25							173	AA
INPUT		3	=	3,13,24							174	AA
INPUT		4	=	4,14,21							175	AA
INPUT		5	=	5,15,26							176	AA
INPUT		12	=	12,23							177	AA
INPUT	C										178	AA
INPUT	C-----ENTER CORRESPONDENCE DATA FOR CASE 3 TO COMBINE FORM FACTORS										179	AA
INPUT	C										180	AA
INPUT	FIG	CASE3,FF									181	AA
INPUT		1	=	1,11,22							182	AA
INPUT		2	=	2,25							183	AA
INPUT		3	=	3,13,24							184	AA
INPUT		4	=	4,14,21							185	AA
INPUT		5	=	5,15,26							186	AA
INPUT		12	=	12,23							187	AA

DATE 082870 TIME 015003 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC/EXC 0 VERSION PAGE 11

MODEL = SAMPLE SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
OPERATION DATA INPUT BLOCK (PASS 1)

CARD ORIGIN	12345670	1	2345670	2	2345670	3	2345670	4	2345670	5	2345670	6	2345670	7	2345670	8	EDIT NO.	OLD EDIT NO.	LABEL
INPUT	HEADER OPERATIONS DATA																100	AA	

+++++ OPERATIONS DATA BLOCK (PASS 1) COMPLETE +++++

MODEL = SAMPLE OPERATION DATA INPUT BLOCK (PASS 2) SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBOEN/DRCAL/AQCAL/QOCAL

CARD	ORGIN	12345678	1	2345678	2	2345678	3	2345678	4	2345678	5	2345678	6	2345678	7	2345678	8	EDIT NO.	OLD EDIT NO.	LABEL
INPUT		C																180		AA
INPUT		C	----	BUILD THE CASE 5 CONFIGURATION														190		AA
INPUT		C																191		AA
PROG		STEP		-1														0		
INPUT		BUILD		CASE5,BOXINR,BOXINL,LIDSP,BOXOUT,LIDOUT														192		AA
PROG				CALL BUILD (BOXINR,6HCASE5)														0		
PROG				CALL ADD (BOXINL)														0		
PROG				CALL ADD (LIDSP)														0		
PROG				CALL ADD (BOXOUT)														0		
PROG				CALL ADD (LIDOUT)														0		
INPUT		C																193		AA
INPUT		C	----	CALCULATE THE FORM FACTOR MATRIX.														194		AA
INPUT		C																195		AA
INPUT		L		FFCAL														196		AA
INPUT		C																197		AA
INPUT		C	----	CALCULATE IMAGE FACTORS														198		AA
INPUT		C																199		AA
INPUT				CALL RBDATA(0.0,0.0,0)														200		AA
INPUT		L		RBCAL														201		AA
INPUT		C																202		AA
INPUT		C	----	CALCULATE THE GRAY BODY MATRIX USING IMAGE FACTORS.														203		AA
INPUT		C																204		AA
INPUT				CALL GBDATA(BOTH,0,RB)														205		AA
INPUT		L		GBCAL														206		AA
INPUT		C																207		AA
INPUT		C	----	CALCULATE AND PUNCH RADIATION CONDUCTORS.														208		AA
INPUT		C																209		AA
INPUT				CALL RKDATA(0.0,0.0,0,SPACE,999,0.0,0.0)														210		AA
INPUT		L		RKCAL														211		AA
INPUT		C																212		AA
INPUT		C	----	DEFINE ORBIT AND VEHICLE ORIENTATION (CIRCULAR-PLANET-ORIENTED)														213		AA
INPUT		C																214		AA
INPUT				CALL ORBIT2(EAR,0.60,0.0,0.100,*6080.,100.*6080.)														215		AA
INPUT				CALL ORIENT(4HPLAN,1,2,3,300.,270.,0.)														216		AA
INPUT		C																217		AA
INPUT		C	----	SET AQPRNT TO PRINT THE COMPONENT VALUES OF ABSORBED Q'S.														218		AA
INPUT		C																219		AA
INPUT				AQPRNT = YES														220		AA
INPUT		C																221		AA
INPUT		C	----	CALCULATE INCIDENT FLUXES PLUS SPECULAR REFLECTIONS.														222		AA
INPUT		C																223		AA
PROG		C																0		
PROG				ORBIT GENERATION STARTS HERE.														0		
INPUT		C		CORBOEN CIRP,0.,100.,2,DI														224		AA
PROG		C																0		
PROG		STEP		10000														0		
PROG				TRUEAN = .000														0		
PROG				TRUEANF = 100.000														0		
PROG				TRUEANI = .000														0		

H-383

```

PROG          IAI      = 0
PROG          IAS      = 0
PROG          PLTYPE   = SMPLSAVE
PROG          CALL DICOMP(0.0.0)
PROG          L        DICAL
PROG          NSPFF    = 10000
PROG          PLTYPE   = SMPLREAD
PROG          CALL AQDATA(IAI,IAS,0.0.0)
PROG          C        AQCAL
PROG          STEP 10001
PROG          TRUEAN   = 90.000
PROG          CALL DICOMP(0.0.10000)
PROG          L        DICAL
PROG          CALL AQDATA(IAI,IAS,0.0.0)
PROG          C        AQCAL
PROG          STEP 10002
PROG          TRUEAN   = 100.000
PROG          CALL DICOMP(0.0.10000)
PROG          L        DICAL
PROG          CALL AQDATA(IAI,IAS,0.0.0)
PROG          C        AQCAL
PROG          STEP 10003
PROG          IF(SHADIN.LT.0.)          GO TO 90400
PROG          TRUEAN   = SHADIN-0.1
PROG          IF(TRUEAN.LT.TRUANF.OR.
PROG          I TRUEAN.GT.TRUANF)      GO TO 90000
PROG          CALL DICOMP(0.4HZERO,10000)
PROG          L        DICAL
PROG          CALL AQDATA(IAI,IAS,0.0.0)
PROG          C        AQCAL
PROG          90000 CONTINUE
PROG          STEP 10004
PROG          TRUEAN   = SHADIN+0.1
PROG          IF(TRUEAN.LT.TRUANF.OR.
PROG          I TRUEAN.GT.TRUANF)      GO TO 90100
PROG          CALL DICOMP(0.0.10000)
PROG          L        DICAL
PROG          CALL AQDATA(IAI,IAS,0.0.0)
PROG          C        AQCAL
PROG          90100 CONTINUE
PROG          STEP 10005
PROG          TRUEAN   = SHAOUT+0.1
PROG          IF(TRUEAN.LT.TRUANF.OR.
PROG          I TRUEAN.GT.TRUANF)      GO TO 90200
PROG          CALL DICOMP(0.4HZERO,10000)
PROG          L        DICAL
PROG          CALL AQDATA(IAI,IAS,0.0.0)
PROG          C        AQCAL
PROG          90200 CONTINUE
PROG          STEP 10006
PROG          TRUEAN   = SHAOUT-0.1
PROG          IF(TRUEAN.LT.TRUANF.OR.
PROG          I TRUEAN.GT.TRUANF)      GO TO 90300
PROG          CALL DICOMP(0.0.10000)
PROG          L        DICAL
PROG          CALL AQDATA(IAI,IAS,0.0.0)
PROG          C        AQCAL

```

PROG	90300	CONTINUE	•	0	
PROG	90400	CONTINUE	•	0	
PROG	C		•	0	
PROG	C	***** ORBIT GENERATION ENDS HERE *****	•	0	
PROG	C		•	0	
INPUT	STEP	10010		225	AA
INPUT		CALL DRDATA(10000.0)		226	AA
INPUT	L	DRCAL		227	AA
INPUT		CALL AQDATA(0.0.0.0.0)		228	AA
INPUT	L	AQCAL		229	AA
INPUT	C			230	AA
INPUT	STEP	10011		231	AA
INPUT		CALL DRDATA(10001.0)		232	AA
INPUT	L	DRCAL		233	AA
INPUT		CALL AQDATA(0.0.0.0.0)		234	AA
INPUT	L	AQCAL		235	AA
INPUT	C			236	AA
INPUT	STEP	10012		237	AA
INPUT		CALL DRDATA(10002.0)		238	AA
INPUT	L	DRCAL		239	AA
INPUT		CALL AQDATA(0.0.0.0.0)		240	AA
INPUT	L	AQCAL		241	AA
INPUT	C			242	AA
INPUT	STEP	10013		243	AA
INPUT		CALL DRDATA(10003.0)		244	AA
INPUT	L	DRCAL		245	AA
INPUT		CALL AQDATA(0.0.0.0.0)		246	AA
INPUT	L	AQCAL		247	AA
INPUT	C			248	AA
INPUT	STEP	10014		249	AA
INPUT		CALL DRDATA(10004.0)		250	AA
INPUT	L	DRCAL		251	AA
INPUT		CALL AQDATA(0.0.0.0.0)		252	AA
INPUT	L	AQCAL		253	AA
INPUT	C			254	AA
INPUT		CALL QODATA(3HALL,0.0.0.0.0.0.0)		255	AA
INPUT	L	QOCAL		256	AA
INPUT		END OF DATA		257	AA

MODEL = SAMPLE SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBOEN/DRCAL/AQCAL/QOCAL
 PROCESSOR CORE ALLOCATION

THE FOLLOWING IS THE PROCESSOR CORE ALLOCATION FOR THOSE SEGMENTS WHICH WILL BE LOADED IN THIS EXECUTION (APPROX.) ...

OCTAL/DECIMAL

TRASYS (0) SEGMENT	121220/	41618		
OPERATIONS DATA (NOT KNOWN AT THIS TIME).....	175000/	64000		
INITIALIZATION SEGMENT	122300/	42176		
FORM FACTOR SEGMENT	138100/	48192		
DIRECT FLUX SEGMENT	150500/	53568		
GRAY BODY SEGMENT	124000/	43008		
ABSORBED Q-S SEGMENT	122500/	42304		
-QO- SEGMENT	130600/	45440		
REAL BODY SEGMENT	142600/	50560		
RADIATION CONDUCTOR SEGMENT	125300/	43840		
DIRECT FLUX REAL BODY SEGMENT	126000/	44032		
GRAY BODY DYNAMIC COMMON	000276/	180		
-QO- DYNAMIC COMMON	003554/	1900		
RADIATION CONDUCTOR DYNAMIC COMMON	000574/	380		
GRAY BODY MINIMUM - MAXIMUM CORE	123573/	42875	-	123723/ 42983
-QO- MINIMUM - MAXIMUM CORE	125147/	43623	-	130557/ 45423
RADIATION CONDUCTOR MINIMUM - MAXIMUM CORE	125228/	43870	-	125472/ 43834
MINIMUM CORE NEEDED FOR PROCESSOR EXECUTION	150500/	53568		
MAXIMUM CORE NEEDED FOR PROCESSOR EXECUTION	150500/	53568		
AMOUNT OF CORE THAT WILL BE USED BY PROCESSOR .	150500/	53568		

MODEL = SAMPLE
WRAP UP OF THE PRE-PROCESSOR

SAMPLE CASE 3 - FFCAL/RBCAL/QBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QCAL

PRE-PROCESSOR ACCOUNTING INFORMATION	CP-SEC	DYN-STORAGE
SOURCE EDITING	1.900	676
DOCUMENTATION DATA PRE-PROCESSING000	0
QUANTITIES DATA PRE-PROCESSING034	268
ARRAY DATA PRE-PROCESSING000	0
SURFACE DATA PRE-PROCESSING (PASS 1) ...	1.832	84
SURFACE DATA PRE-PROCESSING (PASS 2)579	1141
BCS DATA PRE-PROCESSING210	188
FORM FACTOR DATA PRE-PROCESSING665	1038
SHADOW DATA PRE-PROCESSING000	0
FLUX DATA PRE-PROCESSING000	0
CORRESPONDENCE DATA PRE-PROCESSING252	101
OPERATIONS DATA PRE-PROCESSING	4.177	884
SUBROUTINE DATA PRE-PROCESSING302	0
SEQUENTIAL TAPE INITIALIZATION025	0

TOTAL CP TIME FOR PRE-PROCESSOR 10.655 DECIMAL SECONDS OR 000013 OCTAL SECONDS

MINIMUM DYNAMIC STORAGE NEEDED BY PRE-PROCESSOR .. 1141 DECIMAL WORDS

DYNAMIC STORAGE AVAILABLE TO PRE-PROCESSOR 10000 DECIMAL WORDS

NORMAL TERMINATION BY PRE-PROCESSOR

@PHD,BLEP

@ASO,T/S R50.,8C,R50,92,R50 APPENDIX H, CASE 5.

@TEST TNE/1/S3

@JUMP L3
INTERVENING STATEMENTS SKIPPED

@L3:FREE DATA.

@FREE 14

H-387

NASA/HARTIN HARIETTA
THERMAL RADIATION ANALYSIS SYSTEM
UNIVAC 1110/EXEC 8

```
TTTTTTTTTTTT
TTTTTTTTTTTT
TT  TTT  TT
   TTT
   TTT
   TTT
   TTT
   TTT
TTTTTTT
```

```
RRRRRRRRR
RRRRRRRRR
RRR  RRR
RRR  RRR
RRRRRRRRR
RRR  RRR
RRR  RRR
RRR  RRR
RRR  RRR
RRR  RRR
```

```
AAAAAA
AAAAAAAAA
AAAAAAAAA
AAA  AAA
AAA  AAA
AAAAAAAAA
AAA  AAA
AAA  AAA
AAA  AAA
AAAA  AAAA
```

```
SSSSSSSSS
SSSSSSSSSSS
SSS  SS
SSS
SSSSSSSSS
   SSS
SS  SSS
SSSSSSSSSSS
SSSSSSSSS
```

```
YYYY  YYYY
YYY  YYY
YYY  YYY
YYY YYY
YYYYY
YYY
YYY
YYY
YYYYYYY
```

```
SSSSSSSSS
SSSSSSSSSSS
SSS  SS
SSS
SSSSSSSSS
   SSS
SS  SSS
SSSSSSSSSSS
SSSSSSSSS
```

PROCESSOR EXECUTION

```
VERSION/MODIFICATION ... UL2E6
MODIFICATION DATE ..... 061978

DATE OF RUN ..... 062878
TIME OF RUN ..... 022222
JOB NUMBER ..... RVMH05
```

MODEL=SAMPLE CONFIG=CASE5 STEP=-1
 PROCESSING OPERATIONS DATA

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORDGEN/DRCAL/QCCAL/QOCAL

SEQUENCE	NODE	BCS	AREA	ALPH	ENISS	SURF. TYPE	ACTIVE	-----COMMENTS-----
1	1	BOXINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT FRONT
2	2	BOXINR	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT SIDE
3	3	BOXINR	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BACK
4	4	BOXINR	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BOTTOM
5	11	BOXINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT FRONT
6	12	BOXINL	1.00000	.900	.900	RECTANGLE	BOTTOM	INNER RIGHT SIDE
7	13	BOXINL	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BACK
8	14	BOXINL	1.00000	.900	.900	RECTANGLE	TOP	INNER RIGHT BOTTOM
9	200	LIDSP	2.00000	.100	.100	RECTANGLE	BOTTOM	SPECULAR LID
10	21	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
11	22	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
12	23	BOXOUT	1.04040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
13	24	BOXOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
14	25	BOXOUT	1.04040	.200	.900	RECTANGLE	TOP	OUTER SURFACES
15	26	LIDOUT	2.06040	.200	.900	RECTANGLE	TOP	OUTER SURFACE OF LID

NODE, AREA, AND PROPERTIES ARRAYS HAVE BEEN WRITTEN ON THE -RSO- TAPE
 BY -BUILDG- (ACCESS NUMBER = 1)

DATE 062070 TIME 022233

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 2

MODEL= SAMPLE CONFIG=CASE3 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RXCAL/ORBSGN/DRCAL/AQCAL/QOCAL

FORM FACTORS AND COMBINED FORM FACTORS - USER INPUT AND DEFAULT PARAMETERS

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
FFACC	.0500	.0500	ORIENTATION ACCURACY PARAMETER	N/A
FFACCS	.1000	.1000	SHADOWING ACCURACY PARAMETER	N/A
FFMIN	.1-05	1.0E-06	PARAMETER TO ELIMINATE SMALL FORM FACTORS	N/A
FFNOSH	SHAD	SHAD	OVER RIDE SHADOWING PARAMETER	(SHAD,NOSH)
*FFPNCH	NO	NO	PARAMETER TO PUNCH FORM FACTORS	(YES,NO)
FFPRNT	YES	YES	FLAG FOR COMPREHENSIVE FF AND CH PRINT	(YES,NO,FF,CH,RB)
FFRATL	15.0	15.0	RATIO FOR USING SUB-NODE TECHNIQUE	N/A
FFCMB	CORR	CORR	FLAG FOR COMBINING FORM FACTORS	(YES,NO,AUTO,CORR)

* -FFPNCH WILL DEFAULT TO -YES- ON CALCULATED VALUES IF THE -RSO- FILE IS NOT SPECIFIED IN THE OPTIONS DATA BLOCK

DATE 062978 TIME 022234

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 3

MODEL=SAMPLE CONFIG=CASE5 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

SEQUENCE	NODE	AREA	ALPH	ENISS
1	1	1.00000	.900	.900
2	2	1.00000	.900	.900
3	3	1.00000	.900	.900
4	4	1.00000	.900	.900
5	11	1.00000	.900	.900
6	12	1.00000	.900	.900
7	13	1.00000	.900	.900
8	14	1.00000	.900	.900
9	200	2.00000	.100	.100
10	21	2.06040	.200	.900
11	22	2.06040	.200	.900
12	23	1.04040	.200	.900
13	24	2.06040	.200	.900
14	25	1.04040	.200	.900
15	26	2.06040	.200	.900

NUMBER OF NODES = 15 NUMBER OF SURFACES = 9

MODEL=SAMPLE CONFIG=CASE3 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 3 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

(C - INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R - INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
(UN - INDICATES UNKNOWN CALCULATION NODE BECAUSE OF RSI, RTI, OR CARD INPUT)
(9.999999 - INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) M/SHAD	FIR(J,I) M/SHAD	FSOL(I,J) M/SHAD	FSOL(J,I) M/SHAD	FF(I,J) M/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ	
1	2	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	22.033	1108	1108	*
1	3	CAL	.201522	.201522	.201522	.201522	.201522	1.000000	1.000000	.534	36	36	
1	4	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	22.051	1108	1108	*
1	12	CAL	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.300	36	36	
1	13	CAL	.086058	.086058	.086058	.086058	.086058	1.000000	1.000000	.367	36	36	
1	14	CAL	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	21.722	1024	1024	*
1	200	CAL	.193994	.096997	.193994	.096997	.193994	1.000000	1.000000	.407	36	32	
1	FF SUM = .9698		ROW CP TIME = 68.579										
	FORM FACTOR RESTART (RSO) RECORD = 21												
2	3	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	21.730	1108	1108	*
2	4	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	21.476	1108	1108	*
2	11	CAL	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.302	36	36	
2	12	CAL	.068832	.068832	.068832	.068832	.068832	1.000000	1.000000	.366	36	36	
2	13	CAL	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.286	36	36	
2	14	CAL	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.298	36	36	
2	200	CAL	.132107	.066054	.132107	.066054	.132107	1.000000	1.000000	10.647	657	642	*
2	FF SUM = .9218		ROW CP TIME = 56.148										
	FORM FACTOR RESTART (RSO) RECORD = 22												
3	4	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	21.903	1108	1108	*
3	11	CAL	.086058	.086058	.086058	.086058	.086058	1.000000	1.000000	.362	36	36	
3	12	CAL	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.289	36	36	
3	14	CAL	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	20.978	1024	1024	*
3	200	CAL	.060738	.030369	.060738	.030369	.060738	1.000000	1.000000	10.654	650	640	*
3	FF SUM = .8365		ROW CP TIME = 55.291										
	FORM FACTOR RESTART (RSO) RECORD = 23												
4	11	CAL	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	20.992	1024	1024	*

MODEL=SAKPLE CONFIO=CASES STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/OBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
(UN-INDICATES UNKNOWN CALCULATION MODE BECAUSE OF RSI, RTI, OR CARD INPUT)
(9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) M/SHAD	FIR(J,I) M/SHAD	FSOL(I,J) M/SHAD	FSOL(J,I) M/SHAD	FF(I,J) M/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
4	12	CAL	.032922	.032922	.032922	.032922	.032922	1.000000	1.000000	.282	36	36
4	13	CAL	.040501	.040501	.040501	.040501	.040501	1.000000	1.000000	21.150	1024	1024
4	200	CAL	.164809	.082404	.164809	.082404	.164809	1.000000	1.000000	.392	36	32
4	FF SUM = .9009		ROW CP TIME = 43.989									
	FORM FACTOR RESTART (RSO) RECORD = 24											
11	12	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	17.885	1108	1108
11	13	CAL	.201522	.201522	.201522	.201522	.201522	1.000000	1.000000	.427	36	36
11	14	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	16.517	1108	1108
11	200	CAL	.193994	.096997	.193994	.096997	.193994	1.000000	1.000000	.343	36	32
11	FF SUM = .9698		ROW CP TIME = 35.989									
	FORM FACTOR RESTART (RSO) RECORD = 25											
12	13	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	16.572	1108	1108
12	14	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	16.400	1108	1108
12	200	CAL	.132107	.066054	.132107	.066054	.132107	1.000000	1.000000	7.993	657	642
12	FF SUM = .9218		ROW CP TIME = 41.774									
	FORM FACTOR RESTART (RSO) RECORD = 26											
13	14	CAL	.207379	.207379	.207379	.207379	.207379	1.000000	1.000000	16.951	1108	1108
13	200	CAL	.060738	.030369	.060738	.030369	.060738	1.000000	1.000000	8.294	650	640
13	FF SUM = .8365		ROW CP TIME = 26.056									
	FORM FACTOR RESTART (RSO) RECORD = 27											
14	200	CAL	.164809	.082404	.164809	.082404	.164809	1.000000	1.000000	.324	36	32

MODEL=SAHLE CONFIG=CASE5 STEP=-1 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUES OF RSI, RTI, OR CARD INPUT)
 (9.999999 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) W/SHAD	FIR(J,I) W/SHAD	FSOL(I,J) W/SHAD	FSOL(J,I) W/SHAD	FF(I,J) W/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
14		FF SUM = .9009 FORM FACTOR RESTART								ROW CP TIME = 1.115 (RSO) RECORD = 28		
200		FF SUM = .5518 FORM FACTOR RESTART								ROW CP TIME = .654 (RSO) RECORD = 29		
21		FF SUM = .0000 FORM FACTOR RESTART								ROW CP TIME = .502 (RSO) RECORD = 30		
22		FF SUM = .0000 FORM FACTOR RESTART								ROW CP TIME = .388 (RSO) RECORD = 31		
23		FF SUM = .0000 FORM FACTOR RESTART								ROW CP TIME = .334 (RSO) RECORD = 32		
24		FF SUM = .0000 FORM FACTOR RESTART								ROW CP TIME = .201 (RSO) RECORD = 33		

MODEL=SAMPLE CONFIG=CASE5 STEP=-1 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEM/DRCAL/AQCAL/QOCAL
 FORM FACTOR CALCULATION LINK.

(* -INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R -INDICATES FF CALCULATED FROM NODE J TO NODE I BECAUSE NODE J HAS SMALLEST AREA)
 (UN-INDICATES UNKNOWN CALCULATION MODE BECAUSE OF RSI, RTI, OR CARD INPUT)
 (0.000000 -INDICATES UNKNOWN DATA VALUE BECAUSE OF INSUFFICIENT CARD INPUT)

NODE I	NODE J	COMPUTATION	FIR(I,J) W/SHAD	FIR(J,I) W/SHAD	FSOL(I,J) W/SHAD	FSOL(J,I) W/SHAD	FF(I,J) W/SHAD	SHAD.IR FACTOR	SHAD.SOL FACTOR	CP TIME (SEC)	NEI	NEJ
25		FF SUM = .0000										
		FORM FACTOR RESTART										
			ROW CP TIME =									
28		FF SUM = .0000										
		FORM FACTOR RESTART										
			ROW CP TIME =									

.....

FF FORM FACTORS FOR CONFIGURATION CASE5 HAVE BEEN STORED ON RSO.
 LAST RESTART RECORD WRITTEN = 35

.....

DATE 062870 TIME 023105 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION PAGE 0

MODEL=SAMPLE CONFIG=CASE5 STEP=-1
FORM FACTOR CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RSCAL/0BCAL/RBCAL/0R0GEN/0RCAL/AQCAL/QOCAL

SUMMARY OF FORM FACTOR SUMS FOR ALL NODES

NODE I- FF SUM	NODE I- FF SUM	NODE I- FF SUM	NODE I- FF SUM	NODE I- FF SUM	NODE I- FF SUM
1- .9698	2- .9218	3- .8365	4- .9009	11- .9698	12- .9218
13- .8365	14- .9009	200- .5516	21- .0000	22- .0000	23- .0000
24- .0000	25- .0000	26- .0000			

TOTAL TIME FOR FORM FACTOR SEGMENT 331.794

TOTAL TIME SINCE START OF RUN 395.910

DATE 062070 TIME 023106

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC @ VERSION PAGE 9

MODEL=SAMPLE CONFIG=CASE5 STEP=-1
IMAGE FACTOR CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

NODE	AREA	ALPH	EMISS	SPECULAR REFL(SOL)	SPECULAR REFL(IR)
1	1.00000	.900+00	.900+00	.000	.000
2	1.00000	.900+00	.900+00	.000	.000
3	1.00000	.900+00	.900+00	.000	.000
4	1.00000	.900+00	.900+00	.000	.000
11	1.00000	.900+00	.900+00	.000	.000
12	1.00000	.900+00	.900+00	.000	.000
13	1.00000	.900+00	.900+00	.000	.000
14	1.00000	.900+00	.900+00	.000	.000
200	2.00000	.100+00	.100+00	.800+00	.800+00
21	2.06040	.200+00	.900+00	.000	.000
22	2.06040	.200+00	.900+00	.000	.000
23	1.04040	.200+00	.900+00	.000	.000
24	2.06040	.200+00	.900+00	.000	.000
25	1.04040	.200+00	.900+00	.000	.000
26	2.06040	.200+00	.900+00	.000	.000

NUMBER OF NODES = 15 NUMBER OF SURFACES = 9

MODEL=SAMPLE CONFIG=CASE5 STEP=-1
IMAGE FACTOR CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/QBCAL/RKCAL/ORDBGEN/DRCAL/AQCAL/QOCAL

(0 INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R INDICATES FF CALCULATED FROM J TO I)

NODE I	NODE J	COMPUTATION	IFE(I,J) W/SHAD	IFE(J,I) W/SHAD	IFA(I,J) W/SHAD	CP TIME (SEC)
1	1	CAL.	.053297	.053297	.053297	.166
1	2	CAL.	.221283	.221283	.221283	.292
1	3	CAL.	.201522	.201522	.201522	.366
1	4	CAL.	.217091	.217091	.217091	.472
1	11	CAL.	.037057	.037057	.037057	.617
1	12	CAL.	.049448	.049448	.049448	.737
1	13	CAL.	.086058	.086058	.086058	.805
1	14	CAL.	.047559	.047559	.047559	.929
1	200	CAL.	.193994	.096997	.193994	.937
1	ROW CP TIME = .988 - RECT INNER RIGHT FRONT					
1	ROW RESTART RECORD = 37. HAS BEEN WRITTEN TO THE RSO FILE					
1	ROW CP TIME = 1.007 + RECT INNER RIGHT FRONT					
1	ROW RESTART RECORD = 38. HAS BEEN WRITTEN TO THE RSO FILE					
2	3	CAL.	.207379	.207379	.207379	.131
2	4	CAL.	.208765	.208765	.208765	.243
2	11	CAL.	.049448	.049448	.049448	.373
2	12	CAL.	.077642	.077642	.077642	.481
2	13	CAL.	.032922	.032922	.032922	.557
2	14	CAL.	.034983	.034983	.034983	.651
2	200	CAL.	.132107	.066054	.132107	.659
2	ROW CP TIME = .711 - RECT INNER RIGHT SIDE					
2	ROW RESTART RECORD = 38. HAS BEEN WRITTEN TO THE RSO FILE					
2	ROW CP TIME = .734 + RECT INNER RIGHT SIDE					
2	ROW RESTART RECORD = 39. HAS BEEN WRITTEN TO THE RSO FILE					
3	4	CAL.	.207379	.207379	.207379	.106
3	11	CAL.	.086058	.086058	.086058	.171
3	12	CAL.	.032922	.032922	.032922	.217
3	14	CAL.	.040501	.040501	.040501	.309
3	200	CAL.	.060738	.030369	.060738	.317
3	ROW CP TIME = .364 + RECT INNER RIGHT BACK					
3	ROW RESTART RECORD = 39. HAS BEEN WRITTEN TO THE RSO FILE					
3	ROW CP TIME = .383 + RECT INNER RIGHT BACK					
3	ROW RESTART RECORD = 40. HAS BEEN WRITTEN TO THE RSO FILE					

MODEL=SAMPLE CONFIG=CASE3 STEP=-1 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 IMAGE FACTOR CALCULATION LINK.

(* INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
 (R INDICATES FF CALCULATED FROM J TO I)

NODE I	NODE J	COMPUTATION	IFE(I,J) M/SHAD	IFE(J,I) M/SHAD	IFA(I,J) W/SHAD	CP TIME (SEC)
4	11	CAL.	.047559	.047559	.047559	.204
4	12	CAL.	.034983	.034983	.034983	.328
4	13	CAL.	.040501	.040501	.040501	.394
4	200	CAL.	.164809	.082404	.164809	.498
4		ROW CP TIME =	.546	+	RECT	INNER RIGHT BOTTOM
4		ROW RESTART RECORD =	40.			HAS BEEN WRITTEN TO THE RSO FILE
4		ROW CP TIME =	.563	+	RECT	INNER RIGHT BOTTOM
4		ROW RESTART RECORD =	41.			HAS BEEN WRITTEN TO THE RSO FILE
11	11	CAL.	.053297	.053297	.053297	.137
11	12	CAL.	.221283	.221283	.221283	.254
11	13	CAL.	.201522	.201522	.201522	.323
11	14	CAL.	.217091	.217091	.217091	.441
11	200	CAL.	.193994	.096997	.193994	.448
11		ROW CP TIME =	.482	-	RECT	INNER RIGHT FRONT
11		ROW RESTART RECORD =	41.			HAS BEEN WRITTEN TO THE RSO FILE
11		ROW CP TIME =	.499	+	RECT	INNER RIGHT FRONT
11		ROW RESTART RECORD =	42.			HAS BEEN WRITTEN TO THE RSO FILE
12	13	CAL.	.207379	.207379	.207379	.137
12	14	CAL.	.208765	.208765	.208765	.247
12	200	CAL.	.132107	.066054	.132107	.259
12		ROW CP TIME =	.310	-	RECT	INNER RIGHT SIDE
12		ROW RESTART RECORD =	42.			HAS BEEN WRITTEN TO THE RSO FILE
12		ROW CP TIME =	.331	+	RECT	INNER RIGHT SIDE
12		ROW RESTART RECORD =	43.			HAS BEEN WRITTEN TO THE RSO FILE
13	14	CAL.	.207379	.207379	.207379	.101
13	200	CAL.	.060738	.030369	.060738	.109
13		ROW CP TIME =	.160	+	RECT	INNER RIGHT BACK
13		ROW RESTART RECORD =	43.			HAS BEEN WRITTEN TO THE RSO FILE

MODEL=SAMPLE CONFIG=CASE5 STEP=-1
IMAGE FACTOR CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEM/DRCAL/AQCAL/QOCAL

(* INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R INDICATES FF CALCULATED FROM J TO I)

NODE I	NODE J	COMPUTATION	IFE(I,J) W/SHAD	IFE(J,I) W/SHAD	IFA(I,J) W/SHAD	CP TIME (SEC)
13		ROW CP TIME =	.198	+	RECT	INNER RIGHT BACK
13		ROW RESTART RECORD =	44.			HAS BEEN WRITTEN TO THE RSO FILE
14	200	CAL.	.164809	.082404	.164809	.119
14		ROW CP TIME =	.170	+	RECT	INNER RIGHT BOTTOM
14		ROW RESTART RECORD =	44.			HAS BEEN WRITTEN TO THE RSO FILE
14		ROW CP TIME =	.188	+	RECT	INNER RIGHT BOTTOM
14		ROW RESTART RECORD =	45.			HAS BEEN WRITTEN TO THE RSO FILE
200		ROW CP TIME =	.067	-	RECT	SPECULAR LID
200		ROW RESTART RECORD =	45.			HAS BEEN WRITTEN TO THE RSO FILE
200		ROW CP TIME =	.087	+	RECT	SPECULAR LID
200		ROW RESTART RECORD =	46.			HAS BEEN WRITTEN TO THE RSO FILE
21		ROW CP TIME =	.054	+	RECT	OUTER SURFACES
21		ROW RESTART RECORD =	46.			HAS BEEN WRITTEN TO THE RSO FILE
21		ROW CP TIME =	.076	+	RECT	OUTER SURFACES
21		ROW RESTART RECORD =	47.			HAS BEEN WRITTEN TO THE RSO FILE
22		ROW CP TIME =	.054	+	RECT	OUTER SURFACES
22		ROW RESTART RECORD =	47.			HAS BEEN WRITTEN TO THE RSO FILE
22		ROW CP TIME =	.071	+	RECT	OUTER SURFACES
22		ROW RESTART RECORD =	48.			HAS BEEN WRITTEN TO THE RSO FILE

MODEL=SAMPLE CONFIG=CASE5 STEP=1
IMAGE FACTOR CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

(+ INDICATES NODE PAIR HAS BEEN SUBDIVIDED)
(R INDICATES FF CALCULATED FROM J TO I)

NODE I	NODE J	COMPUTATION	IFE(I,J) W/SHAD	IFE(J,I) W/SHAD	IFA(I,J) W/SHAD	CP TIME (SEC)
23		ROW CP TIME =	.088		RECT	OUTER SURFACES
23		ROW RESTART RECORD =	48.			HAS BEEN WRITTEN TO THE RSO FILE
23		ROW CP TIME =	.088		RECT	OUTER SURFACES
23		ROW RESTART RECORD =	49.			HAS BEEN WRITTEN TO THE RSO FILE
24		ROW CP TIME =	.021		RECT	OUTER SURFACES
24		ROW RESTART RECORD =	49.			HAS BEEN WRITTEN TO THE RSO FILE
24		ROW CP TIME =	.038		RECT	OUTER SURFACES
24		ROW RESTART RECORD =	50.			HAS BEEN WRITTEN TO THE RSO FILE
25		ROW CP TIME =	.023		RECT	OUTER SURFACES
25		ROW RESTART RECORD =	50.			HAS BEEN WRITTEN TO THE RSO FILE
25		ROW CP TIME =	.042		RECT	OUTER SURFACES
25		ROW RESTART RECORD =	51.			HAS BEEN WRITTEN TO THE RSO FILE
26		ROW CP TIME =	.013		RECT	OUTER SURFACE OF LID
26		ROW RESTART RECORD =	51.			HAS BEEN WRITTEN TO THE RSO FILE
26		ROW CP TIME =	.037		RECT	OUTER SURFACE OF LID
26		ROW RESTART RECORD =	52.			HAS BEEN WRITTEN TO THE RSO FILE

TOTAL CP TIME (SEC) FOR PROBLEM = 4.712

MODEL=SAMPLE CONFIG=CASE5 STEP=-1 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 GRAY BODIES COMPUTATION LINK.

VARIABLE NAME	CURRENT VALUE	DEFAULT	GREY BODIES DEFINITION	OPTIONS
GBWBND	BOTH	BOTH	WAVEBAND DEFINITION PARAMETER	(2HIR,3HSOL,4HBOTH)

.....

IR GRAY BODIES FOR CONFIGURATION CASE5 HAVE BEEN COMPUTED AND STORED ON RSO.
 LAST RESTART RECORD WRITTEN = 69

.....

.....

SOL GRAY BODIES FOR CONFIGURATION CASE5 HAVE BEEN COMPUTED AND STORED ON RSO.
 LAST RESTART RECORD WRITTEN = 88

.....

TOTAL TIME TO COMPUTE GRAY BODIES .83

MODEL=SAMPLE CONFIG=CASE5 STEP=-1
 RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
RKPRCH	PUN	NO	PUNCH/NO PUNCH PARAMETER FOR RADKS	(YES,NO)
RKHIN	.0001	0.0001	PARAMETER TO ELIMINATE SMALL RADK S	N/A
IRKCN	1	1	INITIAL RADIATION CONDUCTOR ID NUMBER	N/A
RKSP	SPACE	NO	MNEMONIC FLAG FOR COMPUTATION OF RADKS TO SPACE	(SPACE,NO)
IRKNSP	999	32767	SPACE NODE ID NUMBER	N/A
SIGMA	.17-08	1.713E-9	STEFAN-BOLTZMANN CONSTANT	N/A
RKAMPF	1.00	1.0	AREA MULTIPLYING FACTOR	N/A
RKTAPE	NO	NO	PARAMETER TO OUTPUT TO BCD TAPE	(TAPE,NO)
RFRAC	.7+00	0.7	SIGNIFICANT RADIATION FRACTION	(0. TO 1.)
RTOL	.990	0.99	DECIMAL FRACTION OF LAST RADK SAVED	N/A
NERN	0	0	EFFECTIVE RADIATION NODE (ERN) NUMBER	N/A

DATE 062078 TIME 023133

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 18

MODEL=SAMPLE CONFIG=CASE5 STEP=1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

SPECIAL RADIATION NODES

NONE

MESS SPECIAL NODES

PRIMARY SECONDARY

NONE

MODEL=SAMPLE CONFIG=CASE5 STEP=-1
 RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

RADIATION CONDUCTOR (RADKS) CARDS

AREA UNITS = INPUT UNITS * ANPF, WHERE ANPF = 1.0000

PUNCHED AND/OR BCDOU RADKS -	-	1.	1.	2.	.32562-09\$
PUNCHED AND/OR BCDOU RADKS -	-	2.	1.	3.	.29703-09\$
PUNCHED AND/OR BCDOU RADKS -	-	3.	1.	4.	.31982-09\$
PUNCHED AND/OR BCDOU RADKS -	-	4.	1.	11.	.66666-10\$
PUNCHED AND/OR BCDOU RADKS -	-	5.	1.	12.	.81362-10\$
PUNCHED AND/OR BCDOU RADKS -	-	6.	1.	13.	.12813-09\$
PUNCHED AND/OR BCDOU RADKS -	-	7.	1.	14.	.76972-10\$
PUNCHED AND/OR BCDOU RADKS -	-	8.	1.	200.	.31877-10\$
PUNCHED AND/OR BCDOU RADKS -	-	9.	2.	3.	.30306-09\$
PUNCHED AND/OR BCDOU RADKS -	-	10.	2.	4.	.30618-09\$
PUNCHED AND/OR BCDOU RADKS -	-	11.	2.	11.	.81362-10\$
PUNCHED AND/OR BCDOU RADKS -	-	12.	2.	12.	.11709-09\$
PUNCHED AND/OR BCDOU RADKS -	-	13.	2.	13.	.55689-10\$
PUNCHED AND/OR BCDOU RADKS -	-	14.	2.	14.	.58420-10\$
PUNCHED AND/OR BCDOU RADKS -	-	15.	2.	200.	.22359-10\$
PUNCHED AND/OR BCDOU RADKS -	-	16.	3.	4.	.30264-09\$
PUNCHED AND/OR BCDOU RADKS -	-	17.	3.	11.	.12813-09\$
PUNCHED AND/OR BCDOU RADKS -	-	18.	3.	12.	.55689-10\$
PUNCHED AND/OR BCDOU RADKS -	-	19.	3.	13.	.10153-10\$
PUNCHED AND/OR BCDOU RADKS -	-	20.	3.	14.	.63760-10\$
PUNCHED AND/OR BCDOU RADKS -	-	21.	3.	200.	.11499-10\$
PUNCHED AND/OR BCDOU RADKS -	-	22.	4.	11.	.76972-10\$
PUNCHED AND/OR BCDOU RADKS -	-	23.	4.	12.	.58420-10\$
PUNCHED AND/OR BCDOU RADKS -	-	24.	4.	13.	.63760-10\$
PUNCHED AND/OR BCDOU RADKS -	-	25.	4.	14.	.10041-10\$
PUNCHED AND/OR BCDOU RADKS -	-	26.	4.	200.	.27106-10\$
PUNCHED AND/OR BCDOU RADKS -	-	27.	11.	12.	.32562-09\$
PUNCHED AND/OR BCDOU RADKS -	-	28.	11.	13.	.29703-09\$
PUNCHED AND/OR BCDOU RADKS -	-	29.	11.	14.	.31982-09\$
PUNCHED AND/OR BCDOU RADKS -	-	30.	11.	200.	.31877-10\$
PUNCHED AND/OR BCDOU RADKS -	-	31.	12.	13.	.30306-09\$
PUNCHED AND/OR BCDOU RADKS -	-	32.	12.	14.	.30618-09\$
PUNCHED AND/OR BCDOU RADKS -	-	33.	12.	200.	.22359-10\$
PUNCHED AND/OR BCDOU RADKS -	-	34.	13.	14.	.30264-09\$
PUNCHED AND/OR BCDOU RADKS -	-	35.	13.	200.	.11499-10\$
PUNCHED AND/OR BCDOU RADKS -	-	36.	14.	200.	.27106-10\$
PUNCHED AND/OR BCDOU RADKS -	-	37.	1.	999.	.11470-09\$
PUNCHED AND/OR BCDOU RADKS -	-	38.	2.	999.	.24900-09\$
PUNCHED AND/OR BCDOU RADKS -	-	39.	3.	999.	.34933-09\$
PUNCHED AND/OR BCDOU RADKS -	-	40.	4.	999.	.35431-09\$

DATE 062078 TIME 023134

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS), UNIVAC EXEC D VERSION PAGE 10

MODEL=SAMPLE CONFIG=CASE5 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

RADIATION CONDUCTOR (RADK) CARDS

AREA UNITS = INPUT UNITS * AMPF, WHERE AMPF = 1.00000

PUNCHED AND/OR BCDOU RADKS -	-	41,	11,	999.	.11470-09\$
PUNCHED AND/OR BCDOU RADKS -	-	42,	12,	999.	.24900-09\$
PUNCHED AND/OR BCDOU RADKS -	-	43,	13,	999.	.34933-09\$
PUNCHED AND/OR BCDOU RADKS -	-	44,	14,	999.	.35431-09\$
PUNCHED AND/OR BCDOU RADKS -	-	45,	200,	999.	.15660-09\$
PUNCHED AND/OR BCDOU RADKS -	-	46,	21,	999.	.31765-08\$
PUNCHED AND/OR BCDOU RADKS -	-	47,	22,	999.	.31765-08\$
PUNCHED AND/OR BCDOU RADKS -	-	48,	23,	999.	.16040-08\$
PUNCHED AND/OR BCDOU RADKS -	-	49,	24,	999.	.31785-08\$
PUNCHED AND/OR BCDOU RADKS -	-	50,	25,	999.	.16040-08\$
PUNCHED AND/OR BCDOU RADKS -	-	51,	26,	999.	.31765-08\$

DATE 062878 TIME 023135

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC @ VERSION PAGE 19

MODEL=SAMPLE CONFIG=CASE5 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/OBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

CONSERVATION CHECKS
RADIATION SUMS FOR EACH NODE BEFORE RKM IN SCREENING

1 - .10000+01	2 - .10000+01	3 - .10000+01	4 - .10000+01	11 - .10000+01	12 - .10000+01
13 - .10000+01	14 - .10000+01	200 - .10000+01	21 - .10000+01	22 - .10000+01	23 - .10000+01
24 - .10000+01	25 - .10000+01	26 - .10000+01			

DATE 052070 TIME 023135

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION 1 PAGE 20

MODEL=SAHPLE CONFIG=CASE5 STEP=-1
RADIATION CONDUCTOR GENERATION LINK.

SAMPLE CASE 5 - FFCAL/RDCAL/OBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

CONSERVATION CHECKS
RADIATION SUMS FOR EACH NODE AFTER RKHIN SCREENING

1 - .10000+01	2 - .10000+01	3 - .10000+01	4 - .10000+01	11 - .10000+01	12 - .10000+01
13 - .10000+01	14 - .10000+01	200 - .10000+01	21 - .10000+01	22 - .10000+01	23 - .10000+01
24 - .10000+01	25 - .10000+01	26 - .10000+01			

TOTAL TIME TO COMPUTE AND CONDENSE RADKS = .57

MODEL=SAMPLE CONFIG=CASE5 STEP=10000
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS +++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD,NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
0	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
.000	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA +++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA +++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROTY,IROTZ		1 2 3	
.300+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.300+02	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA +++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS Ccw=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- Ccw POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

DATE 062070 TIME 023137

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 22

MODEL=SAMPLE CONFIG=CASE5 STEP=10000
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

***** NSTEP NO = 10000

**** COMPUTED OR INPUT ORBIT DATA ****

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

**** PLANET --EARTH -- DATA ****

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	HDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	HSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

MODEL= SAMPLE CONFIG=CASE5 STEP=10000
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10000 TRUE ANOMALY = .00000 TIME = .00000
 ++++ IN THE SUM ++++

NODE NUMBER	DIRECT FLUX (QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	CALC	.001	9	0
2	.94028+02	.18576+03	.5062	CALC	.089	81	4
3	.00000	.10725+03	.0000	CALC	.130	64	7
4	.16512+03	.37152+03	.4444	CALC	.199	81	8
11	.00000	.00000	.0000	CALC	.209	9	0
12	.00000	.00000	.0000	CALC	.219	9	0
13	.10055+02	.10725+03	.0938	CALC	.266	64	6
14	.91734+02	.37152+03	.2489	CALC	.330	81	7
200	.00000	.00000	.0000	CALC	.340	8	0
21	.00000	.00000	.0000	CALC	.350	8	0
22	.10725+03	.10725+03	1.0000	CALC	.429	66	9
23	.18576+03	.18576+03	1.0000	CALC	.503	81	6
24	.00000	.00000	.0000	CALC	.514	8	0
25	.00000	.00000	.0000	CALC	.525	9	0
26	.18687+03	.18687+03	1.0000	CALC	.633	78	9

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM = 403.015 SECONDS
 PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 91

MODEL=SAMPLE CONFIG=CASE5 STEP=10000 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10000 TRUE ANOHALY = .00000 TIME = .00000
 +--+ IN THE SUN +--+

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		--SHADOW FACTORS--		CP TIME (SECONDS)	--ELEMENTS--		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	PLAN		PLAN	SURF	
1	CALC	.000	.000	.391+02	.268+02	.000	.000	.000	66	9	7
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 93									
2	CALC	.000	.000	.400+02	.264+02	.000	.000	.470	66	9	5
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 95									
3	CALC	.000	.000	.402+02	.268+02	.000	.000	.895	61	9	7
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 97									
4	CALC	.000	.000	.000	.000	.000	.000	.975	1	9	7
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 99									
11	CALC	.000	.000	.391+02	.268+02	.000	.000	1.389	66	9	7
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 101									
12	CALC	.000	.000	.382+02	.264+02	.000	.000	1.821	66	9	5
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 103									
13	CALC	.000	.000	.402+02	.268+02	.000	.000	2.280	61	9	7
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 105									
14	CALC	.000	.000	.000	.000	.000	.000	2.361	1	9	7
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 107									
200	CALC	.215+02	.144+02	.834+02	.559+02	.258	.257	4.078	133	18	8
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 109									
21	CALC	.110+03	.742+02	.110+03	.742+02	1.000	1.000	6.497	112	18	9
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 111									
22	CALC	.402+02	.268+02	.402+02	.268+02	1.000	1.000	7.070	61	10	9
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 113									
23	CALC	.400+02	.264+02	.400+02	.264+02	1.000	1.000	7.593	66	9	7
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 115									
24	CALC	.391+02	.268+02	.391+02	.268+02	1.000	1.000	8.204	66	10	9
		PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 117									

DATE 062070 TIME 023156

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION

PAGE 25

MODEL=SAMPLE CONFIG=CASE5 STEP=10000
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RDCAL/QBCAL/RKCAL/ORGGEN/DRCAL/AQCAL/QOCAL

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10000 TRUE ANOMALY = .00000 TIME = .00000
++++ IN THE SUN +++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		--SHADOW FACTORS--		CP TIME (SECONDS)	--ELEMENTS--		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	FLAN		PLAN	SURF	
25	CALC	.382+02	.264+02	.382+02	.264+02	1.000	1.000	0.703	66	9	7
PLANETARY FF HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 119											
26	CALC	.659+01	.457+01	.659+01	.457+01	1.000	1.000	0.973	52	2	0

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOMP

TOTAL ELAPSED TIME IN PROBLEM = 412.485 SECONDS
S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE. LAST RESTART RECORD WRITTEN = 129

H-413

MODEL=SAMPLE CONFIG=CASE5 STEP=10001
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/OBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS +++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD,NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
90.000	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA +++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES.		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA +++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROTY,IROTZ		1 2 3	
.000	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.900+02	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA +++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCM=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCM POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

DATE 062670 TIME 023200

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 27

MODEL=SAMPLE CONFIG=CASE5 STEP=10001
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

***** NSTEP NO = 10001

**** COMPUTED OR INPUT ORBIT DATA ****

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

**** PLANET --EARTH -- DATA ****

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	HDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	HSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

DATE 062678 TIME 023201

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 20

MODEL=SAMPLE CONFIG=CASE5 STEP=10001
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/OROGEN/DRCAL/AQCAL/QOCAL

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10001 TRUE ANOMALY = 90.00000 TIME = .36701
++++ IN THE SUN +++++

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	CALC	.001	9	0
2	.00000	.00000	.0000	CALC	.037	9	0
3	.00000	.42900+03	.0000	CALC	.086	81	7
4	.00000	.00000	.0000	CALC	.097	9	0
11	.00000	.00000	.0000	CALC	.107	9	0
12	.00000	.00000	.0000	CALC	.118	9	0
13	.00000	.42900+03	.0000	CALC	.179	81	7
14	.00000	.00000	.0000	CALC	.189	9	0
200	.30335+03	.30335+03	1.0000	CALC	.283	78	8
21	.00000	.00000	.0000	CALC	.296	8	0
22	.42900+03	.42900+03	1.0000	CALC	.388	78	9
23	.00000	.00000	.0000	CALC	.400	9	0
24	.00000	.00000	.0000	CALC	.411	8	0
25	.00000	.00000	.0000	CALC	.422	9	0
26	.00000	.00000	.0000	CALC	.431	8	0

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM = 413.370 SECONDS

MODEL=SAMPLE CONFIG=CASE5 STEP=10001 SAMPLE CASE 5 - FFCAL/RBCAL/OBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10001 TRUE ANOMALY = 90.00000 TIME = .36701
 +++++ IN THE SUN +++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		--SHADOW FACTORS--		CP TIME (SECONDS)	--ELEMENTS--		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	PLAN		PLAN	SURF	
1	CALC	.000	.000	.000	.000	.000	.000	.000	66	0	0
2	CALC	.000	.000	.000	.000	.000	.000	.061	66	0	0
3	CALC	.000	.000	.000	.000	.000	.000	.094	61	0	0
4	CALC	.000	.000	.000	.000	.000	.000	.109	1	0	0
11	CALC	.000	.000	.000	.000	.000	.000	.147	66	0	0
12	CALC	.000	.000	.000	.000	.000	.000	.191	66	0	0
13	CALC	.000	.000	.000	.000	.000	.000	.229	61	0	0
14	CALC	.000	.000	.000	.000	.000	.000	.249	1	0	0
200	CALC	.120+01	.144+02	.465+01	.559+02	.258	.257	.325	133	0	0
21	CALC	.143+01	.742+02	.143+01	.742+02	1.000	1.000	.383	112	0	0
22	CALC	.206+01	.268+02	.206+01	.268+02	1.000	1.000	.423	61	0	0
23	CALC	.638+00	.264+02	.638+00	.264+02	1.000	1.000	.465	66	0	0
24	CALC	.000	.268+02	.000	.268+02	1.000	1.000	.503	66	0	0
25	CALC	.634+00	.264+02	.634+00	.264+02	1.000	1.000	.544	66	0	0
26	CALC	.000	.457+01	.000	.457+01	1.000	1.000	.579	52	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOMP

TOTAL ELAPSED TIME IN PROBLEM = 413.997 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 142

MODEL=SAMPLE CONFIG=CASE5 STEP=10002
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RDCAL/OBCAL/RKCAL/ORBOEM/DRCAL/AQCAL/QOCAL

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS ++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD.NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
180.000	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA ++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA ++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROTY,IROTZ		1 2 3	
.300+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.150+03	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE ² CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA ++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCM=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCM POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAMPLE CONFIG=CASE5 STEP=10002
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

***** NSTEP NO = 10002

**** COMPUTED OR INPUT ORBIT DATA ****

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN SIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR SIGMAS ANGLE, DEGREES

**** PLANET --EARTH -- DATA ****

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET OS EMISS POWER	WDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	WSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

DATE 062070 TIME 023209

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 32

MODEL=SAMPLE CONFIG=CASE5 STEP=10002
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10002 TRUE ANOMALY = 180.00000 TIME = .73402
++++ IN THE SHADE ++++

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	+++++	.000	0	0
2	.00000	.00000	.0000	+++++	.034	0	0
3	.00000	.00000	.0000	+++++	.039	0	0
4	.00000	.00000	.0000	+++++	.045	0	0
11	.00000	.00000	.0000	+++++	.049	0	0
12	.00000	.00000	.0000	+++++	.053	0	0
13	.00000	.00000	.0000	+++++	.058	0	0
14	.00000	.00000	.0000	+++++	.064	0	0
200	.00000	.00000	.0000	+++++	.068	0	0
21	.00000	.00000	.0000	+++++	.072	0	0
22	.00000	.00000	.0000	+++++	.076	0	0
23	.00000	.00000	.0000	+++++	.080	0	0
24	.00000	.00000	.0000	+++++	.084	0	0
25	.00000	.00000	.0000	+++++	.088	0	0
26	.00000	.00000	.0000	+++++	.092	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM = 414.518 SECONDS

MODEL=SAMPLE CONFIO=CASE5 STEP=10002

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

DIRECT IRRADIATION CALCULATION LINK.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10002 TRUE ANOMALY = 180.00000 TIME = .73402
 +++ IN THE SHADE +++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		--SHADOW FACTORS--		CP TIME (SECONDS)	--ELEMENTS--		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	PLAN		PLAN	SURF	
1	+++++	.000	.000	.000	.000	.000	.000	.001	0	0	0
2	+++++	.000	.000	.000	.000	.000	.000	.031	0	0	0
3	+++++	.000	.000	.000	.000	.000	.000	.036	0	0	0
4	+++++	.000	.000	.000	.000	.000	.000	.042	0	0	0
11	+++++	.000	.000	.000	.000	.000	.000	.047	0	0	0
12	+++++	.000	.000	.000	.000	.000	.000	.051	0	0	0
13	+++++	.000	.000	.000	.000	.000	.000	.058	0	0	0
14	+++++	.000	.000	.000	.000	.000	.000	.060	0	0	0
20	+++++	.000	.144+02	.000	.000	.000	.000	.065	0	0	0
21	+++++	.000	.742+02	.000	.000	.000	.000	.072	0	0	0
22	+++++	.000	.268+02	.000	.000	.000	.000	.077	0	0	0
23	+++++	.000	.264+02	.000	.000	.000	.000	.081	0	0	0
24	+++++	.000	.268+02	.000	.000	.000	.000	.088	0	0	0
25	+++++	.000	.264+02	.000	.000	.000	.000	.091	0	0	0
26	+++++	.000	.457+01	.000	.000	.000	.000	.095	0	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOMP

TOTAL ELAPSED TIME IN PROBLEM = 414.830 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 155

MODEL=SAMPLE CONFIG=CASE5 STEP=10003
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RFCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS +++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD.NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
105.720	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TIMEST
++++ BASIC ORBIT DATA +++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES,		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA +++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROTY,IROTZ		1 2 3	
.359+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.104+03	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA +++++				
.000	CLOCK ANGLE, DEGREES (ABOUT CCS Z-AXIS CCM=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCM POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAMPLE CONFIG=CASE5 STEP=10003 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 DIRECT IRRADIATION CALCULATION LINK.

***** NSTEP NO = 10003

**** COMPUTED OR INPUT ORBIT DATA ****

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

**** PLANET --EARTH -- DATA ****

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET OS EMISS POWER	HOS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	HSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAY CONSTANT	GRAY		.42900+03	SOLAR CONSTANT AT PSD	SOL

MODEL=SAMPLE CONFIG=CASE5 STEP=10003 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/DRGEN/DRCAL/ABCAL/QOCAL
 DIRECT IRRADIATION CALCULATION LINK.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10003 TRUE ANOMALY = 105.71977 TIME = .43111
 ++++ IN THE SUN ++++

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	CALC	.000	9	0
2	.00000	.69478+01	.0000	CALC	.048	9	4
3	.00000	.41697+03	.0000	CALC	.104	81	7
4	.00000	.00000	.0000	CALC	.114	9	0
11	.00000	.00000	.0000	CALC	.124	9	0
12	.00000	.00000	.0000	CALC	.134	9	0
13	.00000	.41697+03	.0000	CALC	.190	81	7
14	.00000	.00000	.0000	CALC	.200	9	0
200	.24401+03	.36601+03	.8667	CALC	.285	78	8
21	.10066+03	.10066+03	1.0000	CALC	.359	55	9
22	.41698+03	.41698+03	1.0000	CALC	.460	78	9
23	.69478+01	.69478+01	1.0000	CALC	.478	9	5
24	.00000	.00000	.0000	CALC	.494	8	0
25	.00000	.00000	.0000	CALC	.504	9	0
26	.00000	.00000	.0000	CALC	.513	8	0

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RTI, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM = 415.581 SECONDS

MODEL=SAMPLE CONFIG=CASE5 STEP=10003
 DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10003 TRUE ANOMALY = 105.71977 TIME = .43111
 +++++ IN THE SUM +++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX---		---UNSHADOWED FLUX---		--SHADOW FACTORS--		CP TIME (SECONDS)	--ELEMENTS--		SHAD SURF
		ALBEDO	PLANETARY	ALBEDO	PLANETARY	ALBEDO	PLAN		PLAN	SURF	
1	+++++	.000	.000	.000	.000	.000	.000	.001	0	0	0
2	+++++	.000	.000	.000	.000	.000	.000	.032	0	0	0
3	+++++	.000	.000	.000	.000	.000	.000	.037	0	0	0
4	+++++	.000	.000	.000	.000	.000	.000	.042	0	0	0
11	+++++	.000	.000	.000	.000	.000	.000	.046	0	0	0
12	+++++	.000	.000	.000	.000	.000	.000	.051	0	0	0
13	+++++	.000	.000	.000	.000	.000	.000	.056	0	0	0
14	+++++	.000	.000	.000	.000	.000	.000	.060	0	0	0
200	+++++	.000	.144+02	.000	.000	.000	.000	.065	0	0	0
21	+++++	.000	.742+02	.000	.000	.000	.000	.070	0	0	0
22	+++++	.000	.268+02	.000	.000	.000	.000	.075	0	0	0
23	+++++	.000	.264+02	.000	.000	.000	.000	.079	0	0	0
24	+++++	.000	.268+02	.000	.000	.000	.000	.084	0	0	0
25	+++++	.000	.264+02	.000	.000	.000	.000	.089	0	0	0
26	+++++	.000	.457+01	.000	.000	.000	.000	.094	0	0	0

NOTE--
 FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOMP

TOTAL ELAPSED TIME IN PROBLEM = 415.691 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO TAPE, LAST RESTART RECORD WRITTEN = 169

MODEL=SAMPLE CONFIG=CASE5 STEP=10004 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 DIRECT IRRADIATION CALCULATION LINK.

INPUT VALUE	DESCRIPTION	USER OPTIONS	DEFAULT VALUE	VARIABLE NAME
++++ BASIC CONTROL PARAMETERS +++++				
SHAD	SHADOWING OVERRIDE FLAG	SHAD,NOSH	SHAD	DINOSH
.250	PLANETARY ACCURACY FACTOR		0.25	DIACC
.100	SHADOWING ACCURACY FACTOR		0.10	DIACCS
10000	STEP NO. FOR PLANET-ORIENTED DATA		0	NSPFF
105.920	TRUE ANOMALY ANGLE, DEGREES		0.0	TRUEAN
.000	INITIAL TIME (AT PERIAPSIS)		0.0	TINEST
++++ BASIC ORBIT DATA +++++				
.000	LONGITUDE OF ASCENDING NODE, DEGREES		0.0	ALAN
.000	ARGUMENT OF PERIFOCUS, DEGREES		0.0	APER
.000	ORBIT INCLINATION, DEGREES		0.0	OINC
.60800+06	ORBIT ALTITUDE AT PERIAPSIS		0.0	HP
.60800+06	ORBIT ALTITUDE AT APOAPSIS		0.0	HA
.000	ORBIT ECCENTRICITY		0.0	ECC
.000	SUN RA ANGLE, DEGREES		0.0	SUNRA
.000	SUN DEC ANGLE, DEGREES,		0.0	SUNDEC
.000	REFERENCE STAR RA ANGLE, DEGREES		0.0	STRRA
.000	REFERENCE STAR DEC ANGLE, DEGREES		0.0	STRDEC
++++ PLANET-ORIENTED, ORIENTATION DATA +++++				
300.000	ROTATION ABOUT VCS X-AXIS TO CCS		0.0	ROTX
270.000	ROTATION ABOUT VCS Y-AXIS TO CCS		0.0	ROTY
.000	ROTATION ABOUT VCS Z-AXIS TO CCS		0.0	ROTZ
1 2 3	ROTATION ORDER -- IROTX,IROTY,IROTZ		1 2 3	
.359+03	SUN LOOK ANGLE - CLOCK, DEGREES		0.0	SUNCL
.104+03	SUN LOOK ANGLE - CONE, DEGREES		0.0	SUNCO
.000	PLANET LOOK ANGLE - CLOCK, DEGREES		0.0	PLCL
.180+03	PLANET LOOK ANGLE - CONE, DEGREES		0.0	PLCO
++++ SPIN DATA +++++				
.000	CLOCK ANGLE, DEGREES(ABOUT CCS Z-AXIS CCH=POSITIVE)		0.0	CLOCK
.000	CONE ANGLE, DEGREES		0.0	CONE
.000	ROTATION RATE- CCH POSITIVE		0.0	RATE
.000	TIME SPIN BEGINS		0.0	TIMSP

MODEL=SAMPLE CONFIG=CASE5 STEP=10004 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 DIRECT IRRADIATION CALCULATION LINK.

+++++ NSTEP NO = 10004

++++ COMPUTED OR INPUT ORBIT DATA +++++

VALUE	VARIABLE DESCRIPTION	***	VALUE	VARIABLE DESCRIPTION
60.000	-SUN BETA ANGLE, DEGREES		.000	SUN CIGMA ANGLE, DEGREES
.000	STAR BETAS ANGLE, DEGREES		.000	STAR CIGMAS ANGLE, DEGREES

++++ PLANET --EARTH -- DATA +++++

VALUE	DESCRIPTION	NAME	***	VALUE	DESCRIPTION	NAME
.300	PLANET ALBEDO	PALB		.75073+02	PLANET DS EMISS POWER	WDS
.20900+08	PLANET RADIUS	PRAD		.75073+02	PLANET SS EMISS POWER	WSS
.14679+01	ORBIT PERIOD	PERIOD				
.41731+09	PLANET GRAV CONSTANT	GRAV		.42900+03	SOLAR CONSTANT AT PSD	SOL

DATE 062878 TIME 023220

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 40

MODEL=SAMPLE CONFIG=CASE5 STEP=10004
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/OBCAL/RKCAL/ORBGEN/DRCAL/AGCAL/QOCAL

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10004 TRUE ANOMALY = 105.91977 TIME = .43193
**** IN THE SHADE ****

NODE NUMBER	DIRECT FLUX(QDS)	UNSHADOWED FLUX	SHADOW FACTOR	COMPUTATION	CP TIME (SECONDS)	SURFACE ELEMENTS	SHADOWING SURFACES
1	.00000	.00000	.0000	+++++	.000	0	0
2	.00000	.00000	.0000	+++++	.028	0	0
3	.00000	.00000	.0000	+++++	.033	0	0
4	.00000	.00000	.0000	+++++	.037	0	0
11	.00000	.00000	.0000	+++++	.041	0	0
12	.00000	.00000	.0000	+++++	.045	0	0
13	.00000	.00000	.0000	+++++	.050	0	0
14	.00000	.00000	.0000	+++++	.055	0	0
200	.00000	.00000	.0000	+++++	.059	0	0
21	.00000	.00000	.0000	+++++	.065	0	0
22	.00000	.00000	.0000	+++++	.070	0	0
23	.00000	.00000	.0000	+++++	.074	0	0
24	.00000	.00000	.0000	+++++	.079	0	0
25	.00000	.00000	.0000	+++++	.084	0	0
26	.00000	.00000	.0000	+++++	.088	0	0

NOTE--

FLUX VALUES FLAGGED (+++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP, OR FORCED TO ZERO IN DICOM

TOTAL ELAPSED TIME IN PROBLEM * 416.216 SECONDS

DATE 062878 TIME 023220

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC D VERSION PAGE 41

MODEL=SAMPLE CONFIG=CASE5 STEP=10004
DIRECT IRRADIATION CALCULATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GSCAL/RKCAL/GRBGEN/DRCAL/AQCAL/QOCAL

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO. = 10004 TRUE ANOMALY = 105.91977 TIME = .43193
**** IN THE SHADE ****

NODE NUMBER	COMPUT	---DIRECT INCID. ALBEDO	FLUX-- PLANETARY	---UNSHADOWED ALBEDO	FLUX--- PLANETARY	--SHADOW FACTORS-- ALBEDO	PLAN	CP TIME (SECONDS)	--ELEMENTS-- PLAN	SURF	SHAD SURF
1	++++++	.000	.000	.000	.000	.000	.000	.001	0	0	0
2	++++++	.000	.000	.000	.000	.000	.000	.032	0	0	0
3	++++++	.000	.000	.000	.000	.000	.000	.038	0	0	0
4	++++++	.000	.000	.000	.000	.000	.000	.043	0	0	0
11	++++++	.000	.000	.000	.000	.000	.000	.048	0	0	0
12	++++++	.000	.000	.000	.000	.000	.000	.052	0	0	0
13	++++++	.000	.000	.000	.000	.000	.000	.057	0	0	0
14	++++++	.000	.000	.000	.000	.000	.000	.064	0	0	0
200	++++++	.000	.144+02	.000	.000	.000	.000	.068	0	0	0
21	++++++	.000	.742+02	.000	.000	.000	.000	.073	0	0	0
22	++++++	.000	.269+02	.000	.000	.000	.000	.078	0	0	0
23	++++++	.000	.264+02	.000	.000	.000	.000	.084	0	0	0
24	++++++	.000	.268+02	.000	.000	.000	.000	.089	0	0	0
25	++++++	.000	.264+02	.000	.000	.000	.000	.097	0	0	0
26	++++++	.000	.457+01	.000	.000	.000	.000	.102	0	0	0

NOTE--

FLUX VALUES FLAGGED (++++++) MAY HAVE COME FROM RT1, THE FLUX DATA BLOCK, STUFFED FROM ANOTHER STEP OR FORCED TO ZERO IN DICOMP

TOTAL ELAPSED TIME IN PROBLEM = 416.333 SECONDS
S.A.P. FLUXES HAVE BEEN WRITTEN TO RC0 TAPE. LAST RESTART RECORD WRITTEN = 181

MODEL=SAMPLE CONFIG=CASE5 STEP=10010 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 DIRECT IRRADIATION CALCULATION WITH SPECULAR SURFACES.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 9 TRUE ANOMALY = .00000 TIME = .00000
 ♦♦♦♦ IN THE SUN ♦♦♦♦

NODE NUMBER	DIRECT FLUX (QDS)	DIRECT ABS. FLUX
1	.00000	.00000
2	.94028+02	.84625+02
3	.00000	.00000
4	.16512+03	.14861+03
11	.00000	.00000
12	.00000	.00000
13	.10055+02	.90492+01
14	.91734+02	.82561+02
200	.00000	.00000
21	.00000	.00000
22	.10725+03	.21450+02
23	.18576+03	.37152+02
24	.00000	.00000
25	.00000	.00000
26	.18687+03	.37374+02

TOTAL ELAPSED TIME IN PROBLEM = 416.676 SECONDS

MODEL=SAMPLE CONFIG=CASE5 STEP=10010 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 DIRECT IRRADIATION CALCULATION WITH SPECULAR SURFACES.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO 9 TRUE ANOMALY = .00000 TIME = .00000
 ++++ IN THE SUN ++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX--		---DIRECT ABS. FLUX---	
		ALBEDO	PLANETARY	ALBEDO	PLANETARY
1		.000	.000	.000	.000
2		.000	.000	.000	.000
3		.000	.000	.000	.000
4		.000	.000	.000	.000
11		.000	.000	.000	.000
12		.000	.000	.000	.000
13		.000	.000	.000	.000
14		.000	.000	.000	.000
200		.215+02	.144+02	.215+01	.144+01
21		.110+03	.742+02	.220+02	.660+02
22		.402+02	.268+02	.805+01	.241+02
23		.400+02	.264+02	.800+01	.238+02
24		.391+02	.268+02	.783+01	.241+02
25		.382+02	.264+02	.765+01	.238+02
26		.859+01	.457+01	.132+01	.411+01

TOTAL ELAPSED TIME IN PROBLEM = 418.757 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO. LAST RESTART RECORD WRITTEN = 184

DATE 062878 TIME 023224

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION

PAGE 44

MODEL=SAMPLE CONFIG=CASE5 STEP=10010
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
IAQSOS	10010	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10010	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10010	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

MODEL=5SAMPLE CONFIO=CASE5 STEP=10010
 ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBCEN/DRCAL/AQCAL/QOCAL

ABSORBED HEATING RATES FOR ORBIT POINT = 10010 TRUE ANOMALY = .0000 TIME = .0000
 UNITS ARE ENERGY PER UNIT TIME

*** IN THE SUN ***

NODE	SOLAR		ALBEDO		PLANETARY		TOTAL HEAT RATES	
	DIRECT	TOTAL	DIRECT	TOTAL	DIRECT	TOTAL	DIRECT	TOTAL
1	.00000	.59530+01	.00000	.40089+00	.00000	.26715+00	.00000	.66210+01
2	.84625+02	.88420+02	.00000	.28120+00	.00000	.18739+00	.84525+02	.88997+02
3	.00000	.54750+01	.00000	.14461+00	.00000	.96367-01	.00000	.57160+01
4	.14861+03	.15002+03	.00000	.34089+00	.00000	.22717+00	.14861+03	.15139+03
11	.00000	.34174+01	.00000	.40089+00	.00000	.26715+00	.00000	.40854+01
12	.00000	.33593+01	.00000	.28120+00	.00000	.18739+00	.00000	.38279+01
13	.90492+01	.11836+02	.00000	.14461+00	.00000	.96367-01	.90492+01	.12127+02
14	.82561+02	.83356+02	.00000	.34089+00	.00000	.22717+00	.82561+02	.83924+02
200	.00000	.59547+00	.43066+01	.43126+01	.28712+01	.28739+01	.71753+01	.77819+01
21	.00000	.00000	.45564+02	.45574+02	.13765+03	.13765+03	.18302+03	.18302+03
22	.44196+02	.44196+02	.16542+02	.16552+02	.49744+02	.49744+02	.11052+03	.11052+03
23	.38653+02	.38653+02	.83275+01	.83275+01	.24746+02	.24746+02	.71727+02	.71727+02
24	.00000	.00000	.16131+02	.16131+02	.49668+02	.49668+02	.65799+02	.65799+02
25	.00000	.00000	.79547+01	.79547+01	.24746+02	.24746+02	.32701+02	.32701+02
26	.77005+02	.77005+02	.27165+01	.27165+01	.84736+01	.84736+01	.88195+02	.88195+02

TOTAL ELAPSED TIME IN PROBLEM = 417.183 SECONDS

ABSORBED Q STORED IN STEP 10010

TOTAL TIME TO COMPUTE ABSORBED Q .37

DATE 062878 TIME 023228 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 46

MODEL=SAMPLE CONFIG=CASE5 STEP=10011 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
DIRECT IRRADIATION CALCULATION WITH SPECULAR SURFACES.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 10 TRUE ANOMALY = 90.00000 TIME = .36701
*** IN THE SUN ***

NODE NUMBER	DIRECT FLUX (QDS)	DIRECT ABS. FLUX
1	.00000	.00000
2	.00000	.00000
3	.00000	.00000
4	.22877+03	.20589+03
11	.00000	.00000
12	.00000	.00000
13	.00000	.00000
14	.22877+03	.20589+03
200	.30335+03	.30335+02
21	.00000	.00000
22	.42900+03	.85800+02
23	.00000	.00000
24	.00000	.00000
25	.00000	.00000
26	.00000	.00000

TOTAL ELAPSED TIME IN PROBLEM = 417.856 SECONDS

DATE 062878 TIME 023229

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC B VERSION PAGE 47

MODEL=SAMPLE CONFIG=CASE5 STEP=10011

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/URDGEN/DRCAL/AQCAL/QOCAL

DIRECT IRRADIATION CALCULATION WITH SPECULAR SURFACES.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO 10 TRUE ANOHALY = 90.00000 TIME = .36701
++++ IN THE SUN +++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX--		---DIRECT ABS. FLUX --	
		ALBEDO	PLANETARY	ALBEDO	PLANETARY
1		.000	.000	.000	.000
2		.000	.000	.000	.000
3		.000	.000	.000	.000
4		.000	.000	.000	.000
11		.000	.000	.000	.000
12		.000	.000	.000	.000
13		.000	.000	.000	.000
14		.000	.000	.000	.000
200		.120+01	.144+02	.120+00	.144+01
21		.143+01	.742+02	.285+00	.659+02
22		.206+01	.269+02	.412+00	.241+02
23		.639+00	.264+02	.128+00	.239+02
24		.000	.268+02	.000	.241+02
25		.634+00	.264+02	.127+00	.239+02
26		.000	.457+01	.000	.411+01

TOTAL ELAPSED TIME IN PROBLEM = 417.936 SECONDS
S.A.P FLUXES HAVE BEEN WRITTEN TO R.O. LAST RESTART RECORD WRITTEN = 193

H-435

DATE 062878 TIME 023230 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 40

MODEL=SAMPLE CONFIG=CASE5 STEP=10011 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/O₂GEN/DPCAL/AQCAL/QOCAL
ABSORBED Q COMPUTATION LINK.

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10011	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10011	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10011	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

DATE 062078 TIME 023231

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS)

UNIVAC EXEC 8 VERSION

PAGE 49

MODEL=SAMPLE CONFIG=CASE5 STEP=10011
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

ABSORBED HEATING RATES FOR ORBIT POINT = 10011 TRUE ANOMALY = 90.0000 TIME = .3670.
UNITS ARE ENERGY PER UNIT TIME

**** IN THE SUN ****

NODE	SOLAR		ALBEDO		PLANETARY		TOTAL HEAT RATES	
	DIRECT	TOTAL	DIRECT	TOTAL	DIRECT	TOTAL	DIRECT	TOTAL
1	.00000	.11533+02	.00000	.22339-01	.00000	.26715+00	.00000	.11822+02
2	.00000	.93697+01	.00000	.15669-01	.00000	.18739+00	.00000	.95727+01
3	.00000	.74731+01	.00000	.80580-02	.00000	.96367-01	.00000	.75775+01
4	.20589+03	.21117+03	.00000	.18995-01	.00000	.22717+00	.20589+03	.21142+03
11	.00000	.11533+02	.00000	.22339-01	.00000	.26715+00	.00000	.11822+02
12	.00000	.93697+01	.00000	.15669-01	.00000	.18739+00	.00000	.95727+01
13	.00000	.74731+01	.00000	.80579-02	.00000	.96367-01	.00000	.75775+01
14	.20589+03	.21117+03	.00000	.18995-01	.00000	.22717+00	.20589+03	.21142+03
200	.60670+02	.61530+02	.24009+00	.24031+00	.28712+01	.28739+01	.63781+02	.64645+02
21	.00000	.00000	.58914+00	.58914+00	.13765+03	.13765+03	.13824+03	.13824+03
22	.17678+03	.17678+03	.84940+00	.84940+00	.49744+02	.49744+02	.22737+03	.22737+03
23	.00000	.00000	.13273+00	.13273+00	.24746+02	.24746+02	.24879+02	.24879+02
24	.00000	.00000	.00000	.00000	.49660+02	.49660+02	.49660+02	.45568+02
25	.00000	.00000	.13197+00	.13197+00	.24746+02	.24746+02	.24878+02	.24879+02
26	.00000	.00000	.00000	.00000	.84736+01	.84736+01	.84736+01	.84736+01

TOTAL ELAPSED TIME -IN PROBLEM = 418.357 SECCNDS

ABSORBED Q STORED IN STEP 10011

TOTAL TIME TO COMPUTE ABSORBED Q .38

MODEL=SAMPLE CONFIG=CASE5 STEP=10012 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
DIRECT IRRADIATION CALCULATION WITH SPECULAR SURFACES.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 11 TRUE ANOMALY = 180.00000 TIME = .73402
**** IN THE SHADE ****

NODE NUMBER	DIRECT FLUX (QDS)	DIRECT ABS. FLUX
1	.00000	.00000
2	.00000	.00000
3	.00000	.00000
4	.00000	.00000
11	.00000	.00000
12	.00000	.00000
13	.00000	.00000
14	.00000	.00000
200	.00000	.00000
21	.00000	.00000
22	.00000	.00000
23	.00000	.00000
24	.00000	.00000
25	.00000	.00000
26	.00000	.00000

TOTAL ELAPSED TIME IN PROBLEM = 419.134 SECONDS

DATE 062878 TIME 023235

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 51

MODEL=SAMPLE CONFIG=CASE5 STEP=10012 SAMPLE CASE 5 - PFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
DIRECT IRRADIATION CALCULATION WITH SPECULAR SURFACES

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO 11 TRUE ANOMALY = 180.0000 TIME = .73402
++++ IN THE SHADE +++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX--		---DIRECT ABS. FLUX---	
		ALBEDO	PLANETARY	ALBEDO	PLANETARY
1		.000	.000	.000	.000
2		.000	.000	.000	.000
3		.000	.000	.000	.000
4		.000	.000	.000	.000
11		.000	.000	.000	.000
12		.000	.000	.000	.000
13		.000	.000	.000	.000
14		.000	.000	.000	.000
200		.000	.144+02	.000	.144+01
21		.000	.742+02	.000	.668+02
22		.000	.268+02	.000	.241+02
23		.000	.264+02	.000	.238+02
24		.000	.268+02	.000	.241+02
25		.000	.264+02	.000	.238+02
26		.000	.457+01	.000	.411+01

TOTAL ELAPSED TIME IN PROBLEM = 419.216 SECONDS

S.A.P FLUXES HAVE BEEN WRITTEN TO RSO. LAST RESTART RECORD WRITTEN = 202

DATE 062878 TIME 023236

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 52

MODEL=SAMPLE CONFIG=CASE5 STEP=10012
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10012	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10012	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSOP	10012	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

DATE 062070 TIME 023230

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 53

MODEL=SAMPLE CONFIG=CASE5 STEP=10012
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

ABSORBED HEATING RATES FOR ORBIT POINT = 10012 TRUE ANOMALY = 180.0000 TIME = .7340
UNITS ARE ENERGY PER UNIT TIME

◆◆◆ IN THE SHADE ◆◆◆

NODE	SOLAR		ALBEDO		PLANETARY		TOTAL HEAT RATES	
	DIRECT	TOTAL	DIRECT	TOTAL	DIRECT	TOTAL	DIRECT	TOTAL
1	.00000	.00000	.00000	.00000	.00000	.26715+00	.00000	.26715+00
2	.00000	.00000	.00000	.00000	.00000	.18739+00	.00000	.18739+00
3	.00000	.00000	.00000	.00000	.00000	.96367-01	.00000	.96367-01
4	.00000	.00000	.00000	.00000	.00000	.22717+00	.00000	.22717+00
11	.00000	.00000	.00000	.00000	.00000	.26715+00	.00000	.26715+00
12	.00000	.00000	.00000	.00000	.00000	.18739+00	.00000	.18739+00
13	.00000	.00000	.00000	.00000	.00000	.96367-01	.00000	.96367-01
14	.00000	.00000	.00000	.00000	.00000	.22717+00	.00000	.22717+00
200	.00000	.00000	.00000	.00000	.28712+01	.28739+01	.28712+01	.28739+01
21	.00000	.00000	.00000	.00000	.13765+03	.13765+03	.13765+03	.13765+03
22	.00000	.00000	.00000	.00000	.49744+02	.49744+02	.49744+02	.49744+02
23	.00000	.00000	.00000	.00000	.24746+02	.24746+02	.24746+02	.24746+02
24	.00000	.00000	.00000	.00000	.49668+02	.49668+02	.49668+02	.49668+02
25	.00000	.00000	.00000	.00000	.24746+02	.24746+02	.24746+02	.24746+02
26	.00000	.00000	.00000	.00000	.84736+01	.84736+01	.84736+01	.84736+01

TOTAL ELAPSED TIME IN PROBLEM = 419.666 SECONDS

ABSORBED Q STORED IN STEP 10012

TOTAL TIME TO COMPUTE ABSORBED Q .40

MODEL=SAMPLE CONFIG=CASE5 STEP=10013 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 DIRECT IRRADIATION CALCULATION WITH SPECULAR SURFACES.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 12 TRUE ANOMALY = 105.71977 TIME = .43111
 ++++ IN THE SUN ++++

NODE NUMBER	DIRECT FLUX (QDS)	DIRECT ABS. FLUX
1	.40259+02	.36233+02
2	.37050+01	.33345+01
3	.00000	.00000
4	.18529+03	.16676+03
11	.40259+02	.36233+02
12	.00000	.00000
13	.00000	.00000
14	.18529+03	.16676+03
200	.24401+03	.24401+02
21	.10066+03	.20132+02
22	.41696+03	.83393+02
23	.69478+01	.13896+01
24	.00000	.00000
25	.00000	.00000
26	.00000	.00000

TOTAL ELAPSED TIME IN PROBLEM = 420.637 SECONDS

DATE 062070 TIME 023241

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 55

MODEL=SAMPLE CONFIG=CASE5 STEP=10013

SAMPLE CASE 5 - FFCAL/RBCAL/QBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

DIRECT IRRADIATION CALCULATION WITH SPECULAR SURFACES.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO 12 TRUE ANOMALY = 105.71977 TIME = .43111
++++ IN THE SUN +++++

NODE NUMBER	COMPUT	---DIRECT INCID FLUX--		---DIRECT ABS. FLUX---	
		ALBEDO	PLANETARY	ALBEDO	PLANETARY
1		.000	.000	.000	.000
2		.000	.000	.000	.000
3		.000	.000	.000	.000
4		.000	.000	.000	.000
11		.000	.000	.000	.000
12		.000	.000	.000	.000
13		.000	.000	.000	.000
14		.000	.000	.000	.000
20		.000	.144+02	.000	.144+01
21		.000	.742+02	.000	.668+02
22		.000	.268+02	.000	.241+02
23		.000	.264+02	.000	.238+02
24		.000	.263+02	.000	.241+02
25		.000	.264+02	.000	.238+02
26		.000	.457+01	.000	.411+01

TOTAL ELAPSED TIME IN PROBLEM = 420.706 SECONDS
S.A.P FLUXES HAVE BEEN WRITTEN TO RSO. LAST RESTART RECORD WRITTEN = 211

H-443

DATE 082079 TIME 023243

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 56

MODEL=SAMPLE CONFIG=CASE5 STEP=10013
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10013	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10013	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10013	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

DATE 062876 TIME 023244

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 57

MODEL=SAMPLE CONFIG=CASE5 STEP=10013
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GDCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

ABSORBED HEATING RATES FOR ORBIT POINT = 10013 TRUE ANOMALY = 105.7198 TIME = .4311
UNITS ARE ENERGY PER UNIT TIME

****, IN THE SUN ****

NODE	SOLAR		ALBEDO		PLANETARY		TOTAL HEAT RATES	
	DIRECT	TOTAL	DIRECT	TOTAL	DIRECT	TOTAL	DIRECT	TOTAL
1	.36233+02	.46055+02	.00000	.00000	.00000	.26715+00	.36233+02	.46322+02
2	.33345+01	.11970+02	.00000	.00000	.00000	.18739+00	.33345+01	.12157+02
3	.00000	.72246+01	.00000	.00000	.00000	.96367-01	.00000	.73210+01
4	.16676+03	.17212+03	.00000	.00000	.00000	.22717+00	.16676+03	.17235+03
11	.36233+02	.45996+02	.00000	.00000	.00000	.26715+00	.36233+02	.46264+02
12	.00000	.86579+01	.00000	.00000	.00000	.18739+00	.00000	.86453+01
13	.00000	.71652+01	.00000	.00000	.00000	.96367-01	.00000	.72615+01
14	.16676+03	.17206+03	.00000	.00000	.00000	.22717+00	.16676+03	.17229+03
200	.48802+02	.49671+02	.00000	.00000	.28712+01	.28739+01	.51673+02	.52545+02
21	.41479+02	.41479+02	.00000	.00000	.13765+03	.13765+03	.17913+03	.17913+03
22	.17182+03	.17182+03	.00000	.00000	.49744+02	.49744+02	.22157+03	.22157+03
23	.14457+01	.14457+01	.00000	.00000	.24746+02	.24746+02	.26192+02	.26192+02
24	.00000	.00000	.00000	.00000	.49668+02	.49668+02	.49668+02	.49668+02
25	.00000	.00000	.00000	.00000	.24746+02	.24746+02	.24746+02	.24746+02
26	.00000	.00000	.00000	.00000	.84736+01	.84736+01	.84736+01	.84736+01

TOTAL ELAPSED TIME IN PROBLEM = .421.143 SECONDS

ABSORBED Q STOPED IN STEP 10013

TOTAL TIME TO COMPUTE ABSORBED Q .39

DATE 062870 TIME 023247 THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION PAGE 50

MODEL=SAMPLE CONFIG=CASE5 STEP=10014 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/ORCAL/AOCAL/QOCAL
DIRECT IRRADIATION CALCULATION WITH SPECULAR SURFACES.

SOLAR DIRECT INCIDENT FLUX FOR STEP NO 13 TRUE ANOMALY = 105.91977 TIME = .43193
++++ IN THE SHADE +++++

NODE NUMBER	DIRECT FLUX (QDS)	DIRECT ABS. FLUX
1	.40758+02	.36683+02
2	.37993+01	.34194+01
3	.00000	.00000
4	.18515+03	.16664+03
11	.40758+02	.36682+02
12	.00000	.00000
13	.00000	.00000
14	.18515+03	.16664+03
200	.00000	.00000
21	.00000	.00000
22	.00000	.00000
23	.00000	.00000
24	.00000	.00000
25	.00000	.00000
26	.00000	.00000

TOTAL ELAPSED TIME IN PROBLEM = 422.062 SECONDS

MODEL=SAFPLE CONFIG=CASE5 STEP=10014 SAMPLE CASE 5 - FFCAL/RBCAL/BCAL/RNCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 DIRECT IRRADIATION CALCULATION WITH SPECULAR SURFACES.

ALBEDO AND PLANETARY DIRECT INCIDENT FLUXES FOR STEP NO 13 TRUE ANOMALY = 105.91977 TIME = .43193
 ++++ IN THE SHADE ++++

NODE NUMBER	COMPUT	---DIRECT INCID. FLUX--		---DIRECT ABS. FLUX---	
		ALBEDO	PLANETARY	ALBEDO	PLANETARY
1		.000	.000	.000	.000
2		.000	.000	.000	.000
3		.000	.000	.000	.000
4		.000	.000	.000	.000
11		.000	.000	.000	.000
12		.000	.000	.000	.000
13		.000	.000	.000	.000
14		.000	.000	.000	.000
200		.000	.144+02	.000	.144+01
21		.000	.742+02	.000	.668+02
22		.000	.268+02	.000	.241+02
23		.000	.264+02	.000	.238+02
24		.000	.268+02	.000	.241+02
25		.000	.264+02	.000	.238+02
26		.000	.457+01	.000	.411+01

TOTAL ELAPSED TIME IN PROBLEM = 422.137 SECONDS
 S.A.P FLUXES HAVE BEEN WRITTEN TO RSO. LAST RESTART RECORD WRITTEN = 220

DATE 052878 TIME 023249

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UMIVAC EXEC 8 VERSION PAGE 60

MODEL=SAMPLE CONFIG=CASE5 STEP=10014
ABSORBED Q COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

VARIABLE NAME	CURRENT VALUE	DEFAULT	ABSORBED HEAT DEFINITION	OPTIONS
IAQSDS	10014	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR SOLAR DI	N/A
IAQSDA	10014	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR ALBEDO DI	N/A
IAQSDP	10014	CURRENT STEP NO.	STEP NUMBER REFERENCE FOR PLANETARY DI	N/A

MODEL=SAMPLE CONFIG=CASE5 STEP=10014 SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL
 ABSORBED Q COMPUTATION LINK.

ABSORBED HEATING RATES FOR ORBIT POINT = 10014 TRUE ANOMALY = 105.9198 TIME = .4319
 UNITS ARE ENERGY PER UNIT TIME

*** IN-THE SHADE ***

NODE	SOLAR		ALBEDO		PLANETARY		TOTAL HEAT RATES	
	DIRECT	TOTAL	DIRECT	TOTAL	DIRECT	TOTAL	DIRECT	TOTAL
1	.36683+02	.41968+02	.00000	.00000	.00000	.26715+00	.36683+02	.42235+02
2	.34194+01	.88797+01	.00000	.00000	.00000	.18739+00	.34194+01	.90571+01
3	.00000	.55391+01	.00000	.00000	.00000	.96367-01	.00000	.56955+01
4	.16664+03	.16815+03	.00000	.00000	.00000	.22717+00	.16664+03	.16838+03
11	.36682+02	.41907+02	.00000	.00000	.00000	.26715+00	.36682+02	.42174+02
12	.00000	.54836+01	.00000	.00000	.00000	.18739+00	.00000	.56710+01
13	.00000	.55381+01	.00000	.00000	.00000	.96357-01	.00000	.56345+01
14	.16664+03	.16809+03	.00000	.00000	.00000	.22717+00	.16664+03	.16872+03
200	.00000	.82513+00	.00000	.00000	.28712+01	.28739+01	.28712+01	.30014+01
21	.00000	.00000	.00000	.00000	.13765+03	.13765+03	.13765+03	.13765+03
22	.00000	.00000	.00000	.00000	.49744+02	.49744+02	.49744+02	.49744+02
23	.00000	.00000	.00000	.00000	.24746+02	.24746+02	.24746+02	.24746+02
24	.00000	.00000	.00000	.00000	.49668+02	.49668+02	.49668+02	.49668+02
25	.00000	.00000	.00000	.00000	.24746+02	.24746+02	.24746+02	.24746+02
26	.00000	.00000	.00000	.00000	.84736+01	.84736+01	.84736+01	.84736+01

TOTAL ELAPSED TIME IN PROBLEM = 422.592 SECONDS

ABSORBED Q STORED IN STEP 10014

TOTAL TIME TO COMPUTE ABSORBED Q .41

DATE 062878 TIME 023252

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 62

MODEL=SAMPLE CONFIG=CASE5 STEP=10014
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

VARIABLE NAME	CURRENT VALUE	DEFAULT	DEFINITION	OPTIONS
IQOTHE	1	1	TIME ARRAY ID NUMBER FLUX TABLES START AT IQOTHE + 1	N/A
QOTAPE	NO	2HNO	PARAMETER TO OUTPUT TO BCD TAPE	(4HTAPE,2HNO)
QOPNCH	NO	2HNO	PUNCH/NO PUNCH PARAMETER FOR OUTPUT	(3HPUN,2HNO)
QOAMPF	1.0000	1.0	AREA MULTIPLYING FACTOR	N/A
QOFMPF	1.0000	1.0	FLUX MULTIPLYING FACTOR	N/A
QOTMPF	1.0000	1.0	TIME MULTIPLYING FACTOR	N/A
QOTYPE	BOTH	NONE	PARAMETER TO DETERMINE TYPE OF OUTPUT	(3HTAB,2HAV,4HBOH)
IQOARY	ALL	NONE	STEP NO. ARRAY DIRECTIVE	(3HALL,ARRAY NAME)

MODEL= SAMPLE CONFIG=CASE5 STEP=10014
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/R8CAL/GBCAL/RKCAL/ORBGCM/DRCAL/AQCAL/QOCAL

ABSORBED HEAT RATE TABLES PUNCHED

Q = INPUT * RMPF WHERE RMPF = .10000+01
TIME = INPUT * TMPF WHERE TMPF = .10000+01
AREA IS ON SUBROUTINE CALL CARDS

1\$ TIME ARRAY	.000	.367+00.	.431+00.	.432+00.	.734+00
END\$					
2\$ HEAT RATE ARRAY	.662+01.	.118+02.	.463+02.	.422+02.	.267+00
END\$					
3\$ HEAT RATE ARRAY	.889+02.	.957+01.	.122+02.	.907+01.	.187+00
END\$					
4\$ HEAT RATE ARRAY	.572+01.	.758+01.	.732+01.	.570+01.	.964-01
END\$					
5\$ HEAT RATE ARRAY	.151+03.	.211+03.	.172+03.	.168+03.	.227+00
END\$					
6\$ HEAT RATE ARRAY	.409+01.	.118+02.	.463+02.	.422+02.	.267+00
END\$					
7\$ HEAT RATE ARRAY	.383+01.	.957+01.	.885+01.	.567+01.	.187+00
END\$					
8\$ HEAT RATE ARRAY	.121+02.	.758+01.	.726+01.	.563+01.	.964-01
END\$					
9\$ HEAT RATE ARRAY	.839+02.	.211+03.	.172+03.	.168+03.	.227+00
END\$					
10\$ HEAT RATE ARRAY	.778+01.	.646+02.	.525+02.	.370+01.	.287+01
END\$					
11\$ HEAT RATE ARRAY	.183+03.	.138+03.	.179+03.	.138+03.	.138+03
END\$					
12\$ HEAT RATE ARRAY	.111+03.	.227+03.	.222+03.	.497+02.	.497+02
END\$					
13\$ HEAT RATE ARRAY	.717+02.	.249+02.	.262+02.	.247+02.	.247+02
END\$					

DATE 062078 TIME 023254

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 64

MODEL=SAMPLE CONFIG=CASE5 STEP=10014

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

ABSORBED Q OUTPUT COMPUTATION LINK.

ABSORBED HEAT RATE TABLES PUNCHED

Q = INPUT * RMPF WHERE RMPF = .10000+01
TIME = INPUT * TMPF WHERE TMPF = .10000+01
AREA 'S ON SUBROUTINE CALL CARDS

14\$ HEAT RATE ARRAY
.658+02. .497+02. .497+02. .497+02. .497+02
END\$
15\$ HEAT RATE ARRAY
.327+02. .249+02. .247+02. .247+02. .247+02
END\$
16\$ HEAT RATE ARRAY
.882+02. .847+01. .847+01. .847+01. .847+01
END\$

DATE 062878 TIME 023254

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 0 VERSION PAGE 65

MODEL= SAMPLE CONFIG=CASE5 STEP=10014
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QDCAL

DA11HC SUBROUTINE CALL CARDS

	AREA =	INPUT	(UNITS)	* AMPF	WHERE	AMPF =	.10000+01
DA11HC	(1.46792175E	0.TIMEN,A1	.A2	.1.00000000E	0.Q1)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A3	.1.00000000E	0.Q2)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A4	.1.00000000E	0.Q3)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A5	.1.00000000E	0.Q4)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A6	.1.00000000E	0.Q11)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A7	.1.00000000E	0.Q12)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A8	.1.00000000E	0.Q13)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A9	.1.00000000E	0.Q14)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A10	.1.00000000E	0.Q200)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A11	.1.00000000E	0.Q21)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A12	.1.00000000E	0.Q22)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A13	.1.00000000E	0.Q23)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A14	.1.00000000E	0.Q24)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A15	.1.00000000E	0.Q25)\$	
DA11HC	(1.46792175E	0.TIMEN,A1	.A16	.1.00000000E	0.Q26)\$	

DATE 062970 TIME 023254

THERMAL RADIATION ANALYSIS SYSTEM (TRASYS) UNIVAC EXEC 8 VERSION PAGE 66

MODEL=SAMPLE CONFIG=CASE5 STEP=10014
ABSORBED Q OUTPUT COMPUTATION LINK.

SAMPLE CASE 5 - FFCAL/RBCAL/GBCAL/RKCAL/ORBGEN/DRCAL/AQCAL/QOCAL

AVERAGE ORBITAL HEATING RATE AND AREA CARDS PUNCHED

	VALUES ARE	RATE = INPUT (UNITS) * RMPF	WHERE RMPF =	.10000+01
	VALUES ARE	AREA = INPUT (UNITS) * AMPF	WHERE AMPF =	.10000+01
Q1	=1.59449475E	1		
Q2	=2.74823542E	1		
Q3	=5.17319250E	0		
Q4	=1.42343797E	2		
Q11	=1.52960157E	1		
Q12	=5.36798030E	0		
Q13	=6.76049656E	0		
Q14	=1.25462862E	2		
Q200	=2.46076262E	1		
Q21	=1.51001135E	2		
Q22	=1.24700516E	2		
Q23	=3.65944627E	1		
Q24	=5.37007242E	1		
Q25	=2.67737916E	1		
Q26	=2.04939971E	1		

TOTAL TIME TO COMPUTE ABSORBED Q OUT .52

NORMAL TERMINATION BY PROCESSOR

8PHD.FLE8

8BRKPT PRINTS