### **AV Line Managed Switches**

### /// AV Line

**NETGEAR®** 



Introducing the NETGEAR AV Line of M4250 Switches, developed and engineered for audio/video professionals with dedicated service and support. M4250 has been built from the ground up for the growing AV over IP market, combining years of networking expertise in AV with M4300 and M4500 series with best practices from leading experts in the professional AV market. AV codecs



generally use 1Gbps or 10Gbps per stream and the AV Line of M4250 targets the widespread 1Gbps codecs.

PoE+, Ultra90 PoE++ and rear-facing ports ensure a clean integration in AV racks. M4250 switches come pre-configured for standard audio and video signals. When requirements are more specific, an AV user interface offers customization with port-based profiles. For audio Dante,

### Switching Engineered for AV over IP

Q-SYS and AES67 profiles are available, as well as an AVB profile requiring an AVB license sold separately. For video the M4250 offers profiles for NVX, AMX, Q-SYS, NDI, Dante etc. as well as audio/video/control mixed profiles. When multiple switches are used, NETGEAR IGMP Plus<sup>TM</sup> brings automation for you to just connect them together, or with M4300 and M4500 switches.

### Highlights

#### **Extended AV features**

- Dedicated AV web-based GUI interface for more specific AV installations
- Color-based AV profiles can be applied to the different ports
- Dante, Q-SYS, AES67 and AVB audio profiles
- AVB requires a license (sold separately)
- NVX, SVSI, Q-SYS, NDI and Dante video profiles
- Audio / video / control mixed profiles
- Automatic switch interconnect with NETGEAR Auto-Trunk, Auto-LAG and IGMP Plus
- Common Layer 2 and Layer 3 switching engine across all M4250 models

- Built-in IT web GUI, console, telnet and SSH consistent with other NETGEAR M4300 and M4500 series
- Feature set includes static, RIP and PIM routing, DHCP Server and PTPv2

#### Audio Video Bridging (AVB) services

- AVB is one of the many features designed into the M4250 product line
- AVB is an industry standard for transporting content over a network
- AVB is used most often when very low latency is required such as in live performances when lip sync is critical
- All of the AV Line M4250 switches can be optionally licensed for AVB support

#### Other IT use cases

 Standard or recessed mounting with all ports in the back, or all ports in the front  Fully featured L2/L3/L4 platform for midsize Enterprise campus networks, IoT and IPTV

#### Industry standard management

- Industry standard command line interface (CLI), main NETGEAR IT web interface (GUI), SNMP, sFlow and RSPAN
- Single-pane-of-glass NMS300
  management platform with centralized
  firmware updates and massconfiguration support

#### Industry leading warranty

- NETGEAR M4250 series is covered under NETGEAR ProSAFE Limited Lifetime Hardware Warranty\*
- 90 days of Technical Support via phone and email, Lifetime Technical Support through online chat and Lifetime Next Business Day hardware replacement

# **NETGEAR**°

### AV Line

### Hardware-at-a-Glance

|                    |                                    |                          |   | REAR (                                | REVERSIBLE)*            |   |                                  | LEDs                           | MANAGEMENT  |                 |
|--------------------|------------------------------------|--------------------------|---|---------------------------------------|-------------------------|---|----------------------------------|--------------------------------|---|-----------------|
| Model<br>Name      | Form-Factor                        | Switch-<br>ing<br>Fabric | 10/100/1000<br>BASE-T RJ45 ports  | 100/1000/2.5G<br>BASE-T RJ45<br>ports | 1000BASE-X<br>SFP ports | 1000/10G<br>BASE-X<br>SFP+ ports                            | PSU                              | Status<br>Information          | Out-of-band<br>Console                                    | Model<br>Number |
| M4250-10G2F-PoE+   | 1U rackmount<br>440 x 43.2 x 200mm | 24 Gbps                  | 8 ports PoE+ (125W)<br>2 additional ports   | -                                     | 2 ports SFP<br>1G       | -   | 1 x Fixed (C14)<br>On/off switch |                                |   | GSM4212P        |
| M4250-10G2XF-PoE+  | 1U rackmount<br>440 x 43.2 x 200mm | 60 Gbps                  | 8 ports PoE+ (240W)<br>2 additional ports   | -                                     | -                       | 2 ports SFP+<br>1G, 10G                                     | 1 x Fixed (C14)<br>On/off switch |                                |   | GSM4212PX       |
| M4250-10G2XF-PoE++ | 1U rackmount<br>440 x 43.2 x 257mm | 60 Gbps                  | 8 ports PoE++** (720W)<br>2 additional ports  | -                                     | -                       | 2 ports SFP+<br>1G, 10G                                     | 1 x Fixed (C14)<br>On/off switch |                                |   | GSM4212UX       |
| M4250-26G4F-PoE+   | 1U rackmount<br>440x43.2x257mm     | 60 Gbps                  | 24 ports PoE+ (300W)<br>2 additional ports  | -                                     | 4 ports SFP<br>1G       |   | 1 x Fixed (C14)<br>On/Off switch |                                |   | GSM4230P        |
| M4250-26G4F-PoE++  | 1U rackmount<br>440x43.2x400mm     | 60 Gbps                  | 24 ports PoE++<br>(1,440W)**<br>(1 PSU/720W;<br>2 PSU/1,440W)<br>2 additional ports | -                                     | 4 ports SFP<br>1G       |   | 2 x Fixed (C14)<br>On/Off switch | Available both in front and in | Ethernet:<br>1G Out-of-band (Rear)                        | GSM4230UP       |
| M4250-26G4XF-PoE+  | 1U rackmount<br>440x43.2x400mm     | 132 Gbps                 | 24 ports PoE+ (480W)<br>2 additional ports  | -                                     | -                       | 4 ports SFP+<br>1G; 10G                                     | 1 x Fixed (C14)<br>On/Off switch | the rear:                      | Console: RJ45 RS232 (Rear) Console: USB-C (Rear) Storage: | GSM4230PX       |
| M4250-40G8F-PoE+   | 1U rackmount<br>440x43.2x400mm     | 96 Gbps                  | 40 ports PoE+ (480W)  | -                                     | 8 ports SFP<br>1G       |   | 1 x Fixed (C14)<br>On/Off switch | Power LED PoE Max LED          |   | GSM4248P        |
| M4250-40G8XF-PoE+  | 1U rackmount<br>440x43.2x400mm     | 240 Gbps                 | 40 ports PoE+ (960W)  | -                                     | -                       | 8 ports SFP+<br>1G; 10G                                     | 1 x Fixed (C14)<br>On/Off switch | (PoE models)<br>Fan LED        | USB-A (Front)<br>LED Ext:                                 | GSM4248PX       |
| M4250-40G8XF-PoE++ | 2U rackmount<br>440x86.4x350mm     | 240 Gbps                 | 40 ports PoE++<br>(2,880W)**<br>(1 PSU/720W;<br>2 PSU/1,650W;<br>3 PSU/2,880W)      | -                                     | -                       | 8 ports SFP+<br>1G; 10G                                     | 3 x Fixed (C14)<br>On/Off switch | Port LEDs                      | USB-C (Front)   | GSM4248UX       |
| M4250-12M2XF       | 1U rackmount<br>440x43.2x100mm     | 100 Gbps                 | -   | 12 ports<br>100M, 1G,<br>2.5G         | -                       | 2 ports SFP+<br>1G, 10G                                     | 1 x Fixed (C14)<br>On/Off switch |                                |   | MSM4214X        |
| M4250-16XF         | 1U rackmount<br>440x43.2x200mm     | 320 Gbps                 | -   | -                                     | -                       | 16 ports SFP+<br>10G only<br>(First 12 ports<br>support 1G) | 1 x Fixed (C14)<br>On/Off switch |                                |   | XSM4216F        |

<sup>\*</sup> Reversed mounting is possible when ports are desired on the front of the rack by using the standard rackmount ears, or the included alternate rackmount ears to mount the switch recessed by 2-Inches to allow for the cabling.

<sup>\*\*</sup> Ultra90 PoE++ 802.3bt is compatible with 802.3af PoE (15.4W), 802.3at PoE+ (30W) and 802.3bt (60W, 75W and 90W).





# **NETGEAR**<sup>®</sup>

### AV Line

### Acoustic-at-a-Glance

|                    | FAN C                      | OFF MODE S | Setting / maxii        | mum load             | ding*                    | QL                | JIET MC     | DDE Setting at        | 25°C ambient*      | *        | COOL        |                       | ing at 25°C |              |
|--------------------|----------------------------|------------|------------------------|----------------------|--------------------------|-------------------|-------------|-----------------------|--------------------|----------|-------------|-----------------------|-------------|--------------|
| Model Name         | Fanless State              | Ambient    | Sensor                 | PoE<br>Power<br>Load | Conditions               | PoE Power<br>Load | Fan<br>Duty | Sensor                | Case Temp<br>(Top) | Acoustic | Fan<br>Duty | Case<br>Temp<br>(Top) | Acoustic    | Model Number |
| M4250-10G2F-PoE+   | 0dBA / 41.8°C<br>Case Temp | 25°C       | <= 42°C                | 80W                  | All ports can<br>be used | 125W              | 25          | <= 36°C               | 35.9°C             | 27.38dBA | 100         | 27.2°C                | 55dBA       | GSM4212P     |
| M4250-10G2XF-PoE+  | 0dBA / 39.6°C<br>Case Temp | 25°C       | <= 44°C                | 90W                  | All ports can<br>be used | 240W              | 25          | <= 37°C               | 40.6°C             | 27.4dBA  | 100         | 30.9°C                | 56dBA       | GSM4212PX    |
|                    |                            |            |                        |                      |                          | 0-250W            | 25          | <= 49°C               | 42.9°C             | 34.57dBA |             |                       |             |              |
|                    | 0dBA / 44.6°C              |            |                        |                      | All ports can            | 250-380W          | 30          | <= 49°C               | 43.3°C             | 40dBA    |             |                       |             |              |
| M4250-10G2XF-PoE++ | Case Temp                  | 25°C       | <= 67°C                | 45W                  | be used                  | 380W-500W         | 35          | <= 49°C               | 44.9°C             | 44.22dBA | 100         | 41.8°C                | 66.23dBA    | GSM4212UX    |
|                    |                            |            |                        |                      |                          | 500W-720W         | 40          | <= 49°C               | 52.1℃              | 47.19dBA |             |                       |             |              |
|                    | 0dBA / 40.5°C              |            | S1<= 43°C              |                      | 8 ports PoE              | 0-200W            | 25          | S1<= 43°C<br>S2<=47°C | 43.5°C             | 28dBA    |             |                       |             |              |
| M4250-26G4F-PoE+   | Case Temp                  | 25°C       | S2<= 47°C              | 45W                  | (no SFP)                 | 200W-300W         | 30          | S1<= 44°C<br>S2<=48°C | 51.3°C             | 34dBA    | 100         | 36.7°C                | 57dBA       | GSM4230P     |
|                    |                            |            | <u>I</u>               |                      | 1                        | 0-280W            | 20          | S1<= 37°C<br>S2<=39°C | 52.9°C             | 28dBA    |             |                       |             |              |
|                    |                            |            |                        |                      |                          | 280W-360W         | 25          | S1<= 38°C<br>S2<=40°C | 57.4°C             | 36dBA    | -           |                       |             |              |
|                    |                            |            |                        |                      |                          | 360W-420W         | 30          | S1<= 39°C<br>S2<=41°C | 54.4°C             | 41dBA    | 100         |                       |             |              |
|                    |                            |            |                        |                      |                          | 420W-480W         | 35          | S1<= 40°C<br>S2<=42°C | 53.3°C             | 47dBA    |             | 720W<br>36.7°C        |             |              |
| M4250-26G4F-PoE++  |                            | N          | ot Supported           |                      |                          | 480W-540W         | 40          | S1<= 41°C<br>S2<=43°C | 52.3°C             | 50dBA    |             | 1,440W                | 69dBA       | GSM4230UP    |
|                    |                            |            |                        |                      |                          | 540W-600W         | 45          | S1<= 42°C<br>S2<=44°C | 54.4°C             | 54dBA    |             | 46°C                  |             |              |
|                    |                            |            |                        |                      |                          | 600W-660W         | 50          | S1<= 43°C<br>S2<=45°C | 53.6°C             | 57dBA    | -           |                       |             |              |
|                    |                            |            |                        |                      |                          | 660W-1,440W       | 55          | S1<= 44°C<br>S2<=46°C | 55.7°C             | 60dBA    | _           |                       |             |              |
|                    |                            |            |                        |                      |                          | 0-350W            | 20          | S1<= 41°C<br>S2<=46°C | 39.3℃              | 25dBA    |             |                       |             |              |
| M4250-26G4XF-PoE+  | 0dBA / 43.4°C<br>Case Temp | 25°C       | S1<= 41°C<br>S2<= 46°C | 45W                  | 8 ports PoE<br>(no SFP+) | 350W-480W         | 30          | S1<= 42°C<br>S2<=47°C | 36.8℃              | 42dBA    | 100         | 32.3℃                 | 67dBA       | GSM4230PX    |
|                    |                            |            |                        |                      |                          | 0-150W            | 20          | S1<= 37°C             | 43.1°C             | 30dBA    |             |                       |             |              |
|                    |                            |            |                        |                      |                          | 150W-200W         | 25          | S2<=50°C<br>S1<= 38°C | 42.1°C             | 36dBA    |             |                       |             |              |
| M4250-40G8F-PoE+   | 0dBA / 45.2°C<br>Case Temp | 25°C       | S1<= 37°C<br>S2<= 50°C | 30W                  | 8 ports PoE<br>(No SFP)  | 200W-340W         | 30          | S1<= 39°C<br>S2<=51°C | 44°C               | 40dBA    | 100 35.4    | 35.4°C                | 68dBA       | GSM4248P     |
|                    |                            |            |                        |                      |                          | 340W-480W         | 35          | S1<= 40°C             | 47.6°C             | 47dBA    |             |                       |             |              |


### AV Line

### Acoustic-at-a-Glance

|                    | FAN (                      | OFF MODE | Setting / maxi | mum loac             | ling*                     | Ql                | JIET MC     | DDE Setting at 2      | 25°C ambient       | **       | COOL N      |                       | ng at 25°C |              |
|--------------------|----------------------------|----------|----------------|----------------------|---------------------------|-------------------|-------------|-----------------------|--------------------|----------|-------------|-----------------------|------------|--------------|
| Model Name         | Fanless State              | Ambient  | Sensor         | PoE<br>Power<br>Load | Conditions                | PoE Power<br>Load | Fan<br>Duty | Sensor                | Case Temp<br>(Top) | Acoustic | Fan<br>Duty | Case<br>Temp<br>(Top) | Acoustic   | Model Number |
|                    |                            |          |                | ,                    |                           | 0-400W            | 20          | S1<= 33°C<br>S2<=46°C | 54.2°C             | 29dBA    |             |                       |            |              |
|                    |                            |          |                |                      |                           | 400W-480W         | 25          | S1<= 34°C<br>S2<=47°C | 42.8°C             | 35dBA    |             |                       |            |              |
|                    |                            |          |                |                      |                           | 480W-560W         | 30          | S1<= 35°C<br>S2<=48°C | 41.9°C             | 41dBA    |             |                       |            |              |
| MACED ADCOVED F.   |                            |          |                |                      |                           | 560W-640W         | 35          | S1<= 36°C<br>S2<=49°C | 42.1°C             | 48dBA    | 100         | 27.400                | (O ID A    | CCN44040DV   |
| M4250-40G8XF-PoE+  |                            | IN       | lot Supported  |                      |                           | 640W-720W         | 40          | S1<= 37°C<br>S2<=50°C | 40.9°C             | 51dBA    | 100         | 36.1℃                 | 69dBA      | GSM4248PX    |
|                    |                            |          |                |                      |                           | 720W-800W         | 45          | S1<= 38°C<br>S2<=51°C | 40.7°C             | 54dBA    |             |                       |            |              |
|                    |                            |          |                |                      |                           | 800W-880W         | 50          | S1<= 39°C<br>S2<=52°C | 40.4°C             | 57dBA    |             |                       |            |              |
|                    |                            |          |                |                      |                           | 880W-960W         | 55          | S1<= 40°C<br>S2<=53°C | 40.5°C             | 59dBA    |             |                       |            |              |
|                    |                            |          |                |                      |                           | 0-160W            | 20          | S1<= 37°C<br>S2<=49°C | 41.3°C             | 30dBA    |             |                       |            |              |
|                    |                            |          |                |                      |                           | 160W-240W         | 25          | S1<= 38°C             | 38.8℃              | 36dBA    |             |                       |            |              |
|                    |                            |          |                |                      |                           | 240W-320W         | 30          | S1<= 39°C<br>S2<=50°C | 36.4°C             | 42dBA    |             | 720W<br>31.4°C        |            |              |
| 1440F0 40C0VF D F  |                            |          |                |                      |                           | 320W-400W         | 35          | S1<= 40°C             | 35.3℃              | 49dBA    | 100         | 1,650W                | 74 10 4    | 00144040111  |
| M4250-40G8XF-PoE++ |                            | IN       | lot Supported  |                      |                           | 400W-480W         | 40          | S1<= 41°C<br>S2<=51°C | 34.4°C             | 51dBA    | 100         | 33.5℃                 | 71dBA      | GSM4248UX    |
|                    |                            |          |                |                      |                           | 480W-560W         | 45          | S1<= 42°C             | 34.3°C             | 55dBA    |             | 2,880W<br>35.4°C      |            |              |
|                    |                            |          |                |                      |                           | 560W-640W         | 50          | S1<= 43°C<br>S2<=52°C | 35.1℃              | 57dBA    |             | 555                   |            |              |
|                    |                            |          |                |                      |                           | 660W-2,880W       | 55          | S1<= 44°C             | 36.5℃              | 60dBA    |             |                       |            |              |
| M4250-12M2XF       | 0dBA / 56°C<br>Case Temp   | 25°C     | <= 64°C        | -                    | 8 ports 2.5G<br>(no SFP+) | -                 | 25          | <= 58°C               | 53.5℃              | 28.5dBA  | 100         | 33.2℃                 | 55dBA      | MSM4214X     |
| M4250-16XF         | 0dBA / 41.3°C<br>Case Temp | 25°C     | <= 78°C        | -                    | 8 ports SFP+              | -                 | 25          | <= 67°C               | 41.6°C             | 27.44dBA | 100         | 30.3°C                | 57dBA      | XSM4216F     |

<sup>\*</sup> Software-controlled fan adjustments enable the fans to be turned off when ambient temperature and PoE loads are appropriate for a totally fanless operation.

<sup>\*\*</sup> dBA values are SPL (Sound Pressure Level) values, testing following the ISO-7779 standard. Bystander Mode. Chamber Temp 25°C during testing. Full, 100%, Data and PoE loaded. Worst case.

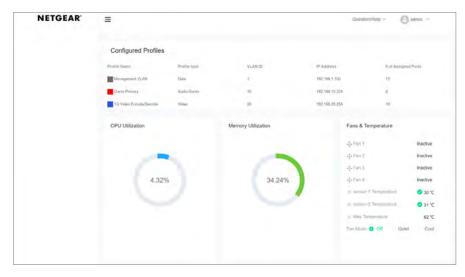

### /// AV Line

### Software-at-a-Glance

|                 |   |   |  |  | LITE LAYER  | 3 PACKAGE   |   |   |   |   |  |                 |
|-----------------|---|---|--|--|---|---|---|---|---|---|--|-----------------|
| Model<br>Name   | Management  | AV<br>Dedicated UI  | IPv4 / IPv6<br>ACL and<br>QoS,<br>DiffServ                                       | IPv4 / IPv6<br>Multicast<br>Filtering  | IPv4 / IPv6<br>Policing and<br>Convergence  | Spanning<br>Tree<br>Green<br>Ethernet   | VLANs   | Trunking<br>Port<br>Channel   | IPv4 / IPv6<br>Authentication<br>Security   | IPv4 / IPv6<br>Static<br>Routing  | IPv4 / IPv6<br>Dynamic<br>Routing      | Model<br>Number |
| M4250<br>series | Out-of-band IT Web GUI (main) HTTPs CLI; Telnet; SSH SNMP, MIBs RSPAN Radius Users, TACACS+ | AV web-based GUI  Designed for AV installers  AV-related controls  Audio over IP profiles  AVB profile*  Video over IP profiles  Mixed Audio and Video profiles | Ingress/<br>egress<br>1 Kbps<br>shaping<br>Time-based<br>Single Rate<br>Policing | NETGEAR IGMP™ Plus for automated IGMP between switches  IGMPv3 MLDv2 Snooping, Proxy ASM & SSM  IGMPv1,v2 Querier (compatible v3)  Control Packet Flooding | Auto-VoIP  Policy-based routing (PBR)  LLDP-MED  IEEE 1588 PTPv2 1-Step End-to-End Transparent Clock  AVB*: 802.1AS, 802.1Qav, 802.1Qat MSRP, | STP, MTP,<br>RSTP  PV(R)STP  BPDU/STRG Root Guard  EEE 802.3az (EEE is disabled by default) | Static,<br>Dynamic,<br>Voice,<br>MAC<br>GVRP/<br>GMRP<br>Double<br>VLAN<br>mode<br>Private<br>VLANs | Auto-Trunk<br>and Auto-LAG<br>between M4250<br>Switches  Static LAG, or<br>Dynamic LACP  (LACP automati-<br>cally reverts to<br>and from Static<br>LAG)  Seven (7) L2/<br>L3/L4 hashing<br>algorithms | Successive Tiering (DOT1X; MAB; Captive Portal)  DHCP Snooping Dynamic ARP Inspection IP Source Guard | Port,<br>Subnet,<br>VLAN<br>routing<br>Multicast<br>static routes<br>DHCPv4<br>Server<br>DHCP Relay<br>Stateful<br>DHCPv6<br>Server | IPv4: RIP IPv4/IPv6: PIM-SM PIM-DM SSM | All<br>models   |

<sup>\*</sup> Requires AVB license, sold separately. All other software features are available, license-free.





# **NETGEAR**<sup>®</sup>

### AV Line

# AV Line Managed Switches

### Performance-at-a-Glance

|                    |                           |                                   |                       |                                     |                  | TA   | BLE SIZE                               |                                       |                 |                                       |             |                            |  |                 |
|--------------------|---------------------------|-----------------------------------|-----------------------|-------------------------------------|------------------|--|--|---------------------------------------|-----------------|---------------------------------------|-------------|----------------------------|--|-----------------|
| Model<br>Name      | MAC<br>ARP/NDP            | Routing/<br>Switching<br>Capacity | Throughput<br>64-byte | Application<br>Route Scaling        | Packet<br>Buffer | Latency                                    | CPU                                    | IP<br>Multicast<br>Routing<br>Entries | Jumbo<br>Frames | Multicast<br>IGMP Group<br>membership | VLANs       | DHCP                       | sFlow                                    | Model<br>Number |
| M4250-10G2F-PoE+   | 16K MAC<br>4K ARP/<br>NDP | 24 Gbps<br>Line-Rate              | 17.86<br>Mpps         | Static:<br>894v4/126v6<br>RIP: 32v4 | 16Mb             | <2.27μs 1G                                 |  |                                       |                 |                                       |             |                            |  | GSM4212P        |
| M4250-10G2XF-PoE+  | 16K MAC<br>4K ARP/<br>NDP | 60 Gbps<br>Line-Rate              | 44.64<br>Mpps         | Static:<br>894v4/126v6<br>RIP: 32v4 | 16Mb             | <2.14µs 1G<br><0.84µs 10G                  | ARM A9<br>1.25Ghz<br>32-Bit<br>2GB RAM |                                       |                 |                                       |             |                            |  | GSM4212P        |
| M4250-10G2XF-PoE++ | 16K MAC<br>4K ARP/<br>NDP | 60 Gbps<br>Line-Rate              | 44.64<br>Mpps         | Static:<br>894v4/126v6<br>RIP: 32v4 | 16Mb             | <1.84µs 1G<br><0.81µs 10G                  |  |                                       |                 |                                       |             |                            |  | GSM4212U        |
| M4250-26G4F-PoE+   | 16K MAC<br>4K ARP/NDP     | 60 Gbps<br>Line-Rate              | 44.64<br>Mpps         | Static:<br>894v4/126v6<br>RIP: 32v4 | 16Mb             | <2.15.μs 1G                                |  |                                       |                 |                                       |             |                            |  | GSM4230P        |
| M4250-26G4F-PoE++  | 16K MAC<br>4K ARP/NDP     | 60 Gbps<br>Line-Rate              | 44.64<br>Mpps         | Static:<br>894v4/126v6<br>RIP: 32v4 | 16Mb             | <2.15μs 1G                                 | Quad-Core<br>Cortex-A57<br>ARMv8       |                                       |                 |                                       |             | DHCP<br>Server:            |  | GSM4230UF       |
| M4250-26G4XF-PoE+  | 16K MAC<br>4K ARP/NDP     | 132 Gbps<br>Line-Rate             | 98.21<br>Mpps         | Static:<br>894v4/126v6<br>RIP: 32v4 | 16Mb             | <2.29µs 1G<br><0.83µs 10G                  |  |                                       | Up to<br>12K    | 2K IPv4<br>2K IPv6                    | 4K<br>VLANs | 2K leases  IPv4: 256 pools | 16 samplers<br>16 pollers<br>8 receivers | GSM4230P>       |
| M4250-40G8F-PoE+   | 16K MAC<br>4K ARP/NDP     | 96 Gbps<br>Line-Rate              | 71.42<br>Mpps         | Static:<br>894v4/126v6<br>RIP: 32v4 | 32Mb             | <2.46μs 1G                                 | 1.8Ghz<br>64-bit<br>2GB RAM            |                                       |                 |                                       |             | IPv6: 16<br>pools          |  | GSM4248P        |
| M4250-40G8XF-PoE+  | 16K MAC<br>4K ARP/NDP     | 240 Gbps<br>Line-Rate             | 178.56<br>Mpps        | Static:<br>894v4/126v6<br>RIP: 32v4 | 32Mb             | <2.74μs 1G<br><0.73μs 10G                  |  |                                       |                 |                                       |             |                            |  | GSM4248P>       |
| M4250-40G8XF-PoE++ | 16K MAC<br>4K ARP/NDP     | 240 Gbps<br>Line-Rate             | 178.56<br>Mpps        | Static:<br>894v4/126v6<br>RIP: 32v4 | 32Mb             | <2.78μs 1G<br><0.73μs 10G                  | ARM A9<br>1.25Ghz<br>32-Bit<br>2GB RAM |                                       |                 |                                       |             |                            |  | GSM4248UX       |
| M4250-12M2XF       | 16K MAC<br>4K ARP/<br>NDP | 100 Gbps<br>Line-Rate             | 74.40<br>Mpps         | Static:<br>894v4/126v6<br>RIP: 32v4 | 16Mb             | <2.84.µs 1G<br><6.02µs 2.5G<br><0.81µs 10G |  |                                       |                 |                                       |             |                            |  | MSM4214X        |
| M4250-16XF         | 16K MAC<br>4K ARP/<br>NDP | 320 Gbps<br>Line-Rate             | 238.08<br>Mpps        | Static:<br>894v4/126v6<br>RIP: 32v4 | 16Mb             | <1.30μs 1G<br><0.86μs 10G                  |  |                                       |                 |                                       |             |                            |  | XSM4216F        |

### /// AV Line

#### **Product Brief**





The NETGEAR AV Line M4250 series was designed with input from AV Professionals. The result is a line of switches built from the ground up to support 1Gb audio and video over IP with customized hardware and software along with dedicated service and support.

#### NETGEAR M4250 series key features:

- Ranges from 8 to 48 ports with a variety of PoE+ and Ultra90 PoE++ options for 15.4W, 30W, 60W, 75W and 90W AVoIP endpoints
- Uplink options include 1G for audio installations or standalone video installations as well as 10G uplinks for larger scale video deployments
- Also includes 12-port multi-gigabit Ethernet and 16-port 1G/10G fiber models for plug and play aggregation in a star topology
- Designed for a clean integration with traditional, rack-mounted, AV equipment
- The M4250 switches come with a sleek, black display panel with status in front and all cabling plus additional status in the back
- Reversed mounting is possible when ports are desired on the front of the rack
- A second pair of rackmount ears allows the switches to be mounted recessed by 2-inches to allow for the cabling

- Software-controlled fan adjustments enable the fans to be turned off when ambient temperature and PoE loads are appropriate for a totally fanless operation
- Threaded holes on the bottom (4xM5 for 50x100mm VESA) and in front (1xM10 for clamps) allow for universal mounting options outside the rack as well

# NETGEAR M4250 series AV software features:

- Pre-configured for audio and video over IP out of the box, the M4250 switches enable encoders and decoders to be connected with zero configuration
- When more configuration is required, an AV web-based GUI is available
- This interface has been specially designed for AV installers with specific AV-related controls made more accessible and with port-based profiles
- For audio, profiles for Dante, Q-SYS and AES67 are built-in, as well as an AVB profile (AVB license sold separately)

- For video, the M4250 offers profiles for NVX, SVSI, Q-SYS, NDI, Kramer KDS, Aurora Multimedia, ZeeVee, Atlona, Dante and SDVoE
- Other AV CODECs and manufacturers are supported as well as audio/video/ control mixed profiles
- To further simplify star deployments, NETGEAR IGMP Plus™ brings multicast automation between all M4250 switches, and with M4300/M4500
- With Auto-Trunk and Auto-LAG, simply connect M4250 switches together and you are done!

# NETGEAR M4250 series other software features:

- All M4250 switches share the same high-end NETGEAR Layer 2 / Layer 3 switching engine for a consistent experience
- All switches in the M4250 series have another main, IT web-based GUI for midsize Enterprise campus networks, IoT and IPTV

### /// AV Line

### **AV Line Managed Switches**

- Additional features include static, RIP and PIM-SM, DM and SSM multicast routing, DHCP Server and PTPv2 Transparent Clock (1-step E2E)
- AVB is the only feature requiring a license, all other advanced features are available license-free
- Advanced classifier-based, time-based hardware implementation for L2 (MAC), L3 (IP) and L4 (UDP/TCP transport ports) security and prioritization
- Selectable Port-Channel / LAG (802.3ad - 802.1AX) L2/L3/L4 hashing for fault tolerance and load sharing with any type of Ethernet channeling
- Voice VLAN with SIP, H323 and SCCP protocols detection and LLDP-MED IP phones automatic QoS and VLAN configuration
- Efficient authentication tiering with successive DOT1X, MAB and Captive Portal methods for streamlined BYOD
- Comprehensive IPv4/IPv6 static and dynamic routing including Policy-based routing and 6-to-4 tunneling
- Advanced IPv4/IPv6 security implementation including malicious code detection, DHCP Snooping, IP Source Guard protection and DoS attacks mitigation

# NETGEAR M4250 series management features:

- DHCP/BootP innovative auto-installation including firmware and configuration file upload automation
- Industry standard SNMP, RMON, MIB, LLDP, AAA, sFlow, RSPAN and PTPv2
- Service port for out-of-band Ethernet management (OOB)
- Standard RS232 straight-through serial RJ45 and USB Type-C ports for local management console
- Standard USB-A port for local storage, logs, configuration or image files
- Dual firmware image for updates with minimum service interruption
- Single-pane-of-glass NMS300 management platform with mass configuration support
- Industry standard command line interface (CLI) for IT admins used to other vendors commands
- Fully functional Web console (main GUI) for IT admins who prefer an easy to use graphical interface
- Dedicated AV web-based GUI interface available at [switch IP address:8080] for AV installations

# NETGEAR M4250 series warranty and support:

- NETGEAR ProSAFE Limited Lifetime Hardware Warranty\*\*
- Included Lifetime Technical Support
- Included Lifetime Next Business Day Hardware Replacement
- Offering free network design services and installation support, the NETGEAR Engineering Services Team is ready to help ensure your 1G deployments with the M4250 AV over IP switches go as smooth as possible. Just drop us an email at ProAVDesign@netgear.com to get started!








### //// AV Line

### Features highlights

#### **Dedicated AV UI for AV installations**

M4250 switch series is pre-configured for Audio and Video over IP out of the box with a dedicated AV web-based GUI interface for more specific AV installations

- Color-based AV profiles can be applied to the different ports
- Dante, Q-SYS, AES67 and AVB audio profiles (AVB license sold separately)
- NVX, AMX, Q-SYS, NDI, Kramer KDS, Aurora Multimedia, ZeeVee, Atlona, Dante, etc. video profiles
- Audio / video / control mixed profiles

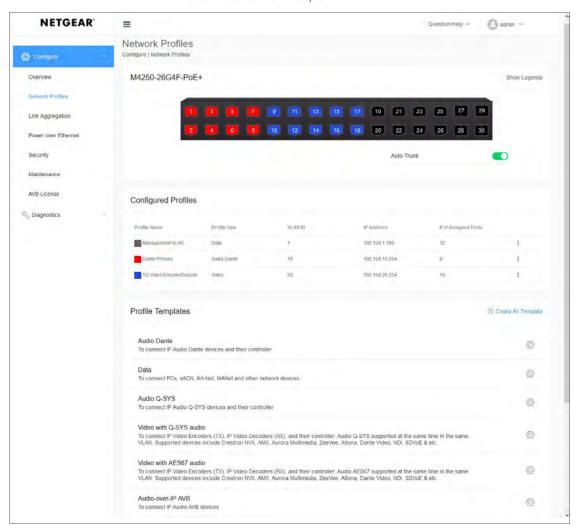

#### Best value switching performance:

 $16 K\,MAC\,address\,table,\,4 K\,ARP\,and\,4 K\,concurrent\,VLANs\,for\,typical\,midsize\,environnements$ 

Low latency at all network speeds, including 10 Gigabit fiber interfaces

Jumbo frames support of up to 12KB accelerating performance with compatible nodes

Ranges from 8 to 48 ports with a variety of PoE+ and Ultra90 PoE++ 802.3bt options for 15.4W, 30W, 60W, 75W and 90W AVoIP (1G) endpoints

# AV Line Managed Switches

### //// AV Line

**NETGEAR**<sup>®</sup>

#### Tier 1 availability

Rapid Spanning Tree (RSTP) and Multiple Spanning Tree (MSTP) allow for rapid transitionning of the ports to the Forwarding state and the suppression of Topology Change Notification

NETGEAR PVSTP implementation follows the same rules than other vendor's Per VLAN STP for strict interoperability

- Including industry-standard PVST+ interoperability
- PVSTP is similar to the MSTP protocol as defined by IEEE 802.1s, the main difference being PVSTP runs one instance per VLAN
- In other words, each configured VLAN runs an independent instance of PVSTP
- FastUplink feature immediately moves an alternate port with lowest cost to forwarding state when the root port goes down to reduce recovery time
- FastBackbone feature selects new indirect port when an indirect port fails
- NETGEAR PVRSTP implementation follows the same rules than other vendor's Per VLAN RSTP for strict interoperability
- Including industry-standard RPVST+ interoperability
- PVRSTP is similar to the RSTP protocol as defined by IEEE 802.1w, the main difference being PVRSTP runs one instance per VLAN
- In other words, each configured VLAN runs an independent instance of PVRSTP
- Each PVRSTP instance elects a root bridge independent of the other
- Hence there are as many Root Bridges in the region as there are VLANs configured
- Per VLAN RSTP has in built support for FastUplink and FastBackbone

IP address conflict detection performed by embedded DHCP servers prevents accidental IP address duplicates from perturbing the overall network stability

IP Event Dampening reduces the effect of interface flaps on routing protocols: the routing protocols temporarily disable their processing (on the unstable interface) until the interface becomes stable, thereby greatly increasing the overall stability of the network

#### Ease of deployment

Automatic configuration with DHCP and BootP Auto Install eases large deployments with a scalable configuration files management capability, mapping IP addresses and host names and providing individual configuration files to multiple switches as soon as they are initialized on the network

Both the Switch Serial Number and primary MAC address are reported by a simple "show hardware" command in CLI - facilitating discovery and remote configuration operations

M4300 DHCP L2 Relay agents eliminate the need to have a DHCP server on each physical network or subnet

- DHCP Relay agents process DHCP messages and generate new DHCP messages
- Supports DHCP Relay Option 82 circuit-id and remote-id for VLANs
- DHCP Relay agents are typically IP routing-aware devices and can be referred to as Layer 3 relay agents

Automatic Voice over IP prioritization with Auto-VoIP simplifies most complex multi-vendor IP telephones deployments either based on protocols (SIP, H323 and SCCP) or on OUI bytes (default database and user-based OUIs) in the phone source MAC address; providing the best class of service to VoIP streams (both data and signaling) over other ordinary traffic by classifying traffic, and enabling correct egress queue configuration

An associated Voice VLAN can be easily configured with Auto-VoIP for further traffic isolation

When deployed IP phones are LLDP-MED compliant, the Voice VLAN will use LLDP-MED to pass on the VLAN ID, 802.1P priority and DSCP values to the IP phones, accelerating convergent deployments

#### Ease of management and granular control

Dual firmware image and dual configuration file for transparent firmware updates / configuration changes with minimum service interruption

Flexible Port-Channel/LAG (802.3ad - 802.1AX) implementation for maximum compatibility, fault tolerance and load sharing with any type of Ethernet channeling from other vendors switch, server or storage devices conforming to IEEE 802.3ad - including static (selectable hashing algorithms) - or to IEEE 802.1AX with dynamic LAGs or port-channel (highly tunable LACP Link Aggregation Control Protocol)

LACP mode automatically reverts to and from Static LAG, useful when the host isn't LACP anymore, for instance during a factory reset or re-configuration

Auto-LAG: If more than one link between two M4250 switches, a Link Aggregation Group is created, dynamically

Unidirectional Link Detection Protocol (UDLD) and Aggressive UDLD detect and avoid unidirectional links automatically, in order to prevent forwarding anomalies in a Layer 2 communication channel in which a bi-directional link stops passing traffic in one direction

Port names feature allows for descriptive names on all interfaces and better clarity in real word admin daily tasks

### //// AV Line

### **AV Line Managed Switches**

SDM (System Data Management, or switch database) templates allow for granular system resources distribution depending on IPv4 or IPv6 applications

- ARP Entries (the maximum number of entries in the IPv4 Address Resolution Protocol ARP cache for routing interfaces)
- IPv4 Unicast Routes (the maximum number of IPv4 unicast forwarding table entries)
- IPv6 NDP Entries (the maximum number of IPv6 Neighbor Discovery Protocol NDP cache entries)
- IPv6 Unicast Routes (the maximum number of IPv6 unicast forwarding table entries)
- ECMP Next Hops (the maximum number of next hops that can be installed in the IPv4 and IPv6 unicast forwarding tables)
- IPv4 Multicast Routes (the maximum number of IPv4 multicast forwarding table entries)
- IPv6 Multicast Routes (the maximum number of IPv6 multicast forwarding table entries)

Loopback interfaces management for routing protocols administration

Private VLANs and local Proxy ARP help reduce broadcast with added security

Management VLAN ID is user selectable for best convenience

Auto-Trunk: Dynamic VLAN trunking as soon as a M4250 switch gets connected to another M4250 switch

Industry-standard VLAN management in the command line interface (CLI) for all common operations such as VLAN creation; VLAN names; VLAN "make static" for dynamically created VLAN by GVRP registration; VLAN trunking; VLAN participation as well as VLAN ID (PVID) and VLAN tagging for one interface, a group of interfaces or all interfaces at once

Simplified VLAN configuration with industry-standard Access Ports for 802.1Q unaware endpoints and Trunk Ports for switch-to-switch links with Native VLAN

System defaults automatically set per-port broadcast, multicast, and unicast storm control for typical, robust protection against DoS attacks and faulty clients which can, with BYOD, often create network and performance issues

IP Telephony administration is simplified with consistent Voice VLAN capabilities per the industry standards and automatic functions associated

Comprehensive set of "system utilities" and "Clear" commands help troubleshoot connectivity issues and restore various configurations to their factory defaults for maximum admin efficiency: traceroute (to discover the routes that packets actually take when traveling on a hop-by-hop basis and with a synchronous response when initiated from the CLI), clear dynamically learned MAC addresses, counters, IGMP snooping table entries from the Multicast forwarding database etc...

Syslog and Packet Captures can be sent to USB storage for rapid network troubleshooting

Replaceable factory-default configuration file for predictable network reset in distributed branch offices without IT personnel

All major centralized software distribution platforms are supported for central software upgrades and configuration files management (HTTP, TFTP), including in highly secured versions (HTTPS, SFTP, SCP)

Simple Network Time Protocol (SNTP) can be used to synchronize network resources and for adaptation of NTP, and can provide synchronized network timestamp either in broadcast or unicast mode (SNTP client implemented over UDP - port 123)

 ${\color{blue}{\sf Embedded\ RMON\ (4\ groups)\ and\ sFlow\ agents\ permit\ external\ network\ traffic\ analysis}}$ 

#### Engineered for convergence and AV-over-IP

Audio (Voice over IP) and Video (multicasting) comprehensive switching, filtering, routing and prioritization

Auto-VoIP, Voice VLAN and LLDP-MED support for IP phones QoS and VLAN configuration

IEEE 1588 (section 10 and 11.5) PTPv2 Transparent Clock (TC) End-to-End implementation considering the residence time of PTPv2 packets from ingress to egress

- 1-step Transparent Clock mode, using the residence time of the PPTPv2 packet at the egress port level in Standalone mode, or Stack Master only
- The "Sync" & "Delay\_Req" fields of passing/egressing out PTPv2 packets are updated with the residence time in the switch, the other fields in PTPv2 packets ("Announce", "Delay\_Resp", "Pdelay\_Req" and "Pdelay\_ Resp") are not updated

NETGEAR IGMP Plus for automatic multicast across a M4250 / M4300 / M4500 L2 network (Spine and Leaf topologies), removing the need for L3 PIM routing

- IGMP Plus is pre-configured on default VLAN 1 out of the box
- IGMP Plus can be configured on another VLAN for automatic IGMP across switches on that VLAN (uplinks can make part of that VLAN in trunk mode)
- IGMP Plus allow AV-over-IP devices (TX/Encoders and RX/Decoders) to be connected across multiple switches in a star topology
- The show igmpsnooping group command in CLI and GUI displays the Source and Group IP addresses along with their corresponding MAC addresses that are learnt through IGMP Snooping in a given VLAN on a given interface

The M4250 series automatically configure the interconnect between switches for robust topologies

With IGMP Plus, Auto-Trunk and Auto-LAG, your deployment will JUST WORK

### //// AV Line

### **AV Line Managed Switches**

IGMP Snooping and Proxy for IPv4, MLD Snooping and Proxy for IPv6, and Querier mode facilitate fast receivers joins and leaves for multicast streams and ensure multicast traffic only reaches interested receivers everywhere in a Layer 2 or a Layer 3 network, including source-specific (SSM) and any-source (ASM) multicast

Multicast VLAN Registration (MVR) uses a dedicated Multicast VLAN to forward multicast streams and avoid duplication for clients in different VLANs

Multicast routing (PIM-SM and PIM-DM, both IPv4 and IPv6) ensure multicast streams can reach receivers in different L3 subnets

PoE power management and schedule enablement for powering on and powering off PoE nodes connected to the switch

AVB is one of the many features designed into the M4250 product line

- IEEE 802.1BA-2011 Audio Video Bridging (AVB) when an AVB license is properly installed in the switch (license sold separately)
- IEEE 802.1AS-2011 gPTP, IEEE 802.1Qav-2009 FQTSS, IEEE 802.1Qat-2010 MSRP, IEEE 802.1ak MMRP, IEEE 802.1ak MVRP
- Maximum of 256 AVB streams per switch
- AVB is not supported in LAG (link aggregation groups, or Etherchannel)

#### Layer 3 routing package

Static Routes/ECMP Static Routes for IPv4 and IPv6

- Static and default routes are configurable with next IP address hops to any given destination
- · Permitting additional routes creates several options for the network administrator
- The admin can configure multiple next hops to a given destination, intending for the router to load share across the next hops
- The admin distinguishes static routes by specifying a route preference value: a lower preference value is a more preferred static route
- A less preferred static route is used if the more preferred static route is unusable (down link, or next hop cannot be resolved to a MAC address)

Advanced Static Routing functions for administrative traffic control

- Static Reject Routes are configurable to control the traffic destined to a particular network so that it is not forwarded through the router
- $\bullet\,$  Such traffic is discarded and the ICMP destination unreachable message is sent back to the source
- Static reject routes can be typically used to prevent routing loops
- Default routes are configurable as a preference option

In order to facilitate VLAN creation and VLAN routing using Web GUI, a VLAN Routing Wizard offers following automated capabilities:

- Create a VLAN and generate a unique name for VLAN
- Add selected ports to the newly created VLAN and remove selected ports from the default VLAN
- Create a LAG, add selected ports to a LAG, then add this LAG to the newly created VLAN
- Enable tagging on selected ports if the port is in another VLAN
- Disable tagging if a selected port does not exist in another VLAN
- Exclude ports that are not selected from the VLAN
- Enable routing on the VLAN using the IP address and subnet mask entered as logical routing interface

DHCP Relay Agents relay DHCP requests from any routed interface, including VLANs, when DHCP server doesn't reside on the same IP network or subnet

- The agent relays requests from a subnet without a DHCP server to a server or next-hop agent on another subnet
- Unlike a router which switches IP packets transparently, a DHCP relay agent processes DHCP messages and generates new DHCP messages
- Supports DHCP Relay Option 82 circuit-id and remote-id for VLANs
- Multiple Helper IPs feature allows to configure a DHCP relay agent with multiple DHCP server addresses per
  routing interface and to use different server addresses for client packets arriving on different interfaces on the
  relay agent server addresses for client packets arriving on different interfaces on the relay agent

Router Discovery Protocol is an extension to ICMP and enables hosts to dynamically discover the IP address of routers on local IP subnets

- Based on RFC 1256 for IPv4
- Routers periodically send router discovery messages to announce their presence to locally-attached hosts
- The router discovery message advertises one or more IP addresses on the router that hosts can use as their default gateway
- Hosts can send a router solicitation message asking any router that receives the message to immediately send a router advertisement
- Router discovery eliminates the need to manually configure a default gateway on each host
- It enables hosts to switch to a different default gateway if one goes down

#### Datasheet | M4250 series

## **NETGEAR**<sup>®</sup>

### AV Line

### **AV Line Managed Switches**

Loopback interfaces are available as dynamic, stable IP addresses for other devices on the network, and for routing protocols

Support of Routing Information Protocol (RIPv2) as a distance vector protocol specified in RFC 2453 for IPv4

- Each route is characterized by the number of gateways, or hops, a packet must traverse to reach its intended destination
- Categorized as an interior gateway protocol, RIP operates within the scope of an autonomous system

IP Multinetting allows to configure more than one IP address on a network interface (other vendors may call it IP Aliasing or Secondary Addressing)

ICMP Throttling feature adds configuration options for the transmission of various types of ICMP messages

- ICMP Redirects can be used by a malicious sender to perform man-in-the-middle attacks, or divert
  packets to a malicious monitor, or to cause Denial of Service (DoS) by blackholing the packets
- ICMP Echo Requests and other messages can be used to probe for vulnerable hosts or routers
- Rate limiting ICMP error messages protects the local router and the network from sending a large number of messages that take CPU and bandwidth

The Policy Based Routing feature (PBR) overrides routing decision taken by the router and makes the packet to follow different actions based on a policy

- It provides freedom over packet routing/forwarding instead of leaving the control to standard routing protocols based on L3
- For instance, some organizations would like to dictate paths instead of following the paths shown by routing protocols
- Network Managers/Administrators can set up policies such as:
  - My network will not carry traffic from the Engineering department
  - Traffic originating within my network with the following characteristics will take path A, while other traffic will take path B
  - When load sharing needs to be done for the incoming traffic across multiple paths based on packet entities in the incoming traffic

#### **Enterprise security**

Traffic control MAC Filter and Port Security help restrict the traffic allowed into and out of specified ports or interfaces in the system in order to increase overall security and block MAC address flooding issues

DHCP Snooping monitors DHCP traffic between DHCP clients and DHCP servers to filter harmful DHCP message and builds a bindings database of (MAC address, IP address, VLAN ID, port) tuples that are considered authorized in order to prevent DHCP server spoofing attacks

IP source guard and Dynamic ARP Inspection use the DHCP snooping bindings database per port and per VLAN to drop incoming packets that do not match any binding and to enforce source IP/MAC addresses for malicious users traffic elimination

Time-based Layer 2 / Layer 3-v4 / Layer 4 Access Control Lists (ACLs) can be binded to ports, Layer 2 interfaces, VLANs and LAGs (Link Aggregation Groups or Port channel) for fast unauthorized data prevention and right granularity

For in-band switch management, management ACLs on CPU interface (Control Plane ACLs) are used to define the IP/MAC or protocol through which management access is allowed for increased HTTP/HTTPS or Telnet/SSH management security

Out-of-band management is available via dedicated service port (1G RJ45 OOB) when in-band management can be prohibited via management ACLs

Bridge protocol data unit (BPDU) Guard allows the network administrator to enforce the Spanning Tree (STP) domain borders and keep the active topology consistent and predictable - unauthorized devices or switches behind the edge ports that have BPDU enabled will not be able to influence the overall STP by creating loops

Spanning Tree Root Guard (STRG) enforces the Layer 2 network topology by preventing rogue root bridges potential issues when for instance, unauthorized or unexpected new equipment in the network may accidentally become a root bridge for a given VLAN

Dynamic 802.1x VLAN assignment mode, including Dynamic VLAN creation mode and Guest VLAN / Unauthenticated VLAN are supported for rigorous user and equipment RADIUS policy server enforcement Up to 48 clients (802.1x) per port are supported, including the authentication of the users domain, in order
to facilitate convergent deployments. For instance when IP phones connect PCs on their bridge, IP phones
and PCs can authenticate on the same switch port but under different VLAN assignment policies (Voice
VLAN versus other Production VLANs)

802.1x MAC Address Authentication Bypass (MAB) is a supplemental authentication mechanism that lets non-802.1x devices bypass the traditional 802.1x process altogether, letting them authenticate to the network using their client MAC address as an identifier

- A list of authorized MAC addresses of client NICs is maintained on the RADIUS server for MAB purpose
- MAB can be configured on a per-port basis on the switch
- MAB initiates after unsuccessful dot1x authentication process (configurable time out), when clients don't respond to any of EAPOL packets
- When 802.1X unaware clients try to connect, the switch sends the MAC address of each client to the authentication server
- The RADIUS server checks the MAC address of the client NIC against the list of authorized addresses
- $\bullet \ \ \text{The RADIUS server returns the access policy and VLAN assignment to the switch for each client}\\$

### **NETGEAR**<sup>®</sup>

### /// AV Line

# Datasheet | M4250 series AV Line Managed Switches

With Successive Tiering, the Authentication Manager allows for authentication methods per port for a Tiered Authentication based on configured time-outs

- By default, configuration authentication methods are tried in this order: Dot1x, then MAB, then Captive Portal (web authentication)
- · With BYOD, such Tiered Authentication is powerful and simple to implement with strict policies
  - For instance, when a client is connecting, M4300 tries to authenticate the user/client using the three methods above, the one after the other
- The admin can restrict the configuration such that no other method is allowed to follow the captive portal method, for instance

Double VLANs (DVLAN) pass traffic from one customer domain to another through the "metro core" in a multi-tenancy environment: customer VLAN IDs are preserved and a service provider VLAN ID is added to the traffic can pass the metro core in a simple, secure manner

Private VLANs (with Primary VLAN, Isolated VLAN, Community VLAN, Promiscuous port, Host port, Trunks) provide Layer 2 isolation between ports that share the same broadcast domain, allowing a VLAN broadcast domain to be partitioned into smaller point-to-multipoint subdomains accross switches in the same Layer 2 network

- Private VLANs are useful in DMZ when servers are not supposed to communicate with each other but need to communicate with a router
- They remove the need for more complex port-based VLANs with respective IP interface/subnets and associated L3 routing
- Another Private VLANs typical application are carrier-class deployments when users shouldn't see, snoop or attack other users' traffic

SSL version 3 and TLS version 2 ensure Web GUI sessions are secured

Secure Shell (SSH version 2) and SNMPv3 (with or without MD5 or SHA authentication) ensure SNMP and Telnet sessions are secured

2048-bit RSA key pairs, SHA2-256 and SHA2-512 cryptographic hash functions for SSLv3 and SSHv2 are supported on all M4300 models

TACACS+ and RADIUS enhanced administrator management provides strict "Login" and "Enable" authentication enforcement for the switch configuration, based on latest industry standards: exec authorization using TACACS+ or RADIUS; command authorization using TACACS+ and RADIUS Server; user exec accounting for HTTP and HTTPS using TACACS+ or RADIUS; and authentication based on user domain in addition to user ID and password

#### Superior quality of service

Advanced classifier-based hardware implementation for Layer 2 (MAC), Layer 3 (IP) and Layer 4 (UDP/TCP transport ports) prioritization

 $8 \; queues \; (7 \; in \; a \; stack) \; for \; priorities \; and \; various \; QoS \; policies \; based \; on \; 802.1p \; (CoS) \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; VLANs \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfaces \; and \; DiffServ \; can \; be \; applied \; to \; interfa$ 

Advanced rate limiting down to 1 Kbps granularity and mininum-guaranteed bandwidth can be associated with ACLs for best granularity

Single Rate Policing feature enables support for Single Rate Policer as defined by RFC 2697

- Committed Information Rate (average allowable rate for the class)
- Committed Burst Size (maximum amount of contiguous packets for the class)
- Excessive Burst Size (additional burst size for the class with credits refill at a slower rate than committed burst size)
- DiffServ feature applied to class maps

 $Automatic Voice over IP\ prioritization\ with\ protocol-based\ (SIP, H323\ and\ SCCP\ )\ or\ OUI-based\ Auto-VoIP\ up\ to\ 144\ simultaneous\ voice\ calls$ 

#### Flow Control

802.3x Flow Control implementation per IEEE 802.3 Annex 31B specifications with Symmetric flow control, Asymmetric flow control or No flow control

- Asymmetric flow control allows the switch to respond to received PAUSE frames, but the ports cannot generate PAUSE frames
- Symmetric flow control allows the switch to both respond to, and generate MAC control PAUSE frames

Allows traffic from one device to be throttled for a specified period of time: a device that wishes to inhibit transmission of data frames from another device on the LAN transmits a PAUSE frame

• A device that wishes to inhibit transmission of data frames from another device on the LAN transmits a PAUSE frame

#### **UDLD Support**


UDLD implementation detects unidirectional links physical ports (UDLD must be enabled on both sides of the link in order to detect an unidirectional link)

- UDLD protocol operates by exchanging packets containing information about neighboring devices
- The purpose is to detect and avoid unidirectional link forwarding anomalies in a Layer 2 communication channel

Both "normal-mode" and "aggressive-mode" are supported for perfect compatibility with other vendors implementations, including port "D-Disable" triggering cases in both modes

### //// AV Line

### **Target Application**

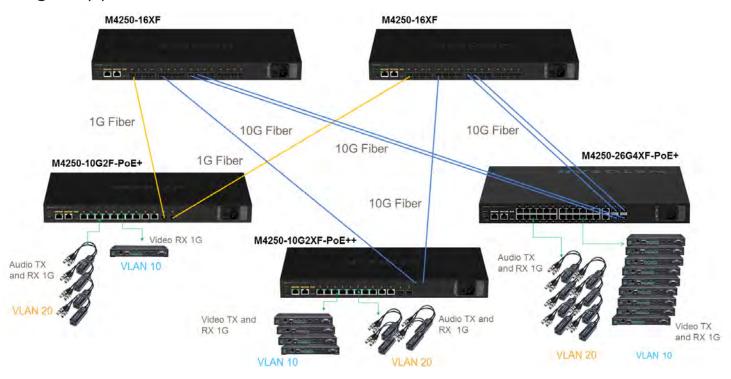

A new AV Line of M4250 switches with out-of-the-box functionality and an industry-first: a concurrent second user interface solely designed with the AV Pro in mind.

NETGEAR has enhanced the experience for AV professionals by including a new user interface designed from the ground up. Pro AV customers don't have to settle for an IT-centric interface with settings and IT-specific functionality they will never need. The new M4250 AV interface presents the common AV controls right up front with user-selectable profiles for common AV platforms making it a snap to ensure the settings are correct for a specific audio or video application.


When each M4250 is simply configured with AV profiles on certain ports, the AV Line offers automatic and dynamic configuration of multiple M4250 switches connected together. This automatic configuration, known as Auto-LAG and Auto-Trunk, combined with as NETGEAR IGMP Plus™, make setting up a complicated AV over IP network easier and quicker than ever before.



### AV Line

### Components and Modules

M4250 AV Licenses

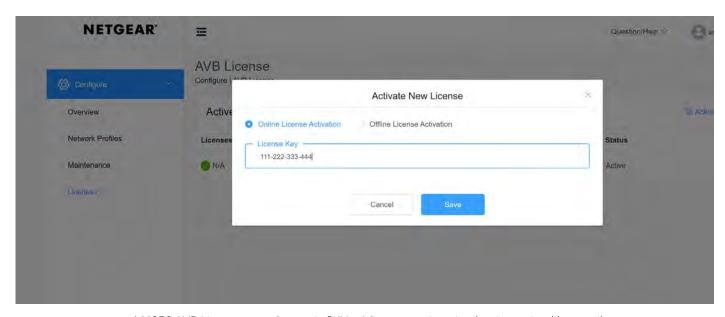

M4250 AVB Licenses are electronic SKUs. A license registration key is received by email and can be copied and pasted directly in the AV UI when the switch is online.









### //// AV Line

### Components and Modules

#### M4250-10G2F-PoE+ AV Line Managed Switch

- Americas: GSM4212P-100NAS
- Europe: GSM4212P-100EUS
- Asia Pacific: GSM4212P-100AJS
- China: GSM4212P-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4212P-10000S (sold separatel

- 8-port 10/100/1000BASE-T (RJ45) PoE+ with 125W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 2-port 1000BASE-X (SFP)
- 24 Gbps non-blocking fabric across 12 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 200 x 43.2 mm
- Weight: 2.85Kg (6.28lb)



### AV Line

### Components and Modules

#### M4250-10G2XF-PoE+ AV Line Managed Switch

- Americas: GSM4212PX-100NAS
- Europe: GSM4212PX-100EUS
- Asia Pacific: GSM4212PX-100AJS
- China: GSM4212PX-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4212PX-10000S (sold separately)

- 8-port 10/100/1000BASE-T (RJ45) PoE+ with 240W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 2-port 1000/10GBASE-X (SFP+)
- 60 Gbps non-blocking fabric across 12 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 200 x 43.2 mm
- Weight: 2.9Kg (6.39lb)



### AV Line

### Components and Modules

#### M4250-10G2XF-PoE++ AV Line Managed Switch

- Americas: GSM4212UX-100NAS
- Europe: GSM4212UX-100EUS
- Asia Pacific: GSM4212UX-100AJS
- China: GSM4212UX-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4212UX-10000S (sold separately)

- 8-port 10/100/1000BASE-T (RJ45) Ultra90 PoE++ with 720W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 2-port 1000/10GBASE-X (SFP+)
- Compatible 802.3af (15.4W), 802.3at (30W), 802.3bt (60, 75 and 90W)
- 60 Gbps non-blocking fabric across 12 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 257 x 43.2 mm
- Weight: 3.83Kg (8.44lb)



### AV Line

### Components and Modules

#### M4250-12M2XF

#### **AV Line Managed Switch**

- Americas: MSM4214X-100NAS
- Europe: MSM4214X-100EUS
- Asia Pacific: MSM4214X-100AJS
- China: MSM4214X-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4214X-10000S (sold separately)

- 12-port 100/1000/2.5GBASE-T (RJ45)
- 2-port 1000/10GBASE-X (SFP+)
- 100 Gbps non-blocking fabric across 14 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 100 x 43.2 mm
- Weight: 1.74Kg (3.85lb)



### AV Line

### Components and Modules

#### M4250-16XF

#### **AV Line Managed Switch**

- Americas: XSM4216F-100NAS
- Europe: XSM4216F-100EUS
- Asia Pacific: XSM4216F-100AJS
- China: XSM4216F-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4216F-10000S (sold separately)

- 16-port 10GBASE-X (SFP+)
- The first 12 ports support 1000BASE-X (1G) SFP modules
- 320 Gbps non-blocking fabric across 16 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 200 x 43.2 mm
- Weight: 1.74Kg (3.85lb)



### //// AV Line

### Components and Modules

# M4250-26G4F-PoE+ AV Line Managed Switch

#### Ordering information

• Americas: GSM4230P-100NAS

• Europe: GSM4230P-100EUS

• Asia Pacific: GSM4230P-100AJS

• China: GSM4230P-100PRS

• Warranty: Lifetime ProSAFE Hardware Warranty

• AVB License: AVB4230P-10000S (sold separately)

- 24-port 10/100/1000BASE-T (RJ45) PoE+ with 300W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 4-port 1000BASE-X (SFP)
- 60 Gbps non-blocking fabric across 30 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 43.2 x 257 mm
- Weight: 4.30Kg (9.47lb)



### //// AV Line

### Components and Modules

#### M4250-26G4F-PoE++ AV Line Managed Switch

- Americas: GSM4230UP-100NAS
- Europe: GSM4230UP-100EUS
- Asia Pacific: GSM4230UP-100AJS
- China: GSM4230UP-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4230UP-10000S (sold separately)

- 24-port 10/100/1000BASE-T (RJ45) Ultra90 PoE++ with 1,440W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 4-port 1000BASE-X (SFP)
- Compatible 802.3af (15.4W), 802.3at (30W), 802.3bt (60, 75 and 90W)
- 2 internal, fixed PSUs (C14 inlets) with embedded RPS/EPS function
- When one PSU is used, PoE budget is 720W
- When two PSU are used, PoE budget is 1,440W
- 60 Gbps non-blocking fabric across 30 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for quiet or cool operation
- Dimensions (WxDxH): 440 x 43.2 x 400 mm
- Weight: 6.75Kg (14.87lb)



### /// AV Line

### Components and Modules

#### M4250-26G4XF-PoE+ AV Line Managed Switch

- Americas: GSM4230PX-100NAS
- Europe: GSM4230PX-100EUS
- Asia Pacific: GSM4230PX-100AJS
- China: GSM4230PX-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4230PX-10000S (sold separately)

- 24-port 10/100/1000BASE-T (RJ45) PoE+ with 480W PoE budget
- 2-port 10/100/1000BASE-T (RJ45)
- 4-port 1000/10GBASE-X (SFP+)
- 132 Gbps non-blocking fabric across 30 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 43.2 x 400 mm
- Weight: 5.45Kg (12.02lb)



### AV Line

### Components and Modules

# M4250-40G8F-PoE+ AV Line Managed Switch

#### Ordering information

• Americas: GSM4248P-100NAS

• Europe: GSM4248P-100EUS

• Asia Pacific: GSM4248P-100AJS

• China: GSM4248P-100PRS

• Warranty: Lifetime ProSAFE Hardware Warranty

• AVB License: AVB4248P-10000S (sold separately)

- 40-port 10/100/1000BASE-T (RJ45) PoE+ with 480W PoE budget
- 8-port 1000BASE-X (SFP)
- 96 Gbps non-blocking fabric across 48 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for fanless, quiet, or cool operation
- Dimensions (WxDxH): 440 x 43.2 x 400 mm
- Weight: 5.85Kg (12.90lb)



### AV Line

### Components and Modules

#### M4250-40G8XF-PoE+ AV Line Managed Switch

- Americas: GSM4248PX-100NAS
- Europe: GSM4248PX-100EUS
- Asia Pacific: GSM4248PX-100AJS
- China: GSM4248PX-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4248PX-10000S (sold separately)

- 40-port 10/100/1000BASE-T (RJ45) PoE+ with 960W PoE budget
- 8-port 1000/10GBASE-X (SFP+)
- 240 Gbps non-blocking fabric across 48 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for quiet or cool operation
- Dimensions (WxDxH): 440 x 43.2 x 400 mm
- Weight: 6.31Kg (13.91lb)



### AV Line

### Components and Modules

#### M4250-40G8XF-PoE++ AV Line Managed Switch

- Americas: GSM4248UX-100NAS
- Europe: GSM4248UX-100EUS
- Asia Pacific: GSM4248UX-100AJS
- China: GSM4248UX-100PRS
- Warranty: Lifetime ProSAFE Hardware Warranty
- AVB License: AVB4248UX-10000S (sold separately)

- 40-port 10/100/1000BASE-T (RJ45) Ultra90 PoE++ with 2,880W PoE budget
- 8-port 1000/10GBASE-X (SFP+)
- Compatible 802.3af (15.4W), 802.3at (30W), 802.3bt (60, 75 and 90W)
- 3 internal, fixed PSUs (C14 inlets) with embedded RPS/EPS function
- When one PSU is used, PoE budget is 720W
- When two PSU are used, PoE budget is 1,650W
- When three PSU are used, PoE budget is 2,880W
- 240 Gbps non-blocking fabric across 48 ports
- Out-of-band 1G Ethernet management port
- USB-C and RJ45 RS232 console ports and USB-A storage port
- Front black display panel and all ports in the back
- Possible reversed mounting with ports in the front
- Rack-mounting standard brackets
- Longer brackets for recessed mounting (2 inches / 5 cm)
- Threaded hole in front (1xM10) for clamps
- Threaded holes on the bottom (4xM5) for 50x100mm VESA plates
- Selectable fan modes for quiet or cool operation
- Dimensions (WxDxH): 440 x 86.4 x 350 mm (2U)



/// AV Line

### GBIC SFP and SFP+ Optics for M4250 series

| Ordering information  · Worldwide: see table below   |  | ode Fiber<br>MF)   | Single mode Fiber<br>(SMF)   |
|--|--|--|--|
| Worldwide, see table below     Warranty: 5 years   | OM1 or OM2<br>62.5/125µm   | OM3 or OM4<br>50/125µm   | 9/125µm  |
| 10 Gigabit SFP+  | AXM763   | AXM763   | AXM762   |
| 0.7  | 10GBase-LRM long reach multimode<br>802.3aq - LC duplex connector                                  | 10GBase-LRM long reach multimode<br>802.3aq - LC duplex connector  | 10GBase-LR long reach single mode<br>LC duplex connector   |
|  | up to 100m (328 ft)  | up to 165m (541 ft)  | up to 10km (6.2 miles)   |
|  | AXM763-10000S (1 unit)   | AXM763-10000S (1 unit)   | AXM762-10000S (1 unit)<br>AXM762P10-10000S<br>(pack of 10 units)                                       |
| • Fits into M4250 SFP+   |  | AXM761   | AXM764   |
| interfaces   |  | 10GBase-SR short reach multimode<br>LC duplex connector  | 10GBase-LR LITE single mode<br>LC duplex connector   |
|  |  | up to 300m (984 ft)  | up to 2km (1.2 mile)   |
|  |  | AXM761-10000S (1 unit)<br>AXM761P10-10000S<br>(pack of 10 units)   | AXM764-10000S (1 unit)   |
| • Fits into M4250 SFP+ and SFP interfaces • M4250-16XF (XSM4216F) supports 1G modules on ports 1-12 only | AGM731F 1000Base-SX short range multimode LC duplex connector up to 275m (902 ft) AGM731F (1 unit) | AGM731F 1000Base-SX short range multimode LC duplex connector OM3: up to 550m (1,804 ft) OM4: up to 1,000m (3,280 ft) AGM731F (1 unit) | AGM732F 1000Base-LX long range single mode LC duplex connector up to 10km (6.2 miles) AGM732F (1 unit) |

AGM734 1000BASE-T RJ45 SFP (Gigabit)

#### Ordering information

• Worldwide: AGM734-10000S

• Warranty: 5 years



- Fits into M4250 SFP+ and SFP interfaces
- 1 port Gigabit RJ45
- Supports only 1000Mbps full-duplex mode
- Up to 100m (328 ft) with Cat5 RJ45 or better
- Conveniently adds 1G copper connectivity to M4250 fiber interfaces
- M4250-16XF (XSM4216F) supports AGM734 on its ports 1 to 12 only

AXM765 10GBASE-T RJ45 SFP+ (10 Gigabit)

- Worldwide: AXM765-20000S
- Warranty: 5 years



- Fits into M4250 SFP+ interfaces
- 1 port 10GBASE-T RJ45
- Copper connectivity up to 80m (262 ft) distance
- CAT6a or better wiring required for 10GBASE-T up to 80 meters
- Conveniently adds 10G copper connectivity to M4250 fiber interfaces



## AV Line

### Direct Attach Cables for M4250 series

| Ordering information   |  | SFP+ to SFP+                                      |   |
|--|--|---|---|
| <ul><li>Worldwide: see table below</li><li>Warranty: 5 years</li></ul> | 1 meter (3.3 ft)   | 3 meters (9.8 ft)                                 | 5 meters (16.4 ft)  |
| 10 Gigabit DAC   | AXC761  10GSFP+ Cu (passive)  SFP+ connectors                                  | AXC763  10GSFP+ Cu (passive)  SFP+ connectors     | AXC765<br>10GSFP+ Cu (active)<br>SFP+ connectors            |
|  | AXC761-10000S (1 unit)   | AXC763-10000S (1 unit)                            | AXC765-10000S (1 unit)                                      |
|  | 7 meters (23.0 ft)   | 10 meters (32.8 ft)                               | 15 meters (49.2 ft)   |
|  | AXC767<br>10GSFP+ Cu (active)<br>SFP+ connectors                               | AXC7610<br>10GSFP+ Cu (active)<br>SFP+ connectors | <b>AXC7615</b> 10GSFP+ (duplex fiber optic) SFP+ connectors |
|  | AXC767-10000S (1 unit)   | AXC7610-10000S (1 unit)                           | AXC7615-10000S (1 unit)                                     |
|  | 20 meters (65.6 ft)  |   |   |
|  | AXC7620  10GSFP+ (duplex fiber optic) SFP+ connectors  AXC7620-10000S (1 unit) |   |   |
| • Fits into M4250 SFP+ interfaces                                      |  |   |   |

### AV Line

### **Technical Specifications**

Requirements based on 13.0.2 software release



| Model Name         | Description  | Model<br>number |
|--------------------|--|-----------------|
| M4250-10G2F-PoE+   | AV Line 8x1G PoE+ 125W 2x1G and 2xSFP Managed Switch             | GSM4212P        |
| M4250-10G2XF-PoE+  | AV Line 8x1G PoE+ 240W 2x1G and 2xSFP+ Managed Switch            | GSM4212PX       |
| M4250-10G2XF-PoE++ | AV Line 8x1G Ultra90 PoE++ 720W 2x1G and 2xSFP+ Managed Switch   | GSM4212UX       |
| M4250-26G4F-PoE+   | AV Line 24x1G PoE+ 300W 2x1G and 4xSFP Managed Switch            | GSM4230P        |
| M4250-26G4F-PoE++  | AV Line 24x1G Ultra90 PoE++ 1,440W 2x1G and 4xSFP Managed Switch | GSM4230UP       |
| M4250-26G4XF-PoE+  | AV Line 24x1G PoE+ 480W 2x1G and 4xSFP+ Managed Switch           | GSM4230PX       |
| M4250-40G8F-PoE+   | AV Line 40x1G PoE+ 480W and 8xSFP Managed Switch                 | GSM4248P        |
| M4250-40G8XF-PoE+  | AV Line 40x1G PoE+ 960W and 8xSFP+ Managed Switch                | GSM4248PX       |
| M4250-40G8XF-PoE++ | AV Line 40x1G Ultra90 PoE++ 2,880W and 8xSFP+ Managed Switch     | GSM4248UX       |
| M4250-12M2XF       | AV Line 12x2.5G and 2xSFP+ Managed Switch                        | MSM4214X        |
| M4250-16XF         | AV Line 12x1G/10G SFP+ and 4x10G SFP+ Managed Switch             | XSM4216F        |

| Physical Interfaces                      |  |  |  |                                |                                       |
|--|--|--|--|--------------------------------|---------------------------------------|
| Gigabit and 10 Gigabit<br>Ethernet Ports | Auto-sensing RJ45 PoE<br>10/100/1000BASE-T | Auto-sensing RJ45<br>10/100/1000BASE-T | Auto-sensing RJ45<br>100/1000/2.5GBASE-T | Auto-sensing SFP<br>1000BASE-X | Auto-sensing SFP+<br>1000/10GBASE-X   |
| M4250-10G2F-PoE+                         | 8 ports PoE+ (125W)                        | 2                                      | -  | 2                              | -                                     |
| M4250-10G2XF-PoE+                        | 8 ports PoE+ (240W)                        | 2                                      | -  | -                              | 2                                     |
| M4250-10G2XF-PoE++                       | 8 ports Ultra90 PoE++<br>(720W)            | 2                                      | -  | -                              | 2                                     |
| M4250-26G4F-PoE+                         | 24 ports PoE+ (300W)                       | 2                                      | -  | 4                              | -                                     |
| M4250-26G4F-PoE++                        | 24 ports Ultra90 PoE++<br>(1,440W)         | 2                                      | -  | 4                              | -                                     |
| M4250-26G4XF-PoE+                        | 24 ports PoE+ (480W)                       | 2                                      | -  | -                              | 4                                     |
| M4250-40G8F-PoE+                         | 40 ports PoE+ (480W)                       | -                                      | -  | 8                              | -                                     |
| M4250-40G8XF-PoE+                        | 40 ports PoE+ (960W)                       | -                                      | -  | -                              | 8                                     |
| M4250-40G8XF-PoE++                       | 40 ports Ultra90 PoE++<br>(2,880W)         | -                                      | -  | -                              | 8                                     |
| M4250-12M2XF                             | -  | -                                      | 12                                       | -                              | 2                                     |
| M4250-16XF                               | -  | -                                      | -  | -                              | 16<br>(only Ports 1-12<br>support 1G) |

| Total Usable Port Count | 1G Ports | 2.5G Ports | 10G Ports |
|-------------------------|----------|------------|-----------|
| M4250-10G2F-PoE+        | 12       | =          | -         |
| M4250-10G2XF-PoE+       | 10       | -          | 2         |
| M4250-10G2XF-PoE++      | 10       | -          | 2         |
| M4250-26G4F-PoE+        | 30       | -          | -         |
| M4250-26G4F-PoE++       | 30       | -          | -         |
| M4250-26G4XF-PoE+       | 26       | -          | 4         |
| M4250-40G8F-PoE+        | 48       | =          | -         |
| M4250-40G8XF-PoE+       | 40       | -          | 8         |
| M4250-40G8XF-PoE++      | 40       | -          | 8         |
| M4250-12M2XF            | -        | 12         | 2         |
| M4250-16XF              | -        | -          | 16        |

# AV Line

# AV Line Managed Switches

| Management Ports   | Console ports  |                     | Service port (Out-of-band         | Ethernet)  | Storage port      |
|--|--|---------------------|-----------------------------------|--|-------------------|
| All models   | Serial RS232 RJ45 (rear); USB-C (rear)                                   | ear)                | 1 x RJ45 10/100/1000BASE          | E-T (rear)                                       | 1 x USB-A (front) |
| Fixed Power Supplies   |  |                     |                                   |  |                   |
| M4250-26G4F-PoE++  | 2 internal PSU (C14 inlets) with 1 c                                     | on/off switch       |                                   |  |                   |
| M4250-40G8XF-PoE++   | 3 internal PSU (C14 inlets) with 1 c                                     | on/off switch       |                                   |  |                   |
| All other models   | 1 internal PSU (C14 inlet) with 1 or                                     | n/off switch        |                                   |  |                   |
| Fixed fans   |  |                     |                                   |  |                   |
| All models   | Side-to-side airflow   |                     |                                   |  |                   |
| Power over Ethernet  |  |                     |                                   |  |                   |
| PSE Capacity   | PoE+ Ports (802.3at)   | Ultra90 PoE+        | + Ports (802.3bt)                 |  |                   |
| M4250-10G2F-PoE+   | 8  |                     | -                                 | Ultra90 PoE++ 802.3bt i                          |                   |
| M4250-10G2XF-PoE+  | 8  |                     | -                                 | 802.3af PoE (15.4W), 80<br>and 802.3bt (60W, 75W |                   |
| M4250-10G2XF-PoE++   | -  |                     | 8                                 | and 002.35t (0000, 7300                          | ana 70vv).        |
| M4250-26G4F-PoE+   | 24   |                     | -                                 |  |                   |
| M4250-26G4F-PoE++  | -  |                     | 24                                |  |                   |
| M4250-26G4XF-PoE+  | 24   |                     | -                                 |  |                   |
| M4250-40G8F-PoE+   | 40   |                     | -                                 |  |                   |
| M4250-40G8XF-PoE+  | 40   |                     | -                                 |  |                   |
| M4250-40G8XF-PoE++   | -  |                     | 40                                |  |                   |
| PoE Budget   | PoE  | Budget @ 110V AC    | in                                |  |                   |
| M4250-10G2F-PoE+   |  | 125 Watts           |                                   |  |                   |
| M4250-10G2XF-PoE+  |  | 240 Watts           |                                   |  |                   |
| M4250-10G2XF-PoE++   |  | 720 Watts           |                                   |  |                   |
| M4250-26G4F-PoE+   |  | 300 Watts           |                                   |  |                   |
|  | 1 I DCII. 720  |                     | I. 1. 4.40 \M-#-                  |  |                   |
| M4250-26G4F-PoE++  | 1 used PSO: 720  | )Watts / 2 used PSU | ): 1,440 vvatts                   |  |                   |
| M4250-26G4XF-PoE+  |  | 480 Watts           |                                   |  |                   |
| M4250-40G8F-PoE+   |  | 480 Watts           |                                   |  |                   |
| M4250-40G8XF-PoE+  |  | 960 Watts           |                                   |  |                   |
| M4250-40G8XF-PoE++   | 1 used PSU: 720Watts / 2 use   |                     | s / 3 used PSU: 2,880 Watts       |  |                   |
| Features Support   | M4250-10G2F-PoE+/M425<br>M4250-26G4F-PoE+/M425<br>M4250-40G8F-PoE+/M4250 | 0-26G4XF-PoE+       | M4250-10G2XF-PoE++/<br>M4250-40G8 |  |                   |
| IEEE 802.3af (up to 15.4W per port)  | Yes  |                     | Yes                               |  |                   |
| IEEE 802.3at (up to 30W per port)  | Yes  |                     | Yes                               |  |                   |
| IEEE 802.3bt (up to 90W per port)  | No   |                     | Yes                               | i  |                   |
| IEEE 802.3at Layer 2 (LLDP) method   | Yes  |                     | Yes                               |  |                   |
| IEEE 802.3at 2-event classification  | Yes  |                     | Yes                               |  |                   |
|  |  |                     |                                   |  |                   |
| IEEE 802.3bt Layer 2 (LLDP) method   | No   |                     | Yes                               |  |                   |
| IEEE 802.3bt auto-classification metho   |  |                     | Yes                               |  |                   |
| Pre-802.3bt standard method  | No   |                     | Yes                               |  |                   |
| PoE timer / schedule (week, days, hou  | ırs) Yes   |                     | Yes                               | 3  |                   |
| Processor/Memory   |  |                     |                                   |  |                   |
| CPU  |  |                     |                                   |  |                   |
| M4250-26G4F-PoE+, M4250-26G4F-<br>26G4XF-PoE+, M4250-40G8F-PoE+,<br>PoE+, M4250-40G8XF-PoE++ |  | Quad-Core Cortex    | c-A57 ARMv8 1.8Ghz CPU (6         | 4-bit)   |                   |
| All other models   | Integrated   | ARM A9 1.25Ghz (    | CPU in switching silicon (32-b    | it)  |                   |
|  | -  |                     | <u> </u>                          |  |                   |
| System memory (RAM) - all models   | 2 GB   |                     |                                   |  |                   |

# AV Line Managed Switches

### /// AV Line

**NETGEAR®** 

| Packet Buffer Memory  |             |   |
|---|-------------|---|
| M4250-40G8F-PoE+, M4250-40G8XF-PoE+, M4250-<br>40G8XF-PoE++ | 32 Mb       | Dynamically shared across only used ports |
| All other models  | 16 Mb       |   |
| Performance Summary   |             |   |
| Switching fabric  |             |   |
| M4250-10G2F-PoE+  | 24 Gbps     |   |
| M4250-10G2XF-PoE+, M4250-10G2XF-PoE++                       | 60 Gbps     |   |
| M4250-26G4F-PoE+, M4250-26G4F-PoE++                         | 60 Gbps     |   |
| M4250-40G8F-PoE+  | 96 Gbps     | Line-rate (non blocking fabric)           |
| M4250-12M2XF  | 100 Gbps    | Line-rate (non blocking labric)           |
| M4250-26G4XF-PoE+   | 132 Gbps    |   |
| M4250-40G8XF-PoE+, M4250-40G8XF-PoE++                       | 240 Gbps    |   |
| M4250-16XF  | 320 Gbps    |   |
| Throughput (64-byte frames)                                 |             |   |
| M4250-10G2F-PoE+  | 17.86 Mpps  |   |
| M4250-10G2XF-PoE+, M4250-10G2XF-PoE++                       | 44.64 Mpps  |   |
| M4250-26G4F-PoE+, M4250-26G4F-PoE++                         | 44.64 Mpps  |   |
| M4250-40G8F-PoE+  | 71.42 Mpps  |   |
| M4250-12M2XF  | 74.40 Mpps  |   |
| M4250-26G4XF-PoE+   | 98.21 Mpps  |   |
| M4250-40G8XF-PoE+, M4250-40G8XF-PoE++                       | 178.56 Mpps |   |
| M4250-16XF  | 238.08 Mpps |   |

| Latency - 10G Fiber | 64-byte frames | 512-byte frames | 1024-byte frames | 1518-byte frames |
|---------------------|----------------|-----------------|------------------|------------------|
| M4250-10G2F-PoE+    | -              | -               | -                | -                |
| M4250-10G2XF-PoE+   | 0.838µs        | 0.821µs         | 0.820µs          | 0.819µs          |
| M4250-10G2XF-PoE++  | 0.807µs        | 0.791µs         | 0.790µs          | 0.789µs          |
| M4250-26G4F-PoE+    | -              | -               | -                | -                |
| M4250-26G4F-PoE++   | -              | -               | -                | -                |
| M4250-26G4XF-PoE+   | 0.834µs        | 0.818µs         | 0.817µs          | 0.816µs          |
| M4250-40G8F-PoE+    | -              | -               | -                | -                |
| M4250-40G8XF-PoE+   | 0.709µs        | 0.717µs         | 0.730µs          | 0.714µs          |
| M4250-40G8XF-PoE++  | 0.708µs        | 0.716µs         | 0.728µs          | 0.713µs          |
| M4250-12M2XF        | 0.807µs        | 0.791µs         | 0.790µs          | 0.789µs          |
| M4250-16XF          | 0.811µs        | 0.834µs         | 0.860µs          | 0.831µs          |

Energy Efficient Ethernet (EEE)

# Datasheet | M4250 series

# AV Line Managed Switches

### AV Line

| Latency - 1G Fiber    | 64-byte frames | 512-byte frames | 1024-byte frames | 1518-byte frame |
|-----------------------|----------------|-----------------|------------------|-----------------|
| M4250-10G2F-PoE+      | 2.271µs        | 2.257µs         | 2.267µs          | 2.266µs         |
| M4250-10G2XF-PoE+     | 1.169µs        | 1.174µs         | 1.159µs          | 1.154µs         |
| M4250-10G2XF-PoE++    | 1.148µs        | 1.141µs         | 1.137µs          | 1.156µs         |
| M4250-26G4F-PoE+      | 1.164µs        | 1.129µs         | 1.124µs          | 1.146µs         |
| M4250-26G4F-PoE++     | 1.141µs        | 1.126µs         | 1.119µs          | 1.140µs         |
| M4250-26G4XF-PoE+     | 1.130µs        | 1.123µs         | 1.119µs          | 1.120µs         |
| M4250-40G8F-PoE+      | 1.074µs        | 1.109µs         | 1.106µs          | 1.102µs         |
| M4250-40G8XF-PoE+     | 1.106µs        | 1.120µs         | 1.107µs          | 1.128µs         |
| M4250-40G8XF-PoE++    | 1.084µs        | 1.103µs         | 1.098µs          | 1.115µs         |
| M4250-12M2XF          | 1.186µs        | 1.178µs         | 1.156µs          | 1.173µs         |
| M4250-16XF            | 1.274µs        | 1.292µs         | 1.291µs          | 1.297µs         |
| Latency - 1G Copper   | 64-byte frames | 512-byte frames | 1024-byte frames | 1518-byte frame |
| M4250-10G2F-PoE+      | 2.133µs        | 2.136µs         | 2.131µs          | 2.142µs         |
| M4250-10G2XF-PoE+     | 2.140µs        | 2.140µs         | 2.137µs          | 2.144µs         |
| M4250-10G2XF-PoE++    | 1.837µs        | 1.829µs         | 1.828µs          | 1.826µs         |
| M4250-26G4F-PoE+      | 2.146µs        | 2.148µs         | 2.140µs          | 2.150µs         |
| M4250-26G4F-PoE++     | 2.139µs        | 2.140µs         | 2.133µs          | 2.146µs         |
| M4250-26G4XF-PoE+     | 2.280µs        | 2.282µs         | 2.270µs          | 2.288µs         |
| M4250-40G8F-PoE+      | 2.027µs        | 2.343µs         | 2.462µs          | 2.358µs         |
| M4250-40G8XF-PoE+     | 2.220µs        | 2.595µs         | 2.744µs          | 2.613µs         |
| M4250-40G8XF-PoE++    | 2.251µs        | 2.625µs         | 2.775µs          | 2.641µs         |
| M4250-12M2XF          | 2.843µs        | 2.836µs         | 2.834µs          | 2.836µs         |
| M4250-16XF            | -              | -               | -                | -               |
| Latency - 2.5G Copper | 64-byte frames | 512-byte frames | 1024-byte frames | 1518-byte frame |
| M4250-10G2F-PoE+      | -              | -               | -                | -               |
| M4250-10G2XF-PoE+     | -              | -               | -                | -               |
| M4250-10G2XF-PoE++    | -              | -               | -                | -               |
| M4250-26G4F-PoE+      | -              | -               | -                | -               |
| M4250-26G4F-PoE++     | -              | -               | -                | -               |
| M4250-26G4XF-PoE+     | -              | -               | -                | -               |
| M4250-40G8F-PoE+      | -              | -               | -                | -               |
| M4250-40G8XF-PoE+     | -              | -               | -                | -               |
| M4250-40G8XF-PoE++    | -              | -               | -                | -               |
| M4250-12M2XF          | 6.013µs        | 6.014µs         | 6.012µs          | 6.016µs         |
|                       |                |                 |                  |                 |

Compliant with IEEE 802.3az Energy Efficient Ethernet Task Force

Deactivated by default

# NETGEAR<sup>®</sup>

### AV Line

# AV Line Managed Switches

| Other I               | Metrics                                       |                               |  |                            |   |                         |  |
|-----------------------|---|-------------------------------|--|----------------------------|---|-------------------------|--|
| Forwarding mode       |   |                               | Store-and-forward  |                            |   |                         |  |
| Addres                | ssing   | 4                             | 8-bit MAC address  |                            |   |                         |  |
| Addres                | ss database size                              | 1                             | 6K MAC addresses   |                            |   |                         |  |
| Numbe                 | er of VLANs                                   | 4                             | ,093 VLANs (802.1Q) simulta  | neously                    |   |                         |  |
| Numbe                 | er of multicast groups filtered               | l (IGMP) 4                    | K total (2,048 IPv4 and 2,048  | IPv6)                      |   |                         |  |
| Numbe                 | er of Link Aggregation Group                  | s (LAGs) 8                    | LAGs with up to 8 ports per  | group 802.3ad / 802        | 2.1AX-2008  |                         |  |
| Numbe                 | er of hardware queues for Qo                  | oS 8                          | 8 queues   |                            |   |                         |  |
| Numbe<br>IPv4<br>IPv6 | er of routes                                  |                               | 394 IPv4 Unicast Routes in Defaul<br>126 IPv6 Unicast Routes in Defaul   |                            | SDM (System Data Mar<br>database) templates all<br>resources distribution of<br>IPv6 applications | low for granular system |  |
| Numbe<br>IPv4<br>IPv6 |   |                               | 4  |                            |   |                         |  |
| RIP app<br>IPv4       | olication route scaling                       | 3                             | 2 in Default IPv4 Basic SDM T  | emplate                    |   |                         |  |
| Numbe                 | er of IP interfaces (port or VLA              | AN) 1                         | 28   |                            |   |                         |  |
| Jumbo frame support   |   | U                             | up to 12KB packet size   |                            |   |                         |  |
| Acoustic noise        |   |                               | @ 25°C ambient (77°F)  |                            |   |                         |  |
| Testing               | method  |                               | Following the ISO-7779 standard. Bystander Mode. Chamber Temp 25°C during testing unless noted otherwise. Full, 100%, Data and PoE loaded. Worst case. |                            |   |                         |  |
| SPL (Sc               | ound Pressure Level)                          |                               | dBA values are SPL (Sound Pressure Level) values, testing following the ISO-7779 standard  |                            |   |                         |  |
| Fan ma                | nagement                                      |                               | hree modes are configurable<br>node  | using the AV GUI or the CL | I: Fan Off mode, Quiet mo   | ode (default), and Cool |  |
| @ 25° (               | f mode<br>C ambient (77° F)<br>um Conditions: | PoE Power Load                | Internal Sensors   | Case Temperature<br>(Top)  | Fan Duty  | Acoustic Noise          |  |
|                       | M4250-10G2F-PoE+                              | 80W(all ports can be used)    | <= 42°C  | 41.8°C                     | 0   | 0dBA                    |  |
|                       | M4250-10G2XF-PoE+                             | 90W (all ports can be used)   | <= 44°C  | 39.6°C                     | 0   | 0dBA                    |  |
|                       | M4250-10G2XF-PoE++                            | 45W (all ports can be used)   | <= 67°C  | 44.6°C                     | 0   | 0dBA                    |  |
|                       | M4250-26G4F-PoE+                              | 45W (no SFP)                  | S1<= 43°C S2<= 47°C  | 40.5°C                     | 0   | 0dBA                    |  |
|                       | M4250-26G4F-PoE++                             | Not Supported                 | Not Supported  | Not Supported              | Not Supported   | Not Supported           |  |
|                       | M4250-26G4XF-PoE+                             | 45W(8 ports PoE+,no<br>SFP+)  | S1<= 41°C S2<= 46°C  | 43.4°C                     | 0   | 0dBA                    |  |
|                       | M4250-40G8F-PoE+                              | 30W (8 ports PoE+, no<br>SFP) | S1<= 37°C S2<= 50°C  | 45.2°C                     | 0   | 0dBA                    |  |
|                       | M4250-40G8XF-PoE+                             | Not Supported                 | Not Supported  | Not Supported              | Not Supported   | Not Supported           |  |
|                       | WI4230 40G0XI TOET                            | . tot oupportou               |  |                            |   | 14ot supported          |  |
|                       | M4250-40G8XF-PoE++                            | Not Supported                 | Not Supported  | Not Supported              | Not Supported   | Not Supported           |  |
|                       |   |                               | Not Supported  | Not Supported              | Not Supported   |                         |  |

# AV Line Managed Switches

# **NETGEAR®**

## /// AV Line

| Quiet mode @<br>25° C ambient<br>(77° F) | Conditions: | PoE Power Load | Internal Sensors   | Case Temperature<br>(Top) | Fan Duty | Acoustic Noise |
|--|-------------|----------------|--------------------|---------------------------|----------|----------------|
| M4250-10G2F-PoE+                         | +           | 0-125W         | <= 36°C            | 35.9°C                    | 25       | 27.38dBA       |
| M4250-10G2XF-Pol                         | Ξ+          | 0-240W         | <= 37°C            | 40.6°C                    | 25       | 27.4dBA        |
| M4250-10G2XF-Pol                         | <u> </u>    | 0-250W         | <= 49°C            | 42.9°C                    | 25       | 34.57dBA       |
|  |             | 250-380W       | <= 49°C            | 43.3°C                    | 30       | 40dBA          |
|  |             | 380-500W       | <= 49°C            | 44.9°C                    | 35       | 44.22dBA       |
|  |             | 500-720W       | <= 49°C            | 52.1°C                    | 40       | 47.19dBA       |
| M4250-26G4F-PoE+                         | +           | 0-200W         | S1<= 43°C S2<=47°C | 43.5°C                    | 25       | 28dBA          |
|  |             | 200W-300W      | S1<= 44°C S2<=48°C | 51.3°C                    | 30       | 34dBA          |
| M4250-26G4F-PoE                          | ++          | 0-280W         | S1<= 37°C S2<=39°C | 52.9°C                    | 20       | 28dBA          |
|  |             | 280W-360W      | S1<= 38°C S2<=40°C | 57.4°C                    | 25       | 36dBA          |
|  |             | 360W-420W      | S1<= 39°C S2<=41°C | 54.4°C                    | 30       | 41dBA          |
|  |             | 420W-480W      | S1<= 40°C S2<=42°C | 53.3°C                    | 35       | 47dBA          |
|  |             | 480W-540W      | S1<= 41°C S2<=43°C | 52.3°C                    | 40       | 50dBA          |
|  |             | 540W-600W      | S1<= 42°C S2<=44°C | 54.4°C                    | 45       | 54dBA          |
|  |             | 600W-660W      | S1<= 43°C S2<=45°C | 53.6°C                    | 50       | 57dBA          |
|  |             | 660W-1,440W    | S1<= 44°C S2<=46°C | 55.7°C                    | 55       | 60dBA          |
| M4250-26G4XF-Pol                         | <b>E</b> +  | 0-350W         | S1<= 41°C S2<=46°C | 39.3°C                    | 20       | 25dBA          |
|  |             | 350W-480W      | S1<= 42°C S2<=47°C | 36.8°C                    | 30       | 42dBA          |
| M4250-40G8F-PoE+                         | +           | 0-150W         | S1<= 37°C S2<=50°C | 43.1°C                    | 20       | 30dBA          |
|  |             | 150W-200W      | S1<= 38°C          | 42.1°C                    | 25       | 36dBA          |
|  |             | 200W-340W      | S1<= 39°C S2<=51°C | 44°C                      | 30       | 40dBA          |
|  |             | 340W-480W      | S1<= 40°C          | 47.6°C                    | 35       | 47dBA          |
| M4250-40G8XF-Pol                         | Ξ+          | 0-400W         | S1<= 33°C S2<=46°C | 54.2°C                    | 20       | 29dBA          |
|  |             | 400W-480W      | S1<= 34°C S2<=47°C | 42.8°C                    | 25       | 35dBA          |
|  |             | 480W-560W      | S1<= 35°C S2<=48°C | 41.9°C                    | 30       | 41dBA          |
|  |             | 560W-640W      | S1<= 36°C S2<=49°C | 42.1°C                    | 35       | 48dBA          |
|  |             | 640W-720W      | S1<= 37°C S2<=50°C | 40.9°C                    | 40       | 51dBA          |
|  |             | 720W-800W      | S1<= 38°C S2<=51°C | 40.7°C                    | 45       | 54dBA          |
|  |             | 800W-880W      | S1<= 39°C S2<=52°C | 40.4°C                    | 50       | 57dBA          |
|  |             | 880W-960W      | S1<= 40°C S2<=53°C | 40.5°C                    | 55       | 59dBA          |
| л4250-40G8XF-Pol                         | <u> </u>    | 0-160W         | S1<= 37°C S2<=49°C | 41.3°C                    | 20       | 30dBA          |
|  |             | 160W-240W      | S1<= 38°C          | 38.8°C                    | 25       | 36dBA          |
|  |             | 240W-320W      | S1<= 39°C S2<=50°C | 36.4°C                    | 30       | 42dBA          |
|  |             | 320W-400W      | S1<= 40°C          | 35.3°C                    | 35       | 49dBA          |
|  |             | 400W-480W      | S1<= 41°C S2<=51°C | 34.4°C                    | 40       | 51dBA          |
|  |             | 480W-560W      | S1<= 42°C          | 34.3°C                    | 45       | 55dBA          |
|  |             |                |                    |                           |          |                |
|  |             | 560W-640W      | S1<= 43°C S2<=52°C | 35.1°C                    | 50       | 57dBA          |
|  |             | 660W-2,880W    | S1<= 44°C          | 36.5°C                    | 55       | 60dBA          |
| M4250-12M2XF                             |             | -              | <= 58°C            | 53.5°C                    | 25       | 28.5dBA        |
|  |             |                |                    |                           |          |                |

# AV Line Managed Switches

# /// AV Line

**NETGEAR®** 

| Cool mode @<br>25 °C ambient (77 °F)    | Case Temperature (Top)  | Fan                            | Duty Acoustic Noise                 |
|---|---|--------------------------------|-------------------------------------|
| M4250-10G2F-PoE+                        | 27.2°C  | 10                             | 00 55dBA                            |
| M4250-10G2XF-PoE+                       | 30.9°C  | 10                             | 00 56dBA                            |
| M4250-10G2XF-PoE++                      | 41.8°C  | 10                             | 00 66.23dBA                         |
| M4250-26G4F-PoE+                        | 36.7°C  |                                | 00 57dBA                            |
| M4250-26G4F-PoE++                       | (720W PoE) 36.7°C (1,440W PoE                                   |                                | 00 69dBA                            |
| M4250-26G4XF-PoE+                       | 32.3°C  |                                | 00 67dBA                            |
| M4250-40G8F-PoE+                        | 35.4°C  |                                | 00 68dBA                            |
| M4250-40G8XF-PoE+<br>M4250-40G8XF-PoE++ | 36.1°C<br>(720W PoE) 31.4°C (1,650W PoE)<br>(2,880W PoE) 35.4°C | 23 E°C                         | 00 69dBA<br>00 71dBA                |
| M4250-12M2XF                            | 33.2°C  | 10                             | 00 55dBA                            |
| M4250-16XF                              | 30.3°C  |                                | 00 57dBA                            |
|   |   |                                |                                     |
| Heat Dissipation (BTU)                  | Without PoE, all ports  | With Max PoE, all ports        | Standby without any port connection |
| M4250-10G2F-PoE+                        | 17.32W - 59.13 BTU/hr   | 163.9W - 559.55 BTU/hr         | 8.53W - 29.12BTU/hr                 |
| M4250-10G2XF-PoE+                       | 25W - 85.35 BTU/hr  | 306.4W - 1046.05 BTU/hr        | 12.96W - 44.24BTU/hr                |
| M4250-10G2XF-PoE++                      | 26.3W - 89.79 BTU/hr  | 837.7W - 2859.91 BTU/hr        | 18W - 61.45BTU/hr                   |
| M4250-26G4F-PoE+                        | 35.8W - 122.22 BTU/hr   | 401W - 1369.01 BTU/hr          | 23.4W - 79.89 BTU/hr                |
| M4250-26G4F-PoE++                       | 48.8W - 166.6 BTU/hr  | 1 PSU: 889W - 3035.05 BTU/hr   | 36.9W - 125.98 BTU/hr               |
|   |   | 2 PSU: 1734W - 5919.88 BTU/hr  |                                     |
| M4250-26G4XF-PoE+                       | 46.8W - 159.78 BTU/hr   | 614W - 2096.2 BTU/hr           | 33.9W - 115.73 BTU/hr               |
| M4250-40G8F-PoE+                        | 59.5W - 203.13 BTU/hr   | 624.8W - 2133.07 BTU/hr        | 46.4W - 158.41 BTU/hr               |
| M4250-40G8XF-PoE+                       | 89.2W - 304.53 BTU/hr   | 1197W - 4086.56 BTU/hr         | 74.5W - 254.34 BTU/hr               |
| M4250-40G8XF-PoE++                      | 82.6W - 282 BTU/hr  | 1 PSU: 912W - 3113.57 BTU/hr   | 68.5W - 233.86 BTU/hr               |
|   |   | 2 PSU: 1998W - 6821.17 BTU/hr  |                                     |
|   |   | 3 PSU: 3523W - 12027.52 BTU/hr |                                     |
| M4250-12M2XF                            | 37.9W - 129.39 BTU/hr   | -                              | 14.1W - 48.14BTU/hr                 |
| M4250-16XF                              | 47.84W - 163.33 BTU/hr  | -                              | 19.27W - 65.78BTU/hr                |
| Mean Time Between Failures<br>(MTBF)    | @ 25 °C ambient (77 °F)   | @ 45 °C ambient (113 °F)       | @ 50 °C ambient (122 °F)            |
| M4250-10G2F-PoE+                        | 778,769 hours (~88.9 years)                                     | 530,659 hours (~60.6 years)    | -                                   |
| M4250-10G2XF-PoE+                       | 576,889 hours (~65.9 years)                                     | 562,708 hours (~64.2 years)    | -                                   |
| M4250-10G2XF-PoE++                      | 947,871 hours (~108.2 years)                                    | 493,860 hours (~56.4 years)    | -                                   |
| M4250-26G4F-PoE+                        | 511,054 hours (~58.3 years)                                     | 342,368 hours (~39.1 years)    | -                                   |
| M4250-26G4F-PoE++                       | 491,282 hours (~56.1 years)                                     | 262,204 hours (~29.9 years)    | -                                   |
| M4250-26G4XF-PoE+                       | 509,057 hours (~58.1 years)                                     | 285,719 hours (~32.6 years)    | -                                   |
| M4250-40G8F-PoE+                        | 341,680 hours (~39 years)                                       | 342,368 hours (~39.1 years)    | -                                   |
| M4250-40G8XF-PoE+                       | 487,900 hours (~55.7 years)                                     | 285,719 hours (~32.6 years)    | -                                   |
| M4250-40G8XF-PoE++                      | 304,916 hours (~34.8 years)                                     | 262,204 hours (~29.9 years)    | -                                   |
| M4250-12M2XF                            | 720,892 hours (~82.3 years)                                     | -                              | 416,021 hours (~47.5 years)         |
| M4250-16XF                              | 844,633 hours (~96.4 years)                                     | -                              | 490,265 hours (~56 years)           |
|   |   |                                |                                     |

### **NETGEAR**<sup>®</sup>

#### AV Line

| 2 Services - VLANs  |            |   |
|---|------------|---|
| IEEE 802.1Q VLAN Tagging  | Yes        | 802.1Q-1998 Up to 4,093 VLANs - 802.1Q Tagging  |
| Auto-Trunk  | Yes        | Dynamic VLAN trunking as soon as a M4250 switch gets connected to anothe M4250 switch               |
| Protocol Based VLANs  | Yes        |   |
| IP subnet   | Yes        |   |
| ARP   | Yes        |   |
| IPX   | Yes        |   |
| Subnet based VLANs  | Yes        |   |
| MAC based VLANs   | Yes        |   |
| Voice VLAN  | Yes        | Based on phones OUI bytes (internal database, or user-maintained) or protocols (SIP, H323 and SCCP) |
| Private Edge VLAN   | Yes        |   |
| Private VLAN  | Yes        |   |
| IEEE 802.1x   | Yes        | 802.1x-2004   |
| Guest VLAN  | Yes        |   |
| RADIUS based VLAN assignment via .1x                              | Yes        | IP phones and PCs can authenticate on the same port but under different                             |
| RADIUS based Filter ID assignment via .1x                         | Yes        | VLAN assignment policies  |
| MAC-based .1x   | Yes        |   |
| Unauthenticated VLAN  | Yes        |   |
| Double VLAN Tagging   | Yes        |   |
| Enabling dvlan-tunnel makes interface                             | Yes        |   |
| Global ethertype (TPID)   | Yes<br>Yes |   |
| Interface ethertype (TPID) Customer ID using PVID                 | Yes        |   |
| GARP with GVRP/GMRP   | Yes        | Automatic registration for membership   |
|   |            | in VLANs or in multicast groups   |
| Multiple Registration Protocol (MRP)                              | Yes        | Can replace GARP functionality  |
| Multicast VLAN Registration Protocol (MVRP)                       | Yes        | Can replace GARP functionality  |
| MVR (Multicast VLAN registration)                                 | Yes        |   |
| 2 Services - Availability   |            |   |
| IEEE 802.3ad - LAGs   | Yes        | Up to 8 LAGs and up to 8 ports per group  |
| LACP  | Yes        |   |
| LACP automatically reverts to and from Static LAG                 | Yes        |   |
| Static LAGs   | Yes        |   |
| LAG Hashing   | Yes        |   |
| LAG Member Port Flaps Tracking                                    | Yes        |   |
| Auto-LAG  | Yes        | If more than one link between two M4250 switches, a Link Aggregation Group is created, dynamically  |
| Storm Control   | Yes        |   |
| IEEE 802.3x (Full Duplex and flow control)  Per port Flow Control | Yes<br>Yes | Asymmetric and Symmetric Flow Control   |
| UDLD Support (Unidirectional Link Detection)                      | Yes        |   |
| Normal-Mode   | Yes        |   |
| Aggressive-Mode   | Yes        |   |
| Link Dependency   | Yes        | Allow the link status of specified ports to be dependent on the link status of other ports          |
| IEEE 802.1D Spanning Tree Protocol                                | Yes        |   |
| IEEE 802.1w Rapid Spanning Tree                                   | Yes        |   |
| IEEE 802.1s Multiple Spanning Tree                                | Yes        |   |
| Per VLAN STP (PVSTP) with FastUplink and                          | Yes        | PVST+ interoperability  |

### **NETGEAR**°

#### /// AV Line

| Per VLAN Rapid STP (PVRSTP)  | Yes               | RPVST+ interoperability  |
|--|-------------------|--|
| STP Loop Guard   | Yes               |  |
| STP Root Guard   | Yes               |  |
| STP BPDU Guard   | Yes               |  |
| STP BPDU Filtering   | Yes               |  |
| STP BPDU Flooding  | Yes               |  |
| L2 Services - Multicast Filtering  |                   |  |
| IGMPv2 Snooping Support  | Yes               |  |
| IGMPv3 Snooping Support  | Yes               |  |
| NETGEAR IGMP Plus™ Enhanced Implementation   | Yes               | For automatic multicast across M4250 / M4300 / M4500 (Spine and Leaf) at Layer 2, removing the need for L3 PIM routing |
| MLDv1 Snooping Support   | Yes               |  |
| MLDv2 Snooping Support   | Yes               |  |
| Expedited Leave function   | Yes               |  |
| Static L2 Multicast Filtering  | Yes               |  |
| Enable IGMP / MLD Snooping per VLAN  | Yes               |  |
| IGMPv1/v2 Snooping Querier, compatible v3 queries  | Yes               |  |
| MLDv1 Snooping Querier   | Yes               |  |
| MGMD Snooping Control Packet Flooding Flooding to mRouter Ports Remove Flood-All-Unregistered Option | Yes<br>Yes<br>Yes |  |
| Multicast VLAN registration (MVR)  | Yes               |  |
| L3 Services - Multicast Routing  |                   |  |
| IGMP Proxy   | Yes               |  |
| MLD Proxy  | Yes               |  |
| Any Source Multicast (ASM)   | Yes               |  |
| Source Specific Multicast (SSM)  | Yes               |  |
| Multicast streams routing between subnets, VLANs   | Yes               |  |
| Multicast static routes (IPv4, IPv6)   | Yes               |  |
| Neighbor discovery   | Yes               |  |
| PIM-DM (Multicast Routing - dense mode)  | Yes               |  |
| PIM-DM (IPv6)  | Yes               |  |
| PIM-SM (Multicast Routing - sparse mode)   | Yes               |  |
| PIM-SM (IPv6)  | Yes               |  |
| PIM multi-hop RP support   | Yes               |  |
| PIM Timer Accuracy   | Yes               |  |
| PIM-SM Unhandled Events  | Yes               |  |
| IPMC replication (hardware support)  | Yes               |  |
| L3 Services - DHCP   |                   |  |
| DHCP IPv4 / DHCP IPv6 Client   | Yes               |  |
| DHCP IPv4 / DHCP IPv6 Server (Stateless, Stateful)   | Yes               |  |
| DHCP Snooping IPv4 / IPv6  | Yes               |  |
| BootP Relay IPv4 / IPv6  | Yes               |  |
| DHCP Relay IPv4 / IPv6   | Yes               |  |



#### //// AV Line

| DHCP Relay Option 82 circuit-id and remote-id for VLANs  | Yes                                   |  |
|--|---------------------------------------|--|
| Multiple Helper IPs  | Yes                                   |  |
| Auto Install (DHCP options 66, 67, 150 and 55, 125)  | Yes                                   |  |
| L3 Services - Routing  |                                       |  |
| Static Routing / ECMP Static Routing Multiple next hops to a given destination Load sharing, Redundancy Default routes Static Reject routes  | IPv4/IPv6<br>Yes<br>Yes<br>Yes<br>Yes |  |
| Port Based Routing   | Yes                                   |  |
| VLAN Routing<br>802.3ad (LAG) for router ports   | Yes<br>Yes                            |  |
| Loopback Interfaces  | Yes                                   |  |
| RIP  | IPv4                                  |  |
| RIPv1/RIPv2 IP Multinetting  | Yes<br>Yes                            |  |
| ICMP throttling  | Yes                                   |  |
| Router Discovery Protocol  | Yes                                   |  |
| DNS Client   | IPv4/IPv6                             |  |
| IP Helper  | Yes                                   |  |
| Max IP Helper entries  | 512                                   |  |
| IP Event Dampening   | IPv4/IPv6                             |  |
| Proxy ARP  | IPv4/IPv6                             |  |
| ICMP ICMP redirect detection in hardware   | IPv4/IPv6<br>Yes                      |  |
| Policy Based Routing (PBR) Based on the size of the packet Based on the Protocol of the payload (Protocol ID field) Based on Source MAC address Based on Source or Destination IP address Based on VLAN tag Based on Priority(802.1P priority) | IPv4/IPv6 Yes Yes Yes Yes Yes Yes Yes |  |
| Network Monitoring and Discovery Services  |                                       |  |
| ISDP (Industry Standard Discovery Protocol)  | Yes                                   | Can interoperate with devices running CDP          |
| 802.1ab LLDP   | Yes                                   |  |
| 802.1ab LLDP - MED   | Yes                                   |  |
| SNMP   | V1, V2, V3                            |  |
| RMON 1,2,3,9   | Yes                                   |  |
| sFlow  | Yes (IPv4 and IPv6 headers)           |  |
| Security   |                                       |  |
| Network Storm Protection, DoS  |                                       |  |
| Broadcast, Unicast, Multicast DoS Protection<br>Denial of Service Protection (control plane)<br>Denial of Service Protection (data plane)  | Yes<br>Yes<br>Yes                     | Switch CPU protection<br>Switch Traffic protection |

#### /// AV Line

| DoS Attacks Protection                         |           | SIPDIP<br>SMACDMAC<br>FIRSTFRAG<br>TCPFRAG<br>TCPFLAG<br>TCPPORT | UDPPORT TCPFLAGSEQ TCPOFFSET TCPSYN TCPSYNFIN TCPFINURGPSH | L4PORT ICMP ICMPV4 ICMPV6 ICMPFRAG PINGFLOOD | SYNACK                |
|--|-----------|--|--|--|-----------------------|
| CPU Rate Limiting                              | Yes       |  | and IPv6 multicast packets with u                          |  | en IP routing/        |
| ICMP throttling                                | Yes       |  | out<br>NG traffic for ICMP-based DoS at                    | ttacks                                       |                       |
| •  | 163       | Restrict ICIVII , I II   | NO traincror reinir-based Dos at                           | itacks                                       |                       |
| Management                                     |           | _  |  |  |                       |
| Management ACL (MACAL)  Max Rules              | Yes<br>64 | Protects manage  | ement CPU access through the LA                            | λN   |                       |
| Out of band Management                         | Yes       | In-band manage   | ement can be shut down entirely                            | when out-of-band manage                      | ement network         |
| Radius accounting                              | Yes       | RFC 2565 and R   | FC 2866  |  |                       |
| TACACS+  | Yes       |  |  |  |                       |
| Malicious Code Detection                       | Yes       | Software image   | files and Configuration files with                         | digital signatures                           |                       |
| Network Traffic                                |           |  |  |  |                       |
| Access Control Lists (ACLs)                    | L2 / L3   | 3 / L4 MA  | AC, IPv4, IPv6, TCP, UDP                                   |  |                       |
| Time-based ACLs                                | Yes       |  |  |  |                       |
| Protocol-based ACLs                            | Yes       |  |  |  |                       |
| ACL over VLANs                                 | Yes       |  |  |  |                       |
| Dynamic ACLs                                   | Yes       |  |  |  |                       |
| IEEE 802.1x Radius Port Access Authentication  | Yes       | Up to 48 clients   | (802.1x) per port are supported,                           | including the authentication                 | on of the users doma  |
| 802.1x MAC Address Authentication Bypass (MAB) | Yes       | Supplemental au  | uthentication mechanism for non-8                          | 802.1x devices, based on t                   | neir MAC address onl  |
| Network Authentication Successive Tiering      | Yes       | Dot1x-> MAP ->   | Captive Portal successive auther                           | ntication methods based o                    | n configured time-ou  |
| Port Security                                  | Yes       |  |  |  |                       |
| IP Source Guard                                | Yes       |  |  | IPv4 / IPv6                                  |                       |
| DHCP Snooping                                  | Yes       |  |  | IPv4 / IPv6                                  |                       |
| Dynamic ARP Inspection                         | Yes       |  |  | IPv4 / IPv6                                  |                       |
| IPv6 RA Guard Stateless Mode                   | Yes       |  |  |  |                       |
| MAC Filtering                                  | Yes       |  |  |  |                       |
| Port MAC Locking                               | Yes       |  |  |  |                       |
| Private Edge VLAN                              | Yes       | A protected por protected port -                                 | t doesn't forward any traffic (unica<br>same switch        | ast, multicast, or broadcas                  | t) to any other       |
| Private VLANs                                  | Yes       | Scales Private Ec<br>Layer 2 network                             | dge VLANs by providing Layer 2 i                           | solation between ports ac                    | ross switches in same |
| Quality of Service (QoS) - Summary             |           |  |  |  |                       |
| Access Lists                                   | Yes       |  |  |  |                       |
| L2 MAC, L3 IP and L4 Port ACLs                 | Yes       |  |  |  |                       |
| Ingress  | Yes       |  |  |  |                       |
| Egress   | Yes       |  |  |  |                       |
| Time-based                                     | Yes       |  |  |  |                       |
| 802.3ad (LAG) for ACL assignment               | Yes       |  |  |  |                       |
| Binding ACLs to VLANs                          | Yes       |  |  |  |                       |
|  | \/        |  |  |  |                       |
| ACL Logging Support for IPv6 fields            | Yes       |  |  |  |                       |

### **NETGEAR**°

#### /// AV Line

| DiffServ QoS Edge Node applicability Interior Node applicability 802.3ad (LAG) for service interface Support for IPv6 fields Ingress/Egress IEEE 802.1p COS 802.3ad (LAG) for COS configuration | Yes  |
|---|--|
| WRED (Weighted Deficit Round Robin) Strict Priority queue technology  | Yes<br>Yes   |
| Single Rate Policing Committed Information Rate Committed Burst Size Excessive Burst Size DiffServ feature applied to class maps  | Yes (CLI only) Yes Yes Yes Yes Yes   |
| Auto-VoIP   | Yes, based on protocols (SIP, H323 and SCCP) or on OUI bytes (default database and user-based OUIs) in the phone source MAC address                              |
| QoS - ACL Feature Support   |  |
| ACL Support (general, includes IP ACLs)  MAC ACL Support  IP Rule Match Fields:  Destination IP  Destination IPv6 IP  Destination L4 Port  Every Packet  IP DSCP  IP Precedence  IP TOS         | Yes Yes Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound |
| Protocol Source IP (for Mask support see below) Source IPv6 IP L3 IPv6 Flow Label Source L4 Port TCP Flag (ack, est, fin) Supports Masking  | Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound   |
| MAC Rule Match Fields COS Destination MAC Destination MAC Mask Ethertype Source MAC Source MAC Mask VLAN ID   | Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound Inbound/Outbound                          |
| Rules attributes Assign Queue Logging deny rules Mirror (to supported interface types only) Redirect (to supported interface types only) Rate Limiting permit rules                             | Inbound Inbound Inbound Inbound Inbound  |

### **NETGEAR**°

#### AV Line

| Interface                                    | V                |
|--|------------------|
| Inbound direction Outbound direction         | Yes              |
|  | Yes              |
| Supports LAG interfaces                      | Yes              |
| Supports Control-plane interface             | Yes              |
| Multiple ACLs per interface, dir             | Yes              |
| Mixed-type ACLs per interface, dir           | Yes              |
| Mixed L2/IPv4 ACLs per interface, inbound    | Yes              |
| Mixed IPv4/IPv6 ACLs per interface, inbound  | Yes              |
| Mixed IPv4/IPv6 ACLs per interface, outbound | Yes              |
| QoS - DiffServ Feature Support               |                  |
| DiffServ Supported                           | Yes              |
| Class Type                                   |                  |
| All  | Yes              |
| Class Match Criteria                         |                  |
| COS  | Inbound/Outbound |
| COS2 (Secondary COS)                         | Inbound          |
| Destination IP (for Mask support see below)  | Inbound/Outbound |
| Destination IPv6 IP                          | Inbound/Outbound |
| Destination L4 Port                          | Inbound/Outbound |
| Destination MAC (for Mask support see below) | Inbound/Outbound |
| Ethertype                                    | Inbound/Outbound |
| Every Packet                                 | Inbound/Outbound |
| IP DSCP                                      | Inbound/Outbound |
| IP Precedence                                | Inbound/Outbound |
| IP TOS (for Mask support see below)          | Inbound/Outbound |
| Protocol                                     | Inbound/Outbound |
| Reference Class                              | Inbound/Outbound |
| Source IP (for Mask support see below)       | Inbound/Outbound |
| Source IPv6 IP                               | Inbound/Outbound |
| L3 IPv6 Flow Label                           | Inbound          |
| Source L4 Port                               | Inbound/Outbound |
| Source MAC (for Mask support see below)      | Inbound/Outbound |
| VLAN ID (Source VID)                         | Inbound/Outbound |
| VLAN ID2 (Secondary VLAN) (Source VID)       | Inbound/Outbound |
| Supports Masking                             | Inbound/Outbound |
| Policy                                       |                  |
| Out Class Unrestricted                       | Yes              |
| Policy Attributes Inbound                    |                  |
| Assign Queue                                 | Yes              |
| Drop   | Yes              |
| Mark COS                                     | Yes              |
| Mark COS-AS-COS2                             | Yes              |
| Mark COS2 (Secondary COS)                    | Yes              |
| Mark IP DSCP                                 | Yes              |
| Mark IP Precedence                           | Yes              |
| Mirror (to supported interface types only)   | Yes              |
| Police Simple                                | Yes              |
| Police Single-Rate                           | Yes              |
| Police Two-Rate                              | Yes              |
| Police Color Aware Mode                      | Yes              |
| Redirect (to supported interface types only) | Yes              |
|  |                  |

# **NETGEAR®**

#### //// AV Line

| Policy Attributes Outbound  | Yes<br>Yes                              |
|---|---|
| Drop<br>Mark COS  | Yes                                     |
| Mark IP DSCP  | Yes                                     |
| Mark IP Precedence  | Yes                                     |
| Mirror (to supported interface types only)  | Yes                                     |
| Police Simple   | Yes                                     |
| Police Single-Rate  | Yes                                     |
| Police Two-Rate   | Yes                                     |
| Police Color Aware Mode   | Yes<br>Yes                              |
| Redirect (to supported interface types only)  | res                                     |
| Service Interface<br>Inbound Slot.Port configurable   | Yes                                     |
| Inbound 'All' Ports configurable  | Yes                                     |
| Outbound Slot.Port configurable   | Yes                                     |
| Outbound 'All' Ports configurable   | Yes                                     |
| Supports LAG interfaces   | Yes                                     |
| Mixed L2/IPv4 match criteria, inbound   | Yes                                     |
| Mixed IPv4/IPv6 match criteria, inbound   | Yes                                     |
| Mixed IPv4/IPv6 match criteria, outbound  | Yes                                     |
| PHB Support   |   |
| EF  | Yes                                     |
| AF4x  | Yes                                     |
| AF3x  | Yes                                     |
| AF2x  | Yes                                     |
| AF1x  | Yes                                     |
| CS  | Yes                                     |
| Statistics Policy Instance  |   |
| Offered<br>Discarded  | packets<br>packets                      |
|   |   |
| QoS - COS Feature Support   |   |
| QoS - COS Feature Support   |   |
| QoS - COS Feature Support COS Support   | Yes                                     |
| COS Support Supports LAG interfaces   |   |
| COS Support Supports LAG interfaces COS Mapping Config  | Yes<br>Yes                              |
| COS Support Supports LAG interfaces COS Mapping Config Configurable per-interface   | Yes                                     |
| COS Support Supports LAG interfaces COS Mapping Config Configurable per-interface IP DSCP Mapping   | Yes<br>Yes<br>Yes                       |
| QoS - COS Feature Support  COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config   | Yes<br>Yes<br>Yes                       |
| COS Support Supports LAG interfaces COS Mapping Config Configurable per-interface IP DSCP Mapping   | Yes<br>Yes<br>Yes                       |
| QoS - COS Feature Support  COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface  | Yes Yes Yes Yes Yes                     |
| COS Support Supports LAG interfaces COS Mapping Config Configurable per-interface IP DSCP Mapping COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface   | Yes Yes Yes Yes Yes Yes                 |
| COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface Interface Traffic Shaping (for whole egress interface) Minimum Bandwidth Weighted Deficit Round Robin (WDRR) Support  | Yes |
| COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface Interface Traffic Shaping (for whole egress interface) Minimum Bandwidth Weighted Deficit Round Robin (WDRR) Support Maximum Queue Weight   | Yes |
| COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface Interface Traffic Shaping (for whole egress interface) Minimum Bandwidth Weighted Deficit Round Robin (WDRR) Support Maximum Queue Weight WRED Support  | Yes |
| COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface Interface Traffic Shaping (for whole egress interface) Minimum Bandwidth Weighted Deficit Round Robin (WDRR) Support Maximum Queue Weight   | Yes |
| COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface Interface Traffic Shaping (for whole egress interface) Minimum Bandwidth Weighted Deficit Round Robin (WDRR) Support Maximum Queue Weight WRED Support  | Yes |
| COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface Interface Traffic Shaping (for whole egress interface) Minimum Bandwidth Weighted Deficit Round Robin (WDRR) Support Maximum Queue Weight WRED Support  | Yes |
| COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface Interface Traffic Shaping (for whole egress interface) Minimum Bandwidth Weighted Deficit Round Robin (WDRR) Support Maximum Queue Weight WRED Support  PTP - PTPv2 Feature Support   | Yes |
| COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface Interface Traffic Shaping (for whole egress interface) Minimum Bandwidth Weighted Deficit Round Robin (WDRR) Support Maximum Queue Weight WRED Support  PTP - PTPv2 Feature Support  PTPv2 IEEE 1588 PTPv2 Section 10 and 11.5                            | Yes |
| COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface Interface Traffic Shaping (for whole egress interface) Minimum Bandwidth Weighted Deficit Round Robin (WDRR) Support Maximum Queue Weight WRED Support  PTP - PTPv2 Feature Support  PTPv2  IEEE 1588 PTPv2 Section 10 and 11.5 Implementation            | Yes |
| COS Support Supports LAG interfaces  COS Mapping Config Configurable per-interface IP DSCP Mapping  COS Queue Config Queue Parms configurable per-interface Drop Parms configurable per-interface Interface Traffic Shaping (for whole egress interface) Minimum Bandwidth Weighted Deficit Round Robin (WDRR) Support Maximum Queue Weight WRED Support  PTP - PTPv2 Feature Support  PTPv2 IEEE 1588 PTPv2 Section 10 and 11.5 Implementation Limitations | Yes |

### AV Line Managed Switches

| TSN - Time Sensitive Networking AVB Feature Support   |   |   |
|---|---|---|
| AVB   |   |   |
| IEEE 802.1BA-2011 Audio Video Bridging (AVB)  | Yes, when an AVB license is properly installed in the tion at the end of the Tech Spec section) | ne switch (license sold separately, see Ordering Informa-                       |
| IEEE 802.1AS-2011 gPTP  | Yes, with an AVB license  |   |
| IEEE 802.1Qav-2009 FQTSS  | Yes, with an AVB license  |   |
| IEEE 802.1Qat-2010 MSRP   | Yes, with an AVB license  |   |
| IEEE 802.1ak MMRP   | Yes, with an AVB license  |   |
| IEEE 802.1ak MVRP   | Yes, with an AVB license  |   |
| Max number of AVB streams   | 256 streams per switch  |   |
| Limitations   | AVB isn't supported on a LAG (link aggregation g  | oup, or port channel)   |
| Functional Summary - IETF RFC Standards and IEEE Netv   | vork Protocols  |   |
| Core Management   |   |   |
| RFC 854 – Telnet  | RFC 3414 – User-Based Security Model  |   |
| RFC 855 – Telnet option specifications  | RFC 3415 – View-based Access Control Model  |   |
| RFC 1155 – SMI v1   | RFC 3416 – Version 2 of SNMP Protocol Operation   | ns  |
| RFC 1157 – SNMP   | RFC 3417 – Transport Mappings   |   |
| RFC 1212 – Concise MIB definitions  | RFC 3418 – Management Information Base (MIB)  | for the Simple Network Management Protocol (SNMP)                               |
| RFC 1867 – HTML/2.0 forms with file upload extensions   | Configurable Management VLAN  |   |
| RFC 1901 – Community-based SNMP v2  |   | SSL 3.0 and TLS 1.2   |
| RFC 1908 – Coexistence between SNMP v1 and SNMP v   | 2   | - RFC 2246 – The TLS protocol, version 1.0                                      |
| RFC 2068 – HTTP/1.1 protocol as updated by draft-ietf-h   | http-v11-spec-rev-03  | - RFC 2346 – AES cipher suites for Transport layer security                     |
| RFC 2271 – SNMP framework MIB   |   | - RFC 2818 – HTTP over TLS SSH 2.0  |
| RFC 2295 – Transparent content negotiation  |   | SSH 2.0   |
| RFC 2296 – Remote variant selection; RSVA/1.0 state ma  | nagement cookies – draft-ietf-http-state-mgmt-05  | - RFC 4253 – SSH transport layer protocol                                       |
| RFC 2576 – Coexistence between SNMP v1, v2, and v3  |   | - RFC 4252 – SSH authentication protocol  |
| RFC 2578 – SMI v2   |   | - RFC 4254 – SSH connection protocol  |
| RFC 2579 – Textual conventions for SMI v2   |   | - RFC 4251 – SSH protocol architecture  |
| RFC 2580 – Conformance statements for SMI v2  |   | - RFC 4716 – SECSH public key file format                                       |
| RFC 3410 – Introduction and Applicability Statements for Internet Standard Management Framework |   | - RFC 4419 – Diffie-Hellman group exchange for the SSH transport layer protocol |
| RFC 3411 – An Architecture for Describing SNMP Management Frameworks                            |   | HTML 4.0 specification, December 1997   |
| RFC 3412 – Message Processing & Dispatching   |   | Java SariatTM 1 2   |
| RFC 3413 – SNMP Applications  |   | Java Script™ 1.3  |
| A.I I M   |   |   |

#### **Advanced Management**

Industry-standard CLI with the following features:

Scripting capability
 Command completion
 Context-sensitive help
 Optional user password encryption
 Multisession Telnet server
 Auto Image Upgrade

### **NETGEAR**<sup>®</sup>

#### AV Line

| Core Switching   |  |
|--|--|
| IEEE 802.1AB – Link level discovery protocol                       | IEEE 802.1BA-2011, 802.1AS-2011 gPTP, 802.1Qav-2009 FQTSS, 802.1Qat-2010 MSRP, 802.1ak MMRP, MVRP with AVB license |
| IEEE 802.1D – Spanning tree  | IEEE 802.3ac – VLAN tagging  |
| IEEE 802.1p – Ethernet priority with user provisioning and mapping | IEEE 802.3ad – Link aggregation  |
| IEEE 802.1Q – Virtual LANs w/ port-based VLANs                     | IEEE 802.3ae – 10 GbE  |
| IEEE 802.1S – Multiple spanning tree compatibility                 | IEEE 802.3af – Power over Ethernet   |
| IEEE 802.1v – Protocol-based VLANs                                 | IEEE 802.3at – Power over Ethernet Plus  |
| IEEE 802.1W – Rapid spanning tree                                  | IEEE 802.3x – Flow control   |
| iEEE 802.1AB – LLDP  | ANSI/TIA-1057 – LLDP-MED   |
| IEEE 802.1X – Port-based authentication                            | GARP – Generic Attribute Registration Protocol: clause 12, 802.1D-2004   |
| IEEE 802.3 – 10Base-T  | GMRP – Dynamic L2 multicast registration: clause 10, 802.1D-2004   |
| IEEE 802.3u – 100Base-T  | GVRP – Dynamic VLAN registration: clause 11.2, 802.1Q-2003   |
| IEEE 802.3ab – 1000Base-T  | RFC 4541 – IGMP snooping and MLD snooping  |
| IEEE 802.3bz-2016 – 2.5GBASE-T                                     | RFC 5171 – UniDirectional Link Detection (UDLD) Protocol   |
| Additional Layer 2 Functionality                                   |  |
| Broadcast storm recovery   | IGMP and MLD snooping querier  |
| Double VLAN/VMAN tagging   | Port MAC locking   |
| DHCP Snooping  | MAC-based VLANs  |
| Dynamic ARP inspection   | IP source guard  |
| Independent VLAN Learning (IVL) support                            | IP subnet-based VLANs  |
| IPv6 classification APIs   | Voice VLANs  |
| Jumbo Ethernet frames  | Protected ports  |
| Port mirroring   | IGMP snooping  |
| Static MAC filtering   | Green Ethernet power savings mode  |
| System Facilities  |  |
| Event and error logging facility                                   | RFC 2030 – Simple Network Time Protocol (SNTP) V4 for IPv4, IPv6, and OSI  |
| Runtime and configuration download capability                      | RFC 2131 – DHCP Client/Server  |
| PING utility   | RFC 2132 – DHCP options and BOOTP vendor extensions  |
| XMODEM   | RFC 2865 – RADIUS client   |
| RFC 768 – UDP  | RFC 2866 – RADIUS accounting   |
| RFC 783 – TFTP   | RFC 2868 – RADIUS attributes for tunnel protocol support   |
| RFC 791 – IP   | RFC 2869 – RADIUS extensions   |
| RFC 792 – ICMP   | RFC 28869bis – RADIUS support for Extensible Authentication Protocol (EAP)   |
| RFC 793 – TCP  | RFC 5176 – RADIUS Change of Auth   |

#### /// AV Line

| RFC 826 - ARP   | RFC 3164 – The BSD syslog protocol with RFC 5424 update   |
|---|---|
| RFC 951 – BOOTP   | RFC 3580 – 802.1X RADIUS usage guidelines   |
| RFC 1321 – Message digest algorithm   | Power Course Equipment /DCE\ IEEE 902 of Powered Ethorset /DCE Power via MDN standard   |
| RFC 1534 – Interoperability between BOOTP and DHCP  | Power Source Equipment (PSE) IEEE 802.af Powered Ethernet (DTE Power via MDI) standard  |
| Core Routing  |   |
| RFC 826 – Ethernet ARP  | RFC 1812 – Requirements for IPv4 routers  |
| RFC 894 – Transmission of IP datagrams over Ethernet networks   | RFC 2082 – RIP-2 MD5 authentication   |
| RFC 896 – Congestion control in IP/TCP networks   | RFC 2131 – DHCP relay   |
| RFC 1027 – Using ARP to implement transparent subnet gateways (Proxy ARP)   | RFC 2385–Protection of BGP Sessions via the TCP MD5 Signature Option  |
| RFC 1256 – ICMP router discovery messages   | RFC 2453 – RIP v2   |
| RFC 1321 – Message digest algorithm   | RFC 3021 – Using 31-Bit Prefixes on Point-to-Point Links  |
| RFC 1519 – CIDR   | RFC 3046 – DHCP/BOOTP relay   |
| Quality of Service - DiffServ   |   |
| RFC 2474 – Definition of the differentiated services field (DS Field) in IPv4/IPv6 headers  | RFC 2697 – A Single Rate Three Color Marker   |
| RFC 2475 – An architecture for differentiated services  | RFC 3246 – An expedited forwarding PHB (Per-Hop Behavior)   |
| RFC 2597 – Assured forwarding PHB group   | RFC 3260 – New terminology and clarifications for DiffServ  |
| Quality of Service - Access Control Lists (ACLs)  |   |
| Permit/deny actions for inbound or outbound IP traffic classification based on:  - Type of service (ToS) or differentiated services (DS) DSCP field  - Source IP address  - Destination IP address  - TCP/UDP source port  - TCP/UDP destination port  - IPv6 flow label  - IP protocol number  | Permit/deny actions for inbound or outbound Layer 2 traffic classification based on:  - Source MAC address - Destination MAC address - EtherType - VLAN identifier value or range (outer and/or inner VLAN tag) - 802.1p user priority (outer and/or inner VLAN tag) Optional rule attributes: - Assign matching traffic flow to a specific queue - Redirect or mirror (flow-based mirroring) matching traffic flow to a specific port - Generate trap log entries containing rule hit counts |
| Quality of Service - Class of Service (CoS)   |   |
| Direct user configuration of the following:  - IP DSCP to traffic class mapping  - IP precedence to traffic class mapping  - Interface trust mode: 802.1p, IP Precedence, IP DSCP, or untrusted  - Interface traffic shaping rate  - Minimum and maximum bandwidth per queue  - Strict priority versus weighted (WRR/WDRR/WFQ) scheduling per queue  - Tail drop versus Weighted Random Early Detection (WRED) queue depth management | Auto VoIP   |
| Core Multicast  |   |
| RFC 1112 – Host extensions for IP multicasting  | RFC3973 – PIM-DM  |
| RFC 2236 – IGMP v2  | RFC4601 – PIM-SM  |
| RFC 2710 – MLDv1  | Draft-ietf-magma-igmp-proxy-06.txt – IGMP/MLD-based multicast forwarding (IGMP/MLD proxying)  |

### AV Line Managed Switches

#### AV Line

**NETGEAR**°

| RFC 2365 – Administratively scoped boundaries                   | Draft-ietf-magma-igmpv3-and-routing-05.txt – IGMPv3 and multicast routing protocol interaction |
|---|--|
| RFC 3376 – IGMPv3   | Static RP configuration  |
| RFC3810 – MLDv2   | Static RP configuration  |
| Core IPv6 Routing   |  |
| RFC 1981 – Path MTU for IPv6                                    | RFC 3493 – Basic socket interface for IPv6   |
| RFC 2373 – IPv6 addressing                                      | RFC 3513 – Addressing architecture for IPv6  |
| RFC 2460 – IPv6 protocol specification                          | RFC 3542 – Advanced sockets API for IPv6   |
| RFC 2461 – Neighbor discovery                                   | RFC 3587 – IPv6 global unicast address format  |
| RFC 2462 – Stateless autoconfiguration                          | RFC 3736 – Stateless DHCPv6  |
| RFC 2464 – IPv6 over Ethernet                                   | RFC 4213 – Basic transition mechanisms for IPv6  |
| RFC 2711 – IPv6 router alert                                    | RFC 4291 – Addressing architecture for IPv6  |
| RFC 3056–Connection of IPv6 Domains via IPv4 Clouds             | RFC 4443 – Internet Control Message Protocol (ICMPv6) for the IPv6 Specification               |
| RFC 3315 –Dynamic Host Configuration Protocol for IPv6 (DHCPv6) | RFC 6164 – Using 127-Bit IPv6 Prefixes on Inter-Router Links                                   |
| RFC 3484 – Default address selection for IPv6                   | RFC 6583 – Operational Neighbor Discovery Problems   |
| Supported MIBs  |  |
| Base Package MIBs   |  |
| ANSI/TIA-1057 – LLDP-EXT-MED-MIB                                | RFC 2674 – Q-BRIDGE-MIB  |
| DIFFSERV DSCP TC (Draft – no RFC)                               | RFC 2677 – IANA Address Family Numbers MIB   |
| DNS-RESOLVER-MIB (IETF DNS Working Group)                       | RFC 2819 – RMON MIB  |
| DNS-SERVER-MIB (IETF DNS Working Group)                         | RFC 2925 – DISMAN-PING-MIB and DISMAN-TRACEROUTE-MIB   |
| GreenEthernet Private MIB                                       | RFC 3273 – RMON MIB for High Capacity Networks   |
| IANA-ADDRESS-FAMILY-NUMBERS-MIB (IANA (3/2002)                  | RFC 3411 – SNMP Management Frameworks MIB  |
| IEEE 802.1AB-2004 – LLDP MIB                                    | RFC 3411 – SNMP-FRAMEWORK-MIB  |
| IEEE 802.1AB-2005 – LLDP-EXT-DOT3-MIB                           | RFC 3412 – SNMP-MPD-MIB  |
| POWER ETHERNET MIB (Draft – no RFC)                             | RFC 3413 – SNMP-NOTIFICATION-MIB   |
| RFC 1155 – SMI-MIB  | RFC 3413 – SNMP-PROXY-MIB (initial revision published as RFC 2273)                             |
| RFC 1450 – SNMPV2-MIB   | RFC 3413 – SNMP-TARGET-MIB (initial revision published as RFC 2273)                            |
| RFC 2273 – SNMP Notification MIB, SNMP Target MIB               | RFC 3414 – User-based Security Model for SNMPv3 MIB  |
| RFC 2392 – IANA RTPROTO-MIB                                     | RFC 3415 – View-based Access Control Model for SNMP MIB  |
| RFC 2572 – SNMP Message Processing and Dispatching MIB          | RFC 3417 – SNMPV2-TM   |
| RFC 2574 – User-based Security Model for SNMPv3 MIB             | RFC 3418 – SNMPv2 MIB  |
| RFC 2575 – View-based Access Control Model for SNMP MIB         | RFC 3434 – RMON MIB Extensions for High Capacity Alarms  |
| RFC 2576 – SNMP Community MIB                                   | RFC 3584 – SNMP Community MIB  |
| RFC 2578 – SNMPV2-SMI   | RFC 3621 – POWER-ETHERNET-MIB  |
|   |  |

#### /// AV Line

| RFC 2579 – SNMPV2-TC   | SNMP-RESEARCH-MIB- SNMP research MIB definitions                                   |
|--|--|
| RFC 2580– SNMPV2-CONF  | SR-AGENT-INFO-MIB- SNMP research MIB definitions                                   |
| RFC 2613 – SMON-MIB  | USM-TARGET-TAG-MIB – SNMP research MIB definitions                                 |
| Switching Package MIBs   |  |
| RFC 1213 – MIB-II  | RFC 2011 – SNMPv2 Management Information Base                                      |
| ANSI/TIA 1057 – LLDP-MED MIB   | RFC 2213 – Integrated Services MIB   |
| FASTPATH Enterprise MIBs supporting switching features                             | RFC 2233 – IF-MIB  |
| FASTPATH-MMRP-MIB – MMRP private MIB for IEEE 802.1Q devices                       | RFC 2233 – The Interfaces Group MIB using SMI v2                                   |
| FASTPATH-MSRP-MIB – MSRP private MIB for IEEE 802.1Q devices                       | RFC 2674 – VLAN and Ethernet Priority MIB (P-Bridge MIB)                           |
| FASTPATH-MVRP-MIB – MVRP private MIB for IEEE<br>802.1Q devices                    | RFC 2737 – Entity MIB (Version 2)  |
| IANAifType-MIB – IANAifType Textual Convention                                     | RFC 2819 – RMON Groups 1,2,3, & 9  |
| IEEE 802.1AB – LLDP MIB  | RFC 2863 – Interfaces Group MIB  |
| IEEE 802.3AD MIB (IEEE8021-AD-MIB)   | RFC 3291 – INET Address MIB  |
| IEEE Draft P802.1AS/D7.0 (IEEE8021-AS-MIB)   | RFC 3291 – Textual Conventions for Internet Network Addresses                      |
| IEEE LAG-MIB – Link Aggregation module for managing IEEE 802.3ad                   | RFC 3621 – Power Ethernet MIB  |
| LLDP-EXT-DOT3-MIB (part of IEEE Std 802.1AB)                                       | RFC 3635 – Etherlike MIB   |
| LLDP-MIB (part of IEEE Std 802.1AB)  | RFC 3636 – IEEE 802.3 Medium Attachment Units (MAUs) MIB                           |
| Private MIB for 802.1Qat, 802.1Qav Configuration                                   | RFC 4022 – Management Information Base for the Transmission Control Protocol (TCP) |
| RFC 1493 – Bridge MIB  | RFC 4113 – Management Information Base for the User Datagram Protocol (UDP)        |
| RFC 1643 – Definitions of managed objects for the<br>Ethernet-like interface types | RFC 4444 – IS-IS MIB   |
| Routing Package MIBs   |  |
| FASTPATH Enterprise MIBs supporting routing features                               | RFC 2096 – IP Forwarding Table MIB   |
| IANA-Address-Family-Numbers-MIB  | RFC 2668 – IEEE 802.3 Medium Attachment Units (MAUs) MIB                           |
| IPv6 Management MIBs   |  |
| RFC 3419 – TRANSPORT-ADDRESS-MIB   | IPv6-MIB (draft)   |
| IPv6-ICMP-MIB (draft)  | IFVO-IVIID (Graft)   |
| IPv6 Routing MIBs  |  |
| RFC 2465 – IPv6 MIB  | RFC 2466 – ICMPv6 MIB  |
| QoS Package MIB  |  |
| RFC 3289 – DIFFSERV-MIB & DIFFSERV-DCSP-TC MIBs                                    | Private MIBs for full configuration of DiffServ, ACL, and CoS functionality        |
| Security MIB   |  |
| RFC 2618 – RADIUS Authentication Client MIB  | IEEE8021-PAE-MIB – The Port Access Entity module for managing IEEE 802.1X          |
| RFC 2620 – RADIUS Accounting MIB   | IEEE 802.1X MIB (IEEE 8021-PAE-MIB 2004 Revision)                                  |
|  |  |

#### AV Line

| Multicast Package MIBs  |  |   |
|---|--|---|
| RFC 2932 – IPv4 Multicast Routing MIB for PIMDMv4   | draft-ietf-magma-mgmd-mib-05.txt –Multicast Gro  | oup Membership Discovery MIB (both IGMP and MLD)  |
| RFC 5060 – PIM-SM and PIM-DM MIB for IPv4 and IPv6  | FASTPATH Enterprise MIBs supporting multicast fe   | actures   |
| RFC 5240 – BSR Protocol MIB   | 1 A311 A111 Enterprise Wilds supporting multicast le   | ratures   |
| NETGEAR-BOXSERVICES-PRIVATE-MIB for SFP/SFP+ MIB  | Support  |   |
| box Services Fiber Ports Optics Table   | box Services Fiber Port Optics Power Out   |   |
| BoxServicesFiberPortsOpticsEntry  | box Services Fiber Port Optics Power In  |   |
| boxServicesFiberPortIndex   | box Services Fiber Port Optics Tx Fault  |   |
| boxServicesFiberPortOpticsTemperature   | boxServicesFiberPortOpticsLos  |   |
| boxServicesFiberPortOpticsVoltage   | boxServicesFiberPortOpticsFaultStatus  |   |
| boxServicesFiberPortOpticsCurrent   | boxservicesi iberi ortopiicsi autistatus   |   |
| Management  |  |   |
| Password management   | Yes  |   |
| Configurable Management VLAN  | Yes  |   |
| Out-of-band Management  | Yes  | In-band management can be shut down using Management ACLs when separate management network                  |
| Auto Install<br>(BOOTP and DHCP options 66, 67, 150 and 55, 125)  | Yes  | Scalable deployment process (firmware, config)  |
| Admin access control via Radius and TACACS+   | Yes  | Policies, Enable  |
| Industry standard CLI (IS-CLI)  | Yes  | Command Line interface  |
| CLI commands logged to a Syslog server  | Yes  |   |
| Web-based graphical user interface (GUI)  | Yes  | Fully functional GUI (exceptions are noted below:)  |
| Features without Web GUI support Authorization List Control Plane ACL UDLD Policy Based Routing LLPF QoS Policy for Single Rate DHCPv6 Snooping IPv6 DHCP Relay eMail Alerting MMRP | CLI only |   |
| Telnet  | Yes  |   |
| IPv6 management   | Yes  |   |
| Dual Software (firmware) image  | Yes  | Allows non disruptive firmware upgrade process  |
| Editable Configuration file   | Yes  | Text-based (CLI commands) configuration file  |
| Non disruptive Config Management  | Yes  | With new startup configuration file, the switch gracefully resolves any differences with the running config |
| IS-CLI Scripting  | Yes  |   |
| Port descriptions   | Yes  |   |

# **NETGEAR®**

### AV Line

| SNTP client over UDP port 123  |  | vides synchronized network timestamp either in adcast or unicast mode |
|--|--|---|
| XMODEM   | Yes  |   |
| SNMP v1/v2   | Yes  |   |
| SNMP v3 with multiple IP addresses   | Yes  |   |
| RMON 1,2,3,9 Max Ether Stats entries Max History entries Max buckets per History entry Max Alarm entries Max Event entries Max Log entries per Event entry           | Yes<br>34<br>102<br>10<br>102<br>102<br>102  |   |
| Port Mirroring Number of monitor sessions Tx/Rx Many to One Port Mirroring LAG supported as source ports Max source ports in a session Remote Port Mirroring (RSPAN) | Yes 1 (multiple sessions are configurable) Yes Yes Yes Total switch port count Yes When a particular session is enabled, any traffic entering copied (mirrored) onto a Remote Switched Port Analyzer |   |
| Flow based mirroring   | Yes  | (NOI AIV) VLAIV   |
| Cable Test utility   | Yes CLI,   | Web GUI   |
| Outbound Telnet  | Yes  |   |
| SSHv2<br>SSH Session Configuration   | Yes Sect<br>Yes  | ure Shell version 2 (OpenSSH 7.5p1)                                   |
| SSL v3 and TLS v1.2 for HTTPS web-based access   | Yes  | Open SSL 1.0.2o)  |
| 2048-bit RSA key pairs   | Yes For SSLv3 and SSHv2  |   |
| SHA2-256 and SHA2-512 cryptographic hash functions   | Yes For SSLv3 and SSHv2  |   |
| File transfers (uploads, downloads)  | TFTP / HTTP  |   |
| Secured protocols for file transfers   | SCP / SFTP / HTTPS   |   |
| HTTP Max Sessions  | 16   |   |
| SSL/HTTPS Max Sessions   | 16   |   |
| HTTP Download (firmware)   | Yes  |   |
| Email Alerting   | Yes (CLI only)   |   |
| Syslog (RFC 3164) (RFC 5424)   | Yes, forwarding messages via UDP using the Syslog proto  | ocol to one or more collectors or relays                              |
| Persistent log supported   | Yes  |   |
| User Admin Management  |  |   |
| User ID configuration Max number of configured users Support multiple READWRITE Users Max number of IAS users (internal user database)                               | Yes<br>6<br>Yes<br>100   |   |
| Authentication login lists   | Yes  |   |
| Authentication Enable lists  | Yes  |   |

### AV Line Managed Switches

#### AV Line

**NETGEAR**°

| Authentication HTTP lists   | Yes                                 |
|---|-------------------------------------|
| Authentication HTTPS lists  | Yes                                 |
| Authentication Dot1x lists  | Yes                                 |
| Accounting Exec lists   | Yes                                 |
| Accounting Commands lists   | Yes                                 |
| Login History   | 50                                  |
| M4250 series - Platform Constants   |                                     |
| Maximum number of remote Telnet connections   | 5                                   |
| Maximum number of remote SSH connections  | 5                                   |
| Number of MAC Addresses   | 16K                                 |
| Number of VLANs   | 4,093 VLANs (802.1Q) simultaneously |
| VLAN ID Range   | 1 - 4093                            |
| Number of 802.1p Traffic Classes  | 8 classes                           |
| IEEE 802.1x<br>Number of .1x clients per port   | 48                                  |
| Number of LAGs  | 8 LAGs with up to 8 ports per group |
| Maximum multiple spanning tree instances (MSTP)   | 16                                  |
| Maximum per VLAN spanning tree instances (PVST)   | 32                                  |
| MAC based VLANS<br>Number supported   | Yes<br>256                          |
| Number of network buffers   | 182                                 |
| Number of log messages buffered   | 200                                 |
| Static filter entries Unicast MAC and source port Multicast MAC and source port Multicast MAC and destination port (only)   | 20<br>20<br>1024                    |
| Subnet based VLANs<br>Number supported  | Yes<br>128                          |
| Protocol Based VLANs<br>Max number of groups<br>Max protocols   | Yes<br>128<br>16                    |
| Maximum Multicast MAC Addresses entries   | 1K                                  |
| Jumbo Frame Support<br>Max Size Supported   | Yes<br>12k                          |
| Number of IP Source Guard stations  | 379                                 |
| Number of DHCP snooping bindings  | 32K                                 |
| Number of DHCPv6 snooping bindings  | 32K                                 |
| Number of DHCP snooping static entries  | 1024                                |
| LLDP-MED number of remote nodes LLDP Remote Management address buffers LLDP Unknown TLV address buffers LLDP Organisationally Defined Large TLV buffers LLDP Organisationally Defined Small TLV buffers | 32<br>32<br>100<br>16<br>100        |

### AV Line Managed Switches

**NETGEAR®** 

| AV | L Ĭ | n e |
|----|-----|-----|
|    |     |     |
|    |     |     |

| Port MAC Locking Dynamic addresses per port Static addresses per port  | Yes<br>600<br>20   |
|--|--|
| sFlow Number of samplers Number of pollers Number of receivers   | 16<br>16<br>8  |
| Radius Max Authentication servers Max Accounting servers   | 32<br>32   |
| Number of Routes (v4/v6)  IPv4 Unicast Routes in Default IPv4 Basic SDM Template  IPv6 Unicast Routes in Default IPv4 Basic SDM Template  RIP application route scaling (IPv4 only)  | 894 SDM (System Data Management, or switch database) 126                           |
|  | 32   |
| Number of routing interfaces (including port/vlan)   | 128  |
| Number of static routes (v4/v6)  | 64/64  |
| DHCP Server  Max number of pools  Total max leases   | 256<br>2K  |
| DNS Client Concurrent requests Name server entries Seach list entries Static host entries Cache entries Domain search list entries   | 16<br>8<br>6<br>64<br>128<br>32  |
| DHCPv6 Server  Max number of pools  DNS domain names within a pool  DNS server addresses within a pool  Delegated prefix definitions within a pool   | 16<br>5<br>8<br>10   |
| Number of Host Entries (ARP/NDP) IPv4 only SDM build IPv4/IPv6 SDM build (v4/v6) Static v4 ARP Entries   | 4K SDM (System Data Management, or switch database) 512 128                        |
| Number of ECMP Next Hops per Route   | 16   |
| Number of ECMP groups  | 128  |
| Total ECMP nexthops in Hardware  | 2048   |
| Maximum MFDB entries   | 1K   |
| IGMPv3 / MLDv2 Snooping Limits IGMPv3/MLDv2 HW entries when IP Multicast present   | 128/64   |
| IP Multicast IGMP Group Memberships per system Multicast Routes PIM-DM Neighbors PIM-SM Neighbors PIM-SM Static RP Entries PIM-SM Candidate RP Group Range Entries PIM-SM SSM Range Entries IGMP Sources processed per group per message | 2K (IPv4) and 2K (IPv6)<br>512 (IPv4) and 128 (IPv6)<br>256<br>256<br>5<br>20<br>5 |

# **NETGEAR®**

ACL Limits

### AV Line

| Maximum Number of ACLs (any type)  Maximum Number Configurable Rules per List  Maximum ACL Rules per Interface and Direction  Maximum ACL Rules per Interface and Direction (IPv6)  Maximum ACL Rules (system-wide)  Maximum ACL Logging Rules (system-wide)  Maximum ACL per VLAN (system-wide)   | 100<br>1,023<br>1,023 ingress / 511 ingress<br>893 ingress / 253 egress<br>16K<br>128<br>64  |
|--|--|
| COS Device Characteristics Configurable Queues per Port Configurable Drop Precedence Levels  | 8 queues (standalone) 7 queues (stack)<br>3  |
| DiffServ Device Limits Number of Queues Requires TLV to contain all policy instances combined Max Rules per Class Max Instances per Policy Max Attributes per Instance Max Service Interfaces Max Table Entries Class Table Class Rule Table Policy Table Policy Instance Table Policy Attribute Table Max Nested Class Chain Rule Count | 8 queues (standalone) 7 queues (stack) Yes 13 28 3 116 32 192 64 768 2304 26   |
| AutoVoIP number of voice calls   | 16   |
| Voice VLAN number of devices   | 16   |
| LEDs   |  |
| Per port   | Speed, Link, Activity, PoE - Available both in front and in the rear   |
| Per device   | Power, Fan - Available both in front and in the rear   |
| Physical Specifications  |  |
| Dimensions M4250-10G2F-PoE+ M4250-10G2XF-PoE+ M4250-10G2XF-PoE++ M4250-26G4F-PoE+ M4250-26G4F-PoE++ M4250-26G4XF-PoE+ M4250-40G8F-PoE+ M4250-40G8XF-PoE+ M4250-40G8XF-PoE+ M4250-40G8XF-PoE+ M4250-12M2XF M4250-16XF   | Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 7.87 inches (200 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 7.87 inches (200 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 10.12 inches (257 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 10.12 inches (257 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 15.75 inches (400 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 15.75 inches (400 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 15.75 inches (400 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 15.75 inches (400 mm) Width: 17.32 inches (440 mm); Height: 2U - 3.40 inches (86.4 mm); Depth: 13.78 inches (350 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 3.94 inches (100 mm) Width: 17.32 inches (440 mm); Height: 1U - 1.70 inches (43.2 mm); Depth: 7.87 inches (200 mm) |
| Weight M4250-10G2F-PoE+ M4250-10G2XF-PoE+ M4250-10G2XF-PoE+ M4250-26G4F-PoE+ M4250-26G4F-PoE+ M4250-26G4XF-PoE+ M4250-40G8F-PoE+ M4250-40G8XF-PoE+ M4250-40G8XF-PoE+ M4250-10G8XF-PoE+ M4250-10G8XF-PoE+   | 6.28 lb (2.850 kg) 6.39 lb (2.900 kg) 8.44 lb (3.830 kg) 9.47 lb (4.300 kg) 14.87 lb (6.746 kg) 12.02 lb (5.453 kg) 12.90 lb (5.852 kg) 13.91 lb (6.312 kg) 22.72 lb (10.280 kg) 3.85 lb (1.745 kg) 6.17 lb (2.800 kg)   |

#### **NETGEAR**®

#### AV Line

#### **AV Line Managed Switches**

| Power | Consump | ti | on |
|-------|---------|----|----|
|-------|---------|----|----|

All ports used, max PoE load, line-rate traffic, maximum

 M4250-10G2F-PoE+
 163.9W - 559.55 BTU/hr

 M4250-10G2XF-PoE+
 306.4W - 1046.05 BTU/hr

 M4250-10G2XF-PoE++
 837.7W - 2859.91 BTU/hr

 M4250-26G4F-PoE+
 401W - 1369.01 BTU/hr

M4250-26G4F-PoE++ 1 PSU: 889W - 3035.05 BTU/hr 2 PSU: 1734W - 5919.88 BTU/hr

 M4250-26G4XF-PoE+
 614W - 2096.2 BTU/hr

 M4250-40G8F-PoE+
 624.8W - 2133.07 BTU/hr

 M4250-40G8XF-PoE+
 1197W - 4086.56 BTU/hr

M4250-40G8XF-PoE++ 1 PSU: 912W - 3113.57 BTU/hr 2 PSU: 1998W - 6821.17 BTU/hr 3 PSU: 3523W - 12027.52 BTU/hr

M4250-12M2XF - M4250-16XF - -

All ports used, no PoE, line-rate traffic, maximum

M4250-10G2F-PoF+ 17.32W - 59.13 BTU/hr M4250-10G2XF-PoE+ 25W - 85.35 BTU/hr M4250-10G2XF-PoE++ 26.3W - 89.79 BTU/hr M4250-26G4F-PoE+ 35.8W - 122.22 BTU/hr M4250-26G4F-PoE++ 48.8W - 166.6 BTU/hr 46.8W - 159.78 BTU/hr M4250-26G4XF-PoE+ M4250-40G8F-PoF+ 59 5W - 203 13 BTU/hr M4250-40G8XF-PoE+ 89.2W - 304.53 BTU/hr M4250-40G8XF-PoE++ 82.6W - 282 BTU/hr M4250-12M2XF 37.9W - 129.39 BTU/hr M4250-16XF 47.84W - 163.33 BTU/hr

Standby, no connection on any port

M4250-10G2F-PoE+ 8 53W - 29 12BTU/hr M4250-10G2XF-PoE+ 12.96W - 44.24BTU/hr M4250-10G2XF-PoE++ 18W - 61.45BTU/hr M4250-26G4F-PoE+ 23.4W - 79.89 BTU/hr M4250-26G4F-PoE++ 36.9W - 125.98 BTU/hr 33.9W - 115.73 BTU/hr M4250-26G4XF-PoE+ 46.4W - 158.41 BTU/hr M4250-40G8F-PoE+ 74.5W - 254.34 BTU/hr M4250-40G8XF-PoE+ M4250-40G8XF-PoE++ 68.5W - 233.86 BTU/hr M4250-12M2XF 14.1W - 48.14BTU/hr M4250-16XF 19.27W - 65.78BTU/hr

#### **Environmental Specifications**

Operating:

Temperature (non-PoE models: M4250-12M2XF, M4250-16XF)

32° to 122°F (0° to 50°C)

Temperature (all other models) 32° to 113°F (0° to 45°C)

Humidity 90% maximum relative humidity, non-condensing

Altitude 10,000 ft (3,000 m) maximum

Storage:

Temperature  $-4^{\circ}$  to  $158^{\circ}$ F ( $-20^{\circ}$  to  $70^{\circ}$ C)

Humidity 95% maximum relative humidity, non-condensing

Altitude 10,000 ft (3,000 m) maximum

**Electromagnetic Emissions and Immunity** 

Certifications FCC: 47 CFR FCC Part 15, Class A; ANSI C63.4:2014

ISED: ICES-003:2016 Issue 7, Class A

CE: EN 55032:2015, Class A; EN61000-3-2:2014, Class A; EN 61000-3-3-:2013; EN 55024:2010; EN

55035:2017

RCM: AS/NZS CISPR 32:2015, Class A

CCC (China Compulsory Certificate): GB/T9254-2008, Class A

VCCI: VCCI-CISPR 32:2016, Class A

KC: KN32; KN 35, Class A

EAC: GOST IEC 62311-2013; GOST30804.3.2-2013; GOST30804.3.3-2013; GOST 30805.22-2013;

GOST CISPR 24-2013

BSMI: CNS 13438, Class A

### **NETGEAR**°

### AV Line

| Safety  |  |
|---|--|
| Certifications                                    | CB report/Certificate: IEC 62368-1 Ed.2; IEC 60950-1 Ed.2 Am2 CSA: UL/ANSI 62368-1 ed.2; CAN/CSA C22.2 No. 62368-1-14 CE: EN 62368-1:2014 RCM: AZ/NZS 62368.1:2018 CCC (China Compulsory Certificate): GB4943.1-2011 KC: K 60950-1 (2011-12) EAC: GOST IEC 62368-1-2014 BSMI: CNS 14336-1  |
| Package Content                                   |  |
| All models  | Switch Power cord(s)  RJ45 straight-through wiring serial console cable to DB9  USB Type-C to USB-A 2.0 console cable Rubber caps for the SFP/SFP+ sockets Rubber footpads for tabletop installation Installation guide  Two regular (short) brackets and screws for two-post rack mount (for front posts) allowing for mounting with ports on the back, or ports on the front of the rack  Two longer brackets for two-post rack mount (for front posts) recessing the switch by 2 inches in order to |
| D CAFFW   | make room for the cabling  |
| ProSAFE Warranty and Support                      |  |
| ProSAFE Limited Lifetime Hardware Warranty**      | Included   |
| 90 days of Technical Support via phone and email* | Included, 90 days after purchase   |
| Lifetime Technical Support through online chat    | Included, lifetime   |
| Lifetime Next Business Day hardware replacement   | Included, lifetime   |
| ProSupport Service Packs                          |  |
| Installation contracts for:                       | All models   |
| PSB0304-10000S                                    | Remote Installation Setup and Configuration Service Contract (2-hour planned appointment)  |
| Supplemental support contracts for:               | M4250-10G2F-PoE+, M4250-10G2XF-PoE+, M4250-10G2XF-PoE++, M4250-12M2XF, M4250-16XF, M4250-26G4F-PoE+  |
| PMB0312-10000S                                    | OnCall 24x7 1-year Category 2  |
| PMB0332-10000S                                    | OnCall 24x7 3-year Category 2  |
| PMB0352-10000S                                    | OnCall 24x7 5-year Category 2  |
| Supplemental support contracts for:               | M4250-26G4F-PoE++, M4250-26G4XF-PoE+, M4250-40G8F-PoE+, M4250-40G8XF-PoE+, M4250-40G8XF-PoE+   |
| PMB0313-10000S                                    | OnCall 24x7 1-year Category 3  |
| PMB0333-10000S                                    | OnCall 24x7 3-year Category 3  |
| PMB0353-10000S                                    | OnCall 24x7 5-year Category 3  |

# **NETGEAR®**

#### /// AV Line

### Ordering Information

| Optional Modules and Acc | eessories  |                                |                       |                  |  |
|--------------------------|--|--------------------------------|-----------------------|------------------|--|
| AGM731F                  | 1000BASE-SX SFP LC Transceiver (multimode                  | , 550m OM4/OM3 50/125µm, 275n  | n OM2/OM1 62.5/125µm) | AGM731F          |  |
| AGM732F                  | 1000BASE-LX SFP LC Transceiver (single mode, 10km 9/125μm) |                                |                       | AGM732F          |  |
| AGM734                   | 1000BASE-T SFP RJ45 Transceiver                            |                                |                       | AGM734-10000S    |  |
| AXC761                   | 10G Direct Attach SFP+ to SFP+ 1 Meter Passive DAC Cable   |                                |                       | AXC761-10000S    |  |
| AXC763                   | 10G Direct Attach SFP+ to SFP+ 3 Meter Passi               | ve DAC Cable                   |                       | AXC763 -10000S   |  |
| AXC765                   | 10G Direct Attach SFP+ to SFP+ 5 Meter Activ               | e DAC Cable                    |                       | AXC765-10000S    |  |
| AXC767                   | 10G Direct Attach SFP+ to SFP+ 7 Meter Activ               | e DAC Cable                    |                       | AXC767 -10000S   |  |
| AXC7610                  | 10G Direct Attach SFP+ to SFP+ 10 Meter Act                | ive DAC Cable                  |                       | AXC7610-10000S   |  |
| AXC7615                  | 10G Direct Attach SFP+ to SFP+ 15 Meter Fibe               | er DAC Cable                   |                       | AXC7615 -10000S  |  |
| AXC7620                  | 10G Direct Attach SFP+ to SFP+ 20 Meter Fibe               | er DAC Cable                   |                       | AXC7620 -10000S  |  |
| AXM761                   | 10GBASE-SR SFP+ LC Transceiver (multimode                  | e, 300m OM4/OM3 50/125µm, 33m  | OM2/OM1 62.5/125μm)   | AXM761-10000S    |  |
| AXM761 (pack of 10)      | Pack of 10 AXM761 Transceivers (multimode,                 | 300m OM4/OM3 50/125μm, 33m (   | OM2/OM1 62.5/125μm)   | AXM761P10-10000S |  |
| AXM762                   | 10GBASE-LR SFP+ LC Transceiver (single mod                 | de, 10km 9/125µm)              |                       | AXM762-10000S    |  |
| AXM762 (pack of 10)      | Pack of 10 AXM762 Transceivers (single mode                | e, 10km 9/125µm)               |                       | AXM762P10-10000S |  |
| AXM763                   | 10GBASE-LRM SFP+ LC Transceiver (multimod                  | e, 165m OM4/OM3 50/125µm, 100ı | m OM2/OM1 62.5/125μm) | AXM763-10000S    |  |
| AXM764                   | 10GBASE-LR LITE SFP+ LC Transceiver (single                | mode, 2km 9/125µm)             |                       | AXM764-10000S    |  |
| AXM765                   | 10GBASE-T SFP+ RJ45 Transceiver (80m)                      | ·                              |                       | AXM765-20000S    |  |
| NETGEAR AVII : M4051     | 1 10G2E PoE+ 9v1G PoE+ 12EW 2v1G av 12v5EF                 | Managed Switch (GCM4212B)      |                       |                  |  |
|                          | 0-10G2F-PoE+ 8x1G PoE+ 125W 2x1G and 2xSFF                 | managed Switch (GSIVI4212P)    |                       |                  |  |
| Americas                 | GSM4212P-100NAS  |                                |                       |                  |  |
| Europe                   | GSM4212P-100EUS  | Optional AVB License           | AVB4212P-10000S       |                  |  |
| Asia Pacific<br>China    | GSM4212P-100AJS<br>GSM4212P-100PRS                         |                                |                       |                  |  |
|                          |  | TD : Managed Code (CCM4242DV)  | <b>N</b>              |                  |  |
|                          | 0-10G2XF-PoE+ 8x1G PoE+ 240W 2x1G and 2xSF                 | -P+ Managed Switch (GSM4212PX) | )                     |                  |  |
| Americas                 | GSM4212PX-100NAS   |                                |                       |                  |  |
| Europe                   | GSM4212PX-100EUS   | Optional AVB License           | AVB4212PX-10000S      |                  |  |
| Asia Pacific             | GSM4212PX-100AJS   |                                |                       |                  |  |
| China                    | GSM4212PX-100PRS   |                                |                       |                  |  |
| NETGEAR AV Line M4250    | 0-10G2XF-PoE++ 8x1G Utra90 PoE++ 802.3bt 72                | OW 2x1G and 2xSFP+ Managed Sv  | vitch (GSM4212UX)     |                  |  |
| Americas                 | GSM4212UX-100NAS   |                                |                       |                  |  |
| Europe                   | GSM4212UX-100EUS   | Optional AVB License           | AVB4212UX-10000S      | S                |  |
| Asia Pacific             | GSM4212UX-100AJS   | -                              |                       |                  |  |
| China                    | GSM4212UX-100PRS   |                                |                       |                  |  |
|                          | 0-26G4F-PoE+ 24x1G PoE+ 300W 2x1G and 4xSF                 | P Managed Switch (GSM4230P)    |                       |                  |  |
| Americas                 | GSM4230P-100NAS  |                                |                       |                  |  |
| Europe                   | GSM4230P-100EUS  | Optional AVB License           | AVB4230P-10000S       |                  |  |
| Asia Pacific             | GSM4230P-100AJS  | ·                              |                       |                  |  |
| China                    | GSM4230P-100PRS  |                                |                       |                  |  |
|                          | 0-26G4F-PoE++ 24x1G Ultra90 PoE++ 802.3bt 1,4              | 440W 2x1G and 4xSFP Managed S  | witch (GSM4230UP)     |                  |  |
| Americas                 | GSM4230UP-100NAS   |                                |                       |                  |  |
|                          | CCM 4000LID 400ELIC  | Ontined AVD Linear             |                       |                  |  |
| Europe<br>Asia Pacific   | GSM4230UP-100EUS<br>GSM4230UP-100AJS                       | Optional AVB License           | AVB4230UP-10000S      |                  |  |

#### /// AV Line

#### Ordering Information

| Americas                | GSM4230PX-100NAS                            |                                |                                 |
|-------------------------|---|--------------------------------|---------------------------------|
| Europe                  | GSM4230PX-100EUS                            |                                | A) /D 4000 D) / 400000          |
| Asia Pacific            | GSM4230PX-100AJS                            | Optional AVB License           | AVB4230PX-10000S                |
| China                   | GSM4230PX-100PRS                            |                                |                                 |
| NETGEAR AV Line M4250-4 | 10G8F-PoE+ 40x1G PoE+ 480W and 8xSFP Mana   | aged Switch (GSM4248P)         |                                 |
| Americas                | GSM4248P-100NAS                             |                                |                                 |
| Europe                  | GSM4248P-100EUS                             | 0 1 100                        | 1) /D 10 10D 100000             |
| Asia Pacific            | GSM4248P-100AJS                             | Optional AVB License           | AVB4248P-10000S                 |
| China                   | GSM4248P-100PRS                             |                                |                                 |
| NETGEAR AV Line M4250-4 | 10G8XF-PoE+ 40x1G PoE+ 960W and 8xSFP+ M    | anaged Switch (GSM4248PX)      |                                 |
| Americas                | GSM4248PX-100NAS                            |                                |                                 |
| Europe                  | GSM4248PX-100EUS                            |                                | AV/D 40 40 DV 400000            |
| Asia Pacific            | GSM4248PX-100AJS                            | Optional AVB License           | AVB4248PX-10000S                |
| China                   | GSM4248PX-100PRS                            |                                |                                 |
| NETGEAR AV Line M4250-4 | 10G8XF-PoE++ 40x1G Ultra90 PoE++ 802.3bt 2, | 880W and 8xSFP+ Managed Switch | (GSM4248UX)                     |
| Americas                | GSM4248UX-100NAS                            |                                |                                 |
| Europe                  | GSM4248UX-100EUS                            | 0 1 100                        | A V / D 4 O 4 O V / 4 O O O O O |
| Asia Pacific            | GSM4248UX-100AJS                            | Optional AVB License           | AVB4248UX-10000S                |
| China                   | GSM4248UX-100PRS                            |                                |                                 |
| NETGEAR AV Line M4250-1 | 12M2XF 12x2.5G and 2xSFP+ Managed Switch (  | MSM4214X)                      |                                 |
| Americas                | MSM4214X-100NAS                             |                                |                                 |
| Europe                  | MSM4214X-100EUS                             | 0 1 1001                       | 1) /2 404 1) / 40000            |
| Asia Pacific            | MSM4214X-100AJS                             | Optional AVB License           | AVB4214X-10000S                 |
| China                   | MSM4214X-100PRS                             |                                |                                 |
| NETGEAR AV Line M4250-1 | 6XF 16xSFP+ Managed Switch (XSM4216F)       |                                |                                 |
| Americas                | XSM4216F-100NAS                             |                                |                                 |
| Europe                  | XSM4216F-100EUS                             | O-4:I AV/D L:                  | AVD 401 / E 10000C              |
| Asia Pacific            | XSM4216F-100AJS                             | Optional AVB License           | AVB4216F-10000S                 |
| China                   | XSM4216F-100PRS                             |                                |                                 |
|                         |   |                                |                                 |

NETGEAR, the NETGEAR Logo and ProSAFE are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. © 2022 NETGEAR, Inc. All rights reserved.

<sup>\*\*</sup> This product comes with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and covers unmodified hardware, fans and internal power supplies - not software or external power supplies, and requires product registration at https://www.netgear.com/business/registration within 90 days of purchase; see https://www.netgear.com/about/warranty for details. Intended for indoor use only.