Overview

HP Z640 Workstation



- 1. Integrated Front Handle
- 2. Dedicated 9.5mm Optical Drive Bay
- 3. Power Button

- 4. HDD Activity LED
- Front I/O: 4 USB 3.0 with Charging Port (topmost port), 1 Microphone, 1 Headset



Overview



- 6. 2 External 5.25" Bays
- 7. 2 Internal 3.5" Bays
- 8. 6 6Gb/s SATA Ports
- 9. Rear Flip-Up Handle
- 10. 925W, 90% Efficient Power Supply
- 11. Rear I/O: Rear Power Button, 4 USB 3.0, 2 USB 2.0, PS/2 Ports, 1 RJ-45 to Integrated GbE, 1 Audio Line In, 1 Audio Line Out

Overview

- 12. Intel Xeon Processors: E5-1600 v3 family or E5-2600 v3 family
- 13. 4 DIMM Slots for DDR4 ECC Registered Memory
- 14. 2nd CPU and Memory Riser Module with 4 DIMM slots
- 15. 2 PCIe x16 Gen 3 Slots
- 16. 1 PCIe x8 Gen 3, 1 PCIe x1 Gen 2, 1 PCIe x4 Gen 2, 1 PCI Slot

| Form Factor | Rackable Minitower |
|-------------------|--|
| Operating Systems | Preinstalled: |
| | Windows 7 Professional 64-bit Windows 8.1 Pro 64-bit Windows 8.1 Pro 64 downgrade to Windows 7 Professional 64-bit |



Overview

| | • Supporte | Ubuntu 14. HP Installer Enterprise Red Hat En d: Windows 7 Windows 8 Red Hat En SUSE Linux | r Kit for Linu Desktop 11, terprise Linu Enterprise (/8.1 Enterpr terprise Linu Enterprise S | ux (includes) Ubuntu 14. ux Desktop (54-bit ise 64-bit ux Desktop 6 Desktop 11 | 04) Paper licens 5, 7 SP3 formation fo | e with 1 yea | r support; no p | .6, RHEL 7, SUS reinstalled OS) | E Linux |
|--------------------------------------|-----------------|--|---|---|--|---------------------|--|------------------------------------|------------|
| Available Processors | | Clock | | Memory | | | Featuring | Intel [®] Turbo | |
| Name | Cores | Speed (GHz) | Cache (MB) | Speed (MHz) | QPI (GT/s) | Hyper- Threading | Intel [®] vPro™ Technology | Boost Technology ¹ | TDP (W) |
| Intel® Xeon® E5-1680 v3 processor | 8 | 3.2 | 20 | 2133 | - | YES | YES | 3, 6 | 140 |
| ntel Xeon E5-1660 v3 processor | 8 | 3.0 | 20 | 2133 | - | YES | YES | 3, 5 | 140 |
| ntel Xeon E5-1650 v3 processor | 6 | 3.5 | 15 | 2133 | - | YES | YES | 1, 3 | 140 |
| ntel Xeon E5-1630 v3 processor | 4 | 3.7 | 10 | 2133 | _ | YES | YES | 1, 1 | 140 |
| ntel Xeon E5-1620 v3 processor | 4 | 3.5 | 10 | 2133 | _ | YES | YES | 1, 1 | 140 |
| ntel Xeon E5-1607 v3 processor | 4 | 3.1 | 10 | 1866 | - | NO | YES | N/A | 140 |
| Intel Xeon E5-1603 v3 processor | 4 | 2.8 | 10 | 1866 | - | NO | YES | N/A | 140 |
| Intel Xeon E5-2699 v3 processor | 18 | 2.3 | 45 | 2133 | 9.6 | YES | YES | 5, 13 | 145 |
| ntel Xeon 5-2697 v3 processor | 1/1 | 2.6 | 35 | 2133 | 9.6 | YES | YES | 5, 10 | 145 |
| ntel Xeon 5-2695 v3 processor | 14 | 2.3 | 35 | 2133 | 9.6 | YES | YES | 5, 10 | 120 |
| ntel Xeon 5-2683 v3 processor | 14 | 2.0 | 35 | 2133 | 9.6 | YES | YES | 5, 10 | 120 |
| ntel Xeon 5-2690 v3 processor | 12 | 2.6 | 30 | 2133 | 9.6 | YES | YES | 5, 9 | 135 |
| ntel Xeon 5-2680 v3 processor | 12 | 2.5 | 30 | 2133 | 9.6 | YES | YES | 4, 8 | 120 |
| ntel Xeon 5-2670 v3 processor | 12 | 2.3 | 30 | 2133 | 9.6 | YES | YES | 3, 8 | 120 |
| ntel Xeon 5-2660 v3 processor | 10 | 2.6 | 25 | 2133 | 9.6 | YES | YES | 3, 7 | 105 |



Overview

| Intel Xeon E5-2650 v3 processor | 10 | 2.3 | 25 | 2133 | 9.6 | YES | YES | 3, 7 | 105 |
|------------------------------------|----|-----|----|------|-----|-----|-----|------|-----|
| Intel Xeon E5-2667 v3 processor | 8 | 3.2 | 20 | 2133 | 9.6 | YES | YES | 2, 4 | 135 |
| Intel Xeon E5-2640 v3 processor | 8 | 2.6 | 20 | 1866 | 8.0 | YES | YES | 2, 8 | 90 |
| Intel Xeon E5-2630 v3 processor | 8 | 2.4 | 20 | 1866 | 8.0 | YES | YES | 2, 8 | 85 |
| Intel Xeon E5-2643 v3 processor | 6 | 3.4 | 20 | 2133 | 9.6 | YES | YES | 2, 3 | 135 |
| Intel Xeon E5-2620 v3 processor | 6 | 2.4 | 15 | 1866 | 8.0 | YES | YES | 2, 8 | 85 |
| Intel Xeon E5-2609 v3 processor | 6 | 1.9 | 15 | 1600 | 6.4 | NO | YES | N/A | 85 |
| Intel Xeon E5-2603 v3 processor | 6 | 1.6 | 15 | 1600 | 6.4 | NO | YES | N/A | 85 |
| Intel Xeon E5-2637 v3 processor | 4 | 3.5 | 15 | 2133 | 9.6 | YES | YES | 1, 2 | 135 |
| Intel Xeon E5-2623 v3 processor | 4 | 3.0 | 10 | 1866 | 8.0 | YES | YES | 3, 5 | 105 |

¹The specifications shown in this column represent the following: (all core maximum turbo steps, one core maximum turbo steps). Turbo boost stepping occurs in 100MHz increments. Processors that do not have turbo functionality are denoted as N/A.

NOTE: Z640 systems configured with an E5-1600 series processor may not add a 2nd processor. To support two processors, an E5-2600 series processor must be chosen.

| Available Processor Disclaimers | When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: http://www.intel.com/products/processor_number/ for details. |
|------------------------------------|---|
| | Multi-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies. |
| Color | 64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See: <u>http://www.intel.com/info/em64t</u> for more information. |
| Color | Hematite Brushed Aluminum and HP Black |
| I/O Expansion Slots(see | Slot 1 (top): |
| system board section for | PCI Express Gen2 x1 with open-ended connector* |
| more details) | Full-height, Half-length (Not available when and processor/memory module is installed) |
| | (Not available when 2nd processor/memory module is installed) |
| | Slot 2: |
| | PCI Express Gen3 x16 |
| | Full-height, Full-length (with |
| | extender) |



Overview

| | Slot 3: PCI Express Gen2 x4 with open-ended connector* Full-height, Full-length (with extender) |
|--|---|
| | Slot 4: PCI Express Gen3 x8 with open-ended connector* Full-height, Full-length (with extender) |
| | Slot 5: PCI Express Gen3 x16 Full-height, Full-length (with extender) |
| | Slot 6: PCI 32bit/33MHz Full-height, Full-length (with extender) * Open-ended connector allows a greater bandwidth (e.g., x16) card to be installed physically into a lower bandwidth connector/slot. |
| Expansion Bays (see Storage section for more details) | 2 internal 3.5" bays (with acoustic dampening rail assemblies preinstalled) 2 external 5.25" bays 3rd and 4th 3.5" HDD each occupy one external bay 3rd and 4th 2.5" HDD/SSD occupy a single external bay within a 2:1 carrier 1 dedicated 9.5mm slim optical disk drive bay |
| Front I/O | 4 USB 3.0, 1 Headset, 1 Microphone |
| Rear I/O | 4 USB 3.0, 2 USB 2.0, 2 PS/2, 1 RJ-45 (NIC), 1 Audio Line-In, 1 Audio Line-Out. Serial supported with optional connector on PCI bracket cabled to system board connector. |
| nternal USB | 2 USB 2.0 ports available with a single 2x5 header. The 2x5 header can be converted to a standard (Type-A) USB connector through the use one HP Internal USB Port Kit (EM165AA). This port kit uses one half of the 2x5 header. The 2x5 header also supports up to one 15-in-1 Media Card Reader. 1 USB 3.0 port available by a 2x10 header. |
| Chassis Dimensions | Footprint Dimensions: |
| H x W x D) | H: 17.45" [442.9mm] W: 6.75" [171.45mm] D: 18.3" [464.8mm] (measured to the rear of service panel) |
| | Maximum Dimensions: |
| | H: 17.45" [442.9mm] W: 6.75" [171.45mm] D: 18.65" [473.3mm] (measured to rear PCIe retainer clips) |
| | Rack utilization: 4U |
| System Weight | Actual weight depends upon configuration Minimum configuration: 15.0 kg (33.1 lbs.) Typical configuration: 17.0 kg (37.5 lbs.) |



Overview

| | Maximum configuration: 21.8 kg (48.0 lbs.) | | | | | | |
|-----------------------------------|---|---|--|--|--|--|--|
| Temperature | Operating: | 5° to 35°C (40° to 95° F) | | | | | |
| | Non-operating | -40° to 60°C (-40° to 140°F) | | | | | |
| Humidity | Operating: | 8% to 85% relative humidity, non-condensing | | | | | |
| | Non-operating | 8% to 90% relative humidity, non-condensing | | | | | |
| Maximum Altitude (non- | Operating: | 3,048m (10,000ft) | | | | | |
| pressurized) | Non-operating | 9,144m (30,000ft) | | | | | |
| Power Supply | Tool-free 925W 90% Efficient wide-ranging, active Power Factor Correction, with two graphics power cables | | | | | | |
| | | port for this product may be found at this link: om/psu_reports/HEWLETT%20PACKARD_D12- Report%20(2).pdf | | | | | |
| Interfaces Supported | 15-in-1 Media Card Reader (optional) 6-channel SATA interfaces (6 @ 6.0 Gb/s). 6 channels are eSATA configurable for use with eSATA CTO/AMO Kit (No hot plug / hot swap supported). USB 2.0, USB 3.0 Factory integrated RAID available for SATA/SAS drives (RAID 0, 0 Data, 1, 5, and 10) | | | | | | |
| Workstation ISV Certifications | See the latest list of certifications at http://www.hp.com/united-states/campaigns/workstations/partnerships.html | | | | | | |

Supported Components

Processors

| | Factory Configured | Option Kit | Option Kit Part Number | Support Notes |
|---------------------------------------|-----------------------|---------------|------------------------------|------------------|
| Intel Xeon E5-1600 v3 Series CPU | | | | |
| Intel Xeon E5-1680 v3 3.2 2133 8C CPU | Y | Ν | | |
| Intel Xeon E5-1660 v3 3.0 2133 8C CPU | Y | Ν | | |
| Intel Xeon E5-1650 v3 3.5 2133 6C CPU | Y | Ν | | |
| Intel Xeon E5-1630 v3 3.7 2133 4C CPU | Y | Ν | | |
| Intel Xeon E5-1620 v3 3.5 2133 4C CPU | Y | Ν | | |
| Intel Xeon E5-1607 v3 3.1 1866 4C CPU | Y | Ν | | |
| Intel Xeon E5-1603 v3 2.8 1866 4C CPU | Y | Ν | | |
| | Factory Configured | Option Kit | Option Kit Part Number | Support Notes |
| Z640 Intel Xeon E5-2600 v3 Series CPU | | | | |
| Xeon E5-2699 v3 2.3 2133 18C CPU | Y | Y | J9P85AA | |
| Xeon E5-2697 v3 2.6 2133 14C CPU | Y | Y | J9P86AA | |
| Xeon E5-2695 v3 2.3 2133 14C CPU | Y | Y | J9P87AA | |
| Xeon E5-2683 v3 2.0 2133 14C CPU | Y | Y | J9P90AA | |
| Xeon E5-2690 v3 2.6 2133 12C CPU | Y | Y | J9P88AA | |
| Xeon E5-2680 v3 2.5 2133 12C CPU | Y | Y | J9P91AA | |
| Xeon E5-2670 v3 2.3 2133 12C CPU | Y | Y | J9P92AA | |
| Xeon E5-2660 v3 2.6 2133 10C CPU | Y | Y | J9P94AA | |
| Xeon E5-2650 v3 2.3 2133 10C CPU | Y | Y | J9P95AA | |
| Xeon E5-2667 v3 3.2 2133 8C CPU | Y | Y | J9P89AA | |
| Xeon E5-2640 v3 2.6 1866 8C CPU | Y | Y | J9P97AA | |
| Xeon E5-2630 v3 2.4 1866 8C CPU | Y | Y | J9P98AA | |
| Xeon E5-2643 v3 3.4 2133 6C CPU | Y | Y | J9P93AA | |
| Xeon E5-2620 v3 2.4 1866 6C CPU | Y | Y | J9Q00AA | |
| Xeon E5-2609 v3 1.9 1600 6C CPU | Y | Y | J9Q01AA | |
| Xeon E5-2603 v3 1.6 1600 6C CPU | Y | Y | J9Q02AA | |
| Xeon E5-2637 v3 3.5 2133 4C CPU | Y | Y | J9P96AA | |
| Xeon E5-2623 v3 3.0 1866 4C CPU | Y | Y | J9P99AA | |

Note 1: When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: http://www.intel.com/products/processor_number/ for details.

Multi-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.

64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See: <u>http://www.intel.com/info/em64t</u> for more information.



HP Z640 Workstation

Supported Components

Z640 processor AMO kits include:

- 2nd CPU/Memory Module (riser)
- processor
- heatsink

First processor (CPUO) upgrades are not supported by HP.

| Monitors / Displays | | Factory Configured | Option Kit | Option Kit Part Number | Support Notes |
|------------------------|---|-----------------------|---------------|------------------------------|------------------|
| | HP Z Display Z30i 30-inch IPS LED Backlit Monitor | | | | |
| | HP Z Display Z27i 27-inch IPS LED Backlit Monitor | | | | |
| | HP Z Display Z24i 24-inch IPS LED Backlit Monitor | | | | |
| | HP Z Display Z23i 23-inch IPS LED Backlit Monitor | | | | |
| | HP Z Display Z22i 21.5-inch IPS LED Backlit Monitor | | | | |
| | HP DreamColor Z27x Professional Display | | | | |
| | HP DreamColor Z24x Professional Display | | | | |
| | | | | | |

Supported Components

Storage/Hard Drives

| SAS Hard Drives | | Factory Configured | Option Kit | Option Kit Part Number | Support Notes | | | | |
|------------------|---|--|---------------|------------------------------|------------------|--|--|--|--|
| | SAS Hard Drives for HP Workstations | - | | | | | | | |
| | HP 1.2TB SAS 10K SFF HDD | Y | Y | E2P04AA | | | | | |
| | HP 600GB SAS 10K SFF HDD | Y | Y | A2Z21AA | | | | | |
| | HP 300GB SAS 10K SFF HDD | Factory ConfiguredOption KitKit Part NumberYYE2P04AAYYA2Z21AAYYA2Z20AAYYL5B75AAYYL5B75AAYYL5B74AAAYYA00 GB; 2.4 TB maxSologe B, 1.2 TB; 4.8 TB maxA, 600 GB, 1.2 TB; 4.8 TB maxSologe B, 1.2 TB; 4.8 TB maxAnd will be automatically installed into a single 2: uired when installing 3rd/4th HDDs using AftermYYLQ036AAYYLQ037AAYYQE298AAYYQE39AAYYBN29AAYYD8N29AAYYD8N29AAYYD8N29AAYYD8N29AAYYB8N29AAYYSEGB NANDAutomatically installed into a 3.5" to 5.25" exterements | | | | | | | |
| | 600GB SAS 15K SFF HDD | | | | | | | | |
| | 300GB SAS 15K SFF HDD | Y | Y | L5B74AA | | | | | |
| | NOTES: Up to (4) 2.5-inch 15K rpm SAS drives: 300, 60 | 0 GB; 2.4 TB ma | x | | | | | | |
| | Up to (4) 2.5-inch 10K rpm SAS drives: 300, 600 GB, 1.2 TB; 4.8 TB max | | | | | | | | |
| | NOTE: SAS controller add-in card required | | | | | | | | |
| | the second se | | - | | | | | | |
| | Removable Boot Drive option | | | | | | | | |
| SATA Hard Drives | SATA Hard Drives for HP Workstations | | | | | | | | |
| | 500GB SATA 7200 rpm 6Gb/s 3.5" HDD | Y | Y | LQ036AA | | | | | |
| | 1TB SATA 7200 rpm 6Gb/s 3.5" HDD | Y | Y | LQ037AA | | | | | |
| | 2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD | Y | Y | QB576AA | | | | | |
| | 3.0TB SATA 7200 rpm 6Gb/s 3.5" HDD | Y | Y | QF298AA | | | | | |
| | 4TB SATA 7200 rpm 6Gb/s 3.5" HDD | Y | Y | K4T76AA | | | | | |
| | 500GB SATA 7.2K SED SFF HDD | Y | Y | D8N29AA | | | | | |
| | 1TB SATA 7200 rpm 8GB 3.5" SSHD (hybrid) NOTES: | Y | Y | M7S54AA | | | | | |
| | Up to (4) 3.5-inch 7200 rpm SATA drives: 500 GB, 1.0, 2.0, 3.0, 4.0 TB; 16.0 TB max | | | | | | | | |
| | Up to (1) 2.5-inch SATA Self-Encrypting Drive (SED): 500 GB Opal 1 | | | | | | | | |
| | Up to (1) 3.5-inch 7200 RPM SATA Solid State Hybrid Drive (SSHD): 1TB + 8GB NAND | | | | | | | | |
| | NOTE: 3rd and 4th HDDs require and will be au adapter. This hardware is required when instal drives. | | | | | | | | |
| | Remoushie Reat Drive ention | | | | | | | | |

Removable Boot Drive option



Supported Components

| SATA Solid State Drives | HP Solid State Drives (SSDs) for Workstations | | | | | |
|-------------------------|---|--------|-----------------------|---------------|--------------------|------------------|
| (SSDs) | HP 128GB SATA 6Gb/s SSD | Y | Y | A3D25A | A | |
| | HP 256GB SATA 6Gb/s SSD | Y | Y | A3D26A | A | |
| | HP 512GB SATA 6Gb/s SSD | Y | Y | D8F30A | A | |
| | HP 1TB SATA 6Gb/s SSD | Y | Y | F3C96A | Α | |
| | Intel Pro 1500 180GB SATA SSD | Y | Y | F5Z70A | Α | |
| | Samsung Enterprise 240GB SATA SSD | Y | Y | F0W94/ | ۹A | |
| | Samsung Enterprise 480GB SATA SSD | Y | Y | F0W95/ | ۹A | |
| | HP 256GB SATA 6Gb/s SED Opal 2 SSD | | | | | |
| | NOTES: | | | | | |
| | Up to (4) 2.5-inch 6Gb/s SATA Solid State Drives: 128 | , 256 | 5, 512 GB, 1 T | B; 4.0 TB | max | |
| | Up to (1) 2.5-inch 6Gb/s SATA Self-Encrypting Solid S | tate | Drive (SED S | SD): 256 G | iB Opal 2 | |
| | Up to (4) 2.5-inch Intel Pro 1500 6Gb/s SATA Solid Sta | ate D | rive: 180 GB; | ; 720 GB m | าลx | |
| | Up to (4) 2.5-inch Samsung Enterprise 6Gb/s SATA So | olid S | tate Drives: 2 | 240, 480 (| 5B; 1.9 TB m | ах |
| | NOTE: 3rd and 4th SSDs require and will be automatic adapter. This hardware is required when installing 3rd drives. | | | - | | - |
| PCIe SSDs | PCIe SSDs for HP Workstations | | | | | |
| | HP Z Turbo Drive 512GB SSD | Y | Y | G3G89A | A | |
| | HP Z Turbo Drive 256GB SSD | Y | Y | G3G88AA | | |
| | HP Z Turbo Drive G2 512GB SSD | Y | Y | M1F74 | A | |
| | HP Z Turbo Drive G2 256GB SSD | Y | Y | M1F73A | A | |
| | NOTES: Up to (2) PCI Express Solid State Drives: 256, 512 GB; PCIe SSDs are not available with SAS controller or SAS | | | | | |
| NOTES | For hard drives, 1 GB = 1 billion bytes; TB = 1 trillion b GB of hard drive (or system disk) is reserved for the s GB of system disk is reserved for system recovery so | ystei | m recovery s | | - | |
| Hard Drive Controllers | | | | | Option | |
| | | | Factory Configured | Option Kit | Kit Part Number | Support Notes |
| | Integrated SATA 6.0 Gb/s Controller | | j | | | |
| | Integrated SATA 6.0 Gb/s Controller | | Y | Ν | | Six ports |
| | Factory integrated RAID on motherboard for SATA d | rives | 5 | | | |
| | RAID 0 Configuration – Striped Array | | Y | Ν | | Note 1 |
| | RAID 1 Configuration – Mirrored Array | | Y | Ν | | Note 1 |
| | RAID 10 Configuration - Striped/Mirrored Array | | Y | Ν | | Note 1 |
| | RAID 0 Data Configuration Boot/OS Drive + 2 Drive Striped Array | | Y | Ν | | Note 1 |



Supported Components

| LSI 9217-4i4e 8-port SAS 6Gb/s RAID Card | | | | | | | |
|--|---|---|---------|--|--|--|--|
| LSI 9217-4i4e 8-port SAS 6Gb/s RAID Card | Y | Y | E0X20AA | | | | |
| LSI 9270-8i SAS 6Gb/s ROC RAID Card and iBBU9 Battery Backup Unit | | | | | | | |
| LSI 9270-8i SAS 6Gb/s ROC RAID Card | Y | Y | E0X21AA | | | | |
| Integrated RAID for PCIe SSDs | | | | | | | |
| RAID 0 Data Configuration | Y | Ν | Note 3 | | | | |
| SATA hardware RAID is supported on Linux systems that have support for the Intel RSTe technology. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit http://www.hp.com/support/linux_hardware_matrix for RAID capabilities with Linux. All drives must be identical in type and capacity. RAID arrays greater than 2 TB are fully supported. NOTE 1: Requires hard drives with identical speed, capacity, and interface. NOTE 2: Specific user-configured hardware SAS RAID configurations are supported on this Linux system. IS: Striping of 2 or more HDDs into a single logical volume IM: Mirroring of 3 or more HDDs into a single logical volume. For details, please visit http://www.hp.com/support/linux_hardware_matrix NOTE 3: PCIe SSDs NOT available for Boot RAID Configuration | | | | | | | |

Graphics

| | Factory | | Option Kit Part | | Supported | | |
|-------------------------------|------------|-------------------|--------------------|---------------|------------|--------|--|
| | Configured | Option Kit | Number | Support Notes | # of cards | Mixed? | |
| Professional 2D | | | | | | | |
| NVIDIA NVS 310 512MB Graphics | Y | Y | A7U59AA | Note 1, 2 | 4 | - | |
| NVIDIA NVS 315 1GB Graphics | Y | Y | E1U66AA | Note 2 | 4 | - | |
| NVIDIA NVS 510 2GB Graphics | Y | Y | C2J98AA | Note 1 | 2 | - | |

Graphics Cable Adapters

| | Option Kit Factory Part | | Supported | | | |
|--|----------------------------|-------------------|-----------|---------------|------------|--------|
| | Configured | Option Kit | | Support Notes | # of cards | Mixed? |
| HP DisplayPort To DVI-D Adapter (4-Pack) | Y | Ν | | | 1 | - |
| HP DisplayPort To VGA Adapter 2nd | Y | Ν | | | 1 | - |
| HP DisplayPort To DVI-D Adapter (6-Pack) | Y | Ν | | | 1 | - |
| HP DisplayPort To DVI-D Adapter (2-Pack) | Y | Ν | | | 1 | - |
| HP DisplayPort to Dual Link DVI Adapter | Y | Y | NR078AA | | 1 | - |
| HP DisplayPort To VGA Adapter | Y | Y | AS615AA | | 1 | - |
| HP DisplayPort To DVI-D Adapter | Y | Y | FH973AA | | 1 | - |
| Entry 3D | | | | | | |
| NVIDIA Quadro K420 1GB Graphics | Y | Y | J3G86AA | | 2 | - |

Supported Components

| NVIDIA Quadro K620 2GB Graphics | Y | Y | J3G87AA | 2 | - |
|--|---|--------|---------|---|----|
| Mid-range 3D | | | | | |
| NVIDIA Quadro K2200 4GB Graphics | Y | Y | J3G88AA | 2 | - |
| AMD FirePro W2100 2GB Graphics | Y | Y | J3G91AA | 2 | - |
| AMD FirePro W5100 4GB Graphics | Y | Y | J3G92AA | 2 | |
| High End 3D | | | | | |
| NVIDIA Quadro K4200 4GB Graphics | Y | Y | J3G89AA | 2 | - |
| NVIDIA Quadro K5200 8GB Graphics | Y | Y | J3G90AA | 2 | - |
| NVIDIA Quadro K6000 12GB Graphics | Y | Y | C2J96AA | 1 | No |
| NVIDIA Quadro M6000 12GB Graphics | Y | Y | L2K02AA | 1 | |
| AMD FirePro W7100 8GB Graphics | Y | Y | J3G93AA | 2 | |
| NOTE 1: If 1st card is NVS 510, 2nd card must be NOTE 2: 4th NVS 310 or NVS 315 supported as AN | | 5 310. | | | |

NOTE 2: 4th NVS 310 or NVS 315 supported as AMO-only

СТО

| High Performance GPU Computing | | Factory Configured | Option Kit | Option Kit Part Number | Support Notes |
|-----------------------------------|--|-----------------------|---------------|------------------------------|---------------|
| | NVIDIA Tesla K40 Workstation Coprocessor | Y | Y | F4A88AA | Note 1 |

NOTE 1: Tesla K40 is supported with QK5200, QK620 or QK2200. Not supported with 2 graphics cards. Not supported with OS WIN7 32-bit. Not supported with OS WIN8.0.

Memory

| DDR4-2133 ECC Registered DIMMs | Option Kit Part | Support Notes | | |
|--|-----------------|---------------|--|--|
| | Number | | | |
| 4GB DDR4-2133 ECC Registered RAM | J9P81AA | 1,2 | | |
| 8GB DDR4-2133 ECC Registered RAM | J9P82AA | 1,2 | | |
| 16GB DDR4-2133 ECC Registered RAM | J9P83AA | 1,2 | | |
| 32GB DDR4-2133 ECC Load Reduced (LR) RAM | J9P84AA | 1,2 | | |
| NOTEC. | | | | |

NOTES:

For details on the supported memory configurations on the HP Z640 Workstation, please refer to the System Technical Specifications - System Board section of this document. Each processor supports up to 4 channels of DDR4 memory. To realize full performance at least 1 DIMM must be inserted into each channel.

With single-processor configurations, 4 DIMM slots are available. 4 additional DIMM slots are available with the 2nd CPU & Memory Module.

The CPUs determine the speed at which the memory is clocked. If an 1866MT/s capable CPU is used in the system, the maximum speed the memory will run at is 1866MT/s, regardless of the specified speed of the memory.

ONLY registered and load reduced DDR4 DIMMs are supported. DDR3 DIMMs ARE NOT SUPPORTED.



Supported Components

Multimedia and Audio Devices

| | Factory Configured | Option Kit | Option Kit Part Number | Support Notes | |
|------------------------------------|-----------------------|---------------|------------------------------|------------------|--|
| Integrated Realtek HD ALC221 Audio | Y | Ν | | | |

Optical and Removable Storage

| | Factory Configured | Option Kit | Option Kit Part Number | Support Notes |
|--------------------------------------|-----------------------|---------------|------------------------------|---------------|
| HP SlimTray Optical Drives | | | | |
| HP 9.5mm Slim SuperMulti DVD Writer | Y | Y | K3R64AA | |
| HP 9.5mm Slim DVD-ROM Drive | Y | Y | K3R63AA | Note 1 |
| HP 9.5mm Slim BDXL Blu-Ray Writer | Y | Y | K3R65AA | Note 2 |
| HP DX115 Removable Drive Enclosure | | | | |
| HP DX115 Removable HDD Frame/Carrier | Ν | Y | FZ576AA | Note 3 |
| HP DX115 Removable HDD Carrier | Ν | Y | NB792AA | Note 4 |
| HP 15-in-1 Media Card Reader | | | | |
| HP 15-in-1 Media Card Reader | Y | Y | G1S79AA | |

Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

With Blu-ray, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

NOTE 1: Not supported as a 2nd Optical Drive.
NOTE 2: Cannot be ordered in combination with another Blu-ray Writer.
NOTE 3: Only one DX115 device can be installed into Z640. This device can only be installed into the top optical (5.25") bay.
NOTE 4: Carrier requires a Z640 to have the DX115 frame installed. This part number is for the carrier only.

| Controller Cards | | Factory Configured | Option Kit | Option Kit Part Number | Support Notes |
|------------------|--|-----------------------|------------|---------------------------|---------------|
| | HP IEEE 1394b FireWire® PCIe Card | Y | Y | NK653AA | |
| | HP Thunderbolt ™ 2 PCIe 1-port I/O Card | Y | Υ | F3F43AA | Note 1 |

NOTE 1: Compatible with NVIDIA Quadro K620, K2200, K4200, and K5200 only.

| Networking and Communications | | | | |
|-------------------------------|------------|-------------------|------------------------|---------------|
| | Factory | | Option Kit Part | |
| | Configured | Option Kit | Number | Support Notes |



Supported Components

| Integrated Intel I218LM PCIe GbE Controller | Y | Ν | | |
|--|---|---|---------|--------|
| Intel Ethernet I210-T1 PCIe NIC | Y | Y | E0X95AA | |
| HP X520 10GbE Dual Port Adapter | Y | Y | C3N52AA | |
| HP 10GbE SFP+ SR Transceiver | Y | Y | C3N53AA | |
| HP 10GbE SFP+ SR Transceiver | Y | Y | C3N53AA | |
| HP 361T PCIe Dual Port Gigabit NIC | Ν | Y | C3N37AA | Note 1 |
| Intel 7260 802.11 a/b/g/n PCIe WLAN NIC* | Y | Y | F2P07AA | |

NOTE 1: "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

* Wireless access point and internet service required. Availability of public wireless access points limited.

| Racking and Phys | ical Security | | | | |
|-------------------------|--|-----------------------|------------|---------------------------|------------------|
| | - | Factory Configured | Option Kit | Option Kit Part Number | Support Notes |
| | HP Solenoid Hood Lock & Hood Sensor | Y | Ν | | |
| | HP Business PC Security Lock Kit | Ν | Y | PV606AA | |
| | HP Z6/8 Adjustable Rail Rack Kit, Flush Mount | Ν | Y | B8S55AA | |
| Input Devices | | Factory Configured | Option Kit | Option Kit Part Number | Support Notes |
| | HP PS/2 Keyboard | Y | Y | QY774AA | |
| | HP USB Keyboard | Y | Y | QY776AA | |
| | HP USB Smart Card Keyboard | Y | Y | E6D77AA | |
| | HP Wireless Keyboard and Mouse | Y | Y | QY449AA | |
| | HP PS/2 Mouse | Y | Y | QY775AA | |
| | HP USB Optical Mouse | Y | Y | QY777AA | |
| | HP USB 1000dpi Laser Mouse | Y | Y | QY778AA | |
| | HP USB Optical 3-Button 2.9M OEM Mouse | Y | Y | ET424AA | |
| | HP SpaceMouse Pro USB 3D Input Device | Ν | Y | B4A20AA | |
| | HP SpacePilot Pro 3D USB Intelligent Controller | Ν | Y | WH343AA | |
| | 3Dconnexion CADMouse | Y | Y | M5C35AA | |
| Other Hardware | | Factory Configured | Option Kit | Option Kit Part Number | Support Notes |
| | HP Internal USB Port Kit | Ν | Y | EM165AA | Note 1 |
| | HP eSATA PCI Cable Kit | Ν | Y | GM110AA | Note 2 |



Supported Components

| HP Serial Port Adapter | Y | Y | PA716A | |
|--|---|---|---------|------------|
| HP Optical Bay HDD Mounting Bracket | Ν | Y | NQ099AA | Note 3 |
| HP 2.5in HDD/SSD 2-in-1 ODD Bay Bracket | Ν | Y | K4T74AA | Note 4 |
| HP Power Cord Kit | Ν | Y | DM293A | |
| HP Workstation Mouse Pad | Y | Ν | | Japan only |
| HP ENERGY STAR [®] Enabled Configuration | Y | Ν | | |

Note 1: The HP Internal USB Port kit has a single USB 2.0 type A connector. **Note 2:** No hot plug / hot swap supported **Note 3:** NQ099AA used to install 3rd/4th 3.5" HDDs in Z640 in the factory or when purchasing Aftermarket Option (AMO) drives **Note 4:** K4T74AA used to install 3rd/4th 2.5" HDD/SSDs in Z640 in the factory or when purchas

Note 4: K4T74AA used to install 3rd/4th 2.5" HDD/SSDs in Z640 in the factory or when purchasing Aftermarket Option (AMO) drives

| Software | | Factory Configured | Option Kit | Option Kit Part Number | Support Notes | |
|--|--|-----------------------|------------|---------------------------|---------------|--|
| | HP Performance Advisor | Y | Y | | Note 1 | |
| | HP Remote Graphics Software (RGS) 6.0 | Y | Y | | Note 2 | |
| | MS Office Home & Business 2013 | Y | Ν | | Note 3 | |
| | Cyberlink Media Suite & PowerDVD | Y | Ν | | | |
| | Foxit PhantomPDF Express | Y | Ν | | | |
| | NOTE 2: Supported operating systems: Windows 7 Professional 32/64 Windows 8 Professional 32/64 RHEL v6.5 SLED 11 SP3 | | | | | |
| For more information, go to: <u>http://www.hp.com/qo/rqs</u> NOTE 3: Must select as a Configure to Order option. | | | | | | |
| Operating Systems | | | | Suppo | rt Notes | |
| | Windows 8.1 Pro 64-bit | | | | | |
| | Windows 8.1 Pro Downgrade to Window | s 7 Professiona | al 64-bit | | | |

(National Academic)

Note 1

HP Linux Installer Kit Red Hat Enterprise Linux (RHEL) Workstation - Paper License (1yr) Ubuntu 14.04

Windows® 7 Professional (MSNA) 64-bit

NOTE 1: This second OS must be ordered with the HP Linux Installer Kit as the first OS



System Technical Specifications

System Board

| System Board Form Factor | Main System Board: 24 x 31 cm 9.6 x 12.2 inches |
|-----------------------------|--|
| | 2nd CPU/Memory Board (optional): 14.9 x 29.2 cm 5.85 x 11.50 inches |
| Processor Socket | LGA2011R3 1st CPU on system board 2nd CPU on optional 2nd CPU/Memory Module |
| CPU Bus Speed | QPI: Up to 9.6GT/second, depending on processor |
| Chipset | Intel C612 Chipset |
| Super I/O Controller | Nuvoton NPCD379H (SIO-12) |
| Memory Expansion Slots | 4 on system board(CPUO) + 4 on optional 2nd CPU/Memory Module(CPU1) |
| Memory Type Supported | DDR4, RDIMM (Registered), ECC: 4GB, 8GB and 16GB DDR4, LRDIMM (Load Reduced), ECC: 32GB |
| Memory Modes | NUMA (Non-Uniform Memory Architecture), Memory Node Interleave |
| Memory Speed Supported | 1600MT/s, 1866MHz and 2133MT/s |




| | Single Processor | | | | | | | |
|----------|------------------|----------------|-------|-------|----------------|--------------|--|--|
| | | | CPL | JO | | | | |
| | | Front | Slots | Rear | Slots | | | |
| Capacity | Notes | DIMM1 | DIMM3 | DIMM6 | DIMM8 | Rating | | |
| 4 GB | * | 4 GB | | | | Fair | | |
| 8 GB | | 4 GB 8 GB | | | 4 GB | Good Fair | | |
| 12 GB | | 4 GB | 4 GB | | 4 GB | Better | | |
| 16 GB | | 4 GB 8 GB | 4 GB | 4 GB | 4 GB 8 GB | Best Good | | |
| 24 GB | 2 | 8 GB | 4 GB | 4 Gb | 8 GB | Better | | |
| 32 GB | | 8 GB 16 GB | 8 GB | 8 GB | 8 GB 16 GB | Best Good | | |
| 48 GB | 2 | 16 GB | 8 GB | 8 GB | 16 GB | Better | | |
| 64 GB | ~ | 16 GB 32 GB | 16 GB | 16 GB | 16 GB 32 GB | Best Good | | |
| 128 GB | | 32 GB | 32 GB | 32 GB | 32 GB | Best | | |
| Slot Loa | d Order | 1 | 3 | 4 | 2 | | | |

| | Dual Processor | | | | | | | | | |
|----------|----------------|-----------------------|-------|-------|----------------|-----------------------|-------|-------|----------------|----------------------|
| | | | CPU O | | | CPU 1 | | | | |
| | | Front | Slots | Rear | Slots | Front | Slots | Rear | Slots | |
| Capacity | Notes | DIMM1 | DIMM3 | DIMM6 | DIMM8 | DIMM1 | DIMM2 | DIMM3 | DIMM4 | Rating |
| 8 GB | | 4 GB | | | | 4 GB | | | | Fair |
| 16 GB | | 4 GB 8 GB | | | 4 GB | 4 GB 8 GB | | | 4 GB | Good Fair |
| 32 GB | | 4 GB 8 GB 16 GB | 4 GB | 4 GB | 4 GB 8 GB | 4 GB 8 GB 16 GB | 4 GB | 4 GB | 4 GB 8 GB | Best Good Fair |
| 48 GB | 2 | 8 GB | 4 GB | 4 GB | 8 GB | 8 GB | 4 GB | 4 GB | 8 GB | Better |
| 64 GB | | 8 GB | 8 GB | 8 GB | 8 GB | 8 GB | 8 GB | 8 GB | 8 GB | Best |
| 96 GB | 2 | 16 GB | 8 GB | 8 GB | 16 GB | 16 GB | 8 GB | 8 GB | 16 GB | Better |
| 128 GB | | 16 GB 32 GB | 16 GB | 16 GB | 16 GB 32 GB | 16 GB 32 GB | 16 GB | 16 GB | 16 GB 32 GB | Best Good |
| 256 GB | | 32 GB | 32 GB | 32 GB | 32 GB | 32 GB | 32 GB | 32 GB | 32 GB | Best |
| Slot Loa | d Order | 1 | 5 | 7 | 3 | 2 | 6 | 8 | 4 | |


System Technical Specifications

Memory Loading Order:

Load Order for Single Processor Configuration



Load Order for Dual Processor Configuration

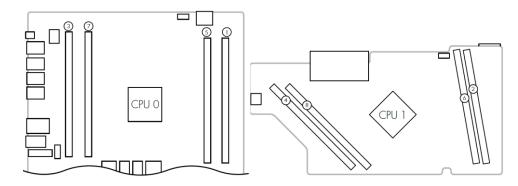

| Maximum Memory | Supports up to 256GB with two processors. Please refer to the table above for details on how supported memory configurations are installed in your system. * For 32 bit operating systems, there is a memory limit of 4GB. |
|--|---|
| Memory Configuration (Supported) | Although technically possible, these configurations are not available to order at this time. Not all memory configurations possible are represented above. Only Registered and LR ECC DIMMs are supported. Do not install memory modules into memory slots if corresponding processor is not installed. Dual processor configurations with memory modules installed for only one processor is not supported. RDIMM (Registered) and LRDIMM (Load Reduced) memory cannot be mixed. All memory installed in the system must be either RDIMM or LRDIMM. |
| PCI Express Connectors | Slot 1 (top): PCI Express Gen2 x1 with open-ended connector* Full-height, Half-length (not available when 2nd CPU/Memory Module is installed) |
| | Slot 2: PCI Express Gen3 x16 Full-height, Full-length (with extender) |

Slot 3:



| | PCI Express Gen2 x4 with open-ended c Full-height, Full-length (with extender) | |
|-------------------------------|--|---|
| | Slot 4: PCI Express Gen3 x8 with open-ended of Full-height, Full-length (with extender) Slot 5: PCI Express Gen3 x16 Full-height, Full-length (with extender) | |
| | * Open-ended connector allows a great lower bandwidth connector/slot | er bandwidth (e.g. x16) card to be installed physically into a |
| PCI Connectors (5.0V) | Slot 6: PCI 32bit/33MHz Full-height, Full-length (with extender) | |
| Supported Drive Interfaces | SATA | 2 SATA @6Gb/s, supports RAID 0, 1 and NCQ. 4 sSATA @6Gb/s, Supports RAID 0,1,10 and NCQ. Factory integrated RAID is Microsoft Windows only. |
| | Serial Attached SCSI | Requires Optional PCIe card |
| Integrated RAID | SATA: RAID 0, 1 SSATA: RAID 0, 1, 10 RAID 0 configuration - striped array (supported and configure to order) RAID 1 configuration - mirrored array (supported and configure to order) RAID 5 parity striping (supported but not configure to order) RAID 10 striped and mirrored array. *HW RAID functionality not supported b Operating system instead | y Linux. Use SW RAID functionality provided in the Red Hat |
| Integrated Graphics | No | |
| Network Controller | Integrated Intel I-218 Gbit LAN Memory Integrated 3KB receive buffer and 3KB transmit buffer Data rates supported 10/100/1000 Mb/s Compliance IEEE 802.1as, 802.1p, 802.1Q, 802.3, 802.3ab, 802.3az, 802.3 802.3u, 802.3x, 802.3z Bus architecture PCIe 1.0 x1 and SMBus Power requirement 0.5 watts Boot ROM support Network transfer rates: 10BASE-T (half-duplex) 10 Mb/s 10BASE-T (full-duplex) 20 Mb/s | |



| | 100BASE-TX (half-duplex) 100 Mb/s 1000BASE-T (full-duplex) 2000 Mb/s 100BASE-TX (full-duplex) 200 Mb/s | | | | | | |
|---|--|--|--|--|--|--|--|
| | | Aanagement capabilities: WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable Jiagnostics. AMT 9.1 support, vPro compliant | | | | | |
| SATA Connectors | Supported on all SATA and sSATA ports * hot plug / hot swap not supported wi | s configurable with optional eSATA* After-Market Option cable kit) th eSATA | | | | | |
| IEEE 1394 Connector(s) | Front Rear Internal | None 2 IEEE 1394b (requires optional PCIe card) None | | | | | |
| USB Connector(s) | Front Rear Internal | 4 - USB 3.0 4 - USB 3.0 2 - USB 2.0 One 2x5 header with two USB 2.0 ports. The 2x5 header can be converted to a standard (Type-A) USB connector through the use one HP Internal USB Port Kit (EM165AA). This port kit uses one half of the 2x5 header. One 2x10 header with one USB 3.0 port. | | | | | |
| HD Integrated Audio | Realtek ALC221 | | | | | | |
| Flash ROM | Yes | | | | | | |
| CPU Fan Header | One for each CPU socket | | | | | | |
| Chassis Fan Header | Rear System Chassis Fan Header Front System Chassis Fan Header | | | | | | |
| CMOS Battery Holder – Lithium | Yes | | | | | | |
| Power Supply Headers | Yes | | | | | | |
| Power Switch, Power LED & Hard Drive LED Header | Yes (includes speaker and intrusion ser | nsor signals) | | | | | |
| Clear Password Jumper | Yes | | | | | | |
| Serial Port | One internal header | | | | | | |
| Parallel Port | No | | | | | | |
| Keyboard/Mouse | PS/2 | | | | | | |



| Z640 Required Power Supply Info | 925W 90% Efficier | nt, Custom PSU | | | |
|---|---|-------------------------------|--|--|--|
| Power Supply | (Wide Ranging, | Active PFC) | | | |
| Operating Voltage Range | 90–269 | VAC | | | |
| Rated Voltage Range | 100–240 V | 118 V | | | |
| Rated Line Frequency | 50–60 Hz | 400 Hz | | | |
| Operating Line Frequency Range | 47–66 Hz 393–407 Hz | | | | |
| Rated Input Current | 11.3 A @ 100-240 V | 11.3 A @ 400 V | | | |
| Heat Dissipation (Configuration and software dependent) | Typical = 2105 btu/ Maximum = 3629 btu | | | | |
| Power Supply Fan | 92x25 mm vari | able speed | | | |
| ENERGY STAR Qualified (Configuration dependent) | Yes | | | | |
| 80 PLUS® Compliant | Yes, 90% Efficient The Z640 925W power supply efficiency report can be found at this lir http://www.plugloadsolutions.com/psu_reports/HEWLETT%20PACKAR 12-925P1A 925W ECOS%203892 Report%20(2).pdf | | | | |
| FEMP Standby Power Compliant @115V (<2W in S5 - Power Off) | Yes | | | | |
| EuP Compliant @ 230V (<0.5 W in S5 - Power Off) | Yes | | | | |
| CECP Compliant @ 220V (<4W in S3 - Suspend to RAM) | Yes; Configuration dependent | | | | |
| Power Consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3) (Instantly Available PC) | <20W | | | | |
| Built-in Self-Test LED | Yes | | | | |
| Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V) | Yes | | | | |
| Access Panel Solenoid Lock Header | Yes | | | | |
| Access Panel Intrusion | Yes | | | | |
| Sensor Header | Integrated in Front User Interface (Power Speaker) Cable | r Switch, Power LED, HDD LED, | | | |
| Multibay Header | No | | | | |
| Integrated Gigabit Ethernet | Integrated Intel I-218 Gbit LAN | | | | |
| Wake on LAN | Yes | | | | |
| ASF 1.0/2.0 (Alert Standard Format) | Νο | | | | |
| ТРМ | Infineon TPM 1.2 Certified | | | | |
| Password Clear Header | Yes | | | | |
| AUX IN (audio) | No | | | | |
| Clear CMOS Button | Yes | | | | |
| Memory Fan Header | CPU0 Memory Fan Header; CPU1 Memory | · Fan Haadar | | | |



System Technical Specifications

SYSTEM CONFIGURATION

| Example Z640 | Processor | 1x Intel Xeor | n E5-1603 v3 | (Quad-core) | | | | |
|-----------------------|-----------------------|---|--------------|------------------------|---------------|-------------|--------------|--|
| Configuration #1 | Memory | 1x 4GB DDR4 | 1-2133 (Regi | stered DIMM) | | | | |
| | Graphics | 1x NVIDIA NV | /S 310 | | | | | |
| ENERGY STAR QUALIFIED | Disks/Optical | 1x 500GB SATA 7200 ; 1x Slim DVD-ROM SATA | | | | | | |
| | Power Supply | 925W 90% Custom PSU | | | | | | |
| | Other | N/A | | | | | | |
| Energy Consumption | | | VAC | | VAC | | VAC | |
| | | LAN Enabled | LAN Disabled | LAN Enabled | LAN Disabled | LAN Enabled | LAN Disabled | |
| | Windows Idle (SO) | 56.6 | 58 W | 55.9 | 98 W | 55.9 | 96 W | |
| | Windows Busy Typ (SO) | 110. | 76 W | 106. | 57 W | 110. | 110.89 W | |
| | Windows Busy Max (SO) | 114. | 16 W | 112. | 25 W | 114. | 114.16 W | |
| | Sleep (S3) | 2.26 W | 2.16 W | 2.49 W | 2.39 W | 2.25 W | 2.15 W | |
| | Off (S5) | 0.924 W | 0.805 W | 1.02 W | 0.992 W | 0.815 W | 0.792 W | |
| | Zero Power Mode (ErP) | 0.20 |)3 W | 0.38 | 38 W | 0.20 | 01 W | |
| Heat Dissipation** | | 115 | VAC | 230 | VAC | 100 | VAC | |
| | | LAN Enabled | LAN Disabled | LAN Enabled | LAN Disabled | LAN Enabled | LAN Disabled | |
| | Windows Idle (SO) | 193.39 | btu/hr | r 191.00 btu/hr 190.94 | | btu/hr | | |
| | Windows Busy Typ (SO) | 377.91 btu/hr 363.61 btu/hr 378.3 | | 378.36 | btu/hr | | | |
| | Windows Busy Max (SO) | 50) 389.51 btu/hr 383.00 btu/hr 38 | | 389.51 | 389.51 btu/hr | | | |
| | Sleep (S3) | 7.72 btu/hr | 7.37 btu/hr | 8.51 btu/hr | 8.17 btu/hr | 7.69 btu/hr | 7.33 btu/hr | |
| | Off (S5) | 3.15 btu/hr | 2.75 btu/hr | 3.48 btu/hr | 3.38 btu/hr | 2.78 btu/hr | 2.70 btu/hr | |
| | Zero Power Mode (ErP) | 0.695 | btu/hr | 1.325 | btu/hr | 0.668 | btu/hr | |

| Example Z640 | Processor | 2x Intel Xeor | n E5-2643 v3 | (Dual Six-co | re) | | |
|--------------------|-----------------------|--|--------------|----------------------|--------------|----------------|--------------|
| Configuration #2 | Memory | 8x 8GB DDR4 | 1-2133 (Regi | stered DIMM) | | | |
| | Graphics | 1x NVIDIA Qι | adro K5200 | | | | |
| | Disks/Optical | 4x 2TB SATA 7200 ; 1x Slim SuperMulti DVDRW SATA | | | | | |
| | Power Supply | 925W 90% Custom PSU | | | | | |
| | Other | N/A | | | | | |
| Energy Consumption | | 115 | VAC | 230 | VAC | 100 | VAC |
| · | | LAN Enabled | LAN Disabled | LAN Enabled | LAN Disabled | LAN Enabled | LAN Disabled |
| | Windows Idle (SO) | 82.6 | 52 W | 82.3 | 36 W | 83.1 | 0 W 0 |
| | Windows Busy Typ (SO) | 399. | 09 W | 397.52 W 495.56 W | | 399.46 W | |
| | Windows Busy Max (SO) | 497. | 57 W | | | 492.48 W | |
| | Sleep (S3) | 4.718 W | 4.612 W | 4.864 W | 4.759 W | 4.699 W | 4.581 W |
| | Off (S5) | 0.992 W | 0.813 W | 1.042 W | 0.988 W | 0.823 W | 0.793 W |
| | Zero Power Mode (ErP) | 0.20 | 94 W | 0.38 | 34 W | 0.20 |)2 W |
| Heat Dissipation** | | 115 | VAC | 230 | VAC | 100 | VAC |
| | | LAN Enabled | LAN Disabled | LAN Enabled | LAN Disabled | LAN Enabled | LAN Disabled |
| | Windows Idle (SO) | 281.90 | btu/hr | 281.01 btu/hr | | 283.54 btu/hr | |
| | Windows Busy Typ (SO) | 1361.70 |) btu/hr | 1356.34 btu/hr | | 1362.95 btu/hr | |
| | Windows Busy Max (SO) | 1697.7 | 1 btu/hr | 1690.85 btu/hr | | 1680.34 btu/hr | |
| | Sleep (S3) | 16.09 | 15.74 | 16.60 | 16.24 | 16.03 | 15.63 |



System Technical Specifications

| | btu/hr | btu/hr | btu/hr | btu/hr | btu/hr | btu/hr |
|-----------------------|--------------|-------------|--------------|-------------|--------------|-------------|
| Off (S5) | 3.15 btu/hr | 2.77 btu/hr | 3.56 btu/hr | 3.37 btu/hr | 2.81 btu/hr | 2.71 btu/hr |
| Zero Power Mode (ErP) | 0.694 btu/hr | | 1.311 btu/hr | | 0.689 btu/hr | |

DECLARED NOISE EMISSIONS

| System Configuration | Processor Info | 1x Intel Xeon E5-2650 v3 2.30 GHz |
|----------------------|----------------------|-----------------------------------|
| (Entry level) | Memory Info | 2x 8 GB DDR4-2133 MT/s RDIMM |
| | Graphics Info | 1x NVIDIA NVS 310 |
| | Disks/Optical/Floppy | 1x 1 TB SATA 7200 RPM |
| | | 1x Blu-ray DVD-RW |

| Declared Noise Emissions (in accordance with ISO | | Sound Power (LWAd, bels) | Deskside Sound Pressure (LpAm, decibels) |
|--|--|--------------------------|--|
| 7779 and ISO 9296) | Idle | 3.3 | 16 |
| | Hard drive Operating (random reads) | 3.5 | 17 |
| | DVD-ROM Operating (sequential reads) | 4.5 | 31 |

| System Configuration (High-end) | Processor Info | 2x Intel Xeon E5-2697 v3 2.60 GHz |
|------------------------------------|----------------------|------------------------------------|
| | Memory Info | 8x 16 GB DDR4-2133 MT/s ACPI RDIMM |
| | Graphics Info | 1x NVIDIA Quadro K4200 |
| | Disks/Optical/Floppy | 2x 600 GB SAS 15K RPM 3.5" HDD |
| | | 1x Blu-ray DVD-RW |

| Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296) | | Sound Power (LWAd, bels) | Deskside Sound Pressure (LpAm, decibels) |
|--|---|--------------------------|--|
| | Idle | 4.4 | 27 |
| | Hard drive Operating (random reads) | 4.8 | 29 |
| | DVD-ROM Operating (sequential reads) | 4.7 | 31 |

ENVIRONMENTAL DATA

| Environmental Requirements | Temperature | Operating: 5°C to 35°C (40°F to 95°F) Non-operating: -40°C to 60°C (-40°F to 140°F) |
|-------------------------------|------------------|--|
| | Humidity | Operating: 8% to 85% RH, non-condensing Non-operating: 8% to 90% RH, non-condensing |
| | Maximum Altitude | Operating: 3,048 m (10,000 ft) Non-operating: 9,144 m (30,000 ft) |
| | Dynamic (new) | Shock Operating: ½-sine: 40 g, 2-3ms (~62 cm/sec) |



System Technical Specifications

| | Non-operating: ½-sine: 160 cm/s, 2-3ms (~105 g) square: 20 g, 422 cm/s NOTE : Values represent individual shock events and do not indicate repetitive shock events. Vibration Operating random: 0.5 g (rms), 5-300 Hz, up to 0.0025 g²/Hz Non-operating random: 2.0 g (rms), 5-500 Hz, up to 0.0150 g²/Hz NOTE: Values do not indicate continuous vibration. |
|---------|--|
| Cooling | Above 1524m (5,000 ft.) altitude, maximum operating temperature is de- rated by 1°C (1.8°F) per 305m (1,000 ft.) elevation increase |

Physical Security and Serviceability

| Access Panel | Tool-less Includes system board and memory information |
|---|---|
| Optical Drive | Tool-less, no carrier or rails required |
| Hard Drives | Tool-less |
| | Integrated blind-mate drive carriers |
| | Optional 5.25" external bay carriers |
| Expansion Cards | Tool-less |
| Processor Socket | 1st socket on main system board. 2nd socket on optional 2nd CPU/Memory Module. |
| Green User Touch Points | Yes, on primary serviceable components |
| Color-coordinated Cables and Connectors | s Yes |
| Memory | Tool-less |
| System Board | Tool-less 2nd CPU/Memory Module: Tool-less |
| Dual Color Power and HD LED on Front of Computer | |
| Configuration Record SW | Yes |
| Over-Temp Warning on Screen | Yes, at POST screen on reboot. |
| Restore CD/DVD Set | Yes, restores the computer to its original factory shipping image - Can be obtained via HP Support. |
| Dual Function Front Power Switch | Yes, also acts as a reset switch when held for 4 seconds. |



| Padlock Support | Νο |
|---|---|
| Cable Lock Support | Yes, Kensington Cable Lock (optional): Prevents entire system theft only. 3mm x 7mm slot at rear of system |
| Universal Chassis Clamp Lock Support | Νο |
| Solenoid Lock and Hood Sensor | Access Panel Solenoid Lock: Yes (optional). Activated remotely to prevent system entry. Access Panel Intrusion Sensor: Yes (optional). |
| Rear Port Control Cover | Νο |
| Removable Media Write/Boot Control | Yes, user can prevent the workstation from writing to or booting from removable media. |
| Power-On Password | Yes, prevents an unauthorized person from booting up the computer. |
| Setup Password 3.3V Aux Power LED on System PCA | Yes, prevents an unauthorized person from changing the system configuration. Yes |
| NIC LEDs (integrated) (Green & Amber) | Yes |
| CPUs and Heatsinks | CPU heatsink removal requires a T-15 Torx or flat blade screwdriver. CPU removal is tool-less. |
| Power Supply Diagnostic LED | Yes |
| Front Power Button | Yes |
| Rear Power Button | Yes |
| Front Power LED | Yes, white (normal), red (fault) |
| Front Hard Drive Activity LED | Yes, green |
| Front ODD Activity LED | Yes |
| Internal Speaker | Yes |
| System/Emergency ROM | Recovers corrupted system BIOS |
| Flash Recovery | |
| Cooling Solutions | Air cooled forced convection |
| Power Supply Fans | 1 - 92mm |

| CPU Heatsink Fan | 1st CPU: 1 - 92mm Optional 2nd CPU: 1 - 92mm | |
|--|---|--|
| Memory Heatsink Fan | Optional 2nd CPU/Memory Module: rear bank: 1 - 80mm. | |
| HP Vision Diagnostics Offline Edition | HP Vision Diagnostics Offline Edition The diagnostics utility enables you to perform testing and to view critical computer hardware and software configuration information from various sources. This utility enables you to: | |
| | Run diagnostics View the hardware configuration of the system | |
| | Key features and benefits HP Vision Diagnostics simplifies the process of effectively identifying, diagnosing, and isolating the hardware issues. In addition to robust management tools, service tools can be invaluable in quickly resolving system problems. To streamline the service process and resolve problems quickly, it is necessary to have the right information available at the time that a service call is placed. The primary information requirement, which is also the one that provides the greatest Vision into potential system issues, is the configuration of the system. Vision diagnostics helps provide higher system availability. Typical uses of the Vision Diagnostics are: | |
| | Testing and diagnosing apparent hardware failures Documenting system configurations for upgrade planning, standardization, inventory tracking, disaster recovery, and maintenance Sending configuration information to another location for more in-depth analysis | |
| | Entered using F2 | |
| Access Panel Key Lock | Yes, prevents removal of the access panel and all internal components including devices installed in the external 5.25" bays. | |
| ACPI-Ready Hardware | Advanced Configuration and Power Management Interface (ACPI). | |
| | Allows the system to wake from a low power mode Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system | |
| Trusted Platform Module Chip | Yes, Infineon TPM 1.2 Certified | |
| Integrated Chassis Handles | Yes | |
| Power Supply | Tool-less. Includes integrated handle. | |
| PCI Card Retention | Yes, tool-less Rear (all) Middle (full-height cards) | |



System Technical Specifications

Front (full-length cards with extender)

| Flash ROM | SPI ROM |
|---|---------|
| Diagnostic Power Switch LED on board | Yes |
| Clear Password Jumper | Yes |
| Clear CMOS Button | Yes |
| CMOS Battery Holder | Yes |
| DIMM Connectors | Yes |

BIOS

| BIOS 32-bit Services | Standard BIOS 32-Bit Service Directory Proposal v0.4 |
|--|---|
| PCI 3.0 Support | Full BIOS support for PCI Express through industry standard interfaces |
| АТАРІ | ATAPI Removable Media Device BIOS Specification Version 1.0 |
| BBS | BIOS Boot Specification v1.01 |
| WMI Support | WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications. |
| BIOS Boot Spec 1.01+ | Provides more control over how and from what devices the workstation will boot |
| BIOS Power On | Users can define a specific date and time for the system to power on |
| ROM Based Computer Setup Utility (F10) | Review and customize system configuration settings controlled by the BIOS |
| System/Emergency ROM Flash Recovery with Video | Recovers system BIOS in corrupted Flash ROM |
| Replicated Setup | Saves BIOS settings to diskette or USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup). |
| SMBIOS | System Management BIOS 2.7 for system management information |
| Boot Control | Disables the ability to boot from removable media on supported devices |
| Memory Change Alert | Alerts management console if memory is removed or changed |



| Thermal Alert | Monitors the temperature state within the chassis. Three modes: |
|---|---|
| | NORMAL - normal temperature ranges. ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown. SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs. |
| Remote ROM Flash | Provides secure, fail-safe ROM image management from a central network console |
| ACPI (Advanced Configuration and Power Management Interface) | Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 4.0 for full compatibility with 64-bit operating systems. |
| Ownership Tag | A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen |
| Remote Wakeup/Remote Shutdown | System administrators can power on, restart, and power off a client computer from a remote location |
| Instantly Available PC (Suspend to RAM - ACPI sleep state S3) | Allows for very low power consumption with quick resume time |
| Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server) | Allows a new or existing system to boot over the network and download software, including the operating system |
| ROM revision levels | Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS) so that management SW applications can use and report this information. |
| System board revision level | Allows management SW to read revision level of the system board Revision level is digitally encoded into the HW and cannot be modified |
| Start-up Diagnostics (Power-on Self-Test) | Assesses system health at boot time with selectable levels of testing |
| Auto Setup when new hardware installed | System automatically detects the addition of new hardware |
| Keyboard-less Operation | The system can be booted without a keyboard |
| Localized ROM Setup | Common BIOS image supports System Configuration Utility (F10 Setup) menus in 12 languages with local keyboard mappings |
| Asset Tag | Allows the user or MIS to set a unique tag string in non-volatile memory |



| Per-slot Control | Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually | | |
|--------------------------------|---|--|--|
| Adaptive Cooling | Fan control parameters are set according to detected hardware configuration for optimal acoustics | | |
| Pre-boot Diagnostics | Early (pre-video) critical errors are reported via beeps and blinks on the power LED | | |
| Industry Standard Specifi | cation Support | | |
| UEFI Specification Revision | 2.3.1 | | |
| Industry Standard | Revision Supported by the BIOS | | |
| АСРІ | Advanced Configuration and Power Management Interface, Version 4.0 | | |
| ATA (IDE) | AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b | | |
| CD Boot | "El Torito" Bootable CD-ROM Format Specification Version 1.0 | | |
| EDD | Enhanced Disk Drive Specification Version 1.1 BIOS Enhanced Disk Drive Specification Version 3.0 | | |
| EHCI | Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0 | | |
| PCI | PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft 0.7 | | |
| PCI Express | PCI Express Base Specification, Revision 2.0 PCI Express Base Specification, Revision 3.0 | | |
| РММ | POST Memory Manager Specification, Version 1.01 | | |
| SATA | Serial ATA Specification, Revision 1.0a Serial ATA 3 Gb/s: Serial ATA Specification, Revision 2.5 Serial ATA 6 Gb/s: Serial ATA Specification, Revision 3.0 | | |
| SPD | PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B | | |
| ТРМ | Trusted Computing Group TPM Specification Version 1.2 | | |
| UHCI | Universal Host Controller Interface Design Guide, Revision 1.1 | | |
| USB | Universal Serial Bus Revision 1.1 Specification | | |



System Technical Specifications

Universal Serial Bus Revision 2.0 Specification

Universal Serial Bus Revision 3.0 Specification

SMBIOS System Management BIOS Reference Specification, Version 2.7

External BIOS Simulator found at: <u>http://h20464.www2.hp.com/index.html</u>

Social and Environmental Responsibility

Eco-Label Certifications & This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- ENERGY STAR[®] (energy-saving features available on selected configurations-Windows only)
- US Federal Energy Management Program (FEMP)
- China Energy Conservation Program
- The ECO Declaration (TED)

Batteries The battery in this product complies with EU Directive 2006/66/EC Battery size: CR2032 (coin cell) Battery type: Lithium Metal

The battery in this product does not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 40ppm by weight

| Restricted Material Usage | This product meets the material restrictions specified in HP's General Specification for the Environment. <u>http://www.hp.com/hpinfo/qlobalcitizenship/environment/pdf/qse.pdf</u> Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. |
|--|--|
| Low Halogen Statement | This product is low-halogen except for power cords, external cables and peripherals. The following customer-configurable internal components may not be low-halogen: 3 ½" SAS HDDs, LSI 9270-8i SAS ROC RAID Card, and LSI 9217-4i4e SAS ROC RAID Card. Service parts obtained after purchase may not be low-halogen. |
| End-of-Life Management and Recycling | Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. This product is greater than 90% recyclable by weight when properly disposed of at end of life. |
| Hewlett-Packard Corporate Environmental | For more information about HP's commitment to the environment: |
| Information | Global Citizenship Report: <u>http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</u> |
| | Eco-label certifications: http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html |



| | ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html | | | | |
|---|---|--|--|--|--|
| Additional Information | This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. http://www.hp.com/hpinfo/qlobalcitizenship/environment/productdata/disassemblyworksta tio.html Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. EPEAT Gold - ENERGY STAR qualified configurations of this product are in compliance with the IEEE 1680 (EPEAT) standard at the Gold level where HP registers workstation products. See http://ww2.epeat.net/CompanyDetail.aspx?CompanyID=24 for registration status in your country. | | | | |
| Packaging | HP Workstation product packaging meets the HP General Specification for the Environment at http://www.hp.com/hpinfo/qlobalcitizenship/society/qen_specifications.html Does not contain restricted substances listed in HP Standard 011-1 General Specification for the Environment Does not contain ozone-depleting substances (ODS) Does not contain heavy metals (lead, mercury, cadmium or hexavalent chromium) in excess of 100 ppm sum total for all heavy metals listed Maximizes the use of post-consumer recycled content materials in packaging materials All packaging material is recyclable All packaging material is designed for ease of disassembly Reduced size and weight of packages to improve transportation fuel efficiency Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards formatting | | | | |
| Packaging Materials | | | | | |
| Internal | Cushions and plastic bags made of low density polyethylene (LDPE). | | | | |
| ^{External} Manageability | Outer carton, accessories carton, and insert made of corrugated paper board. | | | | |
| Industry Standard Specifications | DASH 1.1 required functionalities via Intel LAN on motherboard | | | | |
| Intel Active Management Technology (AMT) | Intel® Active Management Technology (AMT) 9.1 An advanced set of remote management features and functionality providing IT administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 9.1 includes the following advanced management functions: Power Management (on, off, reset, graceful shutdown, sleep and hibernate) Support in Max Power Savings (Shutdown and Hibernate Modes) Hardware Inventory (includes BIOS and firmware revisions) | | | | |



System Technical Specifications

٠

Hardware Alerting

| | Agent Presence System Defense Filters Serial Over LAN (SOL) IDE Redirect ME Wake-on-LAN (WOL) DASH 1.1 compliance IPv6 Support Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection Remote Scheduled Maintenance - pre-schedule when the system connects to the IT or service provider console for maintenance. Remote Alerts - automatically alert IT or service provider if issues arise Access Monitor - Provides oversight into Intel® AMT actions to support security requirements PC Alarm Clock Microsoft NAP Support Host Base set-up and configuration Management Engine (ME) firmware roll back Local Time Sync to UTC Remote Memory Dump Command – Creates memory dump for debug | | | | |
|--|---|--|--|--|--|
| Intel® vPro™ Technology | The HP Z640 Workstation supports Intel® vPro[™] technology when configured as outlined below: Intel® Xeon® processor E5-1600 v3 product family or E5-2600 v3 product family featuring Intel® vPro[™] Technology Intel® C612 chipset Intel® I218LM GbE LAN | | | | |
| Remote Manageability Software Solutions | The HP Z640 Workstation is supported on the following remote manageability software consoles: LANDesk Management Suite (HP recommended solution) Microsoft System Center Configuration Manager HP Client Automation Enterprise For questions or support for manageability needs, please visit http://www.hp.com/go/easydeploy | | | | |
| System Software Manager | For questions or support for SSM, please visit: <u>http://www.hp.com/go/ssm</u> | | | | |
| Service, Support, and Warranty | On-site Warranty and Service (Note 1): Three-years, limited warranty and service offering delivers on- site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 8am - 5pm. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering. | | | | |
| | NOTE 1 : Terms and conditions may vary by country. Certain restrictions and exclusions apply. | | | | |
| | NOTE 2 : On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country. | | | | |
| | NOTE 3 : Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some | | | | |



System Technical Specifications

countries.

HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at <u>http://www.hp.com/go/lookuptool</u>. Additional HP Care Pack Services information by product is available at <u>http://www.hp.com/hps/carepack</u>. Service levels and response times for HP Care Packs may vary depending on your geographic location.

Product Change Notification

- Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile.
- PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition.
- Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.



Stable & Consistent Offerings

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of components designed and tested to work with HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section.

HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers—no special programs, no additional cost—no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

| Processors | Product # | Offering | | |
|-------------|-----------|---|--|--|
| | J6F20AV | Intel Xeon E5-1620 v3 3.5GHz 4-core 10MB 2133 | | |
| | J6F31AV | Intel Xeon E5-2643 v3 3.4GHz 6-core 20MB 2133 1st | | |
| | J6F49AV | Intel Xeon E5-2643 v3 3.4GHz 6-core 20MB 2133 2nd | | |
| | J6F38AV | Intel Xeon E5-2620 v3 2.4GHz 6-core 15MB 1866 1st | | |
| | J6F56AV | Intel Xeon E5-2620 v3 2.4GHz 6-core 15MB 1866 2nd | | |
| | J6F36AV | Intel Xeon E5-2630 v3 2.4GHz 8-core 20MB 1866 1st | | |
| | J6F54AV | Intel Xeon E5-2630 v3 2.4GHz 8-core 20MB 1866 2nd | | |
| Hard Drives | Product # | Offering | | |
| | J3J74AV | 500GB 7200 RPM SATA 1st Hard Disk Drive | | |
| | J3J95AV | 500GB 7200 RPM SATA 2nd Hard Disk Drive | | |
| | J3K16AV | 500GB 7200 RPM SATA 3rd Hard Disk Drive | | |
| | J3K36AV | 500GB 7200 RPM SATA 4th Hard Disk Drive | | |
| | J3J75AV | 1TB 7200 RPM SATA 1st Hard Disk Drive | | |
| | J3J96AV | 1TB 7200 RPM SATA 2nd Hard Disk Drive | | |
| | J3K17AV | 1TB 7200 RPM SATA 3rd Hard Disk Drive | | |
| | J3K37AV | 1TB 7200 RPM SATA 4th Hard Disk Drive | | |
| Graphics | Product # | Offering | | |
| | J1P91AV | NVIDIA NVS 510 2GB 1st Graphics | | |
| | J1Q03AV | NVIDIA NVS 510 2GB 2nd Graphics | | |
| | J1P93AV | NVIDIA Quadro K620 2GB 1st Graphics | | |
| | J1Q05AV | NVIDIA Quadro K620 2GB 2nd Graphics | | |
| | J1P94AV | NVIDIA Quadro K2200 4GB 1st Graphics | | |
| | J1Q06AV | NVIDIA Quadro K2200 4GB 2nd Graphics | | |
| | J1P98AV | AMD FirePro W2100 2GB 1st Graphics | | |
| | J1Q09AV | AMD FirePro W2100 2GB 2nd Graphics | | |
| Memory | Product # | Offering | | |
| - | G8X26AV | 8GB DDR4-2133 (1x8GB) Registered RAM 1CPU | | |
| | G8X30AV | 16GB DDR4-2133 (2x8GB) Registered RAM 1CPU | | |
| | G8X37AV | 16GB DDR4-2133 (2x8GB) Registered RAM 2CPU | | |
| | G8X31AV | 32GB DDR4-2133 (4x8GB) Registered RAM 1CPU | | |
| | G8X38AV | 32GB DDR4-2133 (4x8GB) Registered RAM 2CPU | | |



Stable & Consistent Offerings

| | G8X41AV G8X32AV G8X40AV G8X33AV G8X42AV | 64GB DDR4-2133 (8x8GB) Registered RAM 2CPU 32GB DDR4-2133 (2x16GB) Registered RAM 1CPU 32GB DDR4-2133 (2x16GB) Registered RAM 2CPU 64GB DDR4-2133 (4x16GB) Registered RAM 1CPU 128GB DDR4-2133 (8x16GB) Registered RAM 2CPU |
|----------------------------------|---|---|
| Optical and Removable Storage | Product # F2D70AV G8U64AV | Offering Slim SuperMulti DVDRW SATA 1st Optical Disk Drive Slim SuperMulti DVDRW SATA 2nd Optical Disk Drive |



Technical Specifications - Hard Drives

STORAGE/HARD DRIVES

| SAS Hard Drives for | 600GB SAS 15K SFF HDD | Capacity 600GB | | | |
|---------------------|--------------------------|--|-----------------------------------|----------------------------|--|
| HP Workstations | | Height | 5.9 in; 15 cm | | |
| | | Width | Media Diameter | 3.5 in; 8.9 cm | |
| | | Interface | 12Gb/s SAS | | |
| | | Synchronous Transfer Rate (Maximum) Up to 1200 MB/s (SAS single port) | | | |
| | | Buffer | 128MB | | |
| | | Seek Time (typical reads, includes controller overhead, including settling) | Average | 2.0ms | |
| | | Rotational Speed | 15K rpm | | |
| | | Operating Temperature | 41° to 131° F (5° to 55° C) | | |
| | 600GB SAS 15K SFF HDD | Capacity | 600GB | | |
| | | Height | 5.9 in; 15 cm | | |
| | | Width | Media Diameter | 3.5 in; 8.9 cm | |
| | | Interface | 12Gb/s SAS | | |
| | | Synchronous Transfer Rate (Maximum) | Up to 1200 MB/s (SAS single port) | | |
| | | Buffer | 128MB | | |
| | | Seek Time (typical reads, includes controller overhead, including settling) | Average | 2.0ms | |
| | | Rotational Speed | 15K rpm | | |
| | | Operating Temperature | 41° to 131° F (5° to 55° C) | | |
| | 300GB SAS 10K rpm 6Gb/s | Capacity | 300GB | | |
| | 3.5" HDD | Height | 0.6 in; 1.53 cm | | |
| | | Width | Media Diameter | 2.5 in; 6.36 cm | |
| | | | Physical Size | 2.75 in; 6.99 cm | |
| | | Interface | SAS | | |
| | | Synchronous Transfer Rate (Maximum) | Up to 600 MB/s | | |
| | | Buffer | 64MB | | |
| | | Cache | multi-segmentat | ole cache buffer | |
| | | Seek Time (typical reads, includes | Single Track | 0.4 ms (max) | |
| | | controller overhead, including settling) | Average | 3.6 ms | |
| | | | Full Stroke | 7.3 ms | |
| | | Rotational Speed | 10,000 rpm | | |
| | | Logical Blocks | 585,937,500 | | |
| | | Operating Temperature | 41° to 131° F (5° | 1° to 131° F (5° to 55° C) | |
| | HP 600GB SAS 10K SFF HDD | Capacity | 600GB | | |
| | | Height | 0.6 in; 1.53 cm | | |
| | | Width | Media Diameter | 2.5 in; 6.36 cm | |
| | | | Physical Size | 2.75 in; 6.99 cm | |
| | | Interface | SAS 6Gb/s | | |



| | | Cunchyonous Transfer Data | | |
|-----------------|---------------------------|--|--------------------------------|------------------|
| | | Synchronous Transfer Rate (Maximum) | Up to 600MB/s | |
| | | Buffer | 64MB | |
| | | Cache | multi-segmentab | le cache buffer |
| | | Seek Time (typical reads, includes | Single Track | 0.4 ms (max) |
| | | controller overhead, including settling) | Average | 3.6 ms |
| | | | Full Stroke | 7.3 ms |
| | | Rotational Speed | 10,000 rpm | |
| | | Logical Blocks | 1,172,123,568 | |
| | | Operating Temperature | 41° to 131° F (5° 1 | to 55° C) |
| | HP 1.2TB SAS 10K SFF HDD | Capacity | 1.2TB | |
| | | Height | 0.6 in; 1.53 cm | |
| | | Width | Media Diameter | 2.5 in: 6.36 cm |
| | | | Physical Size | 2.75 in; 6.99 cm |
| | | Interface | SAS 6Gb/s | , |
| | | Synchronous Transfer Rate (Maximum) | - | |
| | | Buffer | 64MB | |
| | | Cache | multi-segmentab | le cache buffer |
| | | Seek Time (typical reads, includes | Single Track | 0.18ms (max) |
| | | controller overhead, including settling) | Average | 3.5ms |
| | | | Full Stroke | 7.17ms |
| | | Rotational Speed | 10,000 rpm | |
| | | Logical Blocks | 2,344,225,968 | |
| | | Operating Temperature | 41° to 131° F (5° to 55° C) | |
| | | | | |
| | 500GB SATA 7200 rpm 6Gb/s | Capacity | 500GB | |
| HP Workstations | 3.5" HDD | Height | 1 in; 2.54 cm | |
| | | Width | Media Diameter | 3.5 in; 8.9 cm |
| | | | Physical Size | 4 in; 10.17 cm |
| | | Interface | Serial ATA (6.0Gb | /s), NCQ enabled |
| | | Synchronous Transfer Rate (Maximum) | Up to 600MB/s | |
| | | Buffer | 16MB | |
| | | Seek Time (typical reads, includes | Single Track | 2 ms |
| | | controller overhead, including settling) | Average | 11 ms |
| | | | Full Stroke | 21 ms |
| | | Rotational Speed | 7,200 rpm | |
| | | Logical Blocks | 976,773,168 | |
| | | Operating Temperature | 41° to 131° F (5° 1 | to 55° C) |
| | 1TB SATA 7200 rpm 6Gb/s | Capacity | 1 Terabyte (1000 | GB) |
| | 3.5" HDD | Height | 1 in; 2.54 cm | |
| | | Width | Media Diameter | 3.5 in; 8.9 cm |



| | Interface Synchronous Transfer Rate (Maximum) | • | 4 in; 10.17 cm |
|---------------------------------------|--|---|------------------------------------|
| | Interface Synchronous Transfer Rate (Maximum) Buffer | Serial ATA (6.0Gb Up to 600 MB/s 64MB | /s), NCQ enabled |
| | Seek Time (typical reads, includes controller overhead, including settling) | Single Track Average | 2 ms 11 ms |
| | Rotational Speed Logical Blocks | Full Stroke 7,200 rpm 1,953,525,168 | 21 ms |
| | Operating Temperature | 41° to 131° F (5° 1 | to 55° C) |
| 2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD | Capacity Height Width | 2TB 1 in; 2.54 cm Media Diameter Physical Size | 3.5 in; 8.9 cm 4 in; 10.17 cm |
| | Interface Synchronous Transfer Rate (Maximum) Buffer | Serial ATA (6.0 Gb Up to 600MB/s 64MB | |
| | Seek Time (typical reads, includes controller overhead, including settling) | Single Track Average Full Stroke | 1.0 ms 11 ms 18 ms |
| | Rotational Speed Logical Blocks Operating Temperature | 7,200 rpm 3,907,029,168 41° to 131° F (5° 1 | to 55° C) |
| 3.0TB SATA 7200 rpm 6Gb/s 3.5" HDD | Capacity Height Width | 3.0TB 1 in; 2.54 cm Media Diameter Physical Size | 3.5 in; 8.9 cm 4.0 in; 10.17 cm |
| | Interface Synchronous Transfer Rate (Maximum) Buffer | Serial ATA (6.0Gb Up to 6.0 Gb/s 64MB | /s), NCQ enabled |
| | Seek Time (typical reads, includes controller overhead, including settling) | Single Track Average Full Stroke | 0.6 ms 11 ms Not specified |
| | Rotational Speed Operating Temperature | 7200 rpm 41° to 140° F (5° 1 | to 60° C) |
| 4TB SATA 7200 rpm 6Gb/s 3.5" HDD | Capacity Height Width | 4TB 1 in; 2.54 cm Media Diameter | 3.5 in; 8.9 cm |



| | | Interface Synchronous Transfer Rate (Maximum) Buffer Seek Time (typical reads, includes controller overhead, including settling) Rotational Speed Operating Temperature | Physical Size Serial ATA (6Gb/s Up to 600MB/s 128MB Single Track Average Full Stroke 7,200 rpm 5° to 60° F (-15° t | 0.7ms 8.5ms 15.7ms |
|------------------|---|---|--|--------------------------|
| | 500GB SATA 7.2K SED SFF | Capacity | 500GB | |
| | HDD | Height | 0.275 in; 0.7 cm | |
| | | Width | Media Diameter | 2.5 in; 6.36 cm |
| | | | Physical Size | 2.75 in; 6.99 cm |
| | | Interface | Serial ATA (6Gb/s |) |
| | | Synchronous Transfer Rate (Maximum) | Up to 600MB/s | |
| | | Buffer | 32MB | |
| | | Seek Time (typical reads, includes | Single Track | 1ms |
| | | controller overhead, including settling) | Average | 4.2ms |
| | | | Full Stroke | 25ms (typical) |
| | | Rotational Speed | 7,200 rpm | |
| | | Operating Temperature | 32° to 140° F (0° t | to 60° C) |
| | 1TB SATA 7200 rpm 8GB 3.5" SSHD (hybrid) | Capacity Height | 1TB 1 in; 2.54 cm | |
| | | Width | Media Diameter | 3.5 in; 8.9 cm |
| | | | Physical Size | 4 in; 10.17 cm |
| | | Interface | 6Gb/s SATA | |
| | | Synchronous Transfer Rate (Maximum) | Up to 600MB/s | |
| | | Buffer | 64MB standard H | DD cache buffer |
| | | Cache | 8GB NAND flash | |
| | | Rotational Speed | 7200 rpm | |
| | | Operating Temperature | 32° to 140° F (0° t | (0 60° C) |
| SATA SSDs for HP | HP 128GB SATA 6Gb/s SSD | Capacity | 128GB | |
| Workstations | | Height | 0.28 in; 0.7 cm | |
| | | Width | Physical Size | 2.5 in; 6.36 cm |
| | | Interface | SATA 6Gb/s | |
| | | Synchronous Transfer Rate (Maximum) | Up to 500MB/s (S | |
| | | Operating Temperature | 32° to 158° F (0° t | |
| | HP 256GB SATA 6Gb/s SSD | Capacity | 256GB | |
| | | Height | 0.28 in; 0.7 cm | |
| | | Interface | 6Gb/s SATA | |
| | | | | |

| | | Synchronous Transfer Rate (Maximum) Operating Temperature | Up to 500MB/s (Sequential Read) 32° to 158° F (0° to 70° C) |
|----------------------------------|----------------------------------|--|--|
| | HP 512GB SATA 6Gb/s SSD | Capacity Height Width Interface | 512GB 0.28 in; 0.7 cm Physical Size 2.5 in; 6.36 cm SATA 6Gb/s |
| | | Synchronous Transfer Rate (Maximum) Operating Temperature | |
| | HP 1TB SATA 6Gb/s SSD | Capacity Height | 1TB 0.28 in; 0.7 cm |
| | | Width Interface | Physical Size2.5 in; 6.36 cmSATA 6Gb/sUp to 550MB/s (Convention Depart) |
| | Samsung Enterprise 240GB | Synchronous Transfer Rate (Maximum) Operating Temperature Capacity | Up to 550MB/s (Sequential Read) 32° to 158° F (0° to 70° C) 240GB |
| | SATA SSD | Width Interface Synchronous Transfer Rate (Maximum) | Physical Size 2.5 in; 6.36 cm SATA 6Gb/s 600 Mb/s |
| | Samsung Enterprise 480GB | | 480GB |
| | SATA SSD | Width Interface Synchronous Transfer Rate (Maximum) | Physical Size2.5 in; 6.36 cmSATA 6Gb/s600 Mb/s |
| | Intel Pro 1500 180GB SATA SSD | Capacity | 180GB |
| | חננ | Width Interface Synchronous Transfer Rate (Maximum) | Physical Size3.5 in; 8.9 cm6Gb/s SATA600 Mb/s |
| | | Operating Temperature | 32° to 158° F (0° to 70° C) |
| PCIe SSDs for HP Workstations | HP Z Turbo Drive 256GB SSD | Capacity Interface | 256GB PCI Express 2.0 x4 electrical x4 physical |
| | | Operating Temperature | 32° to 158° F (0° to 70° C) |
| | HP Z Turbo Drive 512GB SSD | Capacity Interface | 512GB PCI Express 2.0 x4 electrical x4 physical |
| | HP Z Turbo Drive G2 256GB SSD | Operating Temperature Capacity Interface | 32° to 158° F (0° to 70° C) 256GB PCI Express 3.0 x4 electrical x4 |
| | | Operating Temperature | physical 32° to 158° F (0° to 70° C) |



| | Operating Temperature | physical 32° to 158° F (0° to 70° C) |
|---------------------------|-----------------------|---|
| HP Z Turbo Drive G2 512GB | Capacity | 512GB |
| SSD | Interface | PCI Express 3.0 x4 electrical x4 |



Technical Specifications - Hard Drive Controllers

HARD DRIVE CONTROLLERS

| LSI 9217-4i4e 8-port SAS 6Gb/s RAID Card | PCI Bus RAID Levels | 8 lanes, PCI Express 3.0 Offers Integrated RAID (0, 1, 1E and | 10) |
|--|---|---|---------------------------|
| | PCI Data Burst Transfer Rate | Half Duplex x8, PCIe, 8000 MB/s | |
| | SAS Bandwidth | Half Duplex | 600 MB/s per lane |
| | PCI Card Type | 3.3V Add-in Card | |
| | PCI Voltage | 12 V ± 10% | |
| | PCI Power | 9.8W typical, Airflow min 200 LFM | |
| | Bracket | Full height and low profile | |
| | Certification Level | PCI Express 3.0 compliant | |
| | SAS Processor | LSI SAS2308/ Fusion MPT 2.0 | |
| | Internal Connectors | One x4 internal mini-SAS (SFF8087) | |
| | External Connectors | One x4 external mini-SAS (SFF8088 | |
| | Maximum Number of SCSI Devices | 256 Non-RAID SAS/SATA devices | |
| | LED Indicators | N/A | |
| | | volana DCla 2.0 compliant | |
| LSI 9270-8i SAS 6Gb/s ROC RAID Card and iBBU9 | PCI Bus | x8 lane PCIe 3.0 compliant | |
| Battery Backup Unit | RAID Levels | RAID 0, 1, 5, and 6 RAID spans 10, 50 and 60 | |
| | PCI Card Type | Low profile, single PCIe slot design | with full height bracket. |
| | PCI Voltage | +3.3V Add-in Card | |
| | PCI Power | 121111111 | |
| | | +3.3V, +12V | |
| | Certification Level | PCI-Express 3.0 | |
| | Certification Level IO Bus | | SAS/SATA ports |
| | | PCI-Express 3.0 | • |
| | IO Bus | PCI-Express 3.0 Eight 6Gb/s and 3Gb/s compatible S | • |
| | IO Bus SAS Processor | PCI-Express 3.0 Eight 6Gb/s and 3Gb/s compatible S LSISAS2208 Dual-Core RAID on Chip | • |
| | IO Bus SAS Processor Internal Connectors | PCI-Express 3.0 Eight 6Gb/s and 3Gb/s compatible S LSISAS2208 Dual-Core RAID on Chip Two SAS SFF8087 x4 (Mini-SAS) | ves and SSDs |
| | IO Bus SAS Processor Internal Connectors External Connectors Maximum Number of SCSI | PCI-Express 3.0 Eight 6Gb/s and 3Gb/s compatible S LSISAS2208 Dual-Core RAID on Chip Two SAS SFF8087 x4 (Mini-SAS) None Up to 128 SAS and/or SATA hard dri | ves and SSDs |

QuickSpecs

Technical Specifications - Graphics

GRAPHICS

| NVIDIA NVS 310 512MB Graphics | Form Factor | Low Profile: 2.713 inches in height × 6.150 inches in length Weight: ~142 grams |
|----------------------------------|------------------------|--|
| | Graphics Controller | NVIDIA NVS 310 GPU: GF119-825 |
| | Bus Type | PCI Express x16, 2.0 compliant |
| | Memory | Size: 512MB DDR3 Clock: 875Mhz Memory Bandwidth: 14GB/s |
| | Connectors | 2 x DisplayPort |
| | Maximum Resolution | Up to 2560 x 1600 (digital display) per display. |
| | Image Quality Features | The following video formats are supported: - MPEG2 - MPEG4 Part 2 Advanced Simple Profile - H.264 SVC codec support - Support for 3D Blu Ray - VC1 - DivX version 3.11 and later - MVC |
| | | A full range of video resolutions are supported including 1080p, 1080i, 720p, 480p and 480i. The NVS 310 GPU provides hardware acceleration for the computationally intensive parts of video processing, as well as provides improved video playback speeds via faster decode and transcode. |
| | Display Output | Up to 2 displays in the following configurations: |
| | | DisplayPort output: Drives two DisplayPort enabled digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card Supports 2 monitors up to resolution of 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort 1.2 multi stream topology technology. |
| | | DVI-D output: Drives two digital display at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors Drives two digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors |
| | | HDMI output: NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 × 1080P at 60 Hz using DisplayPort to HDMI cable adaptors |
| | | VGA display output: |

• Drives two analog display at resolutions up to 1920 × 1200 at 60



| | | Hz using DisplayPort to VGA cable adaptor |
|---|---------------------------|--|
| | Shading Architecture | Shader Model 5.0 |
| | Supported Graphics APIs | DX11, OpenGL 4.1 |
| | Available Graphics | Windows 8 |
| | Drivers | Genuine Windows 7 Professional (64-bit and 32-bit) |
| | | Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) |
| | | SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) |
| | | HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: <u>http://welcome.hp.com/country/us/en/support.html</u> |
| | | SUSE Linux Enterprise drivers may also be obtained from: <u>ftp://download.nvidia.com/novell</u> or <u>http://www.nvidia.com</u> |
| | Note | The thermal solution used on this card is an active fan heatsink. Factory configured NVS 310 graphics card have no cable adpaters included. Adapters must be ordered separately. Option kit NVS 310 includes 2 DP to DVI-D cable adapters. |
| NVIDIA NVS 315 1GB Graphics (for HP Workstations) | Form Factor | Low Profile: 2.713 inches in height × 5.7 inches in length Weight: ~142 grams |
| | Graphics Controller | NVIDIA NVS 315 (using GF119-825 GPU) Number of Cores: 48 CUDA cores Max. Power: 19.3W Cooling Solution: Active fan heatsink |
| | Bus Type | PCI Express x16, 2.0 compliant |
| | Memory | Size: 1GB DDR3 Clock: 875Mhz Memory Bandwidth: 14GB/s |
| | Connectors | DMS-59 output Cables included: - For CTO: DMS-59 to DVI cable - For AMO: DMS-59 to DVI cable and DMS-59 to VGA cable |
| | Maximum Resolution | Maximum number of displays supported: 2 |
| | | Maximum Resolution Support: - DMS-59 to VGA: 2048 x 1536 @ 85Hz - DMS-59 to DVI: 1980 x 1200 @ 60Hz - DMS-59 to DP: 2560 x 1600 @ 60Hz |
| | Image Quality Features | See Display Output section. |
| | | The following video formats are supported: - MPEG2 - MPEG4 Part 2 Advanced Simple Profile - H.264 SVC codec support - Support for 3D Blu Ray - VC1 - DivX version 3.11 or later |
| | | A full range of video resolutions are supported including 1080p, 1080i, |



| DisplayPort output: - Drives two DisplayPort enabled digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking, when connected via the DMS-59 to DP adapter. DVI-D output: - Drives two digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DMS-59 to DVI-D single-link cable adaptor VGA display output: - Drives two analog displays at resolutions up to 2048 × 1536 at 85 Hz using DMS-59 to VGA cable adaptor. Shading Architecture Shader Model 5.0 Supported Graphics APIS DX11, OpenGL 4.3 Microsoft Windows 7 Professional (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support.thtml SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HVE//welcome.hp.com/country.us/en/support.html SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: http://welcome.hp.com/country.us/en/support.html SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com Notes 1. The thermal solution used on this card is an active fan heatsink. 2. Factory configured graphics card includes DMS-59 to DVI ca |
|--|
| Drives two digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DMS-59 to DVI-D single-link cable adaptor VGA display output: Drives two analog displays at resolutions up to 2048 × 1536 at 85 Hz using DMS-59 to VGA cable adaptor. Shading Architecture Shader Model 5.0 DX11, OpenGL 4.3 Available Graphics Mindows 8 Microsoft Windows 7 Professional (64-bit and 32-bit) Microsoft Windows 8 Microsoft Windows 7 Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) Red Hat Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com The thermal solution used on this card is an active fan heatsink. 2. Factory configured graphics card includes DMS-59 to DVI cable. 3. Option kit graphics card includes DMS-59 to DVI cable. 3. Option kit graphics card includes DMS-59 to DVI and DMS-59 to VGA cables (one each). |
| - Drives two analog displays at resolutions up to 2048 × 1536 at 85 Hz using DMS-59 to VGA cable adaptor. Shading Architecture Shader Model 5.0 Supported Graphics APIs DX11, OpenGL 4.3 Available Graphics Windows 8 Drivers Microsoft Windows 7 Professional (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com 1. The thermal solution used on this card is an active fan heatsink. 2. Factory configured graphics card includes DMS-59 to DVI cable. 3. Option kit graphics card includes DMS-59 to DVI and DMS-59 to VGA cables (one each). |
| Supported Graphics APIs DX11, OpenGL 4.3 Available Graphics Windows 8 Drivers Microsoft Windows 7 Professional (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com Notes 1. The thermal solution used on this card is an active fan heatsink. 2. Factory configured graphics card includes DMS-59 to DVI cable. 3. Option kit graphics card includes DMS-59 to DVI and DMS-59 to VGA cables (one each). |
| Available Graphics DriversWindows 8 Microsoft Windows 7 Professional (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: http://welcome.hp.com/country/us/en/support.htmlNotes1. The thermal solution used on this card is an active fan heatsink. 2. Factory configured graphics card includes DMS-59 to DVI cable. 3. Option kit graphics card includes DMS-59 to DVI and DMS-59 to VGA cables (one each). |
| DriversMicrosoft Windows 7 Professional (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: http://welcome.hp.com/country/us/en/support.htmlSUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com1. The thermal solution used on this card is an active fan heatsink. |
| available from the HP support Web site: http://welcome.hp.com/country/us/en/support.htmlSUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.comNotes1. The thermal solution used on this card is an active fan heatsink. 2. Factory configured graphics card includes DMS-59 to DVI cable. 3. Option kit graphics card includes DMS-59 to DVI and DMS-59 to VGA cables (one each). |
| SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.comNotes1. The thermal solution used on this card is an active fan heatsink. 2. Factory configured graphics card includes DMS-59 to DVI cable. 3. Option kit graphics card includes DMS-59 to DVI and DMS-59 to VGA cables (one each). |
| 2. Factory configured graphics card includes DMS-59 to DVI cable. 3. Option kit graphics card includes DMS-59 to DVI and DMS-59 to VGA cables (one each). |
| |
| NVIDIA NVS 510 2GB Form Factor Low Profile, 2.713 inches × 6.3 inches, single slot |
| Graphics Graphics Controller NVS 510 GPU Core Clock: 797 MHz Memory Clock: 891 MHz CUDA Cores: 192 |
| Bus Type PCI Express x16, Generation 2.0 |
| Memory 2GB DDR3 |
| Connectors Four mini-DisplayPort. |
| ConnectorsFour mini-DisplayPort.Four mini-DisplayPort to DisplayPort adapters included.(DisplayPort to DVI-D, DisplayPort to VGA, DisplayPort to HDMI, andDisplayPort to Dual-Link DVI adapters available as separate accessories) |



| Technical Specificat | ions - Graphics | |
|-------------------------|-------------------------------|---|
| | | 3840 x 2160 @ 60Hz) |
| | | NOTE: This card supports up to four displays. For Windows XP, only 2 active displays are supported. |
| | Image Quality Features | 10-bit internal display processing, including hardware support for 10-bit scan-out |
| | Display Output | DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2) support. |
| | | Digital Display Support |
| | | DisplayPort Output Drives four DisplayPort enabled digital display at resolutions up to 3840 × 2160 at 60 Hz with reduced blanking, when connected natively using the 4 DisplayPort connectors on the NVS 510 graphics card. DisplayPort Multi-Stream Topology (MST) Technology: Supports various combinations of display resolutions and number of displays when using DisplayPort multi stream topology technology - up to a maximum of 4 monitors at a resolution of 1920 × 1200 at 60 Hz with reduced blanking. |
| | | 2. DVI-D Output Drives four digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors. Drives four digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors. |
| | | 3. HDMI Output - The NVS 510 graphics board is capable of driving four high definition (HD) panels up to resolutions of 1920 × 1080P at 60 Hz using DisplayPort to HDMI cable adaptors. |
| | | Analog Display Support |
| | | 1. VGA display output - Drives four analog displays at resolutions up to 1920 × 1200 at 60 Hz using DisplayPort to VGA cable adaptors. |
| | Supported Graphics APIs | Full Microsoft DirectX 11, Shader Model 5.0 support Full OpenGL 4.3 support |
| | Available Graphics Drivers | Genuine Windows 7 Professional (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) |
| | | HP qualified drivers may be preloaded or available from the HP support Web site: <u>http://welcome.hp.com/country/us/en/support.html</u> |
| | Power Consumption | 33.4 Watts |
| | Note | Heatsink cooler design is active. |
| Graphics Cable Adapters | Note | Graphics Cable Adapter option choice is available starting Feb 1 2013 for the following graphics cards: |



NVS 310, Quadro 410, Quadro K5000, FirePro V3900, FirePro W7000

| | | New Graphics Cards introduced after Feb 1 2013 will be eligible for choosing Graphics Cable Adapters, unless otherwise specified. |
|------------------------------------|-------------------------------|---|
| | | No cable choice for NVS 300, NVS 510. |
| | | Maximum number of cables allowed is 8. |
| NVIDIA Quadro K420 1GB Graphics | Form Factor | Low Profile: 2.713 inches × 6.3 inches, single slot |
| | Graphics Controller | NVIDIA Quadro K420 GPU: GK107 |
| | Bus Type | PCI Express x16, 2.0 compliant |
| | Memory | Size: 1GB DDR3 Clock: 891MHz Memory Bandwidth: 29GB/s |
| | Connectors | One dual-link DVI-I connector |
| | | One DisplayPort connector |
| | Maximum Resolution | VGA (via adapter cable): • 2048 × 1536 × 32 bpp at 85 Hz Dual-link DVI |
| | | • 2560 × 1600 × 32 bpp at 60 Hz (reduced blanking) |
| | | Single-link DVI 1920 × 1200 × 32 bpp at 60 Hz (reduced blanking) |
| | | DisplayPort 1.2 • 3840 × 2160 × 30 bpp at 60 Hz |
| | RAMDAC | 400 MHz integrated RAMDAC |
| | Display Output | Maximum number of displays supported: 2 |
| | Shading Architecture | Shader Model 5.0 |
| | Supported Graphics APIs | DX11, OpenGL 4.4 |
| | | Programming support for CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Python, and Fortran |
| | Available Graphics Drivers | Microsoft Windows 8.1 Microsoft Windows 8 Microsoft Windows 7 |
| | | Linux |
| | Notes | 1. Factory configured Quadro K420 does not include any video adapters. Adapters must be ordered separately. 2. Option kit Quadro K420 includes one DP to DVI-D adapter. |
| NVIDIA Quadro K620 2GB Graphics | Form Factor | 2.713" H x 6.3" L Single Slot, Low Profile Full Height Profile bracket installed Low Profile bracket included |



| Graphics Controller NVIDIA Quadro K620 Graphics Card GM107 GPU 384 CUDA cores Max Power: 45 Watts Max Power: 45 Watts Bus Type PCI Express 2.0 x16 Memory 2 GB GDDR3, 900 MHz 128-bit memory I/O path 29 GB/s memory bandwidth |
|--|
| GM107 GPU 384 CUDA cores Max Power: 45 Watts Bus Type PCI Express 2.0 x16 Memory 2 GB GDDR3, 900 MHz 128-bit memory I/O path |
| Max Power: 45 Watts Bus Type PCI Express 2.0 x16 Memory 2 GB GDDR3, 900 MHz 128-bit memory I/0 path |
| Bus TypePCI Express 2.0 x16Memory2 GB GDDR3, 900 MHz 128-bit memory I/O path |
| Memory 2 GB GDDR3, 900 MHz 128-bit memory I/O path |
| 128-bit memory I/O path |
| |
| |
| Connectors 1 DL-DVI(I) output, 1 DisplayPort output |
| Factory Configured: No video cable adapter included |
| Option Kit: One DP-to-DVI adapter included with card |
| |
| Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters |
| are available as Factory Configuration or Option Kit accessories |
| Maximum Resolution DisplayPort 1.2: |
| - up to 4096x2160 x 30 bpp @ 60Hz |
| - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST) |
| Dual Link DVI(I) output: |
| - up to 2560 x 1600 x 32 bpp @ 60Hz |
| |
| Single Link-DVI(I) output: |
| - up to 1920 x 1200 x 32 bpp @ 60Hz |
| Image Quality Features 10-bit internal display processing pipeline |
| 10-bit scan-out support |
| Display Output 1 Dual-link DVI-I connector |
| 1 Diselau Daut anna atau |
| 1 Display Port connector |
| Shading Architecture Full Microsoft DirectX 11.1 Shader Model 5.0 |
| Supported Graphics APIs OpenGL 4.4 DirectX 11.1 |
| API support includes: |
| |
| CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran |
| Available Graphics Microsoft Windows 8.1 |
| Drivers Microsoft Windows 8 Microsoft Windows 7 |
| Linux |
| |
| HP qualified drivers may be preloaded or available from the HP support Web site: |
| http://welcome.hp.com/country/us/en/support.html |
| |
| SUSE Linux Enterprise drivers may also be obtained from: |
| ftp://download.nvidia.com/novell or http://www.nvidia.com |
| Notes 1. Factory configured Quadro K620 does not include a video cable adapter. Video cable adapters must be ordered separately. |
| 2. Quadro K620 offered as an Option Kit (AMO) includes one DP-to- |
| DVI video cable adapter. Additional cables must be ordered |



separately.

| NVIDIA Quadro K2200 4GB Graphics | Form Factor | 4.38" H x 7.97" L Single Slot, Full Height Weight: 240 grams |
|-------------------------------------|-------------------------|---|
| | Graphics Controller | NVIDIA Quadro K2200 Graphics Card GM107 GPU 640 CUDA cores Max Power: 67.7 Watts |
| | Bus Type | PCI Express 2.0 x16 |
| | Memory | 4 GB GDDR5, 2500 MHz 128-bit memory I/O path 80 GB/s memory bandwidth |
| | Connectors | 1 DL-DVI(I) output, 2 DisplayPort outputs Factory Configured Option: No video cable adapter included Option Kit: One DP-to-DVI adapter included with card |
| | | Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as accessories |
| | Maximum Resolution | DisplayPort: - up to 4096 x 2160 x 30 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST) |
| | | DL-DVI(I) output: - up to 2560 x 1600 x 32 bpp @ 60Hz |
| | Display Output | VGA: Requires use of DVI-to-VGA and/or DP-to-VGA video cable adapters 400 MHz integrated RAMDAC Max resolution: 2048 x 1536 x 32 bpp @ 85 Hz |
| | | |
| | | DL-DVI(I): Max resolution: 2560 x 1600 x 32 bpp @ 60 Hz |
| | | SL-DVI(I): • Max resolution: 1920 x 1200 x 32 bpp @ 60 Hz |
| | | DisplayPort: Supports HBR2 and MST Max resolution: 4096 x 2160 x 30 bpp @ 60 Hz (only one monitor can be connected to a Quadro K2200 DisplayPort connector at this resolution) Max number of DisplayPort daisy-chained monitors or hub connected monitors from a single Quadro K2200 DisplayPort connector: 4 with maximum resolution of 1920 x 1200 |
| | | Maximum number of monitors across all available Quadro K2200 outputs 4. |
| | Shading Architecture | Full Microsoft DirectX 11.1 Shader Model 5.0 |
| | Supported Graphics APIs | OpenGL 4.4 DirectX 11.1 API support includes: |



Ø

| | Available Graphics Drivers | CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran Microsoft Windows 8.1 Microsoft Windows 8 Microsoft Windows 7 Linux |
|-----------------------------------|---|--|
| | Note | HP qualified drivers may be preloaded or available from the HP support Web site: <u>http://welcome.hp.com/country/us/en/support.html</u> 1. Quadro K2200 offered as Factory Configured Option does not include a video cable adapter. Video cable adapters must be ordered separately. 2. Quadro K2200 offered as an Option Kit includes one DP-to-DVI video cable adapter. Additional cables must be ordered separately. 3. A total maximum of 4 active monitors are supported across all display output types. This may be accomplished by using daisy chained DisplayPort 1.2 displays or a DisplayPort 1.2 hub device. 4. A DisplayPort hub device may be used to connect multiple DisplayPort monitors to a single Quadro K2200 DisplayPort output. |
| AMD FirePro W2100 2GB Graphics | Form Factor Graphics Controller | Low Profile, half length (full-height bracket included) AMD FirePro™ W2100 professional graphics Power: <50W Cooling: Active |
| | Bus Type | PCI Express® x8, Generation 3.0 |
| | Memory | 2GB DDR3 memory |
| | - | Memory Bandwidth: 14.4 GB/s |
| | Connectors | 2x Display Port 1.2 connectors |
| | | Factory Configured: No video cable adapter included Option Kit: One DP-to-DVI adapter included with card Additional DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as Factory Configuration or Option Kit accessories. |
| | Maximum Resolution | DisplayPort 1.2: - up to 4096x2160 x 30 bpp @ 60Hz Dual Link DVI(I) (requires adapter cable): - up to 2560 x 1600 x 32 bpp @ 60Hz Single Link-DVI(I)(requires adapter): - up to 1920 x 1200 x 32 bpp @ 60Hz VGA(requires adapter): |
| | Display Output Shading Architecture Supported Graphics APIs Available Graphics | - up to 1920 x 1200 x 32 bpp @ 60Hz 2 x DisplayPort® 1.2 Shader Model 5.0 OpenCL™ 1.2, DirectX® 11 and OpenGL 4.4 Windows 8.1 (64-bit and 32-bit) |

| | Drivers | Windows 7 (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Desktop 11(64-bit and 32-bit) Ubuntu |
|-----------------------|------------------------|--|
| | | HP qualified drivers may be preloaded or available from the HP support Web site: <u>http://welcome.hp.com/country/us/en/support.html</u> |
| | | NOTE: Depending on the card model, native DisplayPort [™] connectors and/or certified DisplayPort [™] active or passive adapters to convert your monitor's native input to your card's DisplayPort [™] or Mini-DisplayPort [™] connector(s) may be required. See www.amd.com/firepro for details. |
| AMD FirePro W5100 4GB | Form Factor | Full height, single slot (6.75" X 4.376") |
| Graphics | Graphics Controller | AMD FirePro W5100 graphics GPU Frequency: 930Mhz GPU: 768 Stream Processors organized into 12 Compute Units Power: <75 Watts Cooling: Active |
| | Bus Type | PCI Express® x16, Generation 3.0 |
| | Memory | 4GB GDDR5 memory Memory Bandwidth: up to 96 GB/s Memory Width: 128 bit |
| | Connectors | 4x Display Port 1.2 connectors with HBR2 and MST support. |
| | | Factory Configured: No video cable adapter included After market option kit: No video cable adapter included |
| | | Additional DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as Factory Configuration or Option Kit accessories. |
| | Maximum Resolution | DisplayPort: - 4096x2160 @24bpp 60Hz |
| | | Dual Link DVI: - 2560x1600 (requires DP to DL-DVI adapter) |
| | | Single Link DVI: - 1920x1200 (requires DP to DVI adapter) |
| | | VGA: - 1920x1200 (requires DP to VGA adapter) |
| | Image Quality Features | Advanced support for 8-bit, 10-bit, and 16-bit per RGB color component. High bandwidth scaler for high quality up and downscaling |



| | Display Output | Max number of monitors supported using DisplayPort 1.2a: - 4 direct attached monitors - 6 using DP 1.2a with MST and HBR2 enabled monitors Monitor chaining from a single DisplayPort (subject to a max of 6 total monitors across all outputs, requires use of DisplayPort enabled monitors supporting MST and HBR2): - one 4096x2160 display - two 2560x1600 displays - four 1920x1200 displays |
|-------------------------------------|-------------------------------|--|
| | Shading Architecture | Shader Model 5.0 |
| | Supported Graphics APIs | OpenGL 4.4 OpenCL 1.2 and 2.0 DirectX 11.2 / 12 AMD Mantle |
| | Available Graphics Drivers | Windows 8.1 / 8 (64-bit and 32-bit) Windows® 7 (64-bit and 32-bit) Linux |
| | | HP qualified drivers may be preloaded or available from the HP support Web site: <u>http://welcome.hp.com/country/us/en/support.html</u> |
| | Notes | 1. AMD Eyefinity technology supports up to six DisplayPort [™] monitors on an enabled graphics card. Supported display quantity, type and resolution vary by model and board design; confirm specifications with manufacturer before purchase. To enable more than two displays, or multiple displays from a single output, additional hardware such as DisplayPort-ready monitors or DisplayPort 1.2 MST-enabled hubs may be required. A maximum of two active adapters is recommended for consumer systems. See www.amd.com/eyefinityfaq for full details. |
| | Form Factor | Full height, single slot (6.75" X 4.376") |
| NVIDIA Quadro K4200 4GB Graphics | Form Factor | 4.376" H x 9.5" L Single Slot, Full Height Weight: ~458 grams (without extender) |
| | Graphics Controller | NVIDIA Quadro K4200 Graphics Card Kepler GK104 GPU 1344 CUDA cores Max Power: 108 Watts |
| | Bus Type | PCI Express 2.0 x16 |
| | Memory | 4 GB GDDR5, 2700 MHz 256-bit memory I/O path 173 GB/s memory bandwidth |
| | Connectors | 1 DL-DVI(I) output, 2 DisplayPort outputs CTO: No video cable adapter included |



| | AMO: One DP-to-DVI adapter included with card |
|-------------------------------|--|
| Maximum Resolution | Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as accessories DisplayPort: - up to 3840 x 2160 x 30 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST) |
| Image Quality Features | DL-DVI(I) output: up to 2560 x 1600 x 32 bpp @ 60Hz 10-bit internal display processing pipeline 10-bit scan-out support |
| Display Output | VGA: - requires use of DVI-to-VGA and/or DP-to-VGA video cable adapters - 400 MHz integrated RAMDAC - Max resolution: 2048 x 1536 x 32 bpp @ 85 Hz |
| | DL-DVI(I): - Max resolution: 2560 x 1600 x 32 bpp @ 60 Hz |
| | SL-DVI(I): - Max resolution: 1920 x 1200 x 32 bpp @ 60 Hz |
| | DisplayPort: - Supports HBR2 and MST - Max resolution: 3840 x 2160 x 30 bpp @ 60 Hz (only one monitor can be connected to a Quadro K4200 DisplayPort connector at this resolution) - Max number of DisplayPort daisy-chained monitors or hub connected monitors from a single Quadro K4200 DisplayPort connector: 4 with maximum resolution of 1920 x 1200 |
| | HDMI: - Requires use of DP-to-HDMI cable - Max Resolution: 1920 x 1080 x 32 bpp @ 60Hz |
| | Maximum number of monitors across all available Quadro K4200 outputs is 4. |
| Shading Architecture | Full Microsoft DirectX 11 Shader Model 5.0 |
| Supported Graphics APIs | OpenGL 4.4 DirectX 11.1 API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran |
| Available Graphics Drivers | Microsoft Windows 8.1 Microsoft Windows 8 Microsoft Windows 7 Linux |
| | HP qualified drivers may be preloaded or available from the HP support Web site: |
| Notes | <u>http://welcome.hp.com/country/us/en/support.html</u> Quadro K4200 offered as CTO does not include a video cable adapter. Video cable adapters must be ordered separately. |



| 2. | Quadro K4200 offered as AMO includes one DP-to-DVI video cable |
|----|--|
| | adapter. Additional cables must be ordered separately. |

- 3. A total maximum of 4 active monitors are supported across all display output types. This may be accomplished by using daisy chained DisplayPort 1.2 displays or a DisplayPort 1.2 hub device.
- 4. A DisplayPort hub device may be used to connect multiple DisplayPort monitors to a single Quadro K4200 DisplayPort output. A DisplayPort hub device may be used to connect multiple DisplayPort monitors to a single Quadro K4000 DisplayPort output.

| NVIDIA Quadro K5200 | Form Factor | 4.376" H x 10.5" L |
|---------------------|------------------------|--|
| 8GB Graphics | | Dual Slot Weight: ~880 grams (without extender) |
| | Graphics Controller | NVIDIA Quadro K5200 GK110 GPU 2304 CUDA cores Max Power: 150 Watts |
| | Bus Type | PCI Express 3.0 x16 |
| | Memory | 8GB GDDR5 256-bit memory I/O path 192GB/s memory bandwidth |
| | Connectors | DVI-I (1), DVI-D (1), DP (2) |
| | | Factory configured option: No adapter included with card. Option Kit: No adaptor included with card. |
| | | DVI to VGA, DisplayPort to VGA, DisplayPort to DVI, and DisplayPort to Dual-Link DVI adapters available as accessories |
| | Image Quality Features | DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2), HDMI 1.4, and HDCP support NVIDIA 3D Vision™ technology |
| | Display Output | 400 MHz integrated RAMDAC Maximum resolution over VGA (through DVI to VGA cable): 2048 × 1536 × 32 bpp at 85 Hz |
| | | Dual-link internal TMDS (DVI 1.0) |
| | | Maximum resolution over digital port (single GPU and SLI mode): 2560 × 1600 × 32 bpp at 60 Hz (reduced blanking) |
| | | Single-link internal TMDS (DVI 1.0) Maximum resolution over digital port (single GPU and SLI mode):1920 × 1200 × 32 bpp at 60 Hz (reduced blanking) |
| | | DisplayPort with MST and HBR2. Maximum resolution: 4096 × 2160 × 30 bpp at 60Hz Maximum resolution: 2560 x 1600 × 30 bpp at 120Hz |
| | | HDMI |

• Maximum resolution: 1920 × 1080 × 32 bpp at 60Hz

| | Shading Architecture Supported Graphics APIs | Shader model 5.0 Support OpenGL 4.4 DirectX 11 |
|--------------------------------------|---|--|
| | Available Graphics Drivers | API support for NVIDIA's CUDA™ C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, Fortran Windows 8 Genuine Windows 7 Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation (64-bit) Red Hat Enterprise Linux (RHEL) 7 Desktop/Workstation SUSE Linux Enterprise Desktop 11 SP3 (64-bit) |
| | Note | HP qualified drivers may be preloaded or available from the HP support Web site: <u>http://welcome.hp.com/country/us/en/support.html</u> NVIDIA GRID VGX Pass Through feature supported on NVIDIA Quadro K5200 to enable direct mapping of GPU to Virtual Machine. No display output adapter included. |
| NVIDIA Quadro K6000 12GB Graphics | Form Factor | 4.376" H x 10.5" L Dual Slot Power: 234 Watts Weight: ~880 grams |
| | Graphics Controller | NVIDIA Quadro K6000 Graphics Card based on the GK180 GPU Core Count: 2880 Base Clock: 797 MHz Boost Clock: 902 MHz |
| | Bus Type | PCI Express 3.0 x16 |
| | Memory | 12GB GDDR5 384-bit memory I/O path 288 GB/s memory bandwidth ECC Memory |
| | Connectors | DVI-I (1), DVI-D (1), DP (2), Optional 3D Stereo bracket with 3-pin mini-DIN connector. |
| | | Factory configured option: No adapter included with card. |
| | | Option Kit: No adaptor included with card. |
| | | DVI to VGA, DisplayPort to VGA, DisplayPort to DVI, and DisplayPort to Dual-Link DVI adapters available as accessories. |
| | Image Quality Features | DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2), HDMI 1.4, and HDCP support NVIDIA 3D Vision™ technology NVIDIA Premium Mosaic and nView |
| | Display Output | 400 MHz integrated RAMDAC |
| | | • Maximum resolution over VGA (through DVI to VGA cable): 2048 × |



1536 × 32 bpp at 85 Hz

Dual-link internal TMDS (DVI 1.0)

• Maximum resolution over digital port (single GPU and SLI mode): 2560 × 1600 × 32 bpp at 60 Hz (reduced blanking)

Single-link internal TMDS (DVI 1.0)

• Maximum resolution over digital port (single GPU and SLI mode):1920 × 1200 × 32 bpp at 60 Hz (reduced blanking)

DisplayPort with MST and HBR2.

• Maximum resolution: 3840 × 2160 × 36 bpp at 60Hz

HDMI

| | • Maximum resolution: 1920 × 1080 × 32 bpp at 60Hz | |
|-------------------------------|--|--|
| Shading Architecture | Shader Model 5.0 Full IEEE 764-2008 32-bit and 64-bit precision | |
| Supported Graphics APIs | Full OpenGL 4.3 Full DirectX 11 CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran | |
| Available Graphics Drivers | Windows 8 Windows 7 Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) | |
| | HP qualified drivers may be preloaded or available from the HP support Web site: <u>http://welcome.hp.com/country/us/en/support.html</u> | |
| Note | NVIDIA GRID VGX Pass Through feature supported on NVIDIA Quadro K6000 to enable direct mapping of GPU to Virtual Machine. No display output adapter included. | |



| NVIDIA Quadro M6000 12GB Graphics | Form Factor | 4.42" H x 10.5" L Dual Slot Power: 250 Watts |
|--------------------------------------|------------------------|--|
| | Graphics Controller | Weight: ~1030 grams NVIDIA Quadro M6000 Graphics Card based on the GM200 GPU Core Count: 3072 Base Clock: 1026 MHz Boost Clock: 1152 MHz Idle Clock: 324 MHz |
| | Bus Type | PCI Express 3.0 x16 |
| | Memory | 12GB GDDR5 384-bit memory I/O path 317 GB/s memory bandwidth ECC Memory (disabled by default) |
| | Connectors | DP (x4) DL-DVI(I) 3-pin mini-DIN connector SLI connector Quadro Sync connector One 8-pin auxiliary power connector Factory configured option: No adapter included with card. Option Kit: No adaptor included with card. DVI to VGA, DisplayPort to VGA, DisplayPort to DVI, and DisplayPort to Dual-Link DVI adapters available as accessories. |
| | Image Quality Features | DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2), HDMI 1.4, and HDCP 1.3 support NVIDIA 3D Vision™ technology NVIDIA Premium Mosaic and nView |
| | Display Output | 400 MHz integrated RAMDAC • Maximum resolution over VGA (through DVI to VGA cable): 2048 × 1536 × 32 bpp at 85 Hz |
| | | Dual-link internal TMDS (DVI 1.0) • Maximum resolution over digital port (single GPU and SLI mode): 2560 × 1600 × 32 bpp at 60 Hz (reduced blanking) |
| | | Single-link internal TMDS (DVI 1.0) • Maximum resolution over digital port (single GPU and SLI mode):1920 × 1200 × 32 bpp at 60 Hz (reduced blanking) |
| | | DisplayPort 1.2 with MST and HBR2. • Maximum pixel clock: 592 MPixel/s • Maximum bandwidth: 17.2 Gbps • Example maximum resolution: 4096 × 2160 × 30 bpp at 60Hz |
| | | HDMI |



| | | • Maximum resolution: 4096 × 2160 × 8 bpp at 60Hz |
|-----------------------------------|-------------------------------|---|
| | Shading Architecture | Shader Model 5.0 |
| | Supported Graphics APIs | Full OpenGL 4.4 Full DirectX 12 API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran |
| | Available Graphics Drivers | Windows 8.1 Windows 8 Windows 7 Professional Linux |
| | | HP qualified drivers may be preloaded or available from the HP support Web site: <u>http://www8.hp.com/us/en/drivers.html</u> |
| | Notes | NVIDIA GRID VGX Pass Through feature supported on NVIDIA Quadro M6000 to enable direct mapping of GPU to Virtual Machine. No display output adapter included. For HP Z840 Workstation configurations, the 1125W power supply option must be used. |
| AMD FirePro W7100 8GB Graphics | Form Factor | Full height, single slot (9.5" X 4.376") |
| | Graphics Controller | AMD FirePro W7100 graphics GPU: 1792 Stream Processors organized into 28 Compute Units Power: <75 Watts Cooling: Active |
| | Bus Type | PCI Express [®] x16, Generation 3.0 |
| | Memory | 8GB GDDR5 memory Memory Bandwidth: up to 176 GB/s Memory Width: 256 bit |
| | Connectors | 4x Display Port 1.2a connectors with HBR2 and MST support. |
| | | Factory Configured: No video cable adapter included After market option kit: No video cable adapter included |
| | | Additional DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as Factory Configuration or Option Kit accessories. |
| | Maximum Resolution | DisplayPort: - 4096x2160 @24bpp 60Hz |
| | | Dual Link DVI: |



| | - 2560x1600 (requires DP to DL-DVI adapter) |
|-------------------------------|---|
| | Single Link DVI: - 1920x1200 (requires DP to DVI adapter) |
| | VGA: - 1920x1200 (requires DP to VGA adapter) |
| Image Quality Features | Advanced support for 8-bit, 10-bit, and 16-bit per RGB color component. High bandwidth scaler for high quality up and downscaling |
| Display Output | Max number of monitors supported using DisplayPort 1.2a: - 4 direct attached monitors - 6 using DP 1.2a with MST and HBR2 enabled monitors |
| | Monitor chaining from a single DisplayPort (subject to a max of 6 total monitors across all outputs, requires use of DisplayPort enabled monitors supporting MST and HBR2): - one 4096x2160 display - two 2560x1600 displays - four 1920x1200 displays |
| Shading Architecture | Shader Model 5.0 |
| Supported Graphics APIs | OpenGL 4.4 OpenCL 1.2 and 2.0 DirectX 11.2 / 12 AMD Mantle |
| Available Graphics Drivers | Windows 8.1 / 8 (64-bit and 32-bit) Windows® 7 (64-bit and 32-bit) Linux |
| | HP qualified drivers may be preloaded or available from the HP support Web site: <u>http://welcome.hp.com/country/us/en/support.html</u> |
| Notes | AMD Eyefinity technology supports up to six DisplayPort[™] monitors on an enabled graphics card. Supported display quantity, type and resolution vary by model and board design; confirm specifications with manufacturer before purchase. To enable more than two displays, or multiple displays from a single output, additional hardware such as DisplayPort-ready monitors or DisplayPort 1.2 MST-enabled hubs may be required. See www.amd.com/eyefinityfaq for full details. OpenGL 4.4 support available with driver 14.301.xxx or later. OpenCL 2.0 support planned in driver updates for early 2015. For HP Z440 Workstation configurations, the HP Z4 Fan and Front Card Guide Kit, which is available both CTO (G8T99AV) and AMO (J9P80AA), is required. |



Technical Specifications - High Performance GPU Computing

HIGH PERFORMANCE GPU COMPUTING

| NVIDIA Tesla K40 | Form Factor | Size: 4.376 inches by 10.5 inches |
|---------------------|--------------------------|--|
| Workstation Compute | | Slots: Dual Slot |
| Processor | | Power Connectors: One 6-pin and one 8-pin |
| | | Weight: ~826 grams |
| | System Interface | PCI Express Gen3 ×16 |
| | Video Outputs | None. |
| | Memory | 12GB GDDR5, |
| | | memory path: 384-bit |
| | | memory clock: 3Ghz |
| | Dool: Momony Ponduidth | - |
| | Peak Memory Bandwidth | |
| | Supported APIs | CUDA, OpenACC, OpenCL 1.2 API support includes: |
| | | C, C++, Java, Python, and Fortran |
| | Supported Operating | Windows 8 (64-bit) |
| | Systems | Genuine Windows 7 Professional (64-bit) |
| | - | Red Hat Enterprise Linux (RHEL) 5, 6 Desktop/Workstation (64-bit) |
| | | SUSE Linux Enterprise Desktop 11 (64-bit) |
| | | |
| | | HP qualified drivers may be preloaded or available from the HP support |
| | | Web site: |
| | | http://welcome.hp.com/country/us/en/support.html |
| | | http://wetcome.np.com/country/us/en/support.ntmt |
| | | Novell SUSE Linux Enterprise drivers may also be obtained from: |
| | | ftp://download.nvidia.com/novell or http://www.nvidia.com |
| | | |
| | Processor Cores | GK110B GPU |
| | | Base Clock: 745 MHz |
| | | Boost Clock: up to 875 MHz |
| | | 2888 CUDA cores |
| | | |
| | Power Consumption | ~235 Watts |
| | | |
| | | NOTE: A 1125W PSU is required for any K40 configuration on the Z820 |

OPTICAL AND REMOVABLE STORAGE

| HP 9.5mm Slim SuperMulti DVD Writer | Description Mounting Orientation Interface Type Dimensions (WxHxD) Supported Media Types | 9.5mm height, tray-load Either horizontal or vertical SATA/ATAPI 128 x 9.5 x 127mm DVD-RAM DVD+R DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-R CD-R CD-RW | |
|--|--|---|--|
| | Disc Capacity | DVD-ROM Full Stroke DVD | 8.5 GB DL or 4.7 GB standard < 200 ms (seek) |
| | | Full Stroke CD | < 200 ms (seek) |
| | Maximum Data Transfer Rates | CD ROM Read | CD-ROM, CD-R Up to 24X CD-RW Up to 24X |
| | | DVD ROM Read | DVD-RAM Up to 8X DVD+RW Up to 8X DVD-RW Up to 8X DVD+R DL Up to 8X DVD-R DL Up to 8X DVD-ROM Up to 8X DVD-ROM DL Up to 8X DVD-ROM DL Up to 8X DVD-R Up to 8X |
| | Power | Source | SATA DC power receptacle |
| | | DC Power Requirements | 5 VDC ± 5%-100 mV ripple p-p |
| | | DC Current | 5 VDC -< 800 mA typical, <1600 mA maximum |
| | Operating Environmental | Temperature | 41° to 122° F (5° to 50° C) |
| | (all conditions non- | Relative Humidity | 10% to 80% |
| | condensing) | Maximum Wet Bulb Temperature | 84° F (29° C) |
| | Operating Systems Supported | and 64-bit, Windows Vista Business 64*, Windo | & 11 |



| | Kit Contents | 9.5mm Slim SuperMulti DVD Writer SATA data/power cable, installatio | r, 5.25" ODD Bay adapter/carrier, slim n guide |
|-------------------------|-------------------------------------|---|--|
| HP 9.5mm Slim DVD-ROM | • | 9.5mm height, tray-load | |
| Drive | Mounting Orientation | Either horizontal or vertical | |
| | Interface Type | SATA / ATAPI | |
| | Dimensions (WxHxD) | 128 x 9.5 x 127mm | |
| | Disc Capacity | DVD-ROM | Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB |
| | Access Times | DVD-ROM Single Layer | < 110 ms (typical) |
| | | CD-ROM Mode 1 | < 110 ms (typical) |
| | | Full Stroke DVD | < 230 ms (typical) |
| | | Full Stroke CD | < 220 ms (typical) |
| | Power | Source | SATA DC power receptacle |
| | | DC Power Requirements | 5 VDC ± 5%-100 mV ripple p-p |
| | | DC Current | 5 VDC – <800mA typical, < 1600 mA maximum |
| | Operating Environmental | Temperature | 41° to 122° F (5° to 50° C) |
| | (all conditions non- condensing) | Relative Humidity | 10% to 80% |
| | concensing/ | Maximum Wet Bulb Temperature | 84° F (29° C) |
| | Operating Systems Supported | and 64-bit, Windows Vista Business 64*, Windo | |
| | | No driver is required for this device operating system. | . Native support is provided by the |
| | Kit Contents | 9.5mm Slim DVD-ROM Drive, 5.25" data/power cable, installation guid | ODD Bay adapter/carrier, slim SATA le |
| HP 9.5mm Slim BDXL Blu- | Description | 9.5mm height, tray-load | |
| Ray Writer | Mounting Orientation | Either horizontal or vertical | |
| - | Interface Type | SATA/ATAPI | |
| | Dimensions (WxHxD) | 128 x 9.5 x 127mm | |
| | Supported Media Types | BD-ROM BD-R BD-RE DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL | |



| | DVD-R DVD-RW CD-R CD-RW | |
|--------------------------------|----------------------------------|---|
| Disc Capacity | DVD-ROM Blu-ray | 8.5 GB DL or 4.7 GB standard 25 GB (single-layer) 50 GB (dual-layer) 100/128 GB (BDXL) |
| | Full Stroke DVD | < 230 ms (seek) |
| | Full Stroke CD | < 220 ms (seek) |
| | Blu-ray | < 230 ms (seek) (Full Stroke Blu-ray) |
| | Startup Time | (Time to drive ready from tray loading) BD-ROM (SL/DL) 255 / 285 BD-R (SL/DL) 255 / 285 BD-RE (SL/DL) 255 / 285 DVD-ROM (SL/DL) 185 / 185 DVD-R (SL/DL) 255 / 255 DVD-R (SL/DL) 255 / 255 DVD-R (SL/DL) 255 / 255 DVD-RW 255 DVD+R (SL/DL) 255 / 255 DVD+R (SL/DL) 255 / 255 DVD+RW 255 DVD+RW 255 DVD-RAM 455 CD-ROM 155 |
| Maximum Data Transfer Rates | CD ROM Read | CD-ROM, CD-R Up to 24X CD-RW Up to 24X |
| | DVD ROM Read | DVD-RAM Up to 8X DVD+RW Up to 8X DVD-RW Up to 8X DVD+R DL Up to 8X DVD-R DL Up to 8X DVD-ROM Up to 8X DVD-ROM DL Up to 8X DVD+R Up to 8X DVD-R Up to 8X |
| | Blu-ray | BD-ROM Up to 6X BD-ROM DL Up to 6X BD-R Up to 6X BD-R DL Up to 6X BD-R Up to 6X BD-RE SL/DL Up to 6X |
| Power | Source | SATA DC power receptacle |
| | DC Power Requirements | $5 \text{ VDC} \pm 5\%$ -100 mV ripple p-p |
| | DC Current | 5 VDC -900 mA typical, 2000mA maximum |
| Operating Environmental | Temperature | 41° to 122° F (5° to 50° C) |
| (all conditions non- | Relative Humidity | 10% to 80% |
| condensing) | Maximum Wet Bulb Temperature | |
| Operating Systems | • | d 64-bit, Windows 7 Professional 32-bit |



| | Supported | and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation SUSE Linux Enterprise Desktop 10 & 11 | | |
|---------------------------------------|-----------------------|--|--|--|
| | | No driver is required for this device. Native support is provided by the operating system. | | |
| | Kit Contents | 9.5mm Slim BDXL Blu-Ray Writer, 5.25" ODD Bay adapter/carrier, slim SATA data/power cable, installation guide | | |
| | | As Blu-ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation. | | |
| HP DX115 Removable Drive Enclosure | Interface Type | Compatible with SAS or SATA controllers. Offers 6Gb/s performance when used with 6Gb/s HDDs. | | |
| | Dimensions (WxHxD) | 147.6mm W x 41.1mm H x 205mm L (5.81" W x 1.62" H x 8.08" L) | | |
| | Approvals | Frame and Carrier: 1.73 kg (3.8 lbs.) Carrier: 0.45 kg (1 lbs.) | | |
| HP 15-in-1 Media Card Reader | Description | Supports hardware ECC (Error Correction Code) function Supports hardware CRC (Cyclic Redundancy Check) function Supports MS 4-bit parallel transfer mode Supports MS-PRO 4-bit parallel transfer mode Supports MS PRO-HG Duo 4-bit parallel transfer mode Supports SD 4-bit parallel transfer mode Supports UHS-104 SD 4-bit card (version 3.0) Supports CF v6.0 with PIO mode 6 and Ultra DMA 7 mode | | |
| | Interface Type | USB 3.0 High-speed interface Note: If there is a USB2 connection, USB2 transfer speeds are supported. | | |
| | Dimensions (WxHxD) | 4.9 x 4 x 1 in (124.5 x 101.6 x 25.4 mm) Fits conveniently in the 5.25" drive bay. | | |
| | Supported Media Types | CompactFlash Type I CompactFlash Type II Microdrive Secure Digital Card (SD) Secure Digital High Capacity (SDHC) SD Extended Capacity Memory Card (SDXC) SD Ultra High Speed II(SD UHSII) Memory Stick Memory Stick Select Memory Stick Select Memory Stick PRO (MS Duo) Memory Stick PRO Duo (MS PRO Duo) | | |



Memory Stick PRO-HG Duo

| - | - |
|-------------------|--|
| | MagicGate Memory Stick (MG) |
| | MagicGate Memory Stick Duo |
| | The second distance have distance and successive deviate a second subset of |
| | These additional media types are supported with a card adapter. Memory Stick Micro (M2) |
| | miniSD |
| | miniSD High Capacity |
| | Micro SD Memory Card (MicroSD) |
| | Micro SD High Capacity Memory Card (MicroSDHC) |
| | Test Parameters/Conditions - Power applied, unit operating on system ±5% |
| Operating Systems | Windows 8 Pro (64-bit)* |
| Supported | Windows 8.1 (64-bit)* |
| | Windows 8 (64-bit)* |
| | Windows 7 Ultimate (32-bit)** |
| | Windows 7 Ultimate (64-bit)** |
| | Windows 7 Professional (32-bit)** |
| | Windows 7 Professional (64-bit)** Windows 7 Home Basic** |
| | Windows 7 Home Premium (32-bit)** |
| | Windows 7 Home Premium (64-bit)** |
| | Windows Vista Business 64 |
| | Windows Vista Business 32 |
| | Windows Vista Home Basic 32 |
| | Windows XP Professional |
| | Windows XP Home 32 |
| | No driver is required for this device. Native support is provided by the |
| | operating system. |
| | Not all features are available in all editions of Windows 8. Systems may |
| | require upgraded and/or separately purchased hardware, drivers and/or |
| | software to take full advantage of Windows 8 functionality. See |
| | http://www.microsoft.com. |
| | Not all features are available in all editions of Windows 7. This system may |
| | require upgraded and/or separately purchased hardware to take full |
| | advantage of Windows 7 functionality. See <u>http://www.microsoft.com/windows/windows-7/</u> for details. |
| Kit Contents | Windows 8 Pro (64-bit)* |
| KILCUILEIILS | Windows 8.1 (64-bit)* |
| | Windows 8 (64-bit)* |
| | Windows 7 Ultimate (32-bit)** |
| | Windows 7 Ultimate (64-bit)** |
| | Windows 7 Professional (32-bit)** |
| | Windows 7 Professional (64-bit)** |
| | Windows 7 Home Basic** Windows 7 Home Dramium (22, bit)** |
| | Windows 7 Home Premium (32-bit)** Windows 7 Home Premium (64-bit)** |
| | Windows Vista Business 64 |
| | Windows Vista Business 32 |
| | Windows Vista Home Basic 32 |
| | Windows XP Professional |
| | Windows XP Home 32 |
| | No driver is required for this device. Native support is provided by the |
| | operating system. |
| | |



| | Not all features are available in all editions of Windows 8. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8 functionality. See <u>http://www.microsoft.com</u> . Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <u>http://www.microsoft.com/windows/windows-7/</u> for details. |
|-----------|---|
| Approvals | USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.3, FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUVT |
| Weight | 0.35 lbs. (0.16 kg) |



Technical Specifications – Controller Cards

CONTROLLER CARDS

| HP IEEE 1394b FireWire | Data Transfer Rate | Supports up to 800 Mb/s |
|--------------------------|----------------------------------|---|
| PCIe Card | Devices Supported | IEEE-1394 compliant devices |
| | Bus Type | PCIe card full height PCIe slots |
| | Ports | Two IEEE-1394b bilingual 9-Pin connectors (Rear) |
| | Internal Connectors | One 10-Pin Header connector |
| | System Requirements | Windows 8.1 64-bit, Windows 7 Professional 32-bit and 64-bit, SLED 11 and RHEL 6. Intel i5 series or higher processor, min 2GB of RAM, 20GB Hard Drive, CD-ROM drive, built in sound system, Available PCIe slot. |
| | Temperature – Operating | 50° to 131° F (10° to 55° C) |
| | Temperature – Storage | -22° to 140° F (-30° to 60° C) |
| | Relative Humidity – Operating | 20% to 80% |
| | Compliances | FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC |
| | Operating Systems Supported | Windows 8.1 64-bit, Windows 7 Professional 32-bit and 64-bit |
| HP Thunderbolt-2 PCIe 1- | Data Transfer Rate | Supports up to 20 Gb/s (20,000 Mb/s) |
| port I/O Card | Devices Supported | Thunderbolt™ certified devices |
| | Bus Type | PCIe card, full or half height PCIe slots |
| | Ports | One Thunderbolt™ 2 external 20-Pin output connectors (Rear) One full size DisplayPort input connector (Rear) |
| | Internal Connectors | One 5-Pin header connector |
| | System Requirements | Genuine Windows 7 Professional 64-bit, Genuine Windows 8.1 64-bit, Intel i5 series or higher processor, 4-GB RAM, 20-GB Hard Drive, available PCIe slot. |
| | Temperature - Operating | 50° to 131° F (10° to 55° C) |
| | Temperature - Storage | -22° to 140° F (-30° to 60° C) |
| | Relative Humidity - Operating | 20% to 80% |
| | Compliances | FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC |
| | Operating Systems Supported | Genuine Windows 7 Professional 64-bit, Genuine Windows 8.1 64-bit |
| | Kit Contents | HP Thunderbolt™ 2 PCIe 1-port I/O Card, full height and half height bracket, DisplayPort to DisplayPort cable, internal header cables (2), user documentation and warranty card. |

Technical Specifications - Networking and Communications

NETWORKING AND COMMUNICATIONS

| Integrated Intel I218LM | Connector | RJ-45 (motherboard integration) |
|------------------------------------|-------------------------|--|
| PCIe GbE Controller | Controller | Intel I218LM GbE platform LAN connect networking controller |
| | Memory | 3 KB FIFO packet buffer memory (both Tx and Rx) |
| | Data Rates Supported | 10/100/1000 Mbps |
| | Compliance | 802.1as, 802.1p, 802.1Q, 802.3, 802.3ab, 802.3az, 802.3i, 802.3u, 802.3x, 802.3z |
| | Bus Architecture | PCI Express 1.1 (x1) and SMBus |
| | Data Transfer Mode | PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state) |
| | Power Requirement | Requires 3.3V only (integrated regulators) |
| | Boot ROM Support | Yes |
| | Network Transfer Mode | Full-duplex; Half-duplex (not supported for the 1000BASE-T transceiver) |
| | Network Transfer Rate | 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps |
| | Management Capabilities | WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostics AMT 9.1 support, vPro compliant |
| HP X520 10GbE Dual Port Adapter | Hardware Certifications | FCC B, UL, CE, VCCI, BSMI, CTICK, KCC |
| HP 10GbE SFP+ SR Transceiver | Operating Temperature | OC to 45C (32F to 113F) |
| | Operating Humidity | 0% to 85%, noncondensing |
| | Dimensions (H x W x D) | 0.47(h) x 0.54(w) x 2.19(d)inches (1.19 x 1.38 x 5.57 cm) |
| HP 10GbE SFP+ SR Transceiver | Connector Controller | Two RJ-45 Intel® Ethernet I350 Controller |
| | Data Rates Supported | 10/100/1000 Mbps, Half- and full-duplex |
| | Compliance | 802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q, 802.3az, IEEE 1588 PCIe v2.0 standard RoHS (6 of 6) FCC (U.S. only) Class B DOC (Canada) Class B CE EN 55024, EN55022 Class B VCCI Class II UL 1950 CSA 950 EN 60950 CE ACPI 1.1a |



Technical Specifications - Networking and Communications

| | | Microsoft WHQL (Windows Hardware Quality Labs) |
|--------------------------|------------------------------------|---|
| | Data Path Width | Four lane (x4) PCI Express compatible with x4, x8, and x16 PCI Express slots |
| | Power Requirement | 4.1W idle without EEE link partner 3.2W idle with EEE link partner 4.2W maximum |
| | Network Transfer Rate | 10BASE-T (half-duplex) 10 Mb/s 10BASE-T (full-duplex) 20 Mb/s 100BASE-TX (half-duplex) 100 Mb/s 100BASE-TX (full-duplex) 200 Mb/s 1000BASE-T (full-duplex) 2000 Mb/s |
| | Operating Temperature | 32° to 131° F (0° to 55° C) |
| | Operating Humidity | 10% to 95% non-condensing |
| | Dimensions (H x W x D) | 5.3 x 2.5 in (13.50cm x 6.4 cm) (without brackets) |
| | Operating System Driver Support | Windows 7 Professional 32-bit and 64-bit. Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation Novell SLED 10 & SLED 11 |
| | Kit Contents | HP 361T PCIe Dual Port Gigabit NIC PCA with a standard height bracket attached to it (the low profile bracket is included in the clamshell that the PCA ships in) Product Warranty statement and the Quick Install Card (QIC). |
| Intel X540-T2 10GbE Dual | Operating Temperature | 32° to 131° F (0° to 55° C) |
| Port Adapter | Operating Humidity | 5% to 95% non-condensing |
| | Dimensions (H × W × D) | Standard PCIe with full height bracket installed, half height bracket included. 0.7 x 2.7 x 6.0 in |
| | Operating System Driver Support | The HP driver drop is a unified package that includes the X540-T2 driver. It is the same driver as is used for the 561T. Currently, it includes drivers for Win7-32, Win7-x64, Win8-x64, and Win81-x64. |
| | Kit Contents | Intel X540 10Gb Ethernet Dual port adapter, Installation guide, Warranty card. |
| | NOTES | Windows Server 2012 R2, Windows Server 2012, Windows 8, Windows Server 2008 R2, Windows 7, Windows Server 2008 SP2, Windows Vista SP2, Windows Server 2003 R2, Windows Server 2003 SP2, Linux Stable Kernel version 3.x, 2.6,x, Red Hat Enterprise Linux 5, 6, SUSE Linux Enterprise Server 10, 11, FreeBSD 9, VMware ESX/ESXi. Note: Not all OS's supported on all HP Z Workstations. |
| HP 361T PCIe Dual Port | Connector | Two RJ-45 |
| Gigabit NIC | Controller | Intel [®] Ethernet I350 Controller |
| | Data Rates Supported | 10/100/1000 Mbps, Half- and full-duplex |
| | Compliance | 802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q, 802.3az, IEEE 1588 PCIe v2.0 standard RoHS (6 of 6) FCC (U.S. only) Class B DOC (Canada) Class B |



Technical Specifications - Networking and Communications

| | | CE EN 55024, EN55022 Class B VCCI Class II |
|--|--------------------------------------|---|
| | | UL 1950 |
| | | CSA 950 EN 60950 |
| | | CE |
| | | ACPI 1.1a |
| | | Microsoft WHQL (Windows Hardware Quality Labs) |
| | Data Path Width | Four lane (x4) PCI Express compatible with x4, x8, and x16 PCI Express slots |
| | Power Requirement | 4.1W idle without EEE link partner 3.2W idle with EEE link partner 4.2W maximum |
| | Network Transfer Rate | 10BASE-T (half-duplex) 10 Mb/s |
| | | 10BASE-T (full-duplex) 20 Mb/s 100BASE-TX (half-duplex) 100 Mb/s |
| | | 100BASE-TX (full-duplex) 100 Mb/s |
| | | 1000BASE-T (full-duplex) 2000 Mb/s |
| | Operating Temperature | 32° to 131° F (0° to 55° C) |
| | Operating Humidity | 10% to 95% non-condensing |
| Dimensions (H × W × D) | | 5.3 x 2.5 in (13.50cm x 6.4 cm) (without brackets) |
| | Operating System Driver Support | Windows 7 Professional 32-bit and 64-bit. Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation Novell SLED 10 & SLED 11 |
| | Kit Contents | HP 361T PCIe Dual Port Gigabit NIC PCA with a standard height bracket attached to it (the low profile bracket is included in the clamshell that the PCA ships in) Product Warranty statement and the Quick Install Card (QIC). |
| Intel 7260 802.11 a/b/g/n PCIe WLAN NIC | Operating Humidity | Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing) |
| | Dimensions (H × W × D) | Native HMC: 26.8 x 30.0 x 2.4 mm Carrier Card Assembly 3.3 x 4.7 in (84 x 119 mm) |
| | Kit Contents | PCIe x1 card with full height bracket, rf antenna, antenna cable, separate low profile bracket, software CD and warranty. |
| | NOTES: | |
| | | client utility is required for Cisco Compatible Extensions support with |
| | | vs XP. WLAN may also be compatible with certain third-party software |
| | for Microsoft Win | N supplier IHV extensions required for Cisco Compatible Extensions support dows Vista. |
| | | ware/driver release for updates on supported security features. |
| | 3. Maximum output | power may vary by country according to local regulations. |
| | | lling mode and on battery power. |
| | Receiver sensitivi | ity is measured at a packet error rate of 8% for 802.11b (CCK modulation) |

and a packet error rate of 10% for 802.11a/g (OFDM modulation).



QuickSpecs

Summary of Changes

| Date of change: | Version History: | | Description of change: |
|------------------|------------------|---------|--|
| August 21 | V1 | Added | Style and technical specifications, |
| October 1, 2014 | From v1 to v2 | Added | Cyberlink Power2Go on supported components: software, Foxit PhantomPDF Express to supported components: software, note to supported components: memory, Optical drives, DVD, BD-XL specs |
| | | Changed | Processor table with corrected turbo specs for E5-1660v3, Declared Noise Emissions section, stable & consistent offerings, system technical specifications: system board, supported components: optical and removable storage, supported components: graphics, Zero-ed out Noise Emissions |
| | | Removed | "Cyberlink MediaSuite" from supported components: software |
| January 1, 2015 | From v2 to v3 | Added | HP 256 GB SED Opal 2 SSD, AMD FirePro W7100 GPU, Intel X540 and Ubuntu OS |
| | | Changed | OS Overview Section, Chassis Dimensions, Power Suply note and links |
| February 1, 2015 | From v3 to v4 | Added | Windows 8.1 EM, AMD FirePro W5100 4GB specs, HP DX115 notes |
| | | Changed | Internal I/O USB from Overview and System Board sections |
| | | Removed | NVIDIA Tesla K20c Compute Processor from High Performance GPU Computing |
| March 1, 2015 | From v4 to v5 | Added | OS Support, RAID Interfaces Support, 600 and 300 GB SAS 15K SFF HDD, 4TB SATA HDD |
| | | Changed | Linux Installer Kit, Hard Drives description notes, ACPI support from BIOS section |
| April 1, 2015 | From v5 to v6 | Changed | Hard Drive and Memory Notes from Supported Components section. Memory Speed Supported and Memory Info from System Board section |
| May 1, 2015 | From v6 to v7 | Added | Integrated RAID for PCIe SSDs and note to Supported Hard Drive Controllers section |
| | | Changed | Note 1 from Hard Drive Controllers |
| July 1, 2015 | From v7 to v8 | Added | 1TB SATA 7200 rpm 8GB 3.5" SSHD (hybrid), NVIDIA Quadro M6000 12GB Graphics, 3Dconnexion CADMouse, HP 2.5in HDD/SSD 2-in-1 0DD Bay Bracket, Notes for Other software |
| | | Changed | HP Optical Bay HDD Mounting Bracket, Notes for the Storage section |
| | | Removed | 600GB SAS 15K rpm 6Gb/s 3.5" HDD, 300GB SAS 15K rpm 6Gb/s 3.5" HDD, |

© 2015 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and QuickPath are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation.