



HP COMPAQ ELITE 8300 ULTRA-SLIM BUSINESS PC

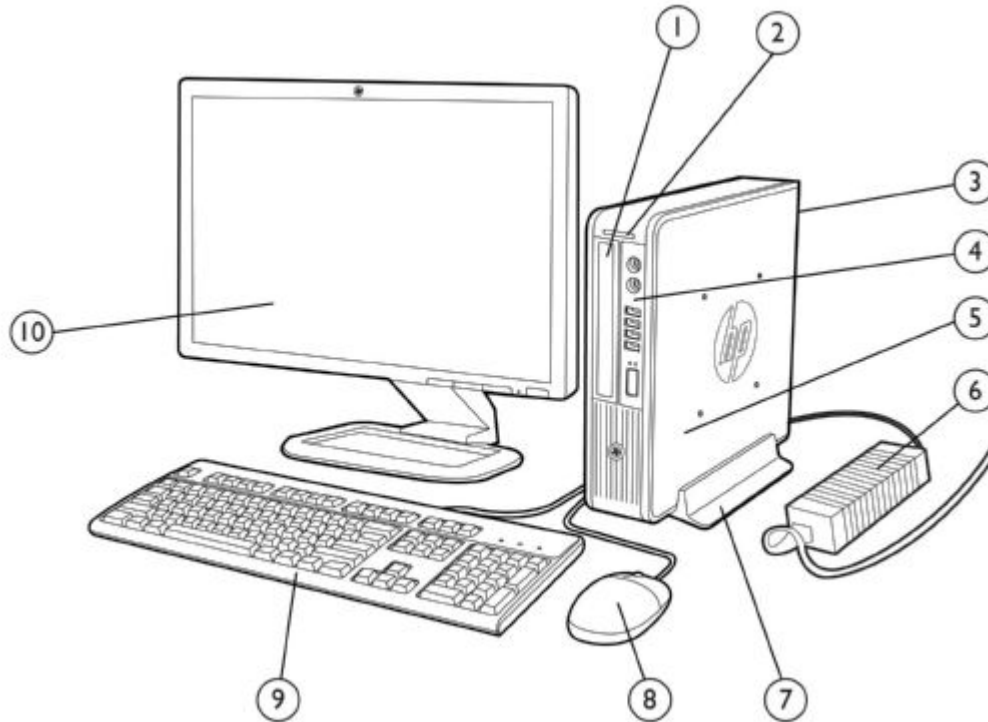


- 1 Optical Disc Drive (optional)
- 2 Secure Digital (SD) Card Reader (optional)
- 3 Rear I/O includes (4) USB 3.0 ports, (2) USB 2.0 ports, (2) DisplayPort and (1) VGA video interfaces, PS/2 mouse and keyboard ports, RJ-45 network interface, 3.5mm audio in/out jacks
- 4 Front I/O includes (4) USB 2.0 ports, a headphone output and a microphone jack
- 5 2.5" internal data drive bay
- 6 135W 87% efficient external Power Adapter or 180W 87% efficient external Power Adapter (when configured with discrete graphics)
- 7 HP USDT Tower Stand (optional)
- 8 HP Mouse
- 9 HP Keyboard
- 10 HP Monitor (sold separately)

HP COMPAQ ELITE 8300 SMALL FORM FACTOR BUSINESS PC

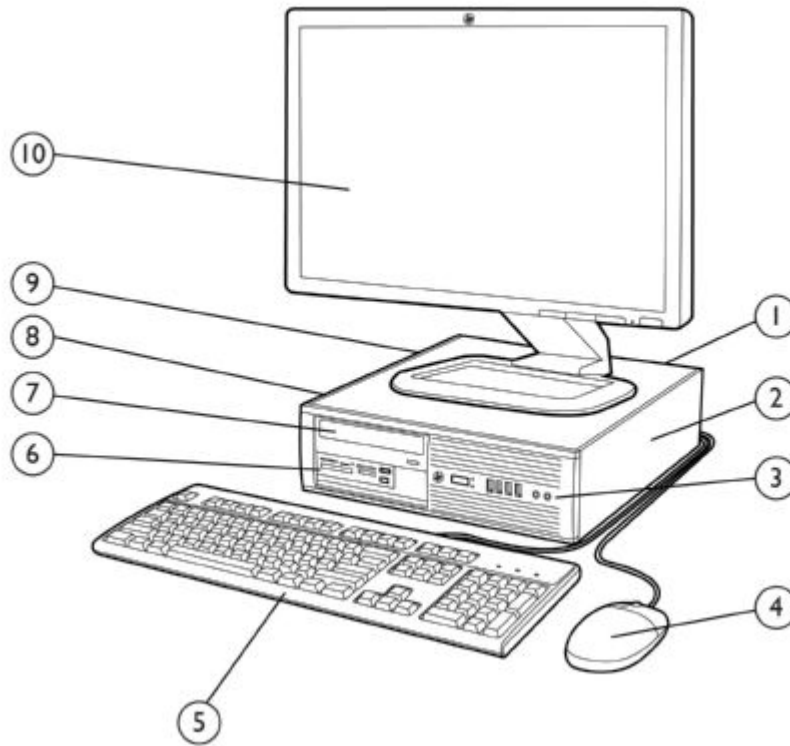


- 1 Rear I/O includes (4) USB 3.0 ports, (2) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort and VGA video interfaces, and 3.5mm audio in/out jacks
- 2 Low profile expansion slots include (1) PCI, (1) PCI Express x1 and (2) PCI Express x16 graphics
- 3 Front I/O includes (4) USB 2.0 ports, a headphone output and a microphone jack
- 4 HP Mouse
- 5 HP Keyboard
- 6 3.5" external drive bay supporting a media card reader or a secondary data drive
- 7 5.25" external drive bay supporting an optical disk drive
- 8 3.5" internal drive bay supporting primary data drive
- 9 240W standard efficiency or 90% high efficiency Power Supply
- 10 HP Monitor (sold separately)

HP COMPAQ ELITE 8300 MICROTOWER BUSINESS PC

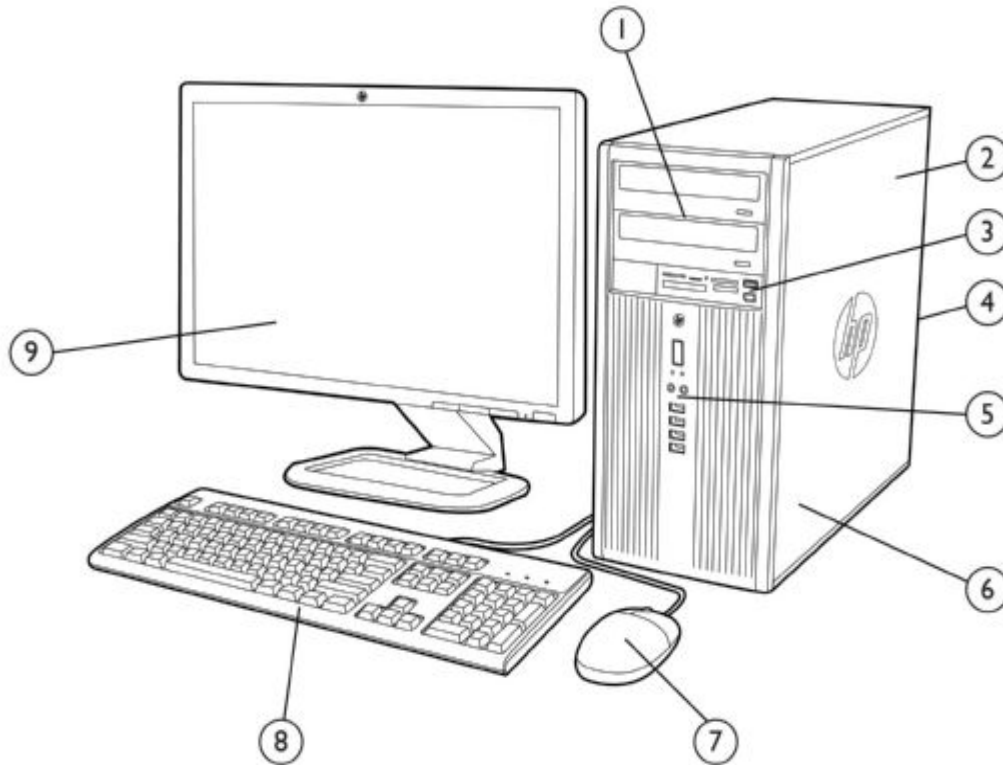

- 1 (2) 5.25" external drive bays supporting optical disk drives or removable hard disk drives
(2) 3.5" internal drive bays supporting data drives capable of RAID configurations
- 2 320W standard efficiency or 90% high efficiency Power Supply
- 3 3.5" external drive bay supporting the optional HP Media Card Reader
- 4 Rear I/O includes (4) USB 3.0 ports, (2) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort and VGA video interfaces, and 3.5mm audio in/out jacks
- 5 Front I/O includes (4) USB 2.0 ports, a headphone output and a microphone jack
- 6 Full height expansion slots include (1) PCI, (1) PCI Express x1 and (2) PCI Express x16 graphics
- 7 HP Mouse
- 8 HP Keyboard
- 9 HP Monitor (sold separately)

HP COMPAQ ELITE 8300 CONVERTIBLE MINITOWER BUSINESS PC

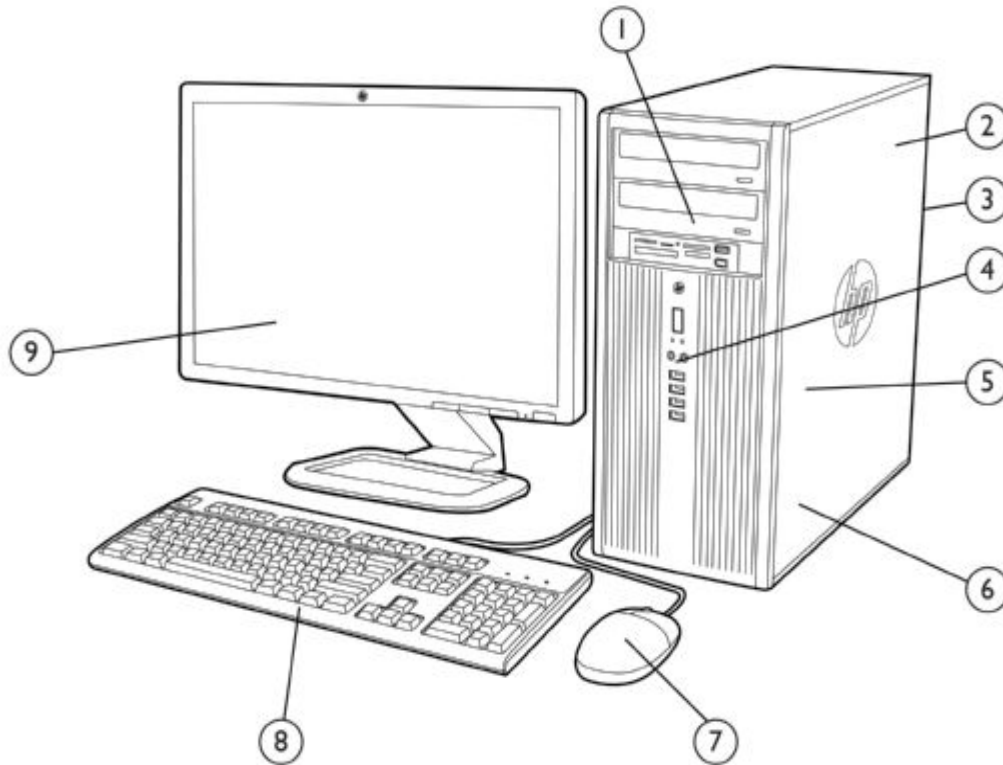

- 1 (3) 5.25" external drive bays supporting optical disk drives, removable hard disk drives, or the HP Media Card Reader
- 2 320W standard efficiency or 90% high efficiency Power Supply
- 3 Rear I/O includes (4) USB 3.0 ports, (2) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort and VGA video interfaces, and 3.5mm audio in/out jacks
- 4 Front I/O includes (4) USB 2.0 ports, a headphone output and a microphone jack
- 5 (3) 3.5" internal drive bays supporting multiple data drives capable of RAID configurations
- 6 Full height expansion slots include (3) full-length PCI, (1) PCI Express x1, and (2) PCI Express x16 graphics
- 7 HP Mouse
- 8 HP Keyboard
- 9 HP Monitor (sold separately)

Overview

At A Glance

- Choice of four professional chassis form factors: USDT, SFF, MT, CMT (MT not available in all regions)
- UEFI BIOS developed and engineered by HP for better security, manageability and software image stability
- Intel Q77 Express chipset supporting Intel 2nd and 3rd generation Core processors, featuring Intel HD Graphics and vPro Technology (available with select processors)
- Intel 82579LM GbE integrated network connection
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Dual independent monitor support via VGA and digital DisplayPort video interfaces; USDT provides dual digital support via dual integrated DisplayPort ports (supports DisplayPort 1.2)
- Discrete graphics options available for all platforms including the Ultra Slim Desktop (USDT) featuring Multi-Stream technology
- SRS Premium Sound audio management software
- Standard efficiency or 90% high efficiency energy saving power supplies available on the SFF, MT and CMT models; 87% efficient energy saving external power adapter standard with USDT models
- ENERGY STAR® qualified models certified EPEAT® Gold
- SFF, MT and CMT models can be configured with multiple data drives in a RAID array
- Optional Intel Smart Response Technology SSD disk cache module
- Guaranteed lengthy purchase lifecycles and image stability
- Software image fully compatible across all models and form factors
- Created using industry leading Design for Environment standards
- Selected configurations with global availability easily set up and ordered through HP.com Business to Business portals (<http://h10019.www1.hp.com/business-site/index.html>)
- Tailored HP Factory Express deployment and lifecycle services available (<http://h71028.www7.hp.com/enterprise/cache/97688-0-0-225-121.aspx>)
- Protected by HP Services, including standard warranties up to 5-5-5 (terms and conditions vary by country; certain restrictions and exclusions apply)
- Tool-less serviceability features for easier upgrades and repairs

Standard Features and Configurable Components (availability may vary by country)

OPERATING SYSTEMS

Preinstalled

- Windows 8 Pro (64-bit)*
- Windows 8 (64-bit)*
- Windows® 7 Ultimate (32-bit)**
- Windows® 7 Ultimate (64-bit)**
- Windows® 7 Professional (32-bit)**
- Windows® 7 Professional (64-bit)**
- Windows® 7 Professional (32-bit) (available through downgrade rights from Windows 8 Pro)***
- Windows® 7 Professional (64-bit) (available through downgrade rights from Windows 8 Pro)***
- Windows® 7 Home Premium (32-bit)**
- Windows® 7 Home Premium (64-bit)**
- Windows® 7 Home Basic (32-bit)**

FreeDOS 2.0

Novell SUSE Linux Enterprise Desktop 11

*Not all features are available in all editions of Windows 8. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8 functionality. See <http://www.microsoft.com>.

**Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://windows.microsoft.com/en-us/windows7/products/home> for details.

***This system is preinstalled with Windows® 7 Pro software and also comes with a license and media for Windows 8 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

CHIPSET

Intel® Q77 Express

USDT	SFF/MT/CMT
X	X

PROCESSOR

Intel® 3rd Generation Core™ i7 Processors

Intel® Core™ i7-3770 Processor

- Up to 3.9 GHz Max. Turbo Frequency (3.4 GHz base frequency)
- 8 MB cache, 4 cores, 8 threads
- Intel HD Graphics 4000
- Supports DDR3 memory up to 1600 MT/s data rate
- Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)

USDT	SFF/MT/CMT
	X

Intel® Core™ i7-3770S Processor

- Up to 3.9 GHz Max. Turbo Frequency (3.1 GHz base frequency)
- 8 MB cache, 4 cores, 8 threads
- Intel HD Graphics 4000
- Supports DDR3 memory up to 1600 MT/s data rate
- Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)

USDT	SFF/MT/CMT
X	

Intel® 3rd Generation Core™ i5 Processors



Standard Features and Configurable Components (availability may vary by country)

<u>Intel® Core™ i5-3570 Processor</u>			X
Up to 3.8 GHz Max. Turbo Frequency (3.4 GHz base frequency)			
6 MB cache, 4 cores, 4 threads			
Intel HD Graphics 2500			
Supports DDR3 memory up to 1600 MT/s data rate			
Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)			
<u>Intel® Core™ i5-3570S Processor</u>		X	
Up to 3.8 GHz Max. Turbo Frequency (3.1 GHz base frequency)			
6 MB cache, 4 cores, 4 threads			
Intel HD Graphics 2500			
Supports DDR3 memory up to 1600 MT/s data rate			
Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)			
<u>Intel® Core™ i5-3475S Processor</u>		X	
Up to 3.6 GHz Max. Turbo Frequency (2.9 GHz base frequency)			
6 MB cache, 4 cores, 4 threads			
Intel HD Graphics 4000			
Supports DDR3 memory up to 1600 MT/s data rate			
Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)			
<u>Intel® Core™ i5-3470 Processor</u>			X
Up to 3.6 GHz Max. Turbo Frequency (3.2 GHz base frequency)			
6 MB cache, 4 cores, 4 threads			
Intel HD Graphics 2500			
Supports DDR3 memory up to 1600 MT/s data rate			
Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)			
<u>Intel® Core™ i5-3470S Processor</u>		X	
Up to 3.6 GHz Max. Turbo Frequency (2.9 GHz base frequency)			
6 MB cache, 4 cores, 4 threads			
Intel HD Graphics 2500			
Supports DDR3 memory up to 1600 MT/s data rate			
Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)			
<u>Intel® Core™ i5-3475S Processor</u>			
Up to 3.6 GHz Max. Turbo Frequency (2.9 GHz base frequency)			
6 MB cache, 4 cores, 4 threads			
Intel HD Graphics 4000 (GT2)			
Supports DDR3 memory up to 1600 MT/s data rate			
Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)			
Intel® 3rd Generation Core™ i3 Processors			
<u>Intel® Core™ i3-3210 Processor</u>		X	X
3.2 GHz base frequency, 3 MB cache, 2 cores, 4 threads			
Intel HD Graphics 2500 (GT1)			
Supports DDR3 memory up to 1600 MT/s data rate			
<u>Intel® Core™ i3-3240</u>		X	X
3.4 GHz base frequency, 3 MB cache, 2 cores, 4 threads			
Intel HD Graphics 2500			
Supports DDR3 memory up to 1600 MT/s data rate			
<u>Intel® Core™ i3-3225</u>		X	X
3.3 GHz base frequency, 3 MB cache, 2 cores, 4 threads			
Intel HD Graphics 4000			
Supports DDR3 memory up to 1600 MT/s data rate			

Standard Features and Configurable Components (availability may vary by country)

<u>Intel® Core™ i3-3220</u> 3.3 GHz base frequency, 3 MB cache, 2 cores, 4 threads Intel HD Graphics 2500 Supports DDR3 memory up to 1600 MT/s data rate	X	X
Intel® 2nd Generation Core™ i3 Processors		
<u>Intel® Core™ i3-2130 Processor</u> 3.4 GHz base frequency, 3 MB cache, 2 cores, 4 threads Intel HD Graphics 2000 Supports DDR3 memory up to 1333 MT/s data rate	X	X
<u>Intel® Core™ i3-2120 Processor</u> 3.3 GHz base frequency, 3 MB cache, 2 cores, 4 threads Intel HD Graphics 2000 Supports DDR3 memory up to 1333 MT/s data rate	X	X
Intel® Pentium® Processors		
<u>Intel® Pentium® G2130 Processor</u> 3.2 GHz base frequency, 2 MB cache, 2 cores, 2 threads Intel HD Graphics 2500 (GT1) Supports DDR3 memory up to 1600 MT/s data rate	X	X
<u>Intel® Pentium® G2020 Processor</u> 2.9 GHz base frequency, 3 MB cache, 2 cores, 2 threads Intel HD Graphics 2500 (GT1) Supports DDR3 memory up to 1600 MT/s data rate	X	X
<u>Intel® Pentium® G2010 Processor</u> 2.8 GHz base frequency, 3 MB cache, 2 cores, 2 threads Intel HD Graphics 2500 (GT1) Supports DDR3 memory up to 1600 MT/s data rate	X	X
<u>Intel® Pentium® G870 Processor</u> 3.1 GHz base frequency, 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1333 MT/s data rate	X	X
<u>Intel® Pentium® G860 Processor</u> 3.0 GHz base frequency, 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1333 MT/s data rate	X	X
<u>Intel® Pentium® G640 Processor</u> 2.8 GHz base frequency, 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1066 MT/s data rate	X	X

Standard Features and Configurable Components (availability may vary by country)

GRAPHICS

	USDT	SFF/MT/CMT
Integrated on all models (depends on processor)		
Intel HD Graphics: Basic, 2000, 2500, 4000	X	X
NOTE: When the USDT model configuration includes an Intel Core i5 or Intel Core i7 processor but not a discrete MXM graphics card, all three monitor ports are driven by the processor's integrated graphics engine. When the model is configured with an Intel Pentium or Core i3 processor only 2 of the 3 graphics display ports are active. Due to a limitation with the Intel integrated graphics, when a DisplayPort to DVI or HDMI adapter is installed, the VGA port will not be active.		
Optional Discrete Graphics Solutions		
AMDTI Radeon HD 7650A (MXM)	X	
NOTE: When this MXM graphics card is installed in the USDT all three monitor ports are active. The integrated processor graphics will operate the top DisplayPort while the discrete AMD graphics will operate the bottom Multi-Stream DisplayPort and the VGA output.		
AMD Radeon HD 6350 (512 MB) PCIe x16 (includes a DMS-59 to Dual VGA Y Cable)		X
AMD Radeon HD7450 (1 GB) PCIe x16 (includes a DVI to VGA adapter cable)		X
NVIDIA NVS 300 (512 MB) PCIe x16 (Includes a DMS-59 to Dual VGA Y Cable)		X
NVIDIA NVS 310 (512 MB) PCIe x16		X
NVIDIA GeForce GT630 (2 GB) FH PCIe x16 (includes a DP to DVI-D adapter and a DVI-I to VGA adapter)		X*
*NOTE: Only fits in the CMT and MT platforms.		
Adapters and Cables		
DisplayPort to DisplayPort Cable	X	X
DisplayPort to DVI-D Adapter	X	X
DisplayPort to HDMI Adapter	X	X
DisplayPort to VGA Adapter	X	X

STORAGE

	USDT	SFF/MT/CMT
SATA Hard Drive		
250 GB, 7200 rpm, SATA 6.0 Gb/s, SMART IV, 3.5"		X
320 GB, 7200 rpm, SATA 3.0 Gb/s, SMRT IV, 2.5"	X	
500 GB, 7200 rpm, SATA 3.0 Gb/s, SMART IV, 2.5"	X	
500 GB, 7200 rpm, SATA 6.0 Gb/s, SMART IV, 3.5"		X
1 TB, 7200 rpm, SATA 6.0 Gb/s, SMART IV, 3.5"		X
SATA Self-encrypting Drive		
320 GB (with 3.5" adapter when installed in SFF/MT/CMT)	X	X
SATA Solid State Drive		
120 GB (with 3.5" adapter when installed in SFF/MT/CMT)	X	X
128 GB (with 3.5" adapter when installed in SFF/MT/CMT)	X	X

Standard Features and Configurable Components (availability may vary by country)

SATA Self-encrypting Solid State Drive

256 GB (with 3.5" adapter when installed in SFF/MT/CMT) X X

Optical Disc Drive

DVD-ROM			X
Slim DVD-ROM		X	
SuperMulti DVD Writer			X
Slim SuperMulti DVD Writer		X	
Blu-ray Writer			X

Media Card Reader

Secure Digital (SD) HC X

Removable

HP Slim Removable SATA HDD Frame/Carrier X

MEMORY

	Form Factor	Type	Maximum	# of Slots
Ultra Slim Desktop		DDR3 non-ECC Up to 1600 MT/s	16 GB	2 SODIMM
Small Form Factor Microtower Convertible Minitower		DDR3 non-ECC Up to 1600 MT/s	32 GB	4 DIMM

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Memory modules support data transfer rates up to 1600 MT/s; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

PERFORMANCE

Intel Smart Response Technology Disk Cache Modules

20 GB SATA Solid State Disk Cache	USDT	SFF/MT/CMT
		X
24 GB mSATA Solid State Disk Cache	X	

Standard Features and Configurable Components (availability may vary by country)

NETWORKING/COMMUNICATIONS

	USDT	SFF/MT/CMT
Ethernet (RJ-45)		
Intel 82579LM Gigabit Network Connection (standard)	X	X
Intel Gigabit CT Desktop PCIe x1 Network Card (optional)		X
Wireless		
802.11b/g/n PCI Express x1 Network Card (optional)		X
Intel Centrino Advanced-N 6205 PCI Express Mini Card Wireless Network Connection (optional)	X	

NOTE: Either the integrated network connection or the Intel Centrino wireless NIC is required to support Intel vPro Technology features.

AUDIO/MULTIMEDIA

	USDT	SFF/MT/CMT
HD audio with Realtek ALC221 codec (all ports are stereo)	X	X
SRS Premium Sound audio management technology	X	X
Microphone* and headphone front ports (3.5mm)	X	X
Line-out and Line-In rear Ports* (3.5mm)	X	X
Multi-streaming capable*	X	X
Internal Speaker (standard)	X	X
Thin USB Powered Speakers (optional)	X	X
USB HD 720P Business Webcam includes CyberLink YouCam BE software includes HP Face Recognition for HP Client Security software	X	X
Business Headset	X	X

* The front microphone port is re-taskable as a Line-in, Microphone-in or Headphone-out port. Rear audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally. Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.

Standard Features and Configurable Components (availability may vary by country)

KEYBOARDS AND POINTING DEVICES

	USDT	SFF/MT/CMT
Keyboard		
HP PS/2 Keyboard	X	X
HP USB Keyboard	X	X
USB Smart Card (CCID) Keyboard	X	X
USB and PS/2 Washable Keyboard	X	X
Wireless Keyboard and Mouse Combo (Keyboard contains 25% post-consumer recycled plastic content)	X	X
Mice		
PS/2 Optical Mouse	X	X
USB Optical Mouse	X	X
USB Laser Mouse	X	X
USB and PS/2 Washable Mouse	X	X

HP BIOS

Key features of the HP BIOS include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP Compaq Elite 8300 Business PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.
- Select models feature either Intel Standard Manageability or Intel Core vPro Processor Technology.
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Support UEFI specification 2.1
- Computrace agent – For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance – Industry leading acoustic emissions across the range of operating conditions.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Additional HP BIOS Features

- Power-On password – Helps prevent an unauthorized user from powering on the system.
- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Elite models use ACPI to provide power conservation features.

S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

Standard Features and Configurable Components (availability may vary by country)

SECURITY

	USDT	SFF/MT/CMT
Trusted Platform Module (TPM) 1.2	X	X
SATA port disablement (via BIOS)	X	X
Drive lock	X	X
RAID configurations		X
Intel Identity Protection Technology (IPT) ¹	X	X
Serial, parallel, USB enable/disable (via BIOS)	X	X
Optional USB Port Disable at factory (user configurable via BIOS)	X	X
Removable media write/boot control	X	X
Power-On password (via BIOS)	X	X
Setup password (via BIOS)	X	X
Solenoid Hood Lock / Sensor		X
Hood Sensor	X	
Support for chassis padlocks and cable lock devices	X	X

¹Models configured with Intel Core processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP Client Security module

POWER

	USDT	SFF	MT/CMT
Power Supply			
Standard efficiency	N/A	240 W active PFC	320 W active PFC
High efficiency	Integrated graphics:	135 W 87% efficient active PFC	240 W 90% efficient active PFC
	Discrete graphics:	180 W 87% efficient active PFC	320 W 90% efficient active PFC

ENVIRONMENTAL & REGULATORY

Energy Star® qualified models available

EPEAT® registered where applicable/supported. See www.epeat.net for registration status by country.

Low Halogen

TAA compliant

Standard Features and Configurable Components (availability may vary by country)

PORTS

I/O Ports – Standard

	USDT	SFF/MT/CMT
USB 2.0		4 each (front) 2 each (rear)
USB 3.0		4 each (rear)
Serial (RS-232)	N/A	1 each
PS/2	2 each (color-coded support for keyboard (purple) and mouse (green))	
Video	1 each VGA and 2 each DisplayPort 1.1a (for integrated dual digital monitor support)	1 each VGA and DisplayPort 1.1a2 (for integrated dual independent monitor support)
<p>NOTE: When configured with an Intel Pentium or 2nd Generation Intel Core i3 CPU only two of the available video output ports are active.</p>		
Audio	Front – microphone & headphone Rear – line input, line out All ports are 3.5mm in diameter <p>NOTE: See Audio/Visual section for information on re-taskable audio ports</p>	
NIC		1 each RJ-45

I/O Ports – Optional

	USDT	SFF/MT/CMT
Serial (RS-232)	N/A	1 each
Parallel	N/A	1 each
eSATA	N/A	1 each

USDT Video Out Ports

Depending upon the model configuration, the USDT video ports will be active as per the following chart:

DisplayPort #1 Connection (top port)	DisplayPort #2 Connection (bottom port)	VGA Port Connection	Result
DP	DP	VGA	All outputs are active ^{1,2}
DP	DP – VGA	VGA	All outputs are active ^{1,2}
DP	DP – dIDVI	VGA	All outputs are active ³
DP	DP – DVI/HDMI	VGA	VGA will be inactive
DP – VGA	DP	VGA	All outputs are active ⁴
DP – VGA	DP – VGA	VGA	All outputs are active ²
DP – VGA	DP – dIDVI	VGA	All outputs are active ^{3,4}
DP – VGA	DP – DVI/HDMI	VGA	VGA will be inactive
DP – dIDVI	DP	VGA	All outputs are active ^{1,2}
DP – dIDVI	DP – VGA	VGA	All outputs are active ^{1,2}
DP – dIDVI	DP – dIDVI	VGA	All outputs are active ³
DP – dIDVI	DP – DVI/HDMI	VGA	VGA will be inactive
DP – DVI/HDMI	DP	VGA	VGA will be inactive
DP – DVI/HDMI	DP – VGA	VGA	VGA will be inactive
DP – DVI/HDMI	DP – dIDVI	VGA	VGA will be inactive

Standard Features and Configurable Components (availability may vary by country)

DP – DVI/HDMI

DP – DVI/HDMI

VGA

VGA will be inactive

Connection Type

Description

DP	Direct connection to a DisplayPort monitor
DP-VGA	VGA monitor connected with a DP to VGA adapter
DP – dIDVI	Dual link DVI monitor connected with a DP to dIDVI-D adapter
DP – DVI/HDMI	DVI-D or HDMI monitor attached using a DP to DVI-D or DP to HDMI adapter
VGA	Direct connection to a VGA monitor

Notes:

1. DisplayPort #2 is restricted to modes 1900x1200 and lower when any display is connected to the VGA Port
2. If active, the VGA output is limited to modes of 1900 x 1200 and lower when any display is connected to the DisplayPort #2
3. Not a recommended configuration since the dP to dIDVI adapter is intended for dual link DVI monitors which have > 1920 x 1200 resolution
4. May not be an optimum configuration due to DP to VGA/DVI/HDMI adapter limitations; better configuration achieved by swapping DisplayPort #1 and DisplayPort #2 connections.

The DP to VGA adapter is limited to resolutions of 1920 x 1200 and below

The DP to DVI and HDMI adapters are limited to resolutions of 1920 x 12 and 1920 x 1080, respectively

The DP to dIDVI adapter is intended to only be used with monitors that require dual link DVI source

SLOTS

	USDT	SFF	MT	CMT
PCI Express Mini Card	1 each	N/A	N/A	N/A
MXM	1 each	N/A	N/A	N/A
mSATA	1 each	N/A	N/A	N/A
Conventional PCI Revision 2.3 5-volt	N/A	1 each 2.5" low profile 6.6" length 25W max. power	1 each 4.2" full height 6.6" length 25W max. power	3 each 4.2" full height 6.6" length 25W max. power
PCI Express x1	N/A	1 each (2.0) 2.5" low profile 6.6" length 10W max. power	1 each (2.0) 4.2" full height 6.6" length 10W max. power	1 each (2.0) 4.2" full height 6.6" length 10W max. power
PCI Express x16 (wired as x4)	N/A	1 each (2.0) 2.5" low profile 6.6" length 35W max. power	1 each (2.0) 4.2" full height 6.6" length 35W max. power	1 each (2.0) 4.2" full height 6.6" length 35W max. power
PCI Express x16	N/A	1 each (3.0) 2.5" low profile 6.6" length 35W max. power	1 each (3.0) 4.2" full height 6.6" length 75W max. power ¹	1 each (3.0) 4.2" full height 6.6" length 75W max. power ¹

NOTE: The CMT and MT can support a single graphics card up to 75W. When configured with dual graphics cards support is limited to 35W for each.

Standard Features and Configurable Components (availability may vary by country)

BAYS

	USDT	SFF	MT	CMT
3.5" external	N/A	1 each	1 each	N/A
5.25" external	N/A	1 each 8.19" depth	2 each 8.19" depth	2 each 8.19" depth 1 each 5.7" depth
Slim	1 each	N/A	N/A	N/A
Secure Digital (SD) Reader	1 each	N/A	N/A	N/A
Internal HDD Bays	1 each 2.5" drives	1 each 3.5" drives	2 each 3.5" drives	3 each 3.5" drives

NOTE: The CMT and MT can support a single graphics card up to 75W. When configured with dual graphics cards support is limited to 35W for each.

FORM FACTORS AVAILABLE

- Ultra-slim Desktop
- Small Form Factor
- Microtower
- Convertible Minitower

SERVICE AND SUPPORT

3 year standard on-site warranty and service¹: This limited warranty and service offering delivers parts, labor and on-site repair. Optional terms available up to 5 years. Response time is next business day² and includes free telephone support³ 24 x 7. Global coverage² ensures any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. Some countries/regions do not offer one year onsite and labor.

OPERATING SYSTEMS

Preinstalled

Windows 8 Pro (64-bit)*
Windows 8 (64-bit)*
Windows® 7 Ultimate (32-bit)**
Windows® 7 Ultimate (64-bit)**
Windows® 7 Professional (32-bit)**
Windows® 7 Professional (64-bit)**
Windows® 7 Professional (32-bit) (available through downgrade rights from Windows 8 Pro)***
Windows® 7 Professional (64-bit) (available through downgrade rights from Windows 8 Pro)***
Windows® 7 Home Premium (32-bit)**
Windows® 7 Home Premium (64-bit)**
Windows® 7 Home Basic (32-bit)**
FreeDOS 2.0
Novell SUSE Linux Enterprise Desktop 11

For all Preinstalled operating systems HP provides Microsoft WHQL certified (where applicable) drivers on www.hp.com at the time of product announcement.

Supported

Windows® 7 Enterprise (32-bit or 64-bit)
Windows 8 Enterprise (32-bit or 64-bit)**
Windows 8 Pro (32-bit)*
Windows 8 Pro (32-bit)*

For all Supported operating systems HP performs testing of the OS, and makes available all HP value add software (OS dependent). Certified drivers are made available on www.hp.com within 30 days of product announcement.

Limited Support

Windows® XP Professional (32-bit)

For all Limited Support operating systems HP will make available on www.hp.com certified drivers for major subsystems, if not provided by the operating system, within 30 days of product announcement.

HP performs functional testing on representative configurations. Some newer technologies may not be supported.

HP value added software and 3rd party applications (i.e. DVD players) are not supported.

Certified

Novell SUSE Linux Enterprise Desktop 11¹
Red Hat Enterprise Linux 64¹

For all Certified operating systems HP will submit hardware to the operating system vendor for testing and certification. All drivers would be obtained from the operating system vendor, not supplied by HP. Certification will be posted by the operating system vendor.

Test & Document

Windows® Vista Enterprise (32-bit or 64-bit)
Windows® Vista Professional (32-bit or 64-bit)

For all Test & Document operating systems HP will perform functional testing of the operating system on the HP business PC platform. Any issues found will be documented in an Engineering Advisory and/or Service Advisory and posted to www.hp.com. HP will not develop or qualify any drivers or perform any integration testing.

*Not all features are available in all editions of Windows 8. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8 functionality. See <http://www.microsoft.com>.

**Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

***This system is preinstalled with Windows® 7 Pro software and also comes with a license and media for Windows 8 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

Technical Specifications – Operating Systems, Software and eDocumentation

¹The following features are not supported by Novell SUSE Linux Enterprise Desktop:

- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet Plus
- HP Client Security
- HP Blu-ray Writer playback of commercial movies
- DisplayPort video interface
- HP 2nd serial port adapter
- Power Management features

Systems configured with Linux do not qualify for ENERGY STAR®

The following features are not supported by Red Hat Enterprise Linux 64:

- TPM v1.2 embedded Security Chip
- Intel Gigabit CT Desktop NIC
- HP Wireless 802.11b/g/n NIC
- HP Blu-ray Writer
- HP FireWire / IEEE 1394 PCI Card
- HP 2nd serial port Adapter
- HP USB Smart Card (CCID) Keyboard
- Power Management features

Systems configured with Linux do not qualify for ENERGY STAR®

SOFTWARE

Included	Windows 8	Windows 7
Security	HP Client Security <ul style="list-style-type: none"> • Credential Manager • Password Manager • Face Recognition with optional WebCam • SpareKey • Device Access Manager w/JITA • Drive Encryption* Computrace (user optional)** Windows Defender	HP Client Security <ul style="list-style-type: none"> • Credential Manager • Password Manager • Face Recognition (with optional WebCam) • Device Access Manager w/ JITA • Drive Encryption • File Sanitizer • Security Manager Computrace (user optional)** Microsoft Security Essentials
Windows Applications	Internet Explorer Store Desktop Photos Mail Games Calendar People (contacts) Messaging SkyDrive Music Video Camera News	IE 10 - Home with Bing (Search)

Technical Specifications – Operating Systems, Software and eDocumentation

	Sports Weather Maps Finance Bing (Search)	
Productivity	Buy Office	Buy Office
HP Additions	HP Registration HP Getting Started with Windows 8 HP ePrint*** HP Support Assistant CyberLink Media Suite Windows 8 CyberLink Media Suite CyberLink YouCam**** CyberLink YouCam Windows 8**** CyberLink PowerDVD SD, BD CyberLink Power2Go CyberLink Photo Director HP Mobile Connect Evernote Skype DTS Sound + DTS Studio Sound	CyberLink Media Suite CyberLink YouCam CyberLink PhotoDirector CyberLink Power 2 Go CyberLink Power DVD HP Magic Canvas Evernote DTS Sound + DTS Studio Sound
Desktop Applications	HP Wireless Hotspot HP Support Assistant PDF Complete, corporate edition	PDF Complete Corporate Edition WinZip Basic Adobe Flash Player
HP Documentation (eDOCS)	HP eHelp Documentation HP Hardware Reference Guide HP Quick Setup & Getting Started Guide HP Regulatory and Safety Information HP Safety and Comfort Guide HP Warranty Documentation	HP eHelp Documentation HP Hardware Reference Guide HP Quick Setup & Getting Started Guide HP Regulatory and Safety Information HP Safety and Comfort Guide HP Warranty Documentation
HP Support Applications	HP EUDI Support Environment HP Help and Support HP Setup v9.0 HP Support Assistant	HP EUDI Support Environment HP Help and Support HP Recovery Manager HP Recovery Disk Creator HP Setup v9.0 HP Support Assistant

*Available via download

** Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription.

Subscriptions can be purchased for terms ranging from one to five years. Service is limited, check with Absolute for availability outside the U.S.

*** Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see www.hp.com/go/eprintcenter). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

****Preinstalled on models with webcam

*****Optional

Technical Specifications – Core vPro Processors

INTEL 3RD GENERATION CORE vPRO PROCESSORS

All HP Compaq Elite 8300 Business PC models featuring this technology include processors that are part of the Intel 2012 Stable Image Platform Program (SIPP) designed to ensure the stability promise inherent in the value proposition of the HP Compaq Elite 8300 Business PC, thus making these models the most stable, secure, and manageable platforms available to enterprises today.

Intel Advanced Management Technology (AMT) v8.0 – An advanced set of remote management features and functionality which provides network administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 8.0 includes the following advanced management functions:

- Power Management (on, off, reset)
- Hardware Inventory (includes BIOS and firmware revisions)
- Hardware Alerting
- Agent Presence
- System Defense Filters
- SOL/IDER
- Cisco NAC/SDN Support
- ME Wake-on-LAN
- DASH 1.1 compliance
- IPv6 Support
- Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection
- Remote Scheduled Maintenance - pre-schedule when the PC connects to the IT or service provider console for maintenance. Remote PCs can get required patches, be inventoried, etc by connecting to their IT console or Service Provider when it's convenient.
- Remote Alerts - automatically alert IT or service provider if issues arise
- Access Monitor - Provides oversight into Intel® AMT actions to support security requirements
- PC Alarm Clock
- Microsoft NAP Support
- Host Base set-up and configuration
- Management Engine (ME) firmware roll back
- Wireless AMT functionality on Desktop (WoDT)
- Enhanced KVM resolution

Technical Specifications - Graphics

Intel HD Graphics

VGA Controller Integrated

DisplayPort Integrated, multi-mode capable; supports HDCP and audio over DisplayPort

Bus Type Intel® Flexible Display Interface (Intel® FDI) - a proprietary link for carrying display traffic from the Processor Graphics controller to the PCH display I/Os.

Memory Intel graphics do not have dedicated memory but utilizes some of the computer's system memory. The amount of memory used for graphics depending on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content.

Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.

Maximum Graphics Memory	Microsoft Windows XP	Microsoft Windows 7	Windows 8
	Up to 1GB	Up to 1.7GB	Up to 1.8GB

Note: the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.

Multi-display Support Integrated dual independent monitor support facilitated via one VGA port and one DisplayPort integrated on the back plane of the system board and presented as part of the rear I/O set of interfaces. Support for DVI, HDMI, dual link DVI or second VGA monitor provided by optional HP DisplayPort adapters (see complete listing of available optional adapters elsewhere in this QuickSpec).

The system can support greater than two monitors with the addition of an optional discrete graphics card. Both integrated graphics and discrete graphics can be utilized simultaneously.

HW Video Decode AVC/VC1/MPEG2/JPEG/MJPEG/PAVP

Maximum Color Depth 32 bits/pixel

Graphics/Video API Support 3rd Generation Core processors:

- The Processor Graphics contains a refresh of the seventh generation graphics core enabling substantial gains in performance and lower power consumption. Up to 16 EU support.
- Next Generation Intel Clear Video Technology HD Support is a collection of video playback and enhancement features that improve the end user's viewing experience
 - Encode/transcode HD content
 - Playback of high definition content including Blu-ray Disc
 - Superior image quality with sharper, more colorful images
 - Playback of Blu-ray disc S3D content using HDMI (V.1.4 with 3D)
- DirectX Video Acceleration (DXVA) support for accelerating video processing
 - Full AVC/VC1/MPEG2 HW Decode
- Advanced Scheduler 2.0, 1.0, XPDM support
- Windows 7, Windows XP, OSX, Linux OS Support
- DirectX 11, DirectX 10.1, DirectX 10, DirectX 9 support
- OpenGL 3.3 support

2nd Generation Core processors:

- The Processor Graphics contains a refresh of the sixth generation graphics core enabling substantial gains in performance and lower power consumption.
- Next Generation Intel Clear Video Technology HD support is a collection of video playback and enhancement features that improve the end user's viewing experience.
 - Encode/transcode HD content

Technical Specifications - Graphics

- Playback of high definition content including Blu-ray Disc
- Superior image quality with sharper, more colorful images
- Playback of Blu-ray disc S3D content using HDMI (V.1.4 with 3D)
- DirectX Video Acceleration (DXVA) support for accelerating video processing
 - Full AVC/VC1/MPEG2 HW Decode
- Advanced Scheduler 2.0, 1.0, XPDM support
- Windows 7, XP, Windows Vista, OSX, Linux OS Support
- DirectX 10.1, DirectX 10, DirectX 9 support
- OpenGL 3.0 support

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Analog (VGA) Max Refresh Rate	DisplayPort Max Refresh Rate
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x768	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60
1920x1200	85	60
1920x1440	85	60
2048x1536	75	N/A
2560x1440	N/A	60
2560x1600	N/A	60

AMD Radeon HD 6350 Graphics Card

Introduction

The AMD Radeon HD 6350 DH PCIe x16 Graphics Card provides a low profile, PCI Express x16 graphics add-in card solution based on the AMD Radeon™ HD 6350 GPU. This card supports dual display video output through its single DMS-59 connector using a DMS-50 adapter cable.

An ideal solution for desktop PC customers seeking stable 2D and advanced 3D graphics performance, the AMD Radeon HD 6350 DH PCIe x16 Graphics Card is an excellent choice for small business users engaging in Web conferencing or video or photo editing, while improving your everyday business PC experience with better graphics and excellent visual display quality.

NOTE: Discrete graphics adapters can also access and use shared system memory, aka non-local video memory, through the PCI Express bus. Because system memory is accessed across the system bus, accessing it is much slower than accessing local memory.

Discrete graphics adapters generally share a portion of system memory with the CPU. Typically, these adapters do not ask for dedicated use of system memory for graphics, thus leaving more resources available for the rest of the system.

Key Benefits

- 512 MB of DDR3 dedicated on-board graphics frame buffer memory
- AMD Radeon™ HD 6350 GPU
- Conforms to full PCI Express 2.0A specification for low profile form factor (x16 lanes native PCI Express implementation)
- Includes a DMS-59 to Dual VGA Y Cable

Technical Specifications - Graphics

- HDCP supported on DVI outputs (DVI Requires optional kit DL139A)
- DirectX 11.1 support in hardware for optimal performance in DX11.1 applications.
- AMD Avivo technology for improved image and video playback.
- OpenGL 4.0 support in hardware for optimal performance with OpenGL applications

NOTE: The AMD Radeon HD 6350 PCIe x16 Graphics Card does not support Dual-link DVI capable monitors.

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	AMD HD 6350 GPU
Output Connector	Single DMS-59 connector Supports dual analog displays with included DMS-59 to dual VGA Y cable. Also supports dual digital displays with an optional DMS-59 to dual DVI cable.
Core Clock	650MHz
Memory Clock	800MHz
Memory Frame Buffer	512MB, DDR3, 64-bit wide
Bus Type	PCI Express x16, Generation 2.0
Max. Vertical Refresh	85Hz
Display Support	Integrated 400MHz RAMDAC
Display Max. Resolution	Digital 1900 x 1200 Analog 2048 x 1536
Max. Power Consumption	19.9W
Supported Graphics APIs	HDCP supported on DVI output using optional DMS-59 to dual DVI cable. DirectX 11.1 support in hardware. OpenGL 4.0 support in hardware.

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1600	N/A	N/A

Note: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

AMD Radeon HD 7450 Graphics Card

Introduction

Technical Specifications - Graphics

The AMD Radeon HD 7450 DP (1GB) PCIe x16 Graphics Card provides a low profile, PCI Express x16 graphics add-in card solution based on the AMD Radeon™ HD 7450 Graphics Processor. This card supports dual displays with its DisplayPort and dual link (DL) DVI connectors.

An ideal solution for desktop PC customers seeking stable 2D and advanced 3D graphics performance, the AMD Radeon HD 7450 DP (1GB) PCIe x16 Graphics Card is an excellent choice for small business users engaging in Web conferencing or video or photo editing, while improving the everyday business PC experience with better graphics and excellent visual display quality.

The AMD Radeon HD 7450 DP (1GB) PCIe x16 Graphics Cards delivers PCI Express (PCIe) features including:

- Full 16 lane PCIe bus support with peak bandwidth support
- High resolution monitor support with the dual-link DVI port
- Multi-mode DisplayPort connector for current and future display technology support

NOTE: Discrete graphics adapters can also access and use shared system memory, aka non-local video memory, through the PCI Express bus. Because system memory is accessed across the system bus, accessing it is much slower than accessing local memory.

Discrete graphics adapters generally share a portion of system memory with the CPU. Typically, these adapters do not ask for dedicated use of system memory for graphics, thus leaving more resources available for the rest of the system.

Key Benefits

- 1GB of DDR3 dedicated on-board graphics frame buffer memory
- Featuring the AMD Radeon™ HD 7450 Graphics Processing Unit
- Conforms to full PCI Express 2.0A specification for low profile form factor (x16 lanes native PCI Express implementation)
- Provides dual-link (DL) DVI-I and DisplayPort output ports. A DVI-to-VGA adapter cable included
- DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits [NR078AA](#), [FH973AT](#), [BP937AA](#), [AS615AA](#).

For a DisplayPort to DisplayPort connection use the optional DisplayPort Cable Kit VN567AA

- Supports audio with video through the DisplayPort connector
- Multi-Stream DisplayPort support provided in a future driver update
- HDCP supported on DisplayPort and DVI output
- DirectX 11 support in hardware for optimal performance in DX11 applications.
- ATI Avivo technology for improved image and video playback.
- OpenGL 4.0 support in hardware for optimal performance with OpenGL applications
- Thermally controlled fan for quiet operation.
- Low Halogen construction

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
Graphics Controller	AMD HD 7450 GPU (based on AMD Radeon HD 6000 series technology)
Output Connector	Dual-link (DL) DVI-I and DisplayPort output ports
Core Clock	625MHz
Memory Clock	800MHz
Memory Frame Buffer	1GB, DDR3, 64-bit wide
Bus Type	PCI Express x16, Generation 2.0
Max. Vertical Refresh	85Hz
Display Support	Integrated 400MHz RAMDAC
Display Max. Resolution	Digital 2560 x 1600 Analog 2048 x 1536

Technical Specifications - Graphics

Max. Power Consumption	20.7 W
Supported Graphics APIs	DirectX 11 support in hardware. OpenGL 4.0 support in hardware.

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	60*
2048 x 1536	75	60*
2560 x 1600	N/A	60**

* Only supported with a Display Port monitor connection

** Only supported when using a dual link DVI or DP monitor connection.

Note: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

AMD Radeon HD 7650A Graphics Card

Form Factor	MXM 3.0
Graphics Controller	AMD Radeon HD 7650A
Output Connector	Dual-link (DL) DVI-I and DisplayPort output ports
Core Clock	600MHz
Memory Clock	800MHz
Memory	2GB, DDR3, 128-bit wide
Max. Power	35W
HDCP Support	Yes
Supported Graphics APIs	DX11, OpenGL 4.1
Display Support	Maximum number of simultaneous displays: 4 DisplayPort Multistreaming and HBR2 supported. DisplayPort Audio supported for one audio stream

Supported Display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	DisplayPort Connection
640x480	85	60
800x600	85	60
1024x768	85	60

Technical Specifications - Graphics

1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60
1920x1200	85	60
1920x1440	85	60
2048x1536	75	60
2560x1440	N/A	60
2560x1600	N/A	60

NVIDIA NVS 300 Graphics Card

Introduction

The NVIDIA NVS 300 PCIe Graphics Card is a low profile, dual-head graphics card delivering next-generation multi-display capabilities to professional business and commercial applications.

If you require a graphics card for use with desktops in a telesales-center environment, or frequently analyze spreadsheets requiring the flexibility of dual-monitor displays, the NVIDIA NVS 300 PCIe Graphics Card is the ideal solution for you. Easily installed with a setup wizard, this controller integrates seamlessly with the Microsoft Windows environment. nView - NVIDIA's multi-display software, enhances your productivity in single or multi-display environments by allowing you to take advantage of features like gridlines & Virtual Desktops (Virtual Desktops allows an end user to create up to 32 individual desktops)

The NVIDIA NVS 300 PCIe Graphics Card is also GPU computing ready. It is capable of enhancing system performance if used in conjunction with applications that support GPU computing through DirectCompute, CUDA, or OpenCL frameworks.

The NVIDIA NVS 300 PCIe Graphics Card includes 512MB of DDR3 graphics memory. A minimum system memory configuration of 1GB is needed to support this card.

NOTE: Discrete graphics adapters can also access and use shared system memory, aka non-local video memory, through the PCI Express bus. Because system memory is accessed across the system bus, accessing it is much slower than accessing local memory.

Discrete graphics adapters generally share a portion of system memory with the CPU. Typically, these adapters do not ask for dedicated use of system memory for graphics, thus leaving more resources available for the rest of the system.

Key Benefits

- View your work on two monitors with nView multi-display software and create up to 32 individual desktops (using 'Virtual Desktops' with nView)
- Compatible with all major financial, non-linear editing (NLE), and electronic design automation (EDA) applications
- Includes 512 MB of dedicated DDR3 graphics memory
- Deliver crystal-clear images via dual 400-MHz RAMDACs
- Supports the latest flat-panel displays, dual analog or digital displays
- Robust IT management tools for seamless installation, deployment and maintenance
- Passive heatsink for silent operation
- DirectX 10.1 support in hardware for optimal performance in DX10 applications
- OpenGL 3.3 support in hardware for optimal performance with OpenGL applications

Form Factor

PCI Express x16 (generation 2.0)
Low Profile, half length, 2.586" x 5.7" (6.57 x 14.48 cm)
Full height bracket utilized when configured to CMT or MT

Graphics Controller

Nvidia GT218 GPU

Technical Specifications - Graphics

Memory Frame Buffer	512MB DDR3, 64-bit wide Single DMS-59 connector
Output Connectors	Supports dual analog displays with included DMS-59 to dual VGA Y cable. Support dual digital displays with an optional adapter (see complete listing of available optional adapters elsewhere in this QuickSpec).
RAMDAC	Dual 400MHz
Core Clock	520MHz
Memory Clock	790MHz
Frame Buffer	512MB DDR2, 64-bit wide
Maximum Pixel Clock (analog)	400MHz
Overlay planes	One 16-bit video overly plane
Video Acceleration	Directx 10.1; OpenGL 3.3; CUDA, DirectCompute Full screen, full frame video playback of HDTV, Blu-ray and DVD content
High-definition Video Processor (HDVP)	Inbuilt video decoder for multiple video formats including MPEG2, VC-1, WMV9, H.264, and MVC Capable of decoding dual Video Streams at HD (1080p) resolutions Hardware color-space conversion (YUV 4:2:2 and 4:2:0) High-Quality in-built Filtering/Scaling Stereo & HD Audio (LPCM 7.1) support for HDMI outputs (HDMI via optional DVI-HDMI dongles) with the DMS-59 to DisplayPort Adapter
Supported Graphics APIs	OpenGL 3.3 support in hardware DirectX 10.0 support in hardware

Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A

Note: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

NVIDIA NVS 310 Graphics Card

Introduction

The NVIDIA® NVS™ 310 Graphics Card is a PCI Express low profile form factor graphics add-in card targeted as an active low cost graphics solution for the corporate business and enterprise markets.

Technical Specifications - Graphics

The NVIDIA® NVS 310 graphics card is an ideal solution for customers requiring a small form factor graphics add-in card for either standard or small form factor PC designs.

Performance and Features

The NVIDIA® NVS 310 Graphics Card offers 512 MB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.

- DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits [NR078AA](#), [FH973AT](#), [BP937AA](#), [AS615AA](#).
- For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.

Form Factor (H x L)	Low Profile: 2.713 × 6.15 in
Bus Type	PCI Express x16, 2.0 compliant
Graphics Controller	NVIDIA® NVS 310
Memory Size	512 MB DDR3
Memory Clock	875MHz
Memory Bandwidth	14 GB/s
Connectors	2 x DisplayPort
Maximum Resolution	Up to 2560 x 1600 (digital display) per display.
Display Output	Up to 2 displays in the following configurations DisplayPort output: <ul style="list-style-type: none"> • Drives two DisplayPort enabled digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card • Supports 2 monitors up to resolution of 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort Multi-Stream topology technology DVI-D output: <ul style="list-style-type: none"> • Drives two digital display at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors • Drives two digital display at resolutions up to 2560× 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors HDMI output: <ul style="list-style-type: none"> • NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 × 1080P at 60 Hz using DisplayPort to HDMI cable adaptors VGA display output: <ul style="list-style-type: none"> • Drives two analog display at resolutions up to 1920 × 1200 at 60 Hz using DisplayPort to VGA cable adaptors
Max. Power	19.5 W

Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rates (Hz) by Connection			
	DisplayPort to VGA	DisplayPort to DVI-D	DisplayPort to HDMI	DisplayPort
640 x 480	85	60	60	60
800 x 600	85	60	60	60
1024 x 768	85	60	60	60
1280 x 720	85	60	60	60
1280 x 1024	85	60	60	60

Technical Specifications - Graphics

1440 x 900	75	60	60	60
1600 x 1200	60	60	60	60
1680 x 1050	60	60	60	60
1920 x 1080	60-R	60-R	60	60
1920 x 1200	60-R	60-R		60
1920 x 1440				60
2048 x 1536				60
2560 x 1600				60

Note: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

NVIDIA GeForce GT 630 Graphics Card

Introduction

The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Card Graphics Card provides a full height, PCI Express x16 graphics add-in card solution based on the NVIDIA Kepler Architecture GPU. The card is designed to support three display connections through its DVI, and two DisplayPort connectors.

An ideal solution for desktop PC customers seeking enhanced 2D and advanced 3D graphics performance, the NVIDIA GeForce GT630 DP (2GB) PCIe x16 Cards are an excellent choice for business users who want run multiple displays from a single graphics board. Engage in Web conferencing or video or photo editing, while improving your everyday business PC experience with better graphics and excellent visual display quality.

The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Cards deliver superior PCI Express (PCIe) Gen 3 features including:

- Unprecedented flexibility for new applications and enhanced performance
- Support for NVIDIA surround technology
- Run multiple displays from a single graphics card
- Full 16 lane PCIe Generation 3 bus support with peak bandwidth support
- Wireless Display ready for future support

NOTE: Graphics cards use part of the total system memory (RAM) for graphics performance. System memory dedicated to graphics performance is not available for other use by other programs.

Key Benefits

- 2 GB of DDR3 dedicated on-board graphics frame buffer memory removing the need to share PC system memory
- Features the latest NVIDIA Kepler Architecture GPU Support
- Run multiple displays from a single graphics board
- DisplayPort 1.2 hardware ready for future multi-monitor support
- Provides Dual-Link (DL) DVI-I and two multimode DisplayPort output ports (useable at the same time)
- Also supports legacy displays using adapters:
 - DVI to VGA adapter (1 included)
 - HP DP to DVI-D adapter FH973AA (1 included)
 - HP DP to HDMI adapter BP937AA (optional)
 - HP DP to VGA adapter AS615AA (optional)
 - HP DP to dual link DVI-D adapter NR078AA (optional)
- Supports Audio over DisplayPort for users who need audio with video thru the DisplayPort connector. Audio is also supported with the optional HP DP to HDMI adapter (BP937AA).
- Audio is also supported using DVI to HDMI adapters (Adapters not available from HP)
- Conforms to full PCI Express 3.0A specification for full height form factor (x16 lanes native PCI Express implementation)
- HDCP supported on DVI and DisplayPort outputs
- DirectX11 support in hardware for optimal performance in DX11 applications
- OpenGL 4.2 support in hardware for optimal performance with OpenGL applications

Technical Specifications - Graphics

NVIDIA GeForce GT630 DP (2GB) PCIe x16 Card

Memory	Peak theoretical memory bandwidth
2 GB DDR3 128 bit	28.5 GB/s

Compatibility

The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Card is compatible with the HP Compaq 6005 Pro MT, HP Compaq 6200 Pro MT, HP Compaq 8200 Elite MT/CMT, HP Compaq Elite 8300 MT/CMT, HP Pro 6300 MT, HP Pro 3330 MT, HP Pro 3335 MT, HP Pro 3340 MT.

NOTE: Not all models are available in all regions.

Service and Support

Your Option Limited Warranty is a one (1) year (HP Option Limited Warranty Period) parts replacement warranty on any HP-branded or Compaq-branded options (HP Options). If your HP Option is installed in an HP Hardware Product, HP may provide warranty service either for the HP Option Limited Warranty Period or the remaining Limited Warranty Period of the HP Hardware Product in which the HP Option is being installed, whichever period is the longer but not to exceed three (3) years from the date you purchased the HP Option.

Output connectors 1 - Dual link DVI; 2 - Multimode Display Port outputs

Board display options Supports three displays

Specification	Description
Graphics Chip	NVIDIA Kepler Architecture GPU

Board configuration	Core clock	875 MHz
	Memory clock	891 MHz
	Frame buffer	2GB DDR3, 128 bit wide

Bus type PCI Express (x16 lanes) 3.0

Maximum vertical refresh rate 85 Hz

Display support Integrated 400 MHz RAMDAC

Display max resolution 2560 x 1600 digital, 2048 x 1536 analog

Display Resolutions and Refresh Rates

Note: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	60
2048x1536	75	60

Technical Specifications - Graphics

2560x1600

N/A

60

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

Technical Specifications – Hard Disk and Solid State Storage

Introduction:

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP Compaq 8300 Pro Business PC supports the latest SATA 6.0Gb/s specification.

HP Drive Lock

HP Serial ATA Hard Drives offer enhanced security via a new Drive Lock. When enabled, this ATA security feature set prevents software access to user data on the drive until one or two user-defined passwords are provided.

SMART IV Technology

Self Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

Note: GB = 1 billion bytes. Actual available capacity is less.

Technical Specifications – Hard Disk and Solid State Storage

Redundant Array of Independent Drives (RAID)


Flexible implementation:

- DriveLock is supported while in RAID mode. Users can manage the DriveLock password from within F10 Setup. Locked drives will be displayed as such in the RAID option ROM interface.
- Hard drive information can be viewed within F10 Setup while in RAID mode. Previously, the hard drives will not appear in Drive Configuration when switching to RAID mode.
- DPS Self Test can be executed on physical hard drives while in RAID mode.
- The RAID Setup Utility (accessed through CTRL-I) can be protected by the F10 Setup password.

NOTE:

RAID 1 is the only RAID configuration offered via factory configurations. The pre-configured systems:

- Are only available on the SFF, MT and CMT form factors. The USDT does not support RAID as it does not allow for more than one hard disk drive.
- Are complete RAID systems and have both drives installed. If the CMT is configured with three hard disk drives, the third drive is would be unpartitioned and not part of the RAID array
- Have the necessary Option ROM configuration.
- Are pre-loaded and pre-installed with all required Intel software.
- Include a preinstalled operating system that is mirrored mode out of the box.

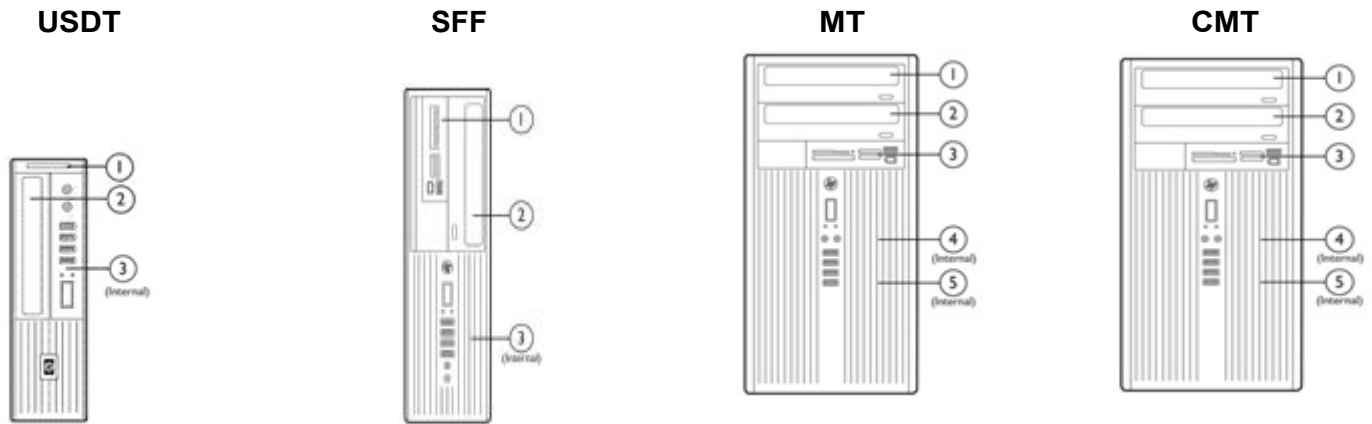

Storage Drive Support												
	USDT			SFF			MT			CMT		
	SDR	ODD	HDD	MCR	ODD	HDD	MCR	ODD	HDD	MCR	ODD	HDD
Quantity Supported	1	1	1	1	1	2	1	2	2	1	2	3
Position	1	2	3	1	2	1,3	3	1,2	4,5	3	1,2	4,5,6

Technical Specifications – Hard Disk and Solid State Storage

Controller	USDT	SFF	MT	CMT
Hard Drive Controller	These systems provide up to four serial ATA (SATA) interfaces that support transfer rates up to 6.0 Gb/s (for ports 0 and 1, 3 Gb/s on all others) and RAID data protection functionality. These systems can also support an external SATA (eSATA) device through an optional bracket/cable assembly (does not apply to USDT).			
SATA Interfaces	2 ea. SATA 3.0	2 ea. SATA 3.0 1 ea. SATA 2.0 1 ea. eSATA		2 ea. SATA 3.0 2 ea. SATA 2.0 1 ea. eSATA
Host SATA Controller	Advanced Host Controller Interface (AHCI) Revision 1.2. The specification includes a description of the hardware/software interface between system software and the host controller hardware.			

HP 250-GB 7200rpm SATA 6.0Gb/s 3.5” Hard Disk Drive

Capacity	250,059,350,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	8 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 1.0 ms Average: 8.5 ms Full-Stroke: 18 ms
Height (nominal)	1 in (2.54 cm)
Width (nominal)	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)
Operating Temperature	41° to 131° F (5° to 55° C)

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive

Capacity	500,107,862,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	976,773,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

Technical Specifications – Hard Disk and Solid State Storage

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive

Capacity	1,000,204,886,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	32 MB
Logical Blocks	1,953,525,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 120-GB Solid State Drive

Unformatted Capacity	120 GB
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
Interface	Serial ATA 2.0 (3.0 Gb/s)
Dimensions (W x H x D)	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
Weight	0.18 lb/80 g
Bandwidth Performance	Sustained Sequential Read: Up to 250 MB/s Sustained Sequential Write: Up to 70 MB/s Random Read: Up to 35K IOPs Random Write: Up to 6.6K IOPs
Latency	Read: 65-ms Write: 85-ms
Power	DC power requirement: 5 VDC 5%-100 mV ripple p-p Total power consumption: 0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years Operating Temperature: 32° to 158° F (0° to 70° C)
Environmental (all conditions, non-condensing)	Relative Humidity: 5% to 95% Maximum Wet Bulb Temperature (operating): 84° F (29° C) Shock: 1,500 G/0.5-ms

Technical Specifications – Hard Disk and Solid State Storage

HP 128 GB Solid State Drive

Unformatted Capacity	128 GB*
Architecture	Multi Level Cell (MLC) NAND
Interface	SATA 6 GB/sec
Dimensions (W x H x D)	2.75 x 0.276 x 3.96 in (6.985 x 0.7 x 10.05 cm)
Weight	0.16 lb (73 g)
Bandwidth Performance	Sustained Sequential Read: Up to 450 MB/s
	Sustained Sequential Write: Up to 260 MB/s
	Random Read: up to 46K IOPs
	Random Write: up to 56K IOPs
Latency	Read: 55ms (TYP)
	Write: 55ms (TYP)
Power	DC power requirement: Min 4.5 V; Max 5.5 V
	Total power consumption: 160 mW (Active) ; <85 mW; (Idle)
Useful Drive Life	1.2 million device hours**
Environmental (all conditions, non-condensing)	Operating Temperature: 32° to 158° F (0° to 70° C)
	Relative Humidity: 5% to 95%
	Maximum Wet Bulb Temperature (operating): 84° F (29° C)
	Shock: 1,500 G/1.0 msec
Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, Korea KCC, CE Mark
Option kit contents	HP 128 GB Solid State Drive, documentation, 3.5-inch bay adapter bracket, 3.5-inch bay adapter bracket screws, SATA cable

HP 256-GB Self-encrypting Solid State Drive

Unformatted Capacity	256 GB
Architecture	Multi Level Cell (MLC) NAND Flash with a single-chip controller
Interface	Serial ATA (SATA) (6.0 Gb/s)
Dimensions (W x H x D)	2.75 x 0.275 x 3.95 in/6.985 x 0.7 x 10.05 cm
Weight	0.16 lb/73 g
Bandwidth Performance	Sustained Sequential 128k Read: Up to 450 MB/s
	Sustained Sequential 128k Write: Up to 260 MB/s
	Random 4k Read: up to 46K IOPs
	Random Write: up to 56K IOPs
Latency	Read: 55-ms
	Write: 55-ms
Power	Voltage input: 4.5 V (min); 5.5 V (max)
	Total power consumption (average): 160 mW (active); <85 mW (idle)
Useful Drive Life	72TB written, up to 40GB/day for 5 years

Technical Specifications – Hard Disk and Solid State Storage

Operating Temperature:32° to 158° F (0° to 70° C)

Non-operating Temperature:-40° to 185° F (-40° to 85° C)

Environmental

(all conditions, non-condensing)

Relative Humidity:5% to 95%

Shock: 1,500 G/1.0-ms

* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content

** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.

Technical Specifications - Removable Storage

HP Blu-ray Writer Drive

AMO Part Number	AR482AA	
Height	5.25-inch, half-height, tray-load	
Orientation	Either horizontal or vertical	
Interface type	SATA	
Disc capacity	50 GB DL or 25 GB standard	
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 19.0 cm)	
Weight (max)	2.0 lb (907 g)	
	DVD-ROM	8.5GB DL or 4.7GB standard
	Blu-ray	50GB DL or 25GB standard
	Full Stroke DVD	< 250 ms (seek)
	Full Stroke CD	< 210 ms (seek)
	Blu-ray	< 275 ms (seek)
		(Time to drive ready from tray loading)
		BD-ROM (SL/DL) 25S / 28S
		BD-R (SL/DL) 25S / 28S
		BD-RE (SL/DL) 25S / 28S
		DVD-ROM (SL/DL) 18S / 18S
Disc Capacity	Startup Time	DVD-R (SL/DL) 25S / 25S
		DVD-RW 25S
		DVD+R (SL/DL) 25S / 25S
		DVD+RW DVD+RW 25S
		DVD-RAM 45S
		CD-ROM 15S
	CD-ROM Read	CD-ROM up to 40X
		CD-R up to 40X
		CD-RW up to 40X
	DVD-ROM Read	DVD-RAM up to 5X
		DVD+RW up to 10X
		DVD-RW up to 10X
		DVD+R DL up to 8X
		DVD-R DL up to 8X

Technical Specifications - Removable Storage

Maximum Data Transfer Rates		DVD-ROM up to 16X
		DVD-ROM DL up to 8X
		DVD+R up to 12X
		DVD-R up to 12X
	Blu-ray	BD-ROM up to 6X
		BD-ROM DL up to 4.8X
		BD-R up to 6X
		BD-R DL up to 4.8X
		BD-R up to 6X
		BD-RE SL/DL up to 4.8X
Power	Source	SATA DC power receptacle
	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
	DC Current	5 VDC -1000 mA typical, 1600 mA maximum 12 VDC -600 mA typical, 1400 mA maximum
	Temperature (operating)	41° to 122° F (5° to 50° C)
Environmental (all conditions non-condensing)	Relative Humidity (operating)	10% to 90%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)

HP SuperMulti DVD Writer Drive

AMO Part Number	AR630AT		
Height	5.25-inch, half-height, tray-load		
Orientation	Either horizontal or vertical		
Interface type	Serial ATA		
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
Weight (max)	2.6 lb (1.2 kg)		
	CD Media Read Access	Random	< 120 ms typical
		Full Stroke	< 200 ms typical
	DVD Media Read Access	Random	< 130 ms typical
		Full Stroke	< 240 ms typical
		CD-ROM, CD-R Read	Up to 6000 KB/s (40X)
		CD-RW Read	Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)
	CD Media Read Transfer	Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)
		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)

Technical Specifications - Removable Storage

		Video CD Playback	Up to 2400 KB/s (16X)	
		DVD-ROM SL Read	Up to 21600 KB/s (16X)	
		DVD-ROM DL Read	Up to 10800 KB/s (8X)	
		DVD Video Playback	Up to 10800 KB/s (8X)	
		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)	
	DVD Media Read Transfer	DVD Video DL (other than playback)	Up to 10800 KB/s (8X)	
Performance		DVD-R	Up to 21600 KB/s (16X)	
		DVD+R	Up to 21600 KB/s (16X)	
		DVD-RW	Up to 10800 KB/s (8X)	
		DVD-R DL	Up to 10800 KB/s (8X)	
		DVD+RW	Up to 10800 KB/s (8X)	
		CD-R Write	Up to 6000 KB/s (40X)	
		CD Media Write Transfer	CD-RW 600 KB/s (4X)	
			CD-RW (High speed) 1500 KB/s (10X)	
			CD-RW (Ultra speed) Up to 3600 KB/s (24X)	
			DVD+R Up to 21600 KB/s (16X)	
			DVD+R DL (v1.2) Up to 16200 KB/s (8X)	
			DVD+R DL (v1.1) Up to 10800 KB/s (8X)	
			DVD+RW (Volume 2 v1.0) Up to 10800 KB/s (8X)	
			DVD+RW (Volume 1 v1.3) Up to 5400 KB/s (4X)	
	DVD Media Write Transfer	DVD-R (v2.1 rev. 6.0) Up to 16200 KB/s (12X)		
		DVD-R (v2.1 rev. 4.0) Up to 21600 KB/s (16X)		
		DVD-R DL (v3.0 rev. 5.0) Up to 10800 KB/s (8X)		
		DVD-R DL (v3.0 rev. 3.0) Up to 10800 KB/s (8X)		
		DVD-RW (v1.2 rev. 3.0) 8100 KB/s (6X)		
		DVD-RW (v1.2 rev. 2.0) Up to 5400 KB/s (4X)		
		DVD-RAM Up to 6750 KB/s (5X)		
Media Compatibility	Media	Read	Write	
		CD-ROM	Yes	No
		CD-R	Yes	Yes
		CD-RW	Yes	Yes
		DVD-ROM	Yes	No
		DVD-ROM DL	Yes	No
		DVD-RAM	Yes	Yes
		DVD+R	Yes	Yes
		DVD+R DL	Yes	Yes
		DVD+RW	Yes	Yes
		DVD-R	Yes	Yes
		DVD-RW	Yes	Yes
		DVD-R DL	Yes	No
		Source	SATA DC power receptacle	
	DC Power Requirement	5 VDC ± 5%	100 mV ripple p-p	
		12 VDC ± 5%	200 mV ripple p-p	

Technical Specifications - Removable Storage

Power Supply		5 VDC	<1000 mA (typical) 1600 mA (max.)
	DC Current	12 VDC	1200 mA (typical) 2000 mA (max.)
		Total Drive Power (Standby Mode)	< 2.5W
Rear Panel	SATA Power Connector, 15-pin		
	SATA Data Connector, 7-pin		
	Markings to identify each connector		
Environmental conditions (all conditions non-condensing)	Operating Temperature	41° to 122° F (5° to 50° C)	
	Storage Temperature	-22° F to 140° F (-30° C to 60° C)	
	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86° F (30° C)	
	Altitude	0 to 10,171 ft. (0 to 3,100 meters)	
HP DVD-ROM Drive			
AMO Part Number	AR629AA		
Height	5.25-inch, half-height, tray-load		
Orientation	Either horizontal or vertical		
Interface type	Serial ATA		
Dimensions (W x H x D)	5.8 x 1.7 x 6.9 in (14.8 x 4.2 x 17.5 cm)		
Weight (max)	2.1 lb (950 kg)		
Performance	CD Media Read Access	Random	< 120 ms typical
		Full Stroke	< 200 ms typical
	DVD Media Read Access	Random	< 130 ms typical
		Full Stroke	< 240 ms typical
		CD-ROM, CD-R Read	Up to 6000 KB/s (40X)
	CD Media Read Transfer	CD-RW Read	Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)
		Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)
		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)
		Video CD Playback	Up to 2400 KB/s (16X)
	DVD Media Read Transfer	DVD-ROM SL Read	Up to 21600 KB/s (16X)
		DVD-ROM DL Read	Up to 10800 KB/s (8X)
		DVD Video Playback	Up to 10800 KB/s (8X)
		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)
		DVD Video DL (other than playback)	Up to 10800 KB/s (8X)
DVD-R		Up to 21600 KB/s (16X)	
DVD+R		Up to 21600 KB/s (16X)	
DVD-RW	Up to 10800 KB/s (8X)		

Technical Specifications - Removable Storage

	Media	Read	Write
	DVD-R DL		Up to 10800 KB/s (8X)
	DVD+RW		Up to 10800 KB/s (8X)
Media Compatibility	CD-ROM	Yes	No
	CD-R	Yes	No
	CD-RW	Yes	No
	DVD-ROM	Yes	No
	DVD-ROM DL	Yes	No
	DVD-RAM	Yes	No
	DVD+R	Yes	No
	DVD+R DL	Yes	No
	DVD+RW	Yes	No
	DVD-R	Yes	No
	DVD-RW	Yes	No
	DVD-R DL	Yes	No
	Source	SATA DC power receptacle	
Power Supply	DC Power Requirement	5 VDC ± 5%	100 mV ripple p-p
		12 VDC ± 5%	200 mV ripple p-p
	DC Current	5 VDC	1000 mA (typical) 1600 mA (max.)
		12 VDC	1200 mA (typical) 2000 mA (max.)
	Total Drive Power (Standby Mode)	< 2.5W	
Rear Panel	SATA Power Connector, 15-pin		
	SATA Data Connector, 7-pin		
	Markings to identify each connector		
Environmental conditions (all conditions non-condensing)	Operating Temperature	41° to 122° F (5° to 50° C)	
	Storage Temperature	-22° F to 140° F (-30° C to 60° C)	
	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86° F (30° C)	
	Altitude	0 to 10,171 ft. (0 to 3,100 meters)	

HP Slim SuperMulti DVD Writer Drive

Height	12.7mm height
Orientation	Either horizontal or vertical
Interface type	SATA/ATAPI
Disc recording capacity	Up to 8.5 GB DL or 4.7 GB standard
Dimensions (W x H x D)	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)
Weight (max)	0.42 lb (190 g)
	DVD-RAM Up to 5X

Technical Specifications - Removable Storage

	DVD-R DL	Up to 4X
	DVD+R	Up to 8X
	DVD+RW	Up to 4X
Write speeds	DVD+R DL	Up to 4X
	DVD-R	Up to 8X
	DVD-RW	Up to 6X
	CD-R	Up to 24X
	CD-RW	Up to 16X
	DVD-RAM	Up to 5X
	DVD-RW, DVD+RW	Up to 8X
	DVD-R DL, DVD+R DL	Up to 6X
Read speeds	DVD+R, DVD-R	Up to 8X
	DVD-ROM DL, DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)
Access time (typical reads, including settling)	Stop Time	< 4 seconds
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s - default)
	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
Power	DC Current	5 VDC (< 1000 mA typical, 1600 mA maximum) 12 VDC (< 600 mA typical, 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
	Line-Out	0.7 VRMS
Audio output	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
	Temperature	41° to 122° F (5° to 50° C)
Environmental conditions (operating - non-condensing)	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)

Technical Specifications - Removable Storage

HP Slim DVD-ROM Drive

Height	12.7mm	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Dimensions (W x H x D)	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)	
Weight (max)	0.42 lb (190 g)	
Read speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 4X
	DVD-ROM	Up to 8X
	CD-ROM, CD-R CD-RW	Up to 24X Up to 24X
Access time (typical reads, including settling)	Random DVD	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	Random CD	DVD: < 250 ms (seek), CD: < 210 ms (seek)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s)
Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum
	Total Drive Power (standby mode)	< 2.5 Watt
Audio output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	5% to 85%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)

HP 22-n-1 Media Card Reader

USB 2.0 High-speed interface

USB Interface

Note:

Requires the USB cable to be connected to the internal USB 2.0 port or a USB 2.0 PCI card.

Supports hardware ECC (Error Correction Code) function

Technical Specifications - Removable Storage

Supports hardware CRC (Cyclic Redundancy Check) function

Supports MS 4-bit parallel transfer mode

Supports MS-PRO 4-bit parallel transfer mode

Advance protocol support Supports MS PRO-HG Duo 4-bit parallel transfer mode

Supports SD 4-bit parallel transfer mode

Supports high-speed 50Mhz SD 4-bit card (version 2.0)

Supports high-speed 52Mhz MultiMediaCard 8-bit card (version 4.2)

Supports CF v4.0 with PIO mode 6 and Ultra DMA mode

CompactFlash Type I

CompactFlash Type II

Microdrive

MultiMediaCard

Reduced Size MultiMediaCard (RS MultiMediaCard)

MultiMediaCard 4.2 (MultiMediaCard Plus, including MultiMediaCard Plus HC)

Reduced Size MultiMediaCard 4.2 (MultiMediaCard Mobile, including MultiMediaCard Mobile HC)

Secure Digital Card (SD)

Secure Digital High Capacity (SDHC)

miniSD

Supported media type miniSD High Capacity

Micro SD (T-Flash)

Micro SD HC

Memory Stick

Memory Stick Select

Memory Stick Duo (MS Duo)

Memory Stick PRO (MS PRO)

Memory Stick PRO Duo (MS PRO Duo)

Memory Stick PRO-HG Duo

MagicGate Memory Stick (MG)

MagicGate Memory Stick Duo

Picture Card

Supported media type with Memory Stick Micro (M2)

card adapter

MultiMediaCard Micro

Test Parameters/Conditions - Power applied,
unit operating on system $\pm 5\%$

Technical Specifications - Removable Storage

Environmental

Operational Environmental Extremes

nominal supply voltage.
10°C 10% R.H. ≤ 24 hours
10°C 90% R.H. ≤ 24 hours
20°C 90% R.H. ≤ 24 hours
30°C 90% R.H. ≤ 24 hours
40°C 90% R.H. ≤ 24 hours
50°C 90% R.H. ≤ 24 hours
50°C 10% R.H. ≤ 24 hours

Storage Environmental Extremes

Test Parameters/Conditions
140°F (60°C) @ 80% R.H. for 96 hours
-22°F (-30°C) @ 20% R.H. for 48 hours
No power applied
Delta °C < 1.0°C/min
Delta % R.H. < 1.5% R.H./min

Approvals

USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0

Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.3

FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV-T

Technical Specifications – Memory

System Memory Support

The HP Compaq Elite 8300 Business PC supports the 2nd and 3rd generation Intel® Core™ processor families. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the processor includes an integrated memory controller (IMC). The IMC supports DDR3 protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC DDR3 unbuffered dual in-line memory modules (UDIMM) or DDR3 unbuffered small outline dual in-line memory modules (SO-DIMM) with a maximum of two DIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- DDR3 memory data transfer rates of up to 1600 MT/s; actual supported DDR3 data transfer rate determined by the configured processor.
- 64-bit wide channels
- DDR3 system memory I/O voltage of 1.5V
- Theoretical Maximum Memory Bandwidth:
 - 10.6 GB/s in single-channel mode or 21.3 GB/s in dual-channel mode assuming DDR3 1333 MT/s
 - 12.8 GB/s in single-channel mode or 25.6 GB/s in dual-channel mode assuming DDR3 1600 MT/s
 - 32 GB maximum memory support depending upon available number of DIMM sockets
- DDR3-1600 (PC3-12800) DIMMs are supported but limited to the 1333 MT/s data transfer rate when not configured with IvyBridge generation chipset.

CAUTION: You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

Memory Configurations: Ultra Slim Desktop

Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Total Memory	Socket	
	Channel A (black)	Channel B (black)
2 GB (dual channel)	2 GB	Unpopulated
4 GB (dual channel)	2 GB	2 GB
8 GB (dual channel)	4 GB	4 GB
16 GB (dual channel)	8 GB	8 GB

Technical Specifications – Memory

Memory Configurations: Small Form Factor / Microtower/ Convertible Minitower

Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Total Memory	Socket			
	Channel A (black)		Channel B (black)	
	1 (black)	2 (white)	3 (white)	4 (white)
2 GB	2 GB	unpopulated	Unpopulated	unpopulated
4 GB (dual channel)	2 GB	unpopulated	2 GB	unpopulated
8 GB (dual channel)	2 GB	2 GB	2 GB	2 GB
16 GB (dual channel)	4 GB	4 GB	4 GB	4 GB

Technical Specifications - Communications

Intel 82579LM GbE Network Connection (integrated)

Connector	RJ-45
System Interface	Integrated on PCA
Controller	Intel 82579LM GbE platform LAN connect networking controller
Memory	24 KB FIFO packet buffer memory
Data rates supported	10/100/1000 Mbps 802.1P 802.1Q 802.2 802.3 802.3ab 802.3az 802.3u
IEEE Compliance	802.3 802.3ab 802.3az 802.3u
Bus architecture	PCI Express and SMBus
Data transfer mode	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
Power requirement	Requires 3.3V and 1.05V or just 3.3V with integrated regulators Power consumption 0.697 Watts
Boot ROM support	Yes
Network transfer mode	Full-duplex Half-duplex (not supported for the 1000BASE-T transceiver)
Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
Environmental	Operating Temperature: 0° to 85° C Operating Humidity: 60% RH
Management Alerting	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic. ASF 2.0 support; AMT 7.0 support

Technical Specifications - Communications

Intel Gigabit CT Desktop Network Interface Controller

Connector	RJ-45
System Interface	PCI Express x1
Controller	Intel WG82574L Gigabit Ethernet Controller
Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
Data rates supported	10/100/1000 Mbps
Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
Bus architecture	PCI-E 1.0a
Data path width	X1, 250 MB/s, Bi-directional interface
Data transfer mode	Bus-master DMA
Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
Boot ROM support	Yes
	10BASE-T (half-duplex) 10 Mbps
	10BASE-T (full-duplex) 20 Mbps
Network Transfer Rate	100BASE-TX (half-duplex) 100 Mbps
	100BASE-TX (full-duplex) 200 Mbps
	1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
Environmental	Operating Temperature: 32° to 131°F (0° to 55° C)
	Operating Humidity: 85% at 131° F (55° C)
Dimensions	4.75 x 2.25 x 0.8 in (12.1 x 5.7 x 2.0 cm)
Management	WOL, PXE, DMI, WFM 2.0

HP 802.11 b/g/n Wireless Network Connection

Dimensions (L x H)	2.8 x 2.2 in (7.0 x 5.7 cm)
Weight	0.08 lbs (40 g)
Controller	Ralink RT2790
System interface	PCI Express x1
Network standard	802.11 b/g/n
Frequency band	2.400 - 2.497 GHz
Operating temperature	14° to 149°F, operating (-10° to 65°C, operating)
Storage temperature	-40° to 176°F, non-operating (-40° to 80°C, non-operating)
Humidity	10-90% operating
	5-95% non-operating
Operating voltage	3.3V +/- 9%
	12V +/- 8%

Technical Specifications - Communications

	Platform/WLAN Mode	Power Consumption
	Maximum Power Consumption:	10 Watts
	Transmit Only	4 Watts maximum averaged power over 1 second
	Transmit Packet or Active Scanning	1000 mA peak current for 100 microseconds or longer
Power Consumption	Receive Only Mode or Idle without IEEE PSP mode enabled	3 Watts maximum averaged over 1 second
	Idle, with IEEE PSP mode enabled	1.0 Watts maximum averaged over 1 second
	Transmit Disabled (turned off in software)	50 mW maximum, averaged over 1 second
	Platform in S3 or S4 (power removed from Low Profile PCI Express Card)	5 mW maximum, averaged over 1 second
Output Power (approximate)	802.11b mode	+19 dBm +/- 1.0 dB maximum
	802.11g mode	+17 dBm +/- 1.0 dB maximum
	EWC mode	+17 dBm +/- 1.0 dB maximum (total power in all transmit chains)
	IEEE and WiFi compliant 64 / 128 bit WEP encryption	
	AES: CCM	
	802.1x authentication	
Security	WPA: 802.1x. WPA-PSK and TKIP	
	WPA2 certification	
	IEEE 802.11i	
	Cisco Certified Extensions, all versions through V5	
Antenna	HP part number 497317-003	
Certifications	Wi-Fi certified	
Certifications for use by country	United States, Canada, Peru, Taiwan	

Intel Centrino Advance-N 6205 Wireless Network Interface Connection (USDT only)

Wireless LAN Standards	IEEE 802.11a/b/g/n IEEE 802.11 e, 802.11i, 802.11d, 802.11d, 802.11h
Interoperability	Wi-Fi certified (802.11 a/b/g/n WMM, WPA, WPA2 and WPS) Tested with wireless access points from several major manufacturers OS compatible with Microsoft Windows, Win7 and XP Cisco Compatible Extensions Program compliant (802.11a/b/g only) with Microsoft Windows XP and Windows 7
Frequency Band	2.4 GHz and 5 GHz
Antenna Structure	2 transmit; 2 receive (2x2)
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification

Technical Specifications - Communications

Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM	
Security	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128bits), TKIP, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP, MSCHAP, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM, EAP-AKA PAP, CHAP, TLS, GTC Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows XP only.	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required) Intel® My Wifi Technology (iPAN)	
Roaming	Provide seamless roaming between like access points (same frequency band)	
Output Power (for CCK)	15 dBm	
Output Power (for OFDM; power varies by data rate)	15 dBm	
Power Consumption	Transmit: 2.3 Watts (average, with one spatial streams) Receive: 1.9 Watts (average with two receive chains) Idle mode: 30mW – 40mW (average) Radio off: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Antenna Connections	3 U.FL type connectors, 50 ohm nominal impedance	
Range	802.11 a - Typical (@6 Mbps)	600 feet - Outdoor Open Area 150 feet - Indoor, Office environment
	802.11 b - Typical (@1 Mbps)	1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment
	802.11 g - Typical (@1 Mbps)	1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment
Form Factor	MiniPCI-Express	
Weight	0.013 lb (4.0 g)	
Dimensions	1.1 x 1.2 in (26.8 x 30.0 mm)	
Operating Voltage	3.3V +/- 9%, 1.5V +/- 5%	
Temperature	Operating:	32° to 176° F (0° to 80° C)
	Non-operating:	-40° to 176° F (-40° to 80° C)
Humidity	Operating:	10% to 90% (non-condensing)
	Non-operating:	5% to 90% (non-condensing)
Configuration Utility	Microsoft Windows XP	Microsoft Windows Win 7
	<ul style="list-style-type: none"> ● Microsoft Windows XP Wireless Network Connection Manager ● Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support) 	<ul style="list-style-type: none"> ● Intel IHV extensions for Win7 available to support Cisco Compatible Extensions

Technical Specifications - Audio

High Definition Audio

Type	Integrated
HD Stereo Codec	Realtek 2-channel ALC221 codec
Audio I/O Ports	Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load) Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal. All ports are 3.5mm
Internal Speaker Amplifier	1.5W amplifier for the internal speaker only. External speakers must be powered externally. Rear Line-in audio port is re-taskable as either Line-in or Microphone-In.
Multi-streaming Capable	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
Sampling	8 kHz - 192 kHz
Wavetable Syntheses	Yes – Uses OS soft wavetable
Analog Audio	Yes
# of Channels on Line-Out	Stereo (Left & Right channels)
Internal Speaker	Yes
External Speaker Jack	Yes
Full Duplex	Yes

HP Thin USB Powered Speakers

On/Off/Volume Controls	Right side of right speaker
Power LED	Front of right speaker (green)
Frequency Response	FO to 20kHz
Watts	2/3 watt (normal/maximum)
Dimensions/Speaker (H x W x D)	5.72 x 3.74 x 0.96 in 14.52 x 9.50 x 2.45 cm
Net Weight	0.68 lbs 0.31kg
Color	Black
Environmental (all conditions non-condensing)	Operating Temperature: 14° to 104° F (-10° to 40° C) Relative Humidity 40% to 90%
Speaker Cable Length	Input Cord: 5.91 ft (1800 mm) L-channel Cord: 3.28 ft (1000 mm) USB Cord: 5.91 ft (1800 mm)

Technical Specifications - Audio

SRS Premium Sound Technology

SRS Premium Sound™ is a state-of-the-art solution suite which optimizes the audio experience for all business applications including VoIP, computer based training, business presentations and digital content creation for any speaker configuration (notebook/desktop speakers or headphones). SRS Premium Sound delivers natural and immersive surround sound complete with deep, enveloping bass and crystal clear dialog which allows users to clearly hear audio and voice in communications or presentations and ensures that digital content can be experienced with uncompromised quality.

SRS Premium Sound Features

- Premium audio experience for all applications including VoIP, Video Conferencing, Webcasts, Multimedia Presentations and Digital Content Creation
- Natural and Immersive sound from two speakers or headphones
- Custom-tuned solutions to provide superior natural sound from desktop speakers and headphones
- Crystal clear dialog
- Deep, rich bass
- Intuitive user interface with presets for ease of use

SRS Premium Sound Benefits

- Turn your desktop into a multimedia powerhouse!
- Bring your business communication to life with natural sounding voice and clear dialog
- Increase productivity by making computer based training, webcasts and VoIP available anytime and anywhere with crystal clear audio
- Make presentations shine with rich, expansive sound without the need for external speakers
- Take digital content creation to a new level with deep bass, enhanced fidelity and immersive surround sound which ensures that your content is heard with uncompromised quality and detail

Technical Specifications - Input/Output Devices

HP USB Standard Keyboard

	Keys	104, 105, 106, 107, 109 layout (depending upon country)
Physical characteristics	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Weight	2 lb (0.9 kg)
	Operating voltage	+ 5VDC \pm 5%
	Power consumption	50-mA maximum (with three LEDs ON)
Electrical	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
	Languages	38 available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
Mechanical	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
Environmental	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
Kit contents	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide

Technical Specifications - Input/Output Devices

HP PS/2 Standard Keyboard

	Keys	104, 105, 106, 107, 109 layout (depending upon country)
Physical Characteristics	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC \pm 5%
Electrical	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	PS/2 6-pin mini din connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
Mechanical	Microsoft PC 99 - 2001	Functionally compliant
	Languages	38 available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft 1.8 m
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
Non-operating temperature	-22° to 140° F (-30° to 60° C)	
Environmental	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
Environmental	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

Technical Specifications - Input/Output Devices

HP USB Smart Card (CCID) Keyboard

Introduction:

Boost your security, simplify access procedures and reduce the costs associated with managing networks by preventing unauthorized access to your computers and networks using smartcard technology with the HP Smart Card (CCID) Keyboard.

The USB Smart Card (CCID) Keyboard is a full-sized keyboard that takes advantage of digital signatures and certificates to secure the environment for transactions performed on both public and private networks. The USB Smart Card (CCID) Keyboard works with all smart cards that comply with ISO standard 7816.

Smart cards are easy-to-use credit card-sized devices which require multiple forms of information to be validated before you gain access to your accounts or resources. Used worldwide, smart cards strengthen access to a network or other resource using dual-factor authentication. Implementing a two-factor authentication (or multi-factor authentication) process reduces the risk of unauthorized access by verifying and validating your identity in one of the following ways:

- Something you know – a combination of username and password or PIN
- Something you have – a smart card or security token.

Something you have (smart card) plus something you know (PIN), improves user-access security within corporate network environments. Smart cards are used in government agencies, healthcare companies and the finance industry.

HP Client Security Smart Card Manager provides authentication software for the smart card. The Smart Card Reader module works with the HP Client Security Manager and enables the user to setup, use, and manage the smart card. This allows strengthened security with HP patented technology.

- Protects against unauthorized access with smart card technology
- Delivers even greater security when combined with a HP Client Security smart card and the HP Client Security Software
- Combination of username and password or pin with a smart card or security token
- Secures online transactions using digital signatures and certificates
- Conforms to industry standards for ease of setup and use
- Delivers long product life and quiet operation with high-impact materials and lubricated keys
- Spill drain feature

Key Benefits:

Physical Characteristics

Keys	104, 105, 106, 107, 109 layout (depending upon country)
Form factor	USB basic smart card keyboard
Colors	Carbonite/Silver
Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in 46.3 x 16.1 x 3.3 cm
Weight	2 lb (0.9 kg) minimum
Operating voltage	+ 5VDC ± 5%
Power consumption	100-mA maximum (with four LEDs ON)
System interface	USB Type A plug connector
ESD	CE level 4, 15-kV air discharge
EMI - RFI	Conforms to FCC rules for a Class B computing device
Microsoft PC 99 - 2001	Functionally compliant
Languages	30+ available
Keycaps	Standard design

Electrical

Technical Specifications - Input/Output Devices

	Switch actuation	55 g nominal peak force with tactile feedback	
	Switch life	20 million keystrokes (using Hasco modified tester)	
Mechanical	Switch type	Contamination-resistant membrane	
	Key-leveling mechanisms	For all double-wide and greater-length keys	
	Cable length	6 ft (1.8 m)	
	Microsoft PC 99 - 2001	Mechanically compliant	
	Acoustics	43-dBA maximum sound pressure level	
	Operating temperature	50° to 122° F (10° to 50° C)	
	Non-operating temperature	-22° to 140° F (-30° to 60° C)	
	Operating humidity	10% to 90% (non-condensing at ambient)	
	Non-operating humidity	20% to 80% (non-condensing at ambient)	
	Operating shock	40 g, six surfaces	
Environmental	Non-operating shock	80 g, six surfaces	
	Operating vibration	2-g peak acceleration	
	Non-operating vibration	4-g peak acceleration	
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
	Support	All ISO 7816 smart cards	
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)	
	Chipset	SCM STCIII	
	Standard APIs supported	PC/SC, EMV2000, CT-API	
	Power	USB Port	
		Short circuit detection (protects smart card and reader)	
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)	
		Supports 3-V and 5-V cards	
SmartCard Function	Power consumption	100-mA maximum draw	
	Communication	From card	9600 bps to 330,000 bps
		From computer	12 Mbps (USB transfer speed)
	Landing mechanism	Contact device	Friction contact
		Card insertions rating	Up to 100,000 insertion cycles
	Interface modes	CCID protocol	
	Reader performance interface	USB connection	
	Electro-magnetic standards	Europe	2004/108/EC
		USA	USAFCC part 15
Approvals	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF		
Ergonomic Compliance	ISO 9241-4, TUVGS		
Kit Contents	Keyboard, I/O Security and Documentation CD, warranty card		

Technical Specifications - Input/Output Devices

HP USB PS/2 Washable Keyboard

	Keys	104 (US) layout or 105 (EU) layout (depending upon country)
Physical Characteristics	Dimensions (L x W x H)	17.67x 6.62 x 1.38 in (449 x 168 x 35 mm)
	Weight	1.7 lb (0.77 kg) minimum
	Operating voltage	+ 5VDC \pm 5%
	Power consumption	50-mA maximum (with three LEDs ON)
Electrical	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
Mechanical	Keycaps	Stepped -profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	7 ft (2.2 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 95% (non-condensing at ambient)
	Non-operating humidity	0% to 95% (non-condensing at ambient)
Environmental	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
Operating system support	Windows® 7, Windows Vista, Windows XP Professional	
Approvals	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

Technical Specifications - Input/Output Devices

HP Wireless Keyboard and Mouse

Keyboard	Dimensions (H x L x W)	1.47 x 18.06 x 6.43 in (37.3 x 458.8 x 163.2 mm)	
	Weight – Without Two AA Alkaline Batteries	1.96 lb (890 g)	
Mouse	Dimensions (H x L x W)	1.51 x 4.69 x 2.71 in (38.4 x 119 x 68.9 mm)	
	Weight – Without Two AA Alkaline Batteries	0.17 lb (80 g)	
Receiver	Dimensions (H x L x W)	0.31 x 0.72 x 2.24 in (8 x 18.4 x 57 mm)	
	Weight	0.27 oz (7.6 g)	
	Cable Length – Minimum	6 ft (1.8 m)	
	Range	32.8 ft (10 m)	
	Windows 7 Home Basic*, Windows 7 Home Premium*, Windows 7 Professional Edition 32*, Windows 7 Professional Edition 64*, Windows 7 Ultimate Edition 32*, Windows 7 Ultimate Edition 64* Windows Vista or Windows XP Available USB port for the receiver CD-ROM Drive *This system may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See http://www.microsoft.com/windows/windows-7/ for details.		
System Requirements	Product Safety	UL; CSA /TUV (Europe only); CE Mark	
	Ergonomics	ANSI; ISO (Europe only); GS Mark (Germany only)	
	EMC	FCC; CISPR; ACA; BSMI; MIC; VCCI	
	CE Mark	EN 55022:1998; EN 55024	
	Design Guidelines for PCs	PC 99 - connector overmold colors; PC 2001 - full functionality	
	Telecom	All local telecom requirements and approvals for intended markets	
	USA	FCC Part 15 Equipment Certificate; CFR 47, Part 15; other local requirements	
	Country Support	US, Belgium, Switzerland, Spain, Denmark, Netherlands, France, Germany, Italy, Portugal, Sweden, Norway, Finland, UK, Poland, Czech Republic, Turkey, Greece, Austria, Bulgaria, Cyprus, Estonia, Hungary, Ireland, Latvia, Lithuania, Luxemburg, Malta, Romania, Slovakia, Slovenia, Vietnam, HK, Australia, NZ, Malaysia, Singapore, Indonesia, Philippines, and Thailand.	
	Environmental	Keyboard contains 25% post-consumer recycled plastic material.	

HP PS/2 Optical Mouse

Dimensions (H x L x W)	1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)
----------------------------------	---

Technical Specifications - Input/Output Devices

Weight	4.44 oz (126 g)
	Operating temperature -32° to 104°F (0° to 40° C)
	Non-operating temperature -4° to 140°F (-20° to 60° C)
	Operating humidity 10% to 90% (non condensing at ambient)
	Non-operating humidity 10% to 90% (non condensing at ambient)
Environmental	Operating shock 40 g, 6 surfaces
	Non-operating shock 80 g, 6 surfaces
	Operating vibration 2 g peak acceleration
	Non-operating vibration 4 g peak acceleration
	Drop (out of box) 80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
	Operating voltage 5 VDC ± 10%
	Power consumption 100mA
	System consumption PS/2 mini-din connector
Electrical	ESD CE level 4, 15 kV air discharge
	EMI-RFI Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001 Functionally compliant
	Resolution 400 ± 20% DPI
	Tracking speed 10 in/s (25.4 cm/s) maximum
	Acceleration 100 in/s/s (2.54 m/s/s)
	Switch actuation 61 g nominal peak force
Mechanical	Switch life 3,000,000 operations (using Hasco modified tester)
	Switch type Low force micro-switches
	Tracking mechanism life 155 mi (250 km) at average speed of 10 in/s
	Cable length 6 ft (1.8 m)
	Microsoft PC99 - 2001 Mechanically compliant
	Width 8 mm
	Diameter 1.01 in (25.6 mm)
Scroll wheel	Maximum rotation speed 48 rats/sec
	Switch type Light force micro-switch
	Switch life 1 million operations
	Mechanical life Minimum 200,000 revolutions
Regulatory Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC

Technical Specifications - Input/Output Devices

HP USB Optical Mouse

Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
Weight	0.27 lb (0.12 kg)
Cable length	72.8 in (185 cm)
System requirements	Available USB port

HP USB Laser Mouse

Scroll Wheel	24
Maximum Rotation Speed	48 rats/sec
Switch Type	Wheel
Switch Life	Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times
Environmental	Operating Temperature 32° to 104° F (0° to 40° C) Non-operating Temperature -4° to 140° F (-20° to 60° C) Operating Humidity 10% to 90% (non-condensing at ambient) Non-operating Humidity 20% to 80% (non-condensing at ambient) Operating Shock 40 g, six surfaces Non-operating Shock 80 g, six surfaces Operating Vibration 2-g peak acceleration Non-operating Vibration 4-g peak acceleration
Electrical	Operating Voltage + 5VDC ± 5% Power Consumption MTBF > 150,000 hrs ESD IEC-61000-4-2 criteria B, Contact discharge: +/- 4kV, Air discharge: +/- 8kV EMI-RFI FCC Class B PC98 PC 99 Compliant
Mechanical	Resolution 800dpi Tracking Speed 25 cm/sec Acceleration 0.5mm

Technical Specifications - Input/Output Devices

Switch Actuation	0.6N (60gf)
Switch Life	Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times
Cable Length	1850mm
PC98-99	PC99 compliant

Regulatory Approvals	UL60950-1, UL 94, UL 746 (A-E), UL 796 TUV/GS: EN 60950-1, EN 60825-1 FCC Class B, UL 1950, cUL, TUV GS, CE, C-tick, VCCI, BSMI, RRL
-----------------------------	--

HP USB PS/2 Washable Mouse

Dimensions (H x L x W) 1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)

Weight 4.44 oz (126 g)

Environmental	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	10% to 90% non-condensing
	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face

Electrical	Operating voltage	5 VDC ± 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector or USB
	ESD	CE level 2 8 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC99 – 2001	Functionally compliant

Mechanical	Resolution	1000 ± 20% DPI
	Tracking speed	14 in/s (35.56 cm/s) maximum
	Acceleration	2 g
	Switch actuation	70 g nominal peak force
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Cable length	8.8 ft total 70 cm+ 2m extension
	Microsoft PC99 – 2001	Mechanically compliant

Scroll wheel	Width	6 mm
	Diameter	1 in (25.4 mm)
	Maximum rotation speed	48 rats/sec
	Switch type	Light force micro-switch

Technical Specifications - Input/Output Devices

	Switch life	3 million operations
	Mechanical life	Minimum 200,000 revolutions
Regulatory approvals	Compliant	FCC, CE Mark, ICES-003-B, IP66/NEMA4X
Compatibility	Operating system support	Windows 7, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32* (No driver is required for this device. Native support is provided by the operating system.), xpe, ce.net, Linux, XP-64

* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Technical Specifications – Power

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)

*Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Power Supply

	USDT	SFF	MT/CMT
Standard Efficiency	N/A	240W active PFC	320W active PFC
High Efficiency*	Integrated graphics: 135W active PFC 87% efficient Discrete graphics: 180W active PFC 87% efficient	240W active PFC 87/90/87% efficient at 20/50/100% load	320W active PFC 87/90/87% efficient at 20/50/100% load
Operating Voltage Range	90 - 264 VAC	90 - 264 VAC	90 - 264 VAC
Rated Voltage Range	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC
Rated Line Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Operating Line Frequency Range	47 – 63 Hz	47 – 63 Hz	47 – 63 Hz
Rated Input Current	N/A	4A	5.5A
Rated Input Current with Energy Efficient* Power Supply	135W: 2.4A 180W: 2.9A	4A	5.5A
Current Leakage (NFPA 99)	< 250 µA	< 275 µA	< 450 µA
Power Supply Fan	N/A	92mm variable speed	92mm variable speed
Power cord length	N/A	6.0 ft. (1.83 m)	6.0 ft. (1.83 m)
External Power Adapter			
Dimensions	6.7 x 2.6 x 1.5 in	N/A	N/A
Total Cord Length	12 ft 8 in	N/A	N/A

Technical Specifications – Power

*High efficiency power supply is a requirement for ENERGY STAR qualification in conjunction with a select range of processors and modules

Technical Specifications – Weights & Dimensions

Weights &

Dimensions

(configured with 1 HDD
& 1 ODD)

	USDT	SFF	MT	CMT
Chassis (H x W x D)	2.6 x 9.9 x 10 in 66 x 252 x 254 mm	4.0 x 13.3 x 14.9 in 100 x 338 x 379 mm	14.9 x 7.0 x 17.0 in 377 x 177 x 431 mm	17.6 x 7.00 x 18.0 in 448 x 178 x 445 mm
System Volume	257.5 cu in 4.2 L	790.3 cu in 12.8 L	782.77 cu in 28.8 L	2160 cu in 35.5 L
System Weight*	6.8 lb 3.1 kg	16.7 lb 7.6 kg	20.5 lb 9.3 kg	24.5 lb 11.2 kg
Max Supported Weight	77.0 lb 35.0 kg	77.0 lb 35.0 kg	N/A	77.0 lb 35.0 kg
(desktop orientation)				
Tower Stand (H x W x D)	1.1 x 4.9 x 6.7 in 27 x 125 x 170 mm	1.1 x 7.0 x 7.9 in 29 x 178 x 200 mm	N/A	N/A
Packaging (H x W x D)	8.6 x 15.7 x 19.7 in 218 x 398 x 500 mm	9.0 x 19.7 x 23.4 in 229 x 500 x 594 mm	11.6 x 19.7 x 23.2 in 295 x 500 x 590 mm	24.25 x 12.3 x 22.1 in 616 x 313 x 562 mm
Shipping Weight*	14.4 lb 6.5 kg	17.9 lb 8.1 kg	28.8 lb 13.1 kg	34.0 lb 15.4 kg
Palletization Profile	6-units per layer 10-layer max. 60-units per pallet	4-units per layer 10-layer max. 40-units per pallet	4-units per layer 8-layer max. 32-units per pallet	6-units per layer 4-layer max. 24-units per pallet

Technical Specifications – Miscellaneous Features

Management Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
 - Number of 1-second red LED blinks followed by a 2-second pause, then repeats:
 - 2 - processor thermal protection activated
 - 3 - processor not installed
 - 4 - power supply failure
 - 5 -- memory error
 - 6 - video error
 - 7 - PCA failure (ROM detected failure prior to video)
 - 8 - invalid ROM, bootblock recovery mode
 - 9 - system not fetching code
 - 10 - system hang while loading an option ROM
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy Identification

Technical Specifications – Miscellaneous Features

Additional Features

Towerable Orientation

Product can be oriented as either a desktop or a tower

Drive Lock

Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.

DPS Access through F10 Setup during Boot

A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user

Drive Protection System

Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced

The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures

SMART Technology (Self-Monitoring, Analysis and Reporting Technology)

Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted

SMART I - Drive Failure Prediction

Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count

SMART II - Off-Line Data Collection

By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure

SMART III - Off-Line Read Scanning with Defect Reallocation

IOEDC: I/O Error Detection Circuitry

SMART IV - End-to-End CRC for hard drives

Detects errors in Read/Write buffers on HDD cache RAM

Interface in F10 setup provides confirmation of SMART IV support.

Technical Specifications - Environmental Data

Environmental Data **Eco-Label Certifications & declarations** This product series has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US ENERGY STAR®
- IT ECO declaration
- EPEAT® Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

Model	Energy Consumption (typically configured)	115 VAC	230 VAC	100 VAC
USDT	Normal Operation	21.17 W	27.37 W	27.04 W
	Sleep (Energy Star® low power mode)	1.41 W	1.46 W	1.40 W
	Off	0.36 W	0.41 W	0.36 W
SFF	Normal Operation	49.299 W	49.369 W	48.75 W
	Sleep (Energy Star® low power mode)	1.832 W	2.082 W	1.817 W
	Off	0.788 W	1.011 W	0.791 W
MT	Normal Operation	44.78 W	45.68 W	44.57 W
	Sleep (Energy Star® low power mode)	1.722 W	1.953 W	1.695 W
	Off	0.735 W	0.942 W	0.712 W
CMT	Normal Operation	46.29 W	46.15 W	45.69 W
	Sleep (Energy Star® low power mode)	1.726 W	1.986 W	1.723 W
	Off	0.752 W	0.971 W	0.779 W

Note: Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured model.

Model	Heat Dissipation*	115 VAC	230 VAC	100 VAC
USDT	Normal Operation	93 BTU/hr	94 BTU/hr	92 BTU/hr
	Sleep	5 BTU/hr	5 BTU/hr	5 BTU/hr
	Off	1 BTU/hr	1 BTU/hr	1 BTU/hr
SFF	Normal Operation	169 BTU/hr	169 BTU/hr	166 BTU/hr
	Sleep	6 BTU/hr	7 BTU/hr	6 BTU/hr
	Off	3 BTU/hr	3 BTU/hr	3 BTU/hr
MT	Normal Operation	153 BTU/hr	156 BTU/hr	152 BTU/hr
	Sleep	6 BTU/hr	7 BTU/hr	6 BTU/hr
	Off	3 BTU/hr	3 BTU/hr	2 BTU/hr

Technical Specifications - Environmental Data

CMT	Normal Operation	158 BTU/hr	158 BTU/hr	156 BTU/hr
	Sleep	6 BTU/hr	7 BTU/hr	6 BTU/hr
	Off	3 BTU/hr	3 BTU/hr	3 BTU/hr

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise

Emissions

(in accordance with ISO 7779 and ISO 9296)

Sound Power (LWAd, bels)

Sound Pressure (LpAm, decibels)

(Typically configured)

USDT	Idle	3.5	25
	Fixed Disk (random writes)	3.6	26
SFF	Idle	3.8	28
	Fixed Disk (random writes)	3.8	28
MT	Idle	3.8	28
	Fixed Disk (random writes)	3.9	29
CMT	Idle	3.7	21
	Fixed Disk (random writes)	3.9	22

Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years. Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery Size

CR2032 (coin cell)

Battery Type

Lithium

Additional Information USDT

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 1.8% post consumer recycled plastic (by wt.)

Technical Specifications - Environmental Data

- This product is 92.8% recyclable when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 1116 g
- Internal:
 - PLASTIC/Polyethylene low density 15 g
 - PLASTIC/EPS (Expanded Polystyrene) 84 g
- The PAPER/Corrugated material contains at least 32% recycled content.
- The PLASTIC/Polyethylene low density material contains at least 0% recycled content.
- The PLASTIC/EPS (Expanded Polystyrene) material contains at least 0% recycled content.
- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 3.5% post consumer recycled plastic (by wt.)
- This product is 93.93% recyclable when properly disposed of at end of life.

SFF

Packaging Materials

- External:
 - PAPER/Corrugated 2300 g
- Internal:
 - PLASTIC/EPE-Expanded Polyethylene 63.4 g
 - PLASTIC/Polyethylene low density 56 g
 - PLASTIC/Polypropylene 15 g
- The PAPER/Corrugated material contains at least 30.7% recycled content.
- The PLASTIC/EPE-Expanded Polyethylene material contains at least 5% recycled content.
- The PLASTIC/Polyethylene low density material contains at least 5% recycled content.
- The PLASTIC/Polypropylene material contains at least 5% recycled content.
- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 5.6% post consumer recycled plastic (by wt.)
- This product is 94.78% recyclable when properly disposed of at end of life.

MT

Packaging Materials

- External:
 - PAPER/Corrugated 2278 g
-

Technical Specifications - Environmental Data

CMT

- Internal:
 - PLASTIC/EPS (Expanded Polystyrene) 114 g
 - PLASTIC/Polyethylene low density 56 g
 - PLASTIC/Polypropylene 15 g
- The PAPER/Corrugated material contains at least 30.6% recycled content.
- The PLASTIC/EPS (Expanded Polystyrene) material contains at least 0% recycled content.
- The PLASTIC/Polyethylene low density material contains at least 0% recycled content.
- The PLASTIC/Polypropylene material contains at least 0% recycled content.
- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 5.3% post consumer recycled plastic (by wt.)
- This product is 95.3% recyclable when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 2080 g
- Internal:
 - PLASTIC/Polyethylene low density 56 g
 - PLASTIC/Plat. Other 114.3 g
 - PLASTIC/Polypropylene 15 g
- The PAPER/Corrugated material contains at least 40.66% recycled content.
- The PLASTIC/Polyethylene low density material contains at least 0% recycled content.
- The PLASTIC/Plat. Other material contains at least 0% recycled content.
- The PLASTIC/Polypropylene material contains at least 0% recycled content.

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at:

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds

Technical Specifications - Environmental Data

- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

After-Market Options (availability may vary by region)

Communication Devices

	USDT	SFF/MT/CMT	Part Number
Intel Gigabit CT Desktop NIC (PCIe x1)		X	FH969AA
Broadcom NetXtreme GbE Ethernet Plus NIC (PCIe x1)		X	FS215AA
HP Wireless 802.11 b/g/n NIC (PCIe x1)		X	FH971AA

Note: The use of any of these optional NIC Cards (wired or wireless) will disable the Intel vPro Technology features.

Graphics Solutions

	USDT	SFF/MT/CMT	Part Number
AMD Radeon HD 6350 Graphics (PCIe x16)		X	QK638AA
AMD Radeon HD 7450 Graphics Card		X	B1R44AA
Nvidia NVS 300 Graphics (PCIe x16)		X	BV456AA
Nvidia NVS 310 Graphics (PCIe x16)		X	A7U59AA
HP DisplayPort Cable Kit	X	X	VN567AA
HP DisplayPort To Dual Link DVI-D Adapter	X	X	NR078AA
HP DisplayPort To DVI-D Adapter	X	X	FH973AA
HP DisplayPort to HDMI Adapter	X	X	BP937AA
HP DisplayPort to VGA Adapter	X	X	AS615AA
HP DMS-59 to Dual DVI Cable		X	DL139A
HP DMS-59 to Dual DisplayPort Adapter		X	XP688AA

Data Storage Drives and Accessories

	USDT	SFF/MT/CMT	Part Number
HP 300GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5"adapter		X	FM802AA
HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive		X	QK554AA
HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive		X	QK555AA
HP 160-GB SATA 3.0Gb/s Solid State Drive	X	X	QV064AA*
			<i>*Not available in all regions.</i>
HP eSATA Adapter		X	FH966AA
HP Removable SATA Hard Drive Enclosure (frame & carrier)		X	RY102AA
HP Removable SATA Hard Drive Enclosure (carrier only)		X	RY103AA
HP Slim Removable SATA HDD Carrier	X		E3F39AA
HP Slim Removable SATA HDD Frame/Carrier	X		C1N41AA

After-Market Options (availability may vary by region)

Input Devices

	USDT	SFF/MT/CMT	Part Number
HP PS/2 Standard Keyboard	X	X	DT527A
HP USB Standard Keyboard	X	X	DT528A
HP USB Keyboard with USB ports	X	X	BT330AA
HP USB Gray Keyboard	X	X	DT529A
HP USB Smart Card (CCID) Keyboard	X	X	BV813AA
HP USB Keyboard and Mouse Kit	X	X	RC465AA
HP USB Washable Keyboard	X	X	VF097AA
HP USB and PS/2 Washable Mouse	X	X	BM866AA
HP USB and PS/2 Washable Keyboard and Mouse Kit	X	X	BU207AA
HP PS/2 Optical Mouse	X	X	EY703AA
HP USB Optical Mouse	X	X	DC172AT
HP USB Laser Mouse	X	X	GW405AT
HP USB Travel Mouse	X	X	RH304AA
HP Wireless Keyboard and Mouse Combination (Keyboard contains 25% post-consumer recycled plastic material)	X	X	NB896AA

System Memory

	Part Number
HP 2GB DDR3-1600 (PC3-12800) DIMM	B4U35AA
HP 4GB DDR3-1600 (PC3-12800) DIMM	B4U36AA
HP 8GB DDR3-1600 (PC3-12800) DIMM	B4U37AA
HP 2GB DDR3-1600 (PC3-12800) SODIMM	B4U38AA
HP 4GB DDR3-1600 (PC3-12800) SODIMM	B4U39AA
HP 8GB DDR3-1600 (PC3-12800) SODIMM	B4U40AA

Multimedia Devices

	USDT	SFF/MT/CMT	Part Number
HP Thin USB Powered Speakers	X	X	KK912AA
HP DVD-ROM Drive		X	AR629AA
HP SuperMulti DVD Writer Drive		X	AR630AA
HP Blu-ray Writer Drive		X	AR482AA
HP Slim DVD-ROM Drive	X		VP033AA
HP Slim SuperMulti DVD Writer Drive	X		VP034AA
HP USB HD 720P Business Webcam	X	X	QP896AA
HP Business Headset	X	X	QK550AA
HP Business Speakers	X	X	D9J19AA

Removable Media Storage

	USDT	SFF/MT/CMT	Part Number
HP USB External Diskette Drive	X	X	DC141B
HP 22-n-1 Media Card Reader		X	AR941AA

After-Market Options (availability may vary by region)

Security Devices

	USDT	SFF/MT/CMT	Part Number
HP/Kensington MicroSaver Cable Lock	X	X	PC766A
HP Business PC Security Lock	X	X	PV606AA
HP USDT Rear Port Controller Cover	X		VN571AA
HP SFF Solenoid Lock and Hood Sensor		SFF only	BP428AA
HP CMT Solenoid Lock and Hood Sensor		MT/CMT only	DE618A
HP SFF Wall Mount/Security Sleeve		SFF only	VN570AA
HP Keyed Lock Cable	X	X	BV411AA

Stands and Accessories

	USDT	SFF/MT/CMT	Part Number
HP Integrated Work Center Stand (USDT)	X		LH526AA
HP Integrated Work Center Stand (SFF)		SFF only	QP897AA
HP USDT Tower Stand	X		VN568AA
HP SFF Tower Stand		SFF only	VN569AA
HP Mobile Meeting Room	X		QS946AA#ABA
HP Executive Meeting Room	X		QS947AA#ABA
HP Serial Port Adapter (RS-232 compatible)		X	PA716A
HP 5.25" Blank Bezel Kit (50 pack)		X	VK889AA
HP FireWire IEEE 1394 Card		X	PA997A

Monitors

	USDT	SFF/MT/CMT	Part Number
HP EliteDisplay E190i	X	X	E4U30AA
HP EliteDisplay E201	X	X	C9V73AA
HP EliteDisplay E221	X	X	C9V76AA
HP EliteDisplay E221c	X	X	D9E49AA
HP EliteDisplay E231	X	X	C9V75AA
HP EliteDisplay E241i	X	X	F0W81AA
HP EliteDisplay E271i	X	X	D7Z72AA

After-Market Options (availability may vary by region)

LANDesk Software (E-Delivery)

Part Number

LANDesk Management Suite License - 1-499 Nodes E-Delivery	QY369AAE
LANDesk Management Suite License - 500-999 Nodes E-Delivery	QY370AAE
LANDesk Management Suite License - 1000-1999 Nodes E-Delivery	QY371AAE
LANDesk Management Suite License - 2000-4999 Nodes E-Delivery	QY372AAE
LANDesk Management Suite License - 5000-9999 Nodes E-Delivery	QY373AAE
LANDesk Security Suite License E-Delivery	QY379AAE
LANDesk Management Suite 1 Year Maintenance - 1-499 Nodes E-Delivery	HZ825AAE
LANDesk Management Suite 1 Year Maintenance - 500-999 Nodes E-Delivery	HZ826AAE
LANDesk Management Suite 1 Year Maintenance - 1000-1999 Nodes E-Delivery	HZ827AAE
LANDesk Management Suite 1 Year Maintenance - 2000-4999 Nodes E-Delivery	HZ828AAE
LANDesk Management Suite 1 Year Maintenance - 5000-9999 Nodes E-Delivery	HZ829AAE
LANDesk Security Suite 1 Year Subscription	HZ830AAE
LANDesk Patch Management 1 Year Subscription - 1-499 Nodes E-Delivery	HZ831AAE
LANDesk Patch Management 1 Year Subscription - 500-999 Nodes E-Delivery	HZ832AAE
LANDesk Patch Management 1 Year Subscription - 1000-1999 Nodes E-Delivery	HZ833AAE
LANDesk Patch Management 1 Year Subscription - 2000-4999 Nodes E-Delivery	HZ834AAE
LANDeskPatch Management 1 Year Subscription - 5000-9999 Nodes E-Delivery	HZ835AAE

Copyright © 2014 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows and Windows 7 are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.