

USB 3.0 to VGA Adapter - Slim Design - 1920x1200

Product ID: USB32VGAES



The USB32VGAES Slim USB 3.0 to VGA Adapter turns a USB 3.0 port into a VGA output port with 1920x1200/1080p video support. The adapter minimizes clutter with a slim design that seamlessly blends with your video cable - an ideal space-saving solution for multi-monitor applications on Ultrabook™, laptop, or desktop computers.

Functioning as an external graphics card, this USB to VGA adapter provides a convenient way to add multi-monitor capability to a USB 3.0-enabled desktop or laptop computer (optimal performance from USB 3.0, backward compatible with USB 2.0).

To save space while travelling, this ultra-portable USB to VGA adapter features a lightweight, small footprint design that fits easily in a laptop carrying bag.

Leveraging the high-bandwidth (5 Gbps) SuperSpeed USB 3.0 interface, the adapter delivers smooth, high-definition content to your VGA display/projector. The adapter can be used to mirror your primary desktop, showing the same image on each display, or to extend your desktop to double your workspace and increase your productivity.


The USB32VGAES is backed by a StarTech.com 2-year warranty and free lifetime technical support.

Recommended System Requirements:

CPU: Quad Core 2.4GHz or Higher (i5 recommended)

RAM: 4GB or higher

USB 3.0 port (Backwards compatible with USB 2.0)

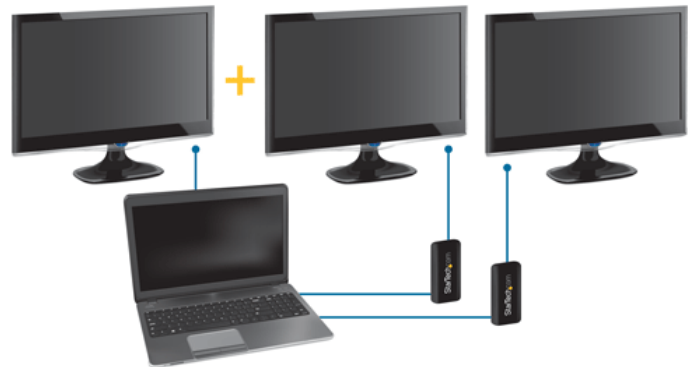

Certifications, Reports and Compatibility



Applications

- Add a secondary VGA display with full HD capability
- View large or multiple spreadsheets across several displays
- Use the adapter to connect your PC to your VGA-equipped projector or display for viewing family pictures and movies
- Add multi-monitor capability to a single computer, to create engaging multimedia presentations
- Have reference material on one display and a working document copy on the other
- Run multiple applications on different screens - check your email on one display and search the web on the other

Features

- Slim lightweight design
- Ultra-portable
- SuperSpeed USB 3.0 (5 Gbps)
- Supports High-Definition video resolutions up to 1920x1200/1080p
- USB-powered - No external power adapter required
- Supports Mirrored, Extended or Primary display configurations
- Supports display rotation

| | | |
|-------------------------------------|----------------------------|---|
| Hardware | Warranty | 2 Years |
| | AV Input | USB 3.0 |
| | AV Output | VGA |
| | Chipset ID | Trigger - T5-302 |
| | Memory | 16MB |
| | Ports | 1 |
| | USB Pass-Through | No |
| Performance | General Specifications | This USB video adapter uses a Trigger family chipset. If you're connecting this device to a computer along with additional USB video adapters or docking stations, please avoid using devices with a DisplayLink or Fresco family chipset. |
| | Maximum Analog Resolutions | 1920x1200/1080p |
| | Supported Resolutions | Widescreen(16/32 bit): 1920x1200, 1920x1080, 1680x1050, 1600x900, 1440x900, 1360x768, 1280x800, 1280x768, 1280x720 Standard(16/32 bit): 1600x1200, 1400x1050, 1280x1024, 1280x960, 1152x864, 1024x768, 800x600 |
| | Wide Screen Supported | Yes |
| Connector(s) | Connector A | 1 - USB Type-A (9 pin) USB 3.0 Male Input |
| | Connector B | 1 - VGA (15 pin, High Density D-Sub) Female Output |
| Software | Microsoft WHQL Certified | Yes |
| | OS Compatibility | Windows® 10 (32/64) Windows 8 / 8.1 (32/64) Windows 7(32/64) Windows Vista (32/64) Windows XP (32/64) |
| Special Notes / Requirements | Note | <p>This USB video adapter uses a Trigger family chipset. If you're connecting this device to a computer along with additional USB video adapters or docking stations, avoid using devices with different family chipsets, such as DisplayLink® or Fresco Logic®</p> <p>Connect a maximum of five USB video adapters on a single computer. Support for multiple adapters will vary depending upon your system resources</p> <p>This USB video adapter is not intended for graphical intensive applications, such as gaming</p> |

| | | |
|---------------------------------|-------------------------------|---|
| | System and Cable Requirements | System Processor: Quad Core 2.4GHz (i5 recommended) System Memory: 4GB |
| Power | Power Source | USB-Powered |
| Environmental | Humidity | < 85% non-condensing |
| | Operating Temperature | 0°C to 50°C (32°F to 122°F) |
| | Storage Temperature | -10°C to 75°C (14°F to 167°F) |
| Physical Characteristics | Cable Length | 2.4 in [62 mm] |
| | Color | Black |
| | Material | Plastic |
| | Product Height | 0.5 in [1.2 cm] |
| | Product Length | 7.5 in [19 cm] |
| | Product Width | 1 in [25 mm] |
| | Weight of Product | 0.9 oz [25 g] |
| Packaging Information | Package Height | 1.3 in [32 mm] |
| | Package Length | 5.9 in [15.1 cm] |
| | Package Width | 6.7 in [17.1 cm] |
| | Shipping (Package) Weight | 5.2 oz [148 g] |
| What's in the Box | Included in Package | 1 - Slim USB 3.0 Video Adapter |
| | | 1 - Driver CD |
| | | 1 - Instruction Manual |

Product appearance and specifications are subject to change without notice.