




Powering Business Worldwide

Eaton 9PX 48V Lithium-ion Extended Battery Module (EBM) used with 9PX1500RT-L, 9PX1500RTN-L, 9PX1500GRT-L UPS, 1U Rack/Tower

MODEL NUMBER: 9PXEBM48RT-L

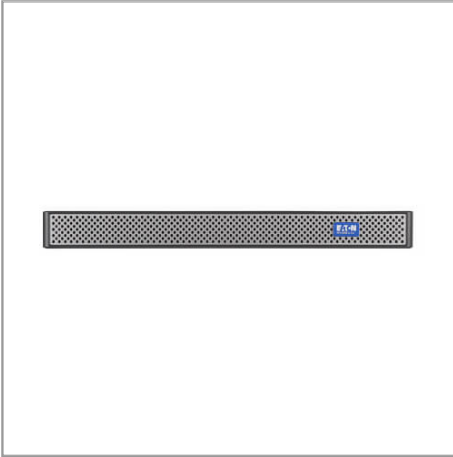

Lithium-ion extended battery module (EBM) provides extended runtime for compatible UPS systems in small business, education, retail, financial or healthcare applications.

Features

Backup Battery Module Gives Your Compatible Eaton UPS System Extended Runtime

The 9PXEBM48RT-L offers extended battery runtime when used in conjunction with Eaton's 9PX1500RT-L, 9PX1500RTN-L and 9PX1500GRT-L 9PX UPS systems. It can also be daisy-chained for a maximum of four matching battery packs to deliver even longer extended-run operation. Heavy-gauge cabling with high-current DC connectors is included for safe, simple installation.

Supports 1U Rack or Tower Installation

This backup battery pack's multi-use form factor supports mounting in 1U of space in EIA-standard 19-inch open frame racks or enclosures using the included 4-post rail kit and mounting brackets. Tower stands from a compatible UPS support optional upright configuration of the battery pack.

Specifications

OVERVIEW	
UPC Code	743172105592
INPUT	
Input Phase	Single-Phase
OUTPUT	
Individually Controllable Load Banks	No
BATTERY	

Highlights

- Connects to select expandable Eaton 9PX UPS systems for extended runtime
- Daisy-chain connector supports additional battery packs for even longer runtime
- Includes heavy-gauge cabling with high-current 48V DC connectors
- Supports 1U rack mounting or upright tower installation using included accessories

System Requirements

Compatible only with Eaton's 9PX1500RT-L, 9PX1500RTN-L and 9PX1500GRT-L 9PX UPS systems

Package Includes

- 9PXEBM48RT-L 48V Extended Battery Module
- External battery cable
- Rack-mounting hardware
- Stabilizer bracket
- Quick Start Guide



Powering Business Worldwide

Battery Type	Lithium-ion (LiFePO4)
Expandable Runtime	No
DC System Voltage (VDC)	48
Battery Management	Integrated battery management system (BMS) for temperature regulation and life cycle monitoring
PHYSICAL	
Primary Form Factor	Rackmount; Tower
Rack Height	1U
External Battery Pack Form Factor	Rack/Tower
Installation Form Factors Supported with Included Accessories	4 post 19 inch rackmount
Installation Form Factors Supported with Optional Accessories	2 post rackmount (https://tripplite.eaton.com/eaton-2-post-rack-mount-installation-kit-for-select-1u-5p-ups-systems-rk2pa)
Minimum Required Rack Depth (cm)	53.34
Minimum Required Rack Depth (inches)	21
Unit Weight (lbs.)	36.500
Unit Weight (kg)	16.56
ENVIRONMENTAL	
Operating Temperature Range	32° to 104°F (0° to 40°C)
Relative Humidity	0-96% non-condensing
STANDARDS & COMPLIANCE	
Product Certifications	cTUVus; NOM (Mexico); EN 62040-2
Product Compliance	CE (Europe); FCC Part 15 Class B (USA); RoHS

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2024 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.