


Overview


HPE ProLiant DL60 Generation9 (Gen9)

The HPE ProLiant DL60 Gen9 Server provides the right density, performance and manageability for file and print, messaging, collaboration workloads and cloud environments. All in a compact 1U chassis at an affordable price to meet the needs of cost conscious service providers and SMBs.

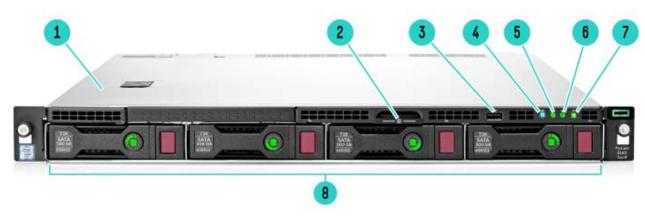

Front View

- 1 Access Panel
- 3 USB 2.0 connector
- 5 Health LED
- 7 Power On/Standby button and system power LED
- 2 Serial label pull tab
- 4 UID button/LED
- 6 NIC status LED
- 8 4LFF drive

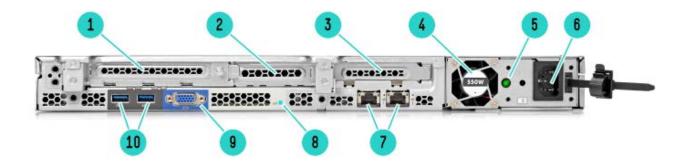


Rear view

- 1 Slot 3 PCle3 x8 (8, 4, 1)
- 3 Slot 1 PCle3 x16 (16, 8, 4, 1)
- 5 Power supply power LED
- 7 Embedded 2x1GbE network adapter
- 9 Video connector

- 2 Slot 2 PCle3 x8 (8, 4, 1)
- 4 Power supply bay (550w shown)
- 6 Power supply power connection
- 8 UID LED
- 10 USB3.0 connectors



Overview

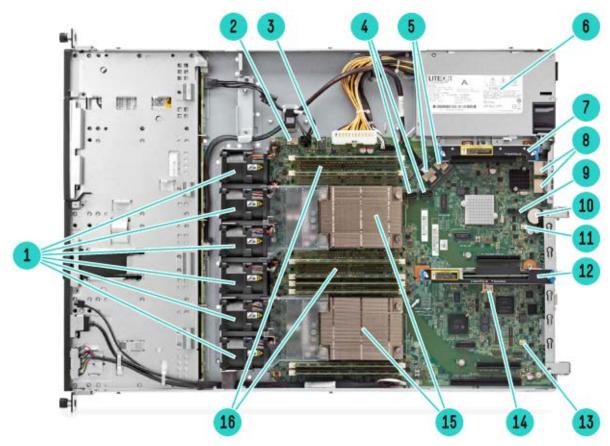

Internal View

- 1 Hot swappable fans (up to 6)
- 3 Internal USB 3.0
- 5 Mini-SAS connectors
- 7 Primary PCIe riser board connector
- 9 TPM connector
- 11 Storage backup power connector for PCIe slots 1-2
- 13 Storage backup power connector for PCle slot 3
- 15 Processor heat sinks (processors with HPE Smart Socket placed below heat sink)

What's New

- HPE Smart Memory 2400 MHz memory
- Intel Xeon E5-2600v4 processor support
- HPE Trusted Platform Module (TPM) 2.0
- New 900W AC/ 240VDC power supply

- 2 HPE Smart Storage Battery connector
- 4 SATA connector
- 6 Power supply bay
- 8 Embedded 2x1GbE network adapter
- 10 System Battery
- 12 Secondary PCIe riser slot
- 14 MicroSD slot
- 16 DDR4 DIMM slots (up to 8)

NOTE: For more information regarding Intel Xeon processors, please see the following http://www.intel.com/xeon.

Processor
One of the following
depending on model

Model	CPU frequency	Cores	L3 Cache	Power	QPI	DDR4 Hz
E5-2660v3	2.6GHz	10	25MB	105W	9.6GT/s	2133
E5-2650v3	2.3GHz	10	25MB	105W	9.6GT/s	2133
E5-2650Lv3	1.8GHz	12	30MB	65W	9.6GT/s	2133
E5-2640v3	2.6GHz	8	20MB	90W	8.0GT/s	1866
E5-2630v3	2.4GHz	8	20MB	85W	8.0GT/s	1866
E5-2630Lv3	1.8GHz	8	20MB	55W	8.0GT/s	1866
E5-2623v3	3.0GHz	4	10MB	105W	8.0GT/s	1866
E5-2620v3	2.4GHz	6	15MB	85W	8.0GT/s	1866
E5-2609v3	1.9GHz	6	15MB	85W	6.4GT/s	1600
E5-2603v3	1.6GHz	6	15MB	85W	6.4GT/s	1600
E5-2660v4	2.0GHz	14	35MB	105W	9.6GT/s	2400
E5-2650v4	2.2GHz	12	30MB	105W	9.6GT/s	2400
E5-2650Lv4	1.7GHz	14	35MB	65W	9.6GT/s	2400
E5-2640v4	2.4GHz	10	25MB	90W	8.0GT/s	2133
E5-2630v4	2.2GHz	10	25MB	85W	8.0GT/s	2133
E5-2630Lv4	1.8GHz	10	25MB	55W	8.0GT/s	2133
E5-2623v4	2.6GHz	4	10MB	85W	8.0GT/s	2133
E5-2620v4	2.1GHz	8	20MB	85W	8.0GT/s	2133
E5-2609v4	1.7GHz	8	20MB	85W	6.4GT/s	1866
E5-2603v4	1.7GHz	6	15MB	85W	6.4GT/s	1866

Chipset Intel® C610 Series Chipset

One of the following Intel® E5-2600v3 Processor Family depending on Intel® E5-2600v4 Processor Family model

NOTE: For more information regarding Intel chipsets, please see the following

URL: http://www.intel.com/products/server/chipsets/

On SystemHPE iLO4 (Firmware HPE iLO4 2.0 or later), 2GB NAND.ManagementNOTE: Read and learn more in the <u>iLO QuickSpecs</u>.

Chipset

One of the following depending on model

Memory Type:

One of the following HPE SmartMemory

depending on DDR4 Registered (RDIMM) or Load Reduced (LRDIMM)

model

	DIMM Slots	Available	8	(4 DIMM slo		essor, 4 cha	nnels per processo	or, 1 DIMMs
	Maximum ((LRDIMM)	Capacity	256GB	8 x 32GB LF	RDIMM @24	00MHz		
	Maximum ((RDIMM)	Capacity	256GB	8 x 32GB RI	DIMM @24C	OMHz		
Memory Protection	Advanced	ECC			•		rection to detect a hin a single DRAM	
One of the following depending on model	Online spare Memory online spare mode detects a rank that is degrading and switch operation to the spare rank.				and switches			
Expansion Slots								
CPU1 PCle riser slots	Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form	ı Factor	Notes
5.015	1	PCIe 3.0	x16	x16	Number	Low	profile	CPU 1
CPU1 FlexibleLOM riser slots	Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Device Number	Form Factor	Notes
(Option 1)	2	PCle 3.0 Flexible LOM	x8 x8	x8 x8			Low profile Flexible LOM	CPU1 CPU 1 (Can only be used
	NATE 71:							for flexibleLOMs)
CPU1 riser PCle		s riser is man	datory to Bus	r installing Fi	Bus	s. Device	Form Factor	Notes
slots (Option 2)	Slots #	Technology	Width	Width	Number	Number	rorm ractor	Notes
	2 3	PCIe 3.0 PCIe 3.0	x8 x8	x8 x8			Low profile slot Full-height, half- length slot	CPU1 CPU1
		y one of the C of the CPU1					configuration.	
Storage Controller One of the following			E Dynami	c Smart Array	B140i Cont	roller		
depending on model	Base Mode NOTE: B14 5.		,	c Smart Array r up to 4 SAT			19 and supports R	AID 0, 1, 1 + 0 &
Internal Storage	Optical Driv	res Op	tional: DVI	D-ROM, DVD-	-RW			
Devices One of the following depending on model	Hard Drive		ne ship sta FF drive b	andard Pays total with	Optical bay	,		

Maximum Interna	I	CAPACITY	CONFIGURATION
Storage	Hot Plug LFF SAS	32.0TB	4 x 8TB
depending on	Hot Plug LFF SATA	32.0TB	4 x 8TB
	Non-Hot Plug LFF SATA	16TB	4 x 4TB
model	Hot Plug LFF SATA SSD	15.36TB	4 x 3.84TB

Power Supply

HPE 550W FIO Power Supply

One of the following HPE 900W Redundant Power Supply

depending on model

Looking for high-efficiency power solutions at an entry-level price for your ProLiant Gen9 Essential Server? Hewlett Packard Enterprise entry-level Power Supplies offer an optimized set of features with options for both redundant and non-redundant power configurations.

The HPE 550W FIO Power Supply offers Silver-certified 80 Plus power efficiency (up to 89%) with an optimized set of features for non-redundant power configurations.

The HPE 900W AC 240VDC Power Input Module with Power Backplane can be configured to support power redundancy in ProLiant servers that offer only a single power supply bay, providing additional protection against power loss. With an 80 Plus Gold power efficiency rating (up to 92%), this power option helps to reduce operating expenses while protecting against trapped power capacity in the data center. Hot-plug AC power input modules allow for better serviceability with fast and easy deployment and replacement.

System Fans	Non-redundant	Redundant
One of the following 1P model	3 fans	5 fans
depending on model	Non-redundant	Redundant
2P model	4 fans	6 fans

NOTE: Redundant fan option kit (PN: 765513-B21) can be bought separately if redundancy is required with 1P or 2P configurations.

NOTE: Additional fans required with 2P configurations are included in "-B21" processor option kits.

Interfaces

Video 1 (Vaux Support) I OM Network Ports 2 x 1GbE ports Micro SD Slot 1 Micro SD

NOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.

USB 4 USB ports (standard):

> Front: 1xUSB 2.0 std: Rear: 2xUSB 3.0 Internal: 1x USB 3.0

Operating Systems and Virtualization **Software Support** **Microsoft Windows Server**

Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES)

VMware

for ProLiant

Servers

NOTE: For more information on the Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your

server, please visit our Support Matrix at: http://www.hp.com/go/ossupport and our driver download page http://h20566.www2.hpe.com/hpsc/swd/public/readIndex?sp4ts.oid=7500987.

Upgradeability

Upgradeable to two processors (28 cores)

One of the following Up to 8 DIMM slots

depending on

FlexibleLOM slot for 1Gigabit or 10 Gigabit Ethernet or QDR/FDR InfiniBand networking options

model

Redundant Power Supply

Redundant Fan

Compliance

Industry Standard ACPI 2.0b Compliant PCle 3.0 Compliant

> **PXE Support WOL Support**

Microsoft® Logo certifications

USB 3.0 Support ASHRAE A3

NOTE: Supports A3 extended ambient temperature.

NOTE: Refer to technical specifications section for more details.

Graphics

Integrated Matrox G200eH2 video standard

- 1280 x 1024 (32 bpp)
- 1920 x 1200 (16 bpp)

HPE Server

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability **UEFI/Legacy ROM** and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

> NOTE: The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit http://www.hpe.com/servers/uefi.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- **Embedded UEFI Shell**
- Mass Configuration Deployment Tool using RESTful API for iLO 4
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM
- Network Stack configurations

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen9 Server.

Form Factor

1U Rack form factor

One of the following 4LFF version:

depending on

1.69" (4.29cm) Height x 17.11" (43.46cm) Width x 23.9" (60.70cm) Length

model

Embedded Management **HPE Integrated Lights-Out (HPE** Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Not available on ML10 Gen9. Learn more

at http://www.hpe.com/info/ilo.

UEFI

iLO)

Configure and boot your servers securely with industry standard Unified

Extensible Firmware Interface (UEFI). Learn more

at http://www.hpe.com/servers/uefi.

RESTful API

RESTful API for iLO 4 is Redfish 1.0 conformance for simplified server management such as configuration and maintenance tasks based on modern industry standards. Learn more at http://www.hpe.com/info/restfulapi.

Intelligent **Provisioning** Hassle free server and OS provisioning for 1 or few servers with Intelligent

Provisioning. Learn more

at http://www.hpe.com/servers/intelligentprovisioning.

Embedded Remote Hewlett Packard Enterprise embedded remote support, when used with Insight Support

Online direct connect or HPE Insight Remote Support, allows HPE ProLiant servers to transmit hardware events directly to Hewlett Packard Enterprise or a Hewlett Packard Enterprise Authorized Partner for automated phone home support. Learn more at http://www.hpe.com/info/insightonline/explore.

NOTE: For more information, visit: http://www.hp.com/go/ilo or HPE iLO Management Engine technologies whitepaper.

Server utilities Smart **Update** Optimize firmware and driver updates with Smart Update solutions including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP) and smart components. Learn more

at http://www.hpe.com/servers/smartupdatemanager.

HPE Systems Insight

HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-Hewlett Packard Enterprise servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware

Manager

updates. Learn more at http://www.hpe.com/servers/hpsim.

(HPE SIM)

Scripting Tool Kit

Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more

at http://www.hpe.com/servers/proliant/stk orhttp://www.hpe.com/servers/powershell.

and

Windows

PowerShell

RESTful

RESTful Interface tool is a scripting tool to provision using RESTful API for iLO 4 to discover and

Interface

deploy servers at scale. Learn more at http://www.hpe.com/info/resttool.

Tool

HPE iLO Enables the ability to access, deploy, and manage your server anytime from anywhere from select

Mobile

smartphones and mobile devices. For additional information please

Application visit: http://www.hpe.com/info/ilo/mobileapp.

HPE Insight Online HPE Insight Online, available at no additional cost as part of your Hewlett Packard Enterprise warranty, Care Pack or contractual support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at http://www.hpe.com/info/insightonline/explore.

Security

Power-on password Serial interface control Administrator's password TPM 2.0

UEFI

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available

at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html.

Optional Features

Embedded Management

iLO Essentials

HPE iLO Essentials is the preferred license for small and medium business that offers full remote server management capabilities for small and medium business via the Integrated Remote Console (IRC), virtual media, and e-mail based alerts. Learn more about HPE iLO Essentials

iLO Scale-Out

HPE iLO Scale-Out is the preferred license built for web hosting, cloud service providers, and high performance computing data centers, managing massive scale out environments for the DL 100 and 10 series servers, not available for ML servers. This license offers sophisticated scripting tools that provides remote access through Text Console via SSH, Dynamic power capping, Email-based Alerting and proactive notifications. For more information,

visit http://www.hpe.com/servers/iLO/scale-out.

at http://www.hpe.com/servers/iloadvanced.

at http://www.hpe.com/servers/iLO/essentials.

iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multiuser collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced

Server Management

HPE Insight Control

HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information,

see http://www.hpe.com/info/insightcontrol.

Rack and Power Infrastructure

HPE Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HPE Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

Learn more at HPE Rack and Power Infrastructure.

Clusters

High Performance HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPEC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters.

Optional Features

HPC Interconnects NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPEC Clusters with InfiniBand

Interconnects: http://www.hp.com/techservers/clusters/ucp/index.html

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further tha Hewlett Packard Enterprise storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities. Storage software that gets the job done:

Data Protection and Recovery Software

Whether you're a large enterprise or a smaller business, Hewlett Packard Enterprise data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.

Data Archive and Migration Software

Hewlett Packard Enterprise storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.

Storage Resource Management Software (SRM)

Hewlett Packard Enterprise storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.

Data Replication Software

Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.

Storage Device Management Software

Maximize your investment in Hewlett Packard Enterprise storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.

HPE StoreVirtual VSA

With HPE StoreVirtual VSA you can use the power of virtualization to create a virtual array within your host server. Manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. HPE ProLiant Gen9 servers include a 3-year limited license for HPE StoreVirtual VSA software with 1TB of capacity at no extra cost. Simply select to install HPE StoreVirtual VSA software during server setup within Intelligent Provisioning. More information, instructional videos, and free console management software are available

at http://www.hp.com/go/vsa1TB.

NOTE: For more information about Storage Software including QuickSpecs, please see: http://www.hp.com/go/storage/software

(SCE)

One Config Simple SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products

Optional Features

not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. https://h22174.www2.hp.com/SimplifiedConfig/Index.

Service and Support

HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support for need for your IT and business.

Connect your devices

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77% reduction in down time, near 100% diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.

1- IDC 2 - HP CSC reports 2014 - 2015

Recommended Support

Basic: HPE Foundation Care NBD, three-year Support Service

HPE Foundation Care Next Business Day connects you to Hewlett Packard Enterprise during business hours for assistance on resolving issues - This service features need based next business day hardware onsite response and software call back within two hours. In addition, Collaborative software support and provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en

Standard: HPE Foundation Care 24x7, three-year Support Service

HPE Foundation Care 24x7 gives you access to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. This service includes need based Hardware onsite response within four hours. In addition, collaborative software support is included in this service that provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en

Optimized: HPE Proactive Care* with 24x7 coverage, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your Hewlett Packard Enterprise servers.

Parts and Materials Hewlett Packard Enterprise will provide Hewlett Packard Enterprise-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage

Service and Support

limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Related Services

HPE Server Hardware Installation

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf

HPE Installation and Startup Service

Provides for the installation and startup of Hewlett Packard Enterprise technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

HPE Technology Services Support Credits

Offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. http://www.hpe.com/ww/learn

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

Learn more http://www.hpe.com/support/hpesc

The Hewlett Packard Enterprise Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Support Service or Hewlett Packard Enterprise contractual support agreement.

*HPE Support Center Mobile App is subject to local availability.

For more information: http://www.hpe.com/services

Pre-configured Models

	Entry Models	Base Models			
[SKU Number]	830012-B21	833865-B21			
Model Name	HPE ProLiant DL60 Gen9 E5-2603v4 HPE ProLiant DL60 Gen9 E5-2603v4 SGB-R B140i 4LFF SATA 550W PS Entry Server Server				
Processor	Intel® Xeon® E5-2603v4	Intel® Xeon® E5-2609v4			
Number of Processors		One			
Memory	8GB (1x8GB Registered DIMMs STND, 2400 MHz)	8GB (1x8GB Registered DIMMs, 2400 MHz)			
Network Controller	HPE Embedded Dual Port 3	HPE Embedded Dual Port 361i Adapter Network Interface			
Storage Controller	HPE Dynamic S	HPE Dynamic Smart Array B140i			
Hard Drive	None shi	p standard			
Internal Storage	4 LFF HDD Bays (Non Hot Plug)	4 LFF HDD Bays			
Optical Drive Bay	1; (Optional: DVI	D-ROM, DVD-RW)			
PCI-Express Slots	3 PCle	3.0 slots			
Power Supply	(1) HPE 550W F	FIO Power Supply			
Fans	3 hot swap fan:	s, non-redundant			
Management	_	iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional)			
Form Factor	Rack (1U), HPE	Rack (1U), HPE Easy Install Rails			
Warranty	,	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response.			

	Entry Models	Base Models		
[SKU Number]	777394-B21	785836-B21		
4GB-R B140i 4LFF Non-hot Plug SATA 8GB-R B140i 4LFF SA		HP ProLiant DL60 Gen9 E5-2609v3 8GB-R B140i 4LFF SATA 550W PS Base Server		
Processor	Intel® Xeon® E5-2603v3	Intel® Xeon® E5-2609v3		
Number of Processors		One		
Memory	4GB (1x4GB Registered DIMMs, 2133 MHz)	8GB (1x8GB Registered DIMMs, 2133 MHz)		
Network Controller	HPE Embedded Dual Port 3	61i Adapter Network Interface		
Storage Controller	HPE Dynamic S	Smart Array B140i		
Hard Drive	None sh	p standard		
Internal Storage	age 4 LFF HDD Bays (Non Hot Plug) 4 LFF HDD Bays			
Optical Drive Bay	1; (Optional: DV	D-ROM, DVD-RW)		
PCI-Express Slots	3 PCle	3 PCle 3.0 slots		
Power Supply	(1) HPE 550W FIO Power Supply			

Pre-configured Models

Fans	3 hot swap fans, non-redundant					
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials					
	(optional), iLO Scale-out (optional only for DL), iLO Advanced (optional)					
Form Factor	Rack (1U), HPE Easy Install Rails					
Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next					
	business day response.					

Country Code Keyxx1 = B21Worldwidexx1 = 291Japanxx1 = AA1PRC

Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- 1. Factory Integrated Models must start with a CTO Server.
- 2. FIO indicates that this option is only available as a factory installable option.
- 3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- 4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

[Chassis]	HP ProLiant DL60 Gen9 Non-hot Plug 4LFF Configure-to-order Server	HP ProLiant DL60 Gen9 4LFF Configure-to- order Server			
SKU Number	777404-B21	777403-B21			
Processor	2 (optional) x HPE Sr	nart Socket Guides			
DIMM Slots	8 DIMM slots for RDIMM, LRDIMM DDR4 Memory				
Storage Controller	HPE Dynamic Smart Array B140i				
PCle	3 PCIe 3.0 slots				
Drive Cage	4LFF Non Hot Plug	4LFF Hot Plug			
Network Controller	HPE Embedded Dual Port 361i Adapter Network Interface				
Fans	3 hot swap fans, non-redundant				
Management	iLO Management (standard), Intelligent Provisioning (standard)				
USB	1 front, 1 internal, 2 rear				
Ears	HPE Thumbscrew Ears				

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HPE Processors

Select one or two processors from Core options-Processor section below,

- If one processor is desired, select one xxxxxx-L21
- If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B21.
- Up to 2 processors supported. Mixing different processor models is not supported.
- DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x v#, 2 = number of CPUs in a Node, 6 is socket/segment designation, <math>00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) = version number.

HPE Memory

Select one or more memory from Core options-Memory section below,

• LRDIMM, RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM and RDIMM.

Configuration Information - Factory Integrated Models

- HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9.
- If only one processor is installed, only half of the total DIMM slots are available. When populating with two processors all DIMM slots are available.
- Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: http://www.hp.com/go/proliant-energy-efficient.
- Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, 1600MHz or 1333MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: http://www.hp.com/go/ddr4config.

HPE Power Supplies

Select one or more power supplies from Core Options-Power Supplies section below:

- Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located
 - at: http://www.hp.com/go/hppoweradvisor.
- Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

Step 3: Choose Additional Factory Integratable Options

HPE Unique Options

Select one or more Unique options from Core options section below.

- This section may contain FIO options, please see the Unique options section below.
- FIO indicates that this option is only available as a factory installable option.

HPE Drives

Select one or more drives from Core options-HPE Drives section below:

- The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.
- Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
- The HPE ProLiant Gen9 Smart Storage solutions are equipped with re-designed Small Form Factor (SFF 2.5 in) and Large Form Factor (LFF 3.5 in) hot plug carriers for HPE Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove".

HPE Flexible LOM Select a FlexibleLOM from Core options-Networking section below,

- Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.
- Please see the QuickSpecs for Technical Specifications and additional information: http://www.hp.com/go/ProLiantNICs.

HPE Networking

Select a standup NIC adapter from Core options-Networking section below,

Configuration Information - Factory Integrated Models

- Please see the QuickSpecs for Technical Specifications and additional information: http://www.hp.com/go/ProLiantNICs.
- These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

HPE I/O Expansion Select one or more Riser Kit options from Core options section below. **Options**

- To take advantage of the additional PCI slot upgrade, the second processor must be installed.
- This section may contain FIO options, please see HPE I/O Expansion Options section below.
- FIO indicates that this option is only available as a factory installable option.

HPE Cooling Options

Select one or more $\operatorname{\sf Fan}\nolimits$ Kits from $\operatorname{\sf Core}\nolimits$ options section below.

- This section may contain FIO options, please see HPE Cooling Options section below.
- FIO indicates that this option is only available as a factory installable option.

HPE Rail Kits

Select one type of rail kit from Additional options section below.

- Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.
- To assist in the installation of the server into the rack, an optional installation tool is available by contacting your local services representative (p/n 695539-001).
- See Hewlett Packard Enterprise Rack Options in Additional Options section of this QuickSpecs for more rack kit choices.

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

765508-B21

HPE Unique

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HP DL60/120 Gen9 CPU1 Riser Kit

	TII DE00/120 GETT CI OTTAISEI KII	703300 DZ1						
Options	HP DL60/120 Gen9 FlexibleLOM Riser Kit	765509-B21						
	HP DL60/120 Gen9 Full Height Half Length PCIe Riser Kit	765510-B21						
	HP AHCI-Enable FIO Setting	801845-B21						
	NOTE: This needs to be selected when Advanced Host Controller Interface							
	mode is required on B140i controller.							
HPE Memory	Registered DIMMs (RDIMMs) for E5-2600v3 Series							
	HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15 Registered Memory Kit	726717-B21						
	HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit	803026-B21						
	HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15 Registered Memory Kit	726718-B21						
	HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	759934-B21						
	HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit	803028-B21						
	HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21						
	HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	728629-B21						
	Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series							
	HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726720-B21						
	HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21						
	Registered DIMMs (RDIMMs) for E5-2600v4 Series							
	HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805347-B21						
	HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Standard Memory Kit	851353-B21						
	HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805349-B21						
	HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	836220-B21						
	HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805351-B21						
	Load Reduced DIMMs (LRDIMMs) for E5-2600v4 Series							
	HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Registered Memory Kit	805353-B21						
HPE Optical Driv	res HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive	726536-B21						
	HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive	726537-B21						

HPE Drives	SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives	
	HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	765424-B21
	HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737394-B21
	HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737261-B21
	HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793669-B21
	HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793671-B21
	SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
	HPE 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	818367-B21
	HPE 2TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	818365-B21
	HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	761477-B21
	HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	695510-B21
	HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652766-B21
	HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652757-B21
	HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652753-B21
	SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
	HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	753874-B21
	HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	693687-B21
	HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	628061-B21
	HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658079-B21
	HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	657750-B21
	HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658071-B21
	HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765253-B21
	HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765255-B21
	HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765257-B21
	HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765259-B21
	HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drives	793665-B21
	HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793667-B21
	SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
	HP 4TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801888-B21
	HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	628065-B21
	HP 3TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801886-B21

659339-B21
801884-B21
659337-B21
801882-B21
659341-B21
762272-B21
762270-B21
804642-B21
804668-B21
804674-B21
804680-B21
756660-B21
764945-B21
764943-B21
764941-B21
764939-B21
804616-B21
804628-B21
804634-B21
832417-B21
793703-B21
793699-B21
789147-B21

HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804578-B21
HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804584-B21
HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804590-B21
HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804596-B21
HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804602-B21
HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804608-B21
6G SATA Hot Plug LFF (3.5-inch) RI-3 SCC SSD	
HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816933-B21
HP 1.92TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816923-B21
HP 960GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816913-B21
HP 480GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816903-B21
HP 240GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816893-B21
HP 120GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816883-B21
6G SATA Hot Plug LFF (3.5-inch) MU-3 SCC SSD	
HP 1.92TB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	817015-B21
HP 960GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816999-B21
HP 480GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816989-B21
HP 240GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816979-B21
HP 120GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816969-B21
6G SATA Hot Plug with SmartDrive LFF (3.5-inch) Midline 512e Helium Drives	
HP 8TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793695-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793683-B21
Hard Drive Blank Kits	
HP Large Form Factor Hard Drive Blank Kit	666986-B21
M.2 SSD	
HP Dual 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	777894-B21
HP 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	788028-B21
HP DL60/120 Gen9 M.2 Cable Kit	805283-B21
NOTE: M.2 drives go in PCIe slot and use B140i SATA controller only.	

HPE Networking 1 Gi	gabit Ethernet adapters		
	Ethernet 1Gb 4-port 331T Adapter	647594-B21	
HP	Ethernet 1Gb 4-port 366T Adapter	811546-B21	
HP	Ethernet 1Gb 2-port 361T Adapter	652497-B21	
HP	Ethernet 1Gb 2-port 332T Adapter	615732-B21	
10 (Gigabit Ethernet adapters		
HP	Ethernet 10Gb 2-port 530T Adapter	656596-B21	
HP	Ethernet 10Gb 2-port 561T Adapter	716591-B21	
HP	Ethernet 10Gb 2-port 530SFP Adapter	652503-B21	
HP	Ethernet 10Gb 2-port 546SFP+ Adapter	779793-B21	
HP	E Ethernet 10Gb 2-port 562SFP+ Adapter	727055-B21	
HP	Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21	
NO	TE: A minimum of two Gigabytes (2 GB) of server memory is required	per each adapter.	
	TE: Direct Attach Cable (DAC) for copper environments or fiber trans		
	ic environments must be purchased separately. See cables/options be	elow.	
	xibleLOM Adapters		
	FlexFabric 10Gb 2-port 533FLR-T Adapter	700759-B21	
HP	FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21	
HP	HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter HP Ethernet 10Gb 2-port 561FLR-T Adapter HP Ethernet 1Gb 4-port 366FLR Adapter HP Ethernet 1Gb 4-port 331FLR Adapter HP Ethernet 10Gb 2-port 546FLR-SFP+ Adapter HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter	665243-B21	
HP		700699-B21	
HP		665240-B21	
HP		629135-B22	
HP		779799-B21	
		727054-B21	
	NOTE: FlexibleLOM riser kit (P/N: 76550765509-B219-B21) is required when any flexibleLOM is selected. NOTE: Please see the QuickSpecs for Technical Specifications and additional		
NO			
info	ormation: http://www.hp.com/go/ProLiantNICs.		
HPE InfiniBand HP	InfiniBand FDR 2-port 545QSFP Adapter	702211-B21	
HP	InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter	764284-B21	
QL	ogic InfiniBand 4X QDR PCI-E G2 Dual Port HCA	583211-B21	
NO	TE: Please see the HPE InfiniBand Options for HP ProLiant and Integ	rity Servers QuickSpecs	
for	additional information.		
HPE I/O Expansion HP	DL60/120 Gen9 Full Height Half Length PCIe Riser Kit	765510-B21	
_ ··	DL60/120 Gen9 FlexibleLOM Riser Kit	765509-B21	
HP	DL60/120 Gen9 CPU1 Riser Kit	765508-B21	
HPE Power Her	wlett Packard Enterprise entry-level Power Supplies		
Supplies HP	550W FIO Power Supply Kit	730941-B21	

NOTE: This is a Factory Installed Option (FIO) only.

NOTE: Supports Silver-level efficiency (89%) with a standard C14 inlet connector. No support for HPE Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers.

HPE 900W AC 240VDC Power Input Module FIO Kit

828734-B21

NOTE: This is a Factory Installed Option (FIO) only.

NOTE: RPS Backplane is mandatory to be chosen with this power input module.

HPE 900W AC 240VDC RPS Power Backplane FIO Kit

828735-B21

NOTE: This is a Factory Installed Option (FIO) only.

NOTE: This RPS backplane is mandatory to be chosen along with 900W RPS input module.

HPE 900W AC 240VDC Power Input Module

775595-B21

NOTE: This part number can only be bought standalone and is for field integration only.

NOTE: RPS Backplane is mandatorily needed with this power input module.

HPE 900W AC 240VDC RPS Power Backplane

814835-B21

NOTE: This part number can only be bought standalone and is for field integration only.

NOTE: This RPS backplane is mandatorily needed with 900W RPS input module.

HPE 900W AC 240VDC Redundant Power Supply Kit

820792-B21

NOTE: This Redundant Power supply kit includes 2 power supply input module and 1 backplane kit.

NOTE: This part number is both factory installed option and field integrable option.

NOTE: This Power supply supports both 100-240V AC and 240V DC.

NOTE: Supports Gold-level efficiency (92%) with a standard C14 inlet connector. No support for HPE Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers.

NOTE: HPE 900W Gold (Redundant) AC 240VDC Power Input Module (775595-B21/ 828734-B21) must be used with Power Backplane (814835-B21).

NOTE: Each Redundant Power Supply Backplane can support up to two (2) power input modules.

NOTE: Redundant AC Power Input Modules do not share power. Redundant AC Power Input Module #1 is the primary AC Power Input Module. Redundant AC Power Input Module #2 is the backup AC Power Input Module.

NOTE: Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

NOTE: Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: http://www.hp.com/go/hppoweradvisor.

HPE Cooling Options

HP DL60/120 Gen9 Redundant Fan Kit

765513-B21

NOTE: Includes two fans and is required to move from non-redundant to redundant configurations.

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Insight	HPE Insight Control	
Software	HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License	C6N27A
	HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License	C6N28ABE
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO Electronic License	C6N36ABE
	HP Insight Management Media Kit	C6N31A

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24x7 HPE Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HPE Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates.

NOTE: For additional license options please see the QuickSpecs

at: http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04123391.

Embedded	HPE iLO Advanced		
Management	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License	512485-B21	
	HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A	
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE	
	HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE	
	HPE iLO Essentials		
	HP Integrated Lights-Out Essentials including 3yr 24x7 Technical Support and Updates E-LTU	E6U61ABE	
	HP Integrated Lights-Out Essentials including 3yr 24x7 Tech Support and Updates Single Svr License	BD774A	
	HP Integrated Lights-Out Essentials including 1yr 24x7 Tech Support and Updates Single Svr License	BD775A	
	HP Integrated Lights-Out Essentials including 1yr 24x7 Technical Support and Updates E-LTU	E6U62ABE	
	HPE iLO Scale-out		
	HP Integrated Lights-Out Scale-Out 3yr 24x7 Tech Support and Updates Flex Quantity License	BD776A	
	HP Integrated Lights-Out Scale-Out including 3yr 24x7 Tech Support and Updates Flex Qty E-LTU	BD776AAE	

	HP Integrated Lights-Out Scale-Out including 3yr 24x7 Tech Support and Updates Tracking License	BD777A
	HP Integrated Lights-Out Scale-Out 1yr 24x7 Tech Support and Updates Flex Quantity License	BD778A
	HP Integrated Lights-Out Scale-Out including 1yr 24x7 Tech Support and Updates Flex Qty E-LTU	BD778AAE
	HP Integrated Lights-Out Scale-Out including 1yr 24x7 Tech Support and Updates Tracking License	BD779A
IPE Converged	HPE OneView Advanced (with HPE iLO Advanced)	
nfrastructure	HP OneView incl 3yr 24x7 Supp Phys 1 Svr Lic	E5Y34A
lanagement	HP OneView incl 3yr 24x7 Supp Flex Qty E-LTU	E5Y35AAE
oftware	HP OneView for ProLiant DL Server incl 3yr 24x7 Supp FIO Bundle Physical 1 Svr Lic	E5Y43A
	HPE OneView without iLO Advanced	
	HP OneView w/o iLO including 3yr 24x7 Support 1 Server LTU	P8B24A
	HP OneView w/o iLO including 3yr 24x7 Support Flex Quantity E-LTU	P8B26AAE
	HP OneView w/o iLO including 3yr 24x7 Support FIO 1 Server LTU	P8B31A
	HP OneView Media Kit Phys No Lic	E5Y37A
	HP Operations Analytics for HP OneView LTU	K8G29A
	HP OneView w/o iLO including 3yr 24x7 Support Track 1 Server LTU	P8B25A
	HP Operations Analytics for HP OneView E-LTU	K8G29AAE
	NOTE: Full licenses of HPE OneView Advanced also provide the right-to-use	1100277012
	HPE Insight Control without additional charge.	
	NOTE: Server provisioning (via 'HPE Insight Control server provisioning') is	
	licensed as part of HPE OneView Advanced and provides multi-server OS and driver provisioning. Media kit #BD883A can be ordered for a physical copy of	
	this software (USB flash drive).	
	NOTE: Licenses ship without media. The HPE OneView Media Kit can be	
	ordered separately, or can be downloaded	
	at: http://www.hp.com/go/oneview.	
	NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.	
IPE Security	HP Trusted Platform Module 2.0 Kit	745823-B21
	NOTE: HPE Trusted Platform Module 2.0 Option works with Gen9 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants.	
	NOTE: HPE Gen9 servers purchased earlier may need the latest firmware update to be compatible with the TPM 2.0 Option.	
	NOTE: HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.	
	HP Trusted Platform Module Option	488069-B21
	action in the date option	100007 DZ1

NOTE: The HPE Trusted Platform Module Option (488069-B21) is the TPM 1.2

version. Compatible server platforms include Gen8 and Gen9 servers

NOTE: HPE server systems can have a TPM module (of any type) installed	
only once. It cannot be replaced with any other TPM module.	
HP 1U Security Bezel Kit	664918-B21
NOTE: Quick Release Ear option kit (P/N 777324-B21) is required for installing	
security bezel.	

HP DL60 Gen9 Quick Release Ear FIO Kit 777324-B21
HP DL60 Gen9 Thumbscrew Ear FIO Kit 787218-B21

HPE Storage Controllers

SAS Controllers

HPE Smart Array Controllers

HP Smart Array P440/2GB FBWC 12Gb 1-port Int SAS Controller	820834-B21
NOTE: Includes the HPE Smart Storage Battery.	
HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller	726821-B21
HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller	726825-B21
HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller	761872-B21
NOTE: Includes the HPE Smart Storage Battery.	
HPE Smart Host Bus Adapters	
HP H240 12Gb 2-ports Int Smart Host Bus Adapter	726907-B21
HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter	761873-B21
HP H241 12Gb 2-ports Ext Smart Host Bus Adapter	726911-B21
HPE Cable Options	
HP DL60/120 Gen9 4LFF Smart HBA H240 SAS Cable Kit	777385-B21

NOTE: One of the above cables is required to be selected depending on the combination of chassis and storage controller. Cable option kit descriptions include the right chassis and storage controller names.

NOTE: FIO indicates that this option is only available as a factory installable option. Please select FIO option if you want the option to be factory installed.

NOTE: NHPE server chassis (Mod-x) includes SATA cables required to connect drives to embedded B140i SATA controller.

Optional Software

HP SmartCache No Media 24x7 Technical Support 1 Svr License	D7S26A
HP SmartCache No Media 24x7 Technical Support Flexible License	D7S27A
HP SmartCache No Media 24x7 Technical Support Electronic License	D7S27AAE

NOTE: HPE SmartCache is supported when one of the supported Smart Array Controllers is installed in the server.

HP DL60/120 Gen9 4LFF Smart Array P440 SAS Cable Kit

HP DL60/80/120 Gen9 4LFF Cable FIO Kit

NOTE: HPE SmartCache comes standard (no licensing is required) if the HPE Smart Array P840 Controller is installed in the server.

Optional Upgrades

HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers 727258-B21

NOTE: This option is mandatorily required with HPE Smart Array controllers. One server can accommodate only 1 Smart Storage Battery that would suffice the requirement of all HPE Smart Array controllers.

777382-B21

777331-B21

HPE Tape Backup NOTE: For the complete range of tape drives, autoloaders, libraries and media see: http://www.hp.com/go/tape. For hardware and software compatibility of HPE tape backup products see: http://www.hp.com/storage/SPOCK and http://www.hp.com/go/ebs.

> NOTE: For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well.

Tape Drives

HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive	BB874A
HPE StoreEver LTO-7 Ultrium 15000 Internal Tape Drive	BB873A
HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive	EH964A
HP StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A
HP StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive	EH958B
HP StoreEver LTO-5 Ultrium 3280 SAS External Tape Drive	EH900B
HP StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive	EH920B
HP StoreEver LTO-3 Ultrium 920 SAS External Tape Drive	EH848B

SAS Rack-Mount Tape Solutions

COL99A
EJ014B
EH946C
AE459B
K2R09A
K2R10A

HPE DAT Autoloader

LIDE CHARLETTO A	Lilleriana (OEO Eileas Channal Tana Asstala adam	COL 110 A
HPE StoreEver 1/8 G2 L 1 O-6	Ultrium 6250 Fibre Channel Tape Autoloader	COH19A

HPE MSL2024 Tape Library

HPE StoreEver MSL2024 O-drive Tape Library AK379A

HPE MSL4048 Tape Library

HPE StoreEver MSL4048 O-drive Tape Library AK381A

HPE StoreEver MSL6480

HPE StoreEver MSL6480 Scaleable Expansion Module QU626A HPE StoreEver MSL6480 Scalable Base Module QU625A

HPE Disk Backup HPE RDX Removable Disk Backup System

HP RDX+ 1TB External Backup System	B7B69B
HP RDX+ 500GB External Backup System	B7B66B
HP RDX 2TB USB3.0 External Disk Backup System	E7X53B
HP D3700 Enclosure	QW967A
HP D3600 Enclosure	QW968A
HP RDX+ External Docking System	C8S07B

NOTE: For the complete range of RDX drives and media see: http://www.hp.com/go/rdx. For hardware and software compatibility of HPE disk backup products see: http://www.hp.com/storage/SPOCK.

NOTE: Please see the HPE RDX Removable Disk Backup System QuickSpecs for additional part numbers, technical specifications, and additional information.

	HPE StoreOnce Backup systems	
	HPE StoreOnce 3100 8TB System	BB913A
	HPE StoreOnce 3540 24TB System	BB914A
	HPE StoreOnce 5100 48TB System	BB915A
	HPE StoreOnce 3520 12TB System	BB922A
HPE Storage	NOTE: These adapters are only supported with Windows Server 2012 R2 operating	system as of now.
Options	Support for other operating systems will follow later.	
	Emulex Fibre Channel HBAs	
	HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AJ762B
	HP 82E 8Gb 2-port PCle Fibre Channel Host Bus Adapter	AJ763B
	HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter	C8R38A
	HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter	C8R39A
	QLogic Fibre Channel HBAs	
	HP 81Q 8Gb 1-port PCle Fibre Channel Host Bus Adapter	AK344A
	HP 82Q 8Gb 2-port PCle Fibre Channel Host Bus Adapter	AJ764A
	HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter	QW971A
	HP StoreFabric SN1000Q 16GB 2-port PCle Fibre Channel Host Bus Adapter	QW972A
	Converged Network Adapter	
	HP StoreFabric CN1200E 10Gb Converged Network Adapter	E7Y06A
	HP StoreFabric CN1100R Dual Port Converged Network Adapter	QW990A
HPE Disk Storage	Disk Enclosures	
Systems	HP D6000 Dual I/O Module Disk Enclosure	QQ695A
	HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB Bundle	E7W30A
	HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB Bundle	E7W31A
	HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB Bundle	QQ697A
	HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB Bundle	QQ698A
	HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB Bundle	QQ699A
	HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB Bundle	QQ700A
	HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle	E7W32A
	HP D6000 w/70 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 560TB	MOT59A
	Bundle	
	HP D6000 w/70 6TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 420TB Bundle	МОТ57А
	HP D6000 w/35 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 280TB Bundle	МОТ58А
	HPE Advanced Series Racks	
HPE Data Center		
HPE Data Center Racks	HPE 11648 1075mm Pallet Universal Rack	H6J87A
		H6J87A H6J88A
	HPE 11648 1075mm Pallet Universal Rack	
	HPE 11648 1075mm Pallet Universal Rack HPE 11648 1075mm Shock Universal Rack	H6J88A H6J65A
	HPE 11648 1075mm Pallet Universal Rack HPE 11648 1075mm Shock Universal Rack HPE 11642 1075mm Pallet Universal Rack	H6J88A

INTL PDU

Additional Options

	HPE 11636 1075mm Pallet Universal Rack	Н6Ј77А
	HPE 11636 1075mm Shock Universal Rack	H6J78A
	HPE 11622 G2 1075mm Shock Universal Rack	H6J83A
	HPE 11622 G2 1075mm Shock Universal Rack	H6J84A
	HPE 11614 1075mm Shock Universal Rack	H6J82A
	NOTE: Please see the HPE Advanced Series Racks QuickSpecs for	
	information on additional racks options and rack specifications.	
	HPE Enterprise Series Racks	
	HPE 647 1075mm Pallet Intelligent Series Rack	BW911A
	HPE 647 1075mm Shock Intelligent Series Rack	BW912A
	HPE 647 1200mm Pallet Intelligent Series Rack	BW913A
	HPE 647 1200mm Shock Intelligent Series Rack	BW914A
	HPE 642 1075mm Pallet Intelligent Series Rack	BW903A
	HPE 642 1075mm Shock Intelligent Series Rack	BW904A
	HPE 642 1200mm Pallet Intelligent Series Rack	BW907A
	HPE 642 1200mm Shock Intelligent Series Rack	BW908A
	HPE 636 1075mm Pallet Intelligent Series Rack	BW895A
HPE 636 10	HPE 636 1075mm Shock Intelligent Series Rack	BW896A
	HPE 842 1075mm Pallet Intelligent Series Rack	BW917A
	HPE 842 1075mm Shock Intelligent Series Rack	BW918A
	NOTE: Please see the HPE Enterprise Series Racks QuickSpecs for	
	information on additional racks options and rack specifications.	
	HPE Standard Series Rack	
	HPE V142 1075mm deep Pallet 100 series Rack	AF046A
	NOTE: Please see the HPE Standard Series Racks QuickSpecs for information	
	on additional racks options and rack specifications.	
HPE Power	HPE Basic Power Distribution Units (PDU)	
Distribution Units	HPE Basic 1.9kVA/L5-20P 16A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU	H5M54A
(PDUs)	HPE Basic 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU	H5M56A
	HPE Basic 2.8kVA/L5-30P 24A/120V Outlets (18) 5-20R/Vertical NA/JP PDU	H5M55A
	HPE Basic 4.9kVA/60320 C20 Detachable 16A/230V Outlets (20) C13/Vertical WW PDU	H5M57A
	HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (20) C13/Vertical NA/JP PDU	H5M58A
	HPE Basic 7.3kVA/60309 5-wire 32A/230V Outlets (20) C13/Vertical INTL PDU	H5M68A
	HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13/Vertical NA/JP PDU	H5M61A
	HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU	H5M59A
	HPE Basic 7.3kVA/60309 3-wire 32A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU	H5M70A
	HPE Basic 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (6) C19/Vertical NA PDU	H5M60A

HPE Basic 11kVA/60309 63A 3-wire 48A/230V Outlets (30) C13 (6) C19/Vertical

H5M71A

HPE Basic 9.2kVA/50A Terminal Block 40A/230V Outlets (30) C13 (6) C19/Vertical WW PDU	H5M75A
HPE Basic 3Ph 5.7kVA/ L21-20P 16A/120-208V Outlets (24) C13 (3) 5-20R/Vertical NA/JP PDU	H5M63A
HPE Basic 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (24) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU	H5M64A
HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU	H5M62A
HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU	H5M72A
HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (36) C13 (6) C19/Vertical INTL PDU	H5M73A
HPE Basic 3Ph 11kVA/60309 16A/240V Outlets (36) C13 (6) C19/Vertical NA PDU	H5M67A
HPE Basic Modular 2.8kVA/L5-30P 24A/120V Outlets (4) C19/Horizontal NA/JP PDU	252663-D71
HPE Basic Modular 4.9kVA/L6-30P 24A/208V Outlets (4) C19/Horizontal NA/JP Core Only PDU	252663-D74
HPE Basic Modular 8.3kVA/CS8265C 40A/208V Outlets (4) C19/Horizontal NA/JP PDU	252663-D75
HPE Basic Modular 7.3kVA/60309 3-wire 32A/230V Outlets (4) C19/Horizontal INTL Core Only PDU	252663-B33
HPE Basic Modular 9.2kVA/60309 63A 3-wire 40A/230V Outlets (4) C19/Horizontal INTL PDU	252663-B34
HPE Basic Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF512A
HPE Basic Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU	AF513A
HPE Basic Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF519A
HPE Basic Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF511A
HPE Basic Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF518A
HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer	H3X09A
NOTE: Please see the HPE Basic Power Distribution Units (PDU) QuickSpecs	
for information on additional options and product specifications.	
HPE Metered Power Distribution Units (PDU)	
HPE Metered 2.8kVA/L5-30P 24A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU	D9N43A
HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU	D9N46A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Horizontal NA/JP PDU	D9N44A
HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (16) C13/Vertical WW PDU	D9N45A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Vertical NA/JP PDU	G9Z05A
HPE Metered 7.3kVA/60309 3-wire 32A/230V Outlets (12) C13/Vertical INTL PDU	G9Z06A

HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU	D9N47A
HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlets (20) C13 (4) C19/Vertical INTL PDU	D9N48A
HPE Metered 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (3) C19/Vertical NA/JP PDU	D9N51A
HPE Metered 3Ph 5.7kVA/L21-20P 16A/120-208V Outlets (13) C13 (3)5-20R/Vertical NA/JP PDU	D9N52A
HPE Metered 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (18) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU	D9N53A
HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (18) C13 (3) C19/Vertical INTL PDU	D9N55A
HPE Metered 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (3) C19/Vertical NA PDU	D9N49A
HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlets (32) C13 (4) C19/Vertical INTL PDU	D9N50A
HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (30) C13 (3) C19/Vertical INTL PDU	D9N57A
HPE Metered 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (30) C13 (3)	D9N58A D9N61A
C19/Vertical NA/JP PDU HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (12) C13 (12)	D9N62A
C19/Vertical NA/JP PDU HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (24) C13 (3)	D9N54A
C19/Vertical NA/JP PDU HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12)	D9N59A
C19/Vertical NA/JP PDU HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12)	G9Z07A
C19/Vertical NA/JP PDU HPE Metered 3Ph 19.9kVA/L22-30P 24A/277V Outlets (30) RF-203P-HP/Vertical	D9N63A
NA PDU HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlets (30) C13 (3)	D9N56A
C19/Vertical INTL PDU HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12) C13 (12)	D9N60A
C19/Vertical INTL PDU HPE Metered 3Ph 22kVA/60309 5-wire WT 32A/230V Outlets (12) C13 (12)	G9Z08A
C19/Vertical INTL PDU HP Environmental Sensor for Remote Monitored and Managed PDUs	E2D53A
NOTE: Please see the HPE Metered Power Distribution Units (PDU) QuickSpecs	
for information on additional options and product specifications.	
HPE Intelligent Power Distribution Unit (PDU) HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (6) C19/Horizontal	AF520A
NA/JP PDU	AFJZUA
HPE Intelligent Modular 8.3kVA/CS8265C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF521A

HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF522A
HPE Intelligent Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V (6)	AF523A
C19/Horizontal NA/JP PDU	
HPE Intelligent Modular 3Ph 11kVA/L22-20P 16A/240V Outlets (6) C19/Horizontal NA/JP PDU	AF900A
HPE Intelligent Modular 3Ph 17.3kVA/60309 30A 5-wire 24A/240V (6)	AF901A
C19/Horizontal NA/JP PDU	A 5505 A
HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF525A
HPE Intelligent Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU	AF526A
HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF527A
HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 60A 4-wire 48A/208V (12) C19/Horizontal NA/JP PDU	AF535A
HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 30A 5-wire 24A/240V (12)	AF537A
C19/Horizontal NA/JP PDU	AI 337A
HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12)	AF538A
C19/Horizontal INTL PDU	
HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU	AF531A
HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (20) C13 (6)	AF532A
C19/Horizontal NA/JP PDU	
HPE Intelligent Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF533A
HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6)	AF534A
C19/Horizontal INTL PDU Kit	
HP 5xC13 Intelligent PDU Extension Bar G2 Kit	AF547A
HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar	AF528A
NOTE: Please see the HPE Intelligent Power Distribution Unit (PDU) QuickSpecs	
for information on additional options and product specifications.	
HPE Metered and Switched Power Distribution Units (PDU)	
HPE Metered Switched 2.8kVA/L5-30P 24A/120V Outlets (24) 5-20R /Vertical	H8B48A
NA/JP PDU	
HPE Metered Switched 3.6kVA/60320 C20 Detachable 16A/230V Outlets (7) C13 (1) C19/Vertical WW PDU	H8B49A
HPE Metered Switched 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU	H8B50A
HPE Metered Switched 7.3kVA/60309 3-wire 32A/230V Outlets (20) C13 (4) C19/Vertical INTL PDU	H8B51A
HPE Metered Switched 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (6)	H8B52A
C19/Vertical NA/JP PDU	1.0055
HPE Metered Switched 3Ph 8.6kVA/L2190-30P 24A/208V Outlets (23) C13 C19 (1) 520R/Vertical NA/JP PDU	H8B53A
HPE Metered Switched 3Ph 11kVA/60309 5-wire 16A/230V Outlets (21) C13 (3) C19/Vertical INTL PDU	H8B54A

TL052A

Additional Options

HPE Metered Switched 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12)	H8B55A
C19/Vertical NA/JP PDU	
HPE Metered Switched 3Ph 17.3kVA/60309 4-wire 48A/208V Outlets (12) C13 (12)	H8B56A
C19/Vertical NA/JP PDU	

NOTE: Please see the <u>HPE Metered and Switched Power Distribution Units (PDU) QuickSpecs</u> for information on additional options and product specifications.

NOTE: To learn more, please visit the HPE Uninterruptible Power Systems (UPS) web page.

HPE Rack Moun
Consoles, KVM
Switches, and
Keyboards

HPE Location Discovery Services

HP Location Discovery Services LCD8500 Kit **NOTE:** Please see the <u>HPE Location Discovery Services QuickSpecs</u> for information on additional options and product specifications.

HPE Rack Mount Consoles

HP LCD8500 1U US Rackmount Console Kit	AF630A
HP LCD8500 1U UK Rackmount Console Kit	AF631A
HP LCD8500 1U DE Rackmount Console Kit	AF632A
HP LCD8500 1U FR Rackmount Console Kit	AF633A
HP LCD8500 1U JP Rackmount Console Kit	AF642A
HP LCD8500 1U RU Rackmount Console Kit	AF643A
HP LCD8500 1U INTL Rackmount Console Kit	AF644A
HP LCD8500 1U US TAA Rackmount Console Kit	AF645A

HPE KVM Switches

HP 0x2x16 G3 KVM Console Switch	AF652A
HP TAA 0x2x16 G3 KVM Console Switch	AF653A
HP USB Remote Access Key for G3 KVM Console Switches	AF650A
HP KVM Console USB Interface Adapter	AF628A
HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A
HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter	AF629A
HP 1x4 USB/PS2 KVM Console Switch	AF611A
HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
HP 0x1x8 G3 KVM Console Switch	AF651A
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A
HPE KVM Console USB/Display Port Interface Adapter	AF654A
HPE KVM Console USB 8-pack Interface Adapter	AF655A

NOTE: To learn more, please visit the **HPE KVM Switches web page**.

HPE USB Keyboard and Mouse

HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B21
HP USB BFR with PVC Free UK Keyboard/Mouse Kit	631344-B21
HP USB BFR with PVC Free FR Keyboard/Mouse Kit	631346-B21
HP USB BFR with PVC Free ES Keyboard/Mouse Kit	631348-B21
HP USB BFR with PVC Free DE Keyboard/Mouse Kit	631358-B21
HP USB BFR with PVC Free JP Keyboard/Mouse Kit	631360-B21

HP USB BFR with PVC Free IT Keyboard/Mouse Kit	631362-B21
HP USB BFR with PVC Free CN Keyboard/Mouse Kit	631364-B21
HP USB BFR with PVC Free AE Keyboard/Mouse Kit	638212-B21
HP USB BFR with PVC Free RU Keyboard/Mouse Kit	638214-B21
HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-103
HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-113
HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-133
HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-143
HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-223
HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-353
HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373
HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-B33
HP USB BFR with PVC Free IN Keyboard/Mouse Kit	672097-D63
HP USB BFR with PVC Free KR Keyboard/Mouse Kit	672097-KD3
Rail Kits	
HP 1U Small Form Factor Easy Install Rail Kit	734807-B21
HP 1U Cable Management Arm for Easy Install Rail Kit	734811-B21
HPE Other Options	
HP Rack LED Light Kit	BW939A
HP Kit LCD 1.83m Latch Display Port Cable	G7T29A
HP Advanced Power Manager Kit	741192-B21
HP ConvergedSystem Door Branding Kit	TK815A
HP ConvergedSystem Rack Light Kit	TK816A
HP ConvergedSystem Rack Side Panel 1075mm Kit	TK817A
HP Apollo 4200 Gen9 FIO Strap Shipping Bracket	822640-B21

HPE Uninterruptible HPE DirectFlow Three Phase UPS

Power Systems	Power Unit (1U UPS)
(UPS)	HP R12000 DirectFlow

HP R12000 DirectFlow - 1U Rackmount Uninterruptible Power System G9Y75A HP R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System AF478A HP RP12000/3 12000VA Three Phase INTL 6U Rackmount Uninterruptible Power AF437A System

Input/Output Module Options for 1U UPS

HP 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS IEC309 Input/Output Module HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 AF489A Input/Output Module HP 32A 380 Volt Three Phase China R12000 DirectFlow UPS Unterminated AF490A Input/Output Module HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output AF491A Module

HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output AF492A

HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 G9Y76A

Input/Output Module

AF488A

Additional Options

Power Unit (2U UPS)	
HP R18000 DirectFlow - 2U Rackmount Uninterruptible Power System	AF479A
Input/Output Module Options for 2U UPS	
HP 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS IEC309	AF483A
Input/Output Module	
HP 30A 380 Volt Three Phase China R18000 DirectFlow UPS Unterminated	AF485A
Input/Output Module	Λ Γ / Ο / Λ
HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF486A
HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output	AF487A
Module	711 10771
HP 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output	D9Q02A
Module	
HP 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309	AF484A
Input/Output Module	
NOTE: All Input/Output Modules support dual output outlets except the AF484A.	
	AF493A
HP DirectFlow UPS Management Card	AF493A
Battery Pack Options HP DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack	AF480A
HP DirectFlow UPS - 3U Rackmount VRLA Battery Pack	AF482A
HP WW DirectFlow Secondary Battery Cable	AF497A
NOTE: Please see the HPE DirectFlow Three Phase Uninterruptible Power System Qu	
for information on additional options and product specifications.	
HPE Tower UPS	
HPE T750 G4 UPS Models	
HP T750 G4 NA/JP Uninterruptible Power System	
	J2P85A
HP T750 G4 INTL Uninterruptible Power System	J2P85A J2P88A
HP T750 G4 INTL Uninterruptible Power System	
HP T750 G4 INTL Uninterruptible Power System HPE T1000 G4 UPS Models	J2P88A
HP T750 G4 INTL Uninterruptible Power System HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System	J2P88A J2P86A
HP T750 G4 INTL Uninterruptible Power System HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 INTL Uninterruptible Power System	J2P88A J2P86A
HP T750 G4 INTL Uninterruptible Power System HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 INTL Uninterruptible Power System HPE T1500 G4 UPS Models	J2P88A J2P86A J2P89A
HP T750 G4 INTL Uninterruptible Power System HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 INTL Uninterruptible Power System HPE T1500 G4 UPS Models HP T1500 G4 NA/JP Uninterruptible Power System	J2P88A J2P86A J2P89A J2P87A
HP T750 G4 INTL Uninterruptible Power System HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 INTL Uninterruptible Power System HPE T1500 G4 UPS Models HP T1500 G4 NA/JP Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System	J2P88A J2P86A J2P89A J2P87A
HP T750 G4 INTL Uninterruptible Power System HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 INTL Uninterruptible Power System HPE T1500 G4 UPS Models HP T1500 G4 NA/JP Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HPE UPS Options	J2P88A J2P86A J2P89A J2P87A J2P90A
HP T750 G4 INTL Uninterruptible Power System HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 INTL Uninterruptible Power System HPE T1500 G4 UPS Models HP T1500 G4 NA/JP Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HPE UPS Options HP R/T2200 G4 Extended Runtime Module	J2P88A J2P86A J2P89A J2P87A J2P90A J2R09A
HP T750 G4 INTL Uninterruptible Power System HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 INTL Uninterruptible Power System HPE T1500 G4 UPS Models HP T1500 G4 NA/JP Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HPE UPS Options HP R/T2200 G4 Extended Runtime Module HP R/T3000 G4 Extended Runtime Module	J2P88A J2P86A J2P89A J2P87A J2P90A J2R09A J2R10A
HPE T1000 G4 UPS Models HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 INTL Uninterruptible Power System HPE T1500 G4 UPS Models HP T1500 G4 NA/JP Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HPE UPS Options HP R/T2200 G4 Extended Runtime Module HP R/T3000 G4 Extended Runtime Module HP 2U Rack/Tower UPS Shipping Kit HPE Rack/Tower UPS Models	J2P88A J2P86A J2P89A J2P87A J2P90A J2R09A J2R10A L4Q11A
HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 INTL Uninterruptible Power System HPE T1500 G4 UPS Models HP T1500 G4 NA/JP Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HPE UPS Options HPE UPS Options HP R/T2200 G4 Extended Runtime Module HP R/T3000 G4 Extended Runtime Module HP 2U Rack/Tower UPS Shipping Kit HPE Rack/Tower UPS HPE R/T2200 G4 UPS Models HP R/T2200 G4 NA/JP Uninterruptible Power System	J2P88A J2P86A J2P89A J2P87A J2P90A J2R09A J2R10A
HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 NA/JP Uninterruptible Power System HPE T1500 G4 UPS Models HP T1500 G4 NA/JP Uninterruptible Power System HPE T1500 G4 NA/JP Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HPE UPS Options HP R/T2200 G4 Extended Runtime Module HP R/T3000 G4 Extended Runtime Module HP 2U Rack/Tower UPS Shipping Kit HPE Rack/Tower UPS HPE R/T2200 G4 UPS Models HP R/T2200 G4 NA/JP Uninterruptible Power System HPE R/T3000 G4 UPS Models	J2P88A J2P86A J2P89A J2P87A J2P90A J2R09A J2R10A L4Q11A
HP T750 G4 INTL Uninterruptible Power System HPE T1000 G4 VA/JP Uninterruptible Power System HP T1000 G4 NA/JP Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HPE T1500 G4 VA/JP Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HPE UPS Options HP R/T2200 G4 Extended Runtime Module HP R/T3000 G4 Extended Runtime Module HP 2U Rack/Tower UPS Shipping Kit HPE Rack/Tower UPS HPE R/T2200 G4 VA/JP Uninterruptible Power System HPE R/T3000 G4 UPS Models HP R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System	J2P88A J2P86A J2P89A J2P87A J2P90A J2R09A J2R10A L4Q11A J2R00A J2R01A
HPE T1000 G4 UPS Models HP T1000 G4 NA/JP Uninterruptible Power System HP T1000 G4 NA/JP Uninterruptible Power System HPE T1500 G4 UPS Models HP T1500 G4 NA/JP Uninterruptible Power System HPE T1500 G4 NA/JP Uninterruptible Power System HP T1500 G4 INTL Uninterruptible Power System HPE UPS Options HP R/T2200 G4 Extended Runtime Module HP R/T3000 G4 Extended Runtime Module HP 2U Rack/Tower UPS Shipping Kit HPE Rack/Tower UPS HPE R/T2200 G4 UPS Models HP R/T2200 G4 NA/JP Uninterruptible Power System HPE R/T3000 G4 UPS Models	J2P88A J2P86A J2P89A J2P87A J2P90A J2R09A J2R10A L4Q11A

Additional Options

HPE USB and SD

HPE Care Pack Services


Options

R1500 G4 Models	
HP R1500 G4 NA Uninterruptible Power System	J2Q99A
HP R1500 G4 JP/TWN Uninterruptible Power System	J2R05A
HP R1500 G4 INTL Uninterruptible Power System	J2R03A
R7000 Uninterruptible Power System (UPS)	
HP R7000 4U 50A High Voltage NA/JP Uninterruptible Power System	AF462A
HP R7000 4U IEC-32A High Voltage INTL Uninterruptible Power System	AF463A
R5000 Uninterruptible Power System (UPS)	
HP R5000 3U L630 High Voltage NA/JP Uninterruptible Power System	AF460A
HP R5000 3U IEC309-32A High Voltage INTL Uninterruptible Power System	AF461A
NOTE: To learn more, please visit the HPE Uninterruptible Power Systems (U	PS) web page
HPE Enterprise Mainstream Flash Media Kits for Memory Cards	
HP 32GB microSD Enterprise Mainstream Flash Media Kit	700139-B21
HP 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B21
HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21
HP Dual 8GB microSD Enterprise Midline USB Kit	741279-B21
Installation & Start-up Services	
HPE Installation ML/DL Series 10 Service	U7WZ5E
HPE Startup ML/DL Series 10 Service	U7WZ7E
Foundation Care	
HPE 3 year Foundation Care Next business day DL60 Gen9 Service	U7VX4E
HPE 3 year Foundation Care Next business day with DMR DL60 Gen9 Service	U7VX5E
HPE 3 year Foundation Care Next business day with CDMR DL60 Gen9 Service	U7VX6E
HPE 3 year Foundation Care 24x7 DL60 Gen9 Service	U7VX7E
HPE 3 year Foundation Care 24x7 wDMR DL60 Gen9 Service	U7VX8E
HPE 3 year Foundation Care 24x7 wCDMR DL60 Gen9 Service	U7VX9E
Proactive Care	
HPE 3 year Proactive Care 24x7 DL60 Gen9 Service	U7WA4E
HPE 3 year Proactive Care 24x7 with DMR DL60 Gen9 Service	U7WA5E

HPE 3 year Proactive Care 24x7 with CDMR DL60 Gen9 Service

U7WA6E

Memory Population guidelines

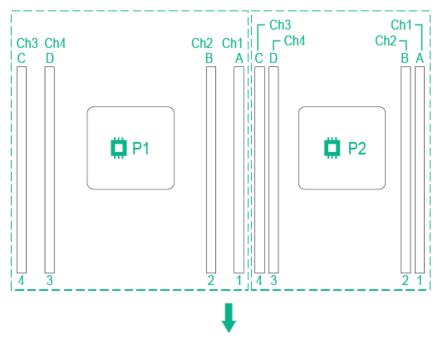

General Memory Population Rules and Guidelines:

- . Install DIMMs only if the corresponding processor is installed.
- . If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors and load the channels similarly whenever possible.
- . When two processors are installed, balance the DIMMs across the two processors.
- . White DIMM slots denote the first slot to be populated in a channel.
- . Do not mix RDIMMs or LRDIMMs.
- . Quad rank RDIMMs are not supported in HPE ProLiant DL60 Gen9 servers.
- . DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- . The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- . The maximum memory capacity is a function of the memory type and number of installed processors.
- . To realize the performance memory capabilities listed in this document, HPE SmartMemory is required.

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v3 Series Processor Family

Memory Bandwidth and Capacity								
[DIMM Type]							Reduced DIMMs)	
DIMM Rank	Single Rank	Single Rank	Dual Rank	Dual Rank	Dual Rank	Dual Rank	Quad Rank	
DIMM Capacity	4GB	8GB	8GB	16GB	32GB	16GB	32GB	

DIN 43.4 3.1	0477	2477	0477	2477	2477	2477	2477
DIMM Native	2133	2133	2133	2133	2133	2133	2133
Speed (MT/s)							
Voltage	Std	Std	Std	Std	Std	Std	Std
	Voltage	Voltage	Voltage	Voltage	Voltage	Voltage	Voltage
	1.2V	1.2V	1.2V	1.2V	1.2V	1.2V	1.2V
SLOTS THAT CAN	BE POPUL	ATED					
8 slot servers	8	8	8	8	8	8	8
MAXIMUM CAPAC	TY (GB)						
	32	64	64	128	256	128	256
POPULATED DIMM	SPEED (N	1T/s)					
1 DIMM Per	2133	2133	2133	2133	2133	2133	2133
Channel							
2 DIMM Per	2133	2133	2133	2133	2133	2133	2133
Channel							
3 DIMM Per	1600	1600	1600	1600	1600	1866	1866
Channel							

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v4 Series Processor Family

Memory Bandwidt	h and Cap	acity					
[DIMM Type]	Regi	Load Reduced (LRDIMMs)					
DIMM Rank	Single Rank	Single Rank	Dual Rank	Dual Rank	Dual Rank		
DIMM Capacity	8GB	16GB	16GB	32GB	32GB		
DIMM Native Speed (MT/s)	2400	2400	2400	2400	2400		
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V		
SLOTS THAT CAN	BE POPUI	LATED					
8 slot servers	8	8	8	8	8		
MAXIMUM CAPAC	ITY (GB)						
	64	128	128	256	256		
POPULATED DIMM SPEED (MT/s)							
1 DIMM Per Channel	2400	2400	2400	2400	2400		
2 DIMM Per Channel	2133	2133	2133	2133	2400		

3 DIMM Per	1866	1866	1866	1866	2400
Channel					

DIMM slot and configuration diagram

DIMM slot and configuration diagrams Basic memory slot & population diagram

- Population order; start with "A" first, "B" second, "C" third, etc.
- When one processor is installed, install DIMMs in sequential alphabetic order: A, B, C, D, E, F ...
- When two processors are installed, install DIMMs in sequential alphabetic order: CPU1-A, CPU2-A,CPU1-B,CPU2-B,CPU1-C, CP2-C

CPU #1 IS PROCESSOR ON RIGHT - LOOKING FROM FRONT OF SERVER

		CPU1	CPU 2	
	Slot#	population order	Slot # population order	
Chnl 1	1	A1	1 A1	
		CPU1	CPU 2	
	Slot #	population order	Slot # population order	
Chnl 2	2	B2	2 B2	
		CPU1	CPU 2	
	Slot #	CPU 1 population order	CPU 2 Slot # population order	
Chnl 4	Slot #			1
Chnl 4		population order	Slot # population order]
Chnl 4	3	population order	Slot # population order 3 D3	

Memory Speed by Processor Model

Processor Models	Supported Memory Speeds
E5-2603v3, E5-2609v3	1600MHz
E5-2620v3, E5-2630v3, E5-2640v3, E5-2630Lv3, E5-2623v3	1866MHz
E5-2650v3, E5-2660v3, E5-2650Lv3	2133MHz
E5-2609v4, E5-2603v4	1866MHz
E5-2623v4, E5-2620v4, E5-2630Lv4, E5-2640v4, E5-2630v4	2133MHz
E5-2650Lv4, E5-2660v4, E5-2650v4	2400MHz


Standard and
Maximum Memory
Capacity (Preconfigured
Models)

Pre Configured Models	Standard Memory	Optional Memory	Standard Memory Replaced with Optional Memory
E5-2603v4, E5-2609v4, E5-2609v3	8GB (1x8GB)	232GB (7x32GB, 1x8GB)	256GB (8x32GB)
E5-2603v3	4GB (1x4GB)	228GB (7x32GB, 1x4GB)	256GB (8x32GB)

DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values:

- 2GB = 2,048MB
- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB
- 64GB = 65,536MB

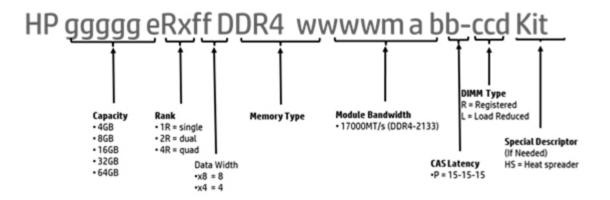

Storage



 $4 \times LFF SATA/SAS/SSD Hot Pluggable Hard Drives Bays$

System Unit Dimensions 4 LFF - 1.69 x 17.11 x 23.9 inches (4.29 x 43.46 x 60.70 cm)

 $(H \times W \times D)$

Weight Maximum: 37.44 lb (17kg)

(approximate) (all hard drives,

power supplies, and processors installed)

Minimum: 19.82 lb (9kg)

(one hard drive, power supply, and processor installed)

Input Rated Line 100 to 240 VAC

Requirements Voltage

for Standard Rated Input For 550W Power Supply: 460W PSU, see Current 6.7 A (at 100 VAC)

power specifications

Rated Input 47 to 63 Hz

tables for detail on 460W, 750W and

Frequency

Rated Input 1200W power

supplies)

For 550 W Power Supply: Power < 670 W (at 100 VAC),

< 660 W (at 200 VAC),

3.3 A (at 100 VAC)

Maximum **BTU Rating** For 550 W Power Supply:

> 2201 BTU/hr (at 100 VAC). 2153 BTU/hr (at 200 VAC)

To review typical system power ratings use the Power Advisor which is available via **Power**

the online tool located at URL: http://www.hp.com/go/proliant-energy-efficient **Specifications** or http://www.hp.com/go/hppoweradvisor - Click on the system of interest.

Example: DL160 Gen9- Follow the instructions of the next screens.

Power Supply Output

Rated Steady-For 550 W Power Supply: State Power 550 W (at 100 VAC).

550 W (at 200 VAC),

Maximum Peak For 550 W Power Supply: Power 550 W (at 100 VAC),

550 W (at 200 VAC).

System Inlet Standard **Temperature**

Operating Support of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during

standard operating support may be reduced if operating with a

10° to 35°C (50° to 95°F) at sea level with an altitude derating

fan fault or above 30°C

(86°F).

Extended Ambient For approved hardware configurations, the supported system Operating Support inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35°

to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3048 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

http://www.hp.com/servers/ashrae.

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

NOTE: Supports A3 extended ambient.

Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of change is

20°C/hr (36°F/hr).

Relative Humidity Operating Minimum to be the higher (more moisture) of -12°C (10.4°F)

dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative

humidity.

(non-condensing) Non-operating 5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet

bulb temperature, non-condensing.

Altitude Operating 3048 m (10,000 ft). This value may be limited by the type and

number of options installed. Maximum allowable altitude change

rate is 457 m/min (1500 ft/min).

Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is

457.2 m/min (1500 ft/min).

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).

Idle

L WAd Entry 5.7 B

Base 5.0 B

L pAm Entry 33 dBA

Base 37 dBA

Operating

L WAd Entry 5.8 B

Base 5.5 B

L pAm Entry 38 dBA

Base 40 dBA

Emissions FCC Classification Nor

FCC Rating Class A

Classification Normative (EMC) Standards

CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22; K24; EN 61000-3-2; EN 61000-3-3; EN

60950-1; IEC 60950-1

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

HPE Dynamic Smart Array B140i links

Number of PCI

Four

Controller

PCI link rate

4 Gb/s

Storage protocol SATA

support

SAS/SATA peak 6 Gb/s

data transfer

rate

Number of

10 links

SAS/SATA links

SAS/SATA

2x4 connectors; 2x1 connectors

connectivity

Expander

No

support

Drives Up to 10 Internal Drives

supported (max)

RAID support

0, 1, 10, 5 SATA

Software

HPE SSA, SMH, SIM

management

Warranty

Server warranty Not Supported

HPE Secure

Encryption

license

HPE SmartCache Not Supported

License

HPE Smart

Supported

Storage

Administrator

HPE Embedded Dual Port 361i Adapter

Network Interface 10Base-T/100Base-TX/1000Base-TX

Compatibility

IEEE 802.3 10Base-T

IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX IEEE 1588, IEEE 802.1AS

IEEE 802.3az - Energy Efficient Ethernet (EEE)

Ports

Data Transfer

PCI Express v 2.0, 5.0 GT/s, two lanes (x2)

Method

Controller Intel I350 Powerville

Network 10Base-T (Half-

Transfer Rate Duplex) 10 Mb/s per port, 40 Mb/s combined

10Base-T (Full-

Duplex) 20 Mb/s per port, 80 Mb/s combined

100Base-TX (Half-

100 Mb/s per port, 400 Mb/s combined Duplex)

100Base-TX (Full-

Duplex) 200 Mb/s per port, 800 Mb/s combined

1000Base-TX (Half

and Full-Duplex) 1000Mb/s per port, 4000 Mb/s combined

Connector Two RJ-45

Cable Support 10 Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m)

10/100/1000 Base-TX Category 5 or higher UTP; up to 328 ft (100 m)

Environment- End-of-life friendly **Products and Approach**

Management and Recycling

Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
31-Mar-2016	From Version 10 to 11	Added	Added new HPE Smart Memory 2400 MHz memory, support for Intel Xeon E5-2600v4 processor, new HPE Trusted Platform Module (TPM) 2.0, and new 900W AC/ 240VDC power supply.
		Changed	Memory, Maximum Internal Storage, Power Supply, Upgradeability, HPE Server UEFI/Legacy ROM, Embedded Management, HPE Security, Service and Support, Pre-configured Models, HPE Memory, and HPE Power Supplies sections were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
16-Feb-2016	From Version 9 to 10	Added	New HDD offering was added to HPE Drives.
		Changed	HPE Power Supplies, HPE Data Center Racks, and HPE Power Distribution Units (PDUs) were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
1-Dec-2015	From Version 8 to 9	Added	New options added to HPE Tape Backup, HPE Disk Backup, HPE Rack Mount Consoles, and KVM Switches, and Keyboards.
		Changed	On System Management Chipset, Memory, Maximum Internal Storage, Embedded Management, and Server utilities were revised.
			Product images were updated.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
23-Oct-2015	From Version 7 to 8	Changed	Memory and HPE Security were revised.
28-Sep-2015	From Version 6 to 7	Added	Added new 6Gb SATA Solid State Drives.
			Added new HPE OneView management software.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
17-Aug-2015	From Version 5 to 6	Added	New Solid State Drives offering was added to Core Options.
		Changed	Maximum Internal Storage was revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
1-Jun-2015	From Version 4 to 5	Added	New Hard Drives were added to Core Options.
			New options added to HPE Power Supplies.
			New HPE OneView LTUs added to HPE Converged Infrastructure Management Software.
			New RDX+ external backup options were added.
		Changed	Core Options and Additional Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.

Summary of Changes

24-Apr-2015	From Version 3 to 4	Added	Added 813534-B21 and 813535-B21 to HPE Power Supplies.
30-Mar-2015	From Version 2 to 3	Added	New Hard Drives offering.
			Optional Software added to HPE Storage Controllers.
		Changed	HPE Memory, HPE Disk Storage Systems, HPE USB and SD Options, HPE Storage Controllers, and HPE Disk Storage Systems were updated.
9-Feb-2015	From Version 1 to 2	Added	Added HPE Insight Software, HPE Disk Backup.
			Added new HPE Drives and new G4 UPS models.
		Changed	HPE Memory, HPE Drives, HPE Tape Backup, HPE
			Rack Mount Consoles, KVM Switches, and
			Keyboards, and HPE Uninterruptible Power Systems
			(UPS) sections were revised.













Rate this document

© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

c04447824 - 15088 - Worldwide - V11 - 31-March-2016

