

**Lenovo**™ **ThinkVision**

# PSREF



**Product Specifications Reference**

Version 528, August 2018

**EMEA**

Visit <http://psref.lenovo.com> for the latest version

# Contents

---

<b>Cover</b>		
<b>Contents</b>		
<b>Summary Of Change</b>		
<b>17 Inch - 20 Inch</b>		
<b>ThinkVision E1922s</b>		
ThinkVision E1922s Platform Specifications		
<b>ThinkVision E2054</b>		
ThinkVision E2054 Platform Specifications		
<b>ThinkVision LT1913p Square</b>		
ThinkVision LT1913p Square Platform Specifications		
<b>ThinkVision T1714</b>		
ThinkVision T1714 Platform Specifications		
<b>ThinkVision T1714p</b>		
ThinkVision T1714p Platform Specifications		
<b>ThinkVision T2054p</b>		
ThinkVision T2054p Platform Specifications		
<b>21 Inch - 24 Inch</b>		
<b>ThinkVision E21</b>		
ThinkVision E21 Platform Specifications		
<b>ThinkVision E24</b>		
ThinkVision E24 Platform Specifications		
<b>ThinkVision LT2423</b>		
ThinkVision LT2423 Platform Specifications		
<b>ThinkVision P24h</b>		
ThinkVision P24h Platform Specifications		
<b>ThinkVision P24q</b>		
ThinkVision P24q Platform Specifications		
<b>ThinkVision S22e</b>		
ThinkVision S22e Platform Specifications		
<b>ThinkVision S24e</b>		
ThinkVision S24e Platform Specifications		
<b>ThinkVision T2220 VA</b>		
ThinkVision T2220 VA Platform Specifications		
<b>ThinkVision T2224d</b>		
ThinkVision T2224d Platform Specifications		
<b>1 ThinkVision T2224z</b>	<b>35</b>	
<b>2 ThinkVision T2224z Platform Specifications</b>	<b>36</b>	
<b>4 ThinkVision T2254</b>	<b>37</b>	
<b>5 ThinkVision T2254 Platform Specifications</b>	<b>38</b>	
<b>5 ThinkVision T2254p</b>	<b>39</b>	
<b>6 ThinkVision T2254p Platform Specifications</b>	<b>40</b>	
<b>7 ThinkVision T22i</b>	<b>41</b>	
<b>8 ThinkVision T22i Platform Specifications</b>	<b>42</b>	
<b>9 ThinkVision T22v</b>	<b>43</b>	
<b>10 ThinkVision T22v Platform Specifications</b>	<b>44</b>	
<b>11 ThinkVision T2324d</b>	<b>45</b>	
<b>12 ThinkVision T2324d Platform Specifications</b>	<b>46</b>	
<b>13 ThinkVision T2364t</b>	<b>47</b>	
<b>14 ThinkVision T2364t Platform Specifications</b>	<b>48</b>	
<b>15 ThinkVision T23d</b>	<b>49</b>	
<b>16 ThinkVision T23d Platform Specifications</b>	<b>50</b>	
<b>17 ThinkVision T23i</b>	<b>51</b>	
<b>17 ThinkVision T23i Platform Specifications</b>	<b>52</b>	
<b>18 ThinkVision T2424z</b>	<b>53</b>	
<b>19 ThinkVision T2424z Platform Specifications</b>	<b>54</b>	
<b>20 ThinkVision T2454p</b>	<b>55</b>	
<b>21 ThinkVision T2454p Platform Specifications</b>	<b>56</b>	
<b>22 ThinkVision T24d</b>	<b>57</b>	
<b>23 ThinkVision T24d Platform Specifications</b>	<b>58</b>	
<b>24 ThinkVision T24i</b>	<b>59</b>	
<b>25 ThinkVision T24i Platform Specifications</b>	<b>60</b>	
<b>26 ThinkVision T24m</b>	<b>61</b>	
<b>27 ThinkVision T24m Platform Specifications</b>	<b>62</b>	
<b>28 ThinkVision T24v</b>	<b>63</b>	
<b>29 ThinkVision T24v Platform Specifications</b>	<b>64</b>	
<b>30 ThinkVision X24 Pro</b>	<b>65</b>	
<b>31 ThinkVision X24 Pro Platform Specifications</b>	<b>66</b>	
<b>32 ThinkVision X24-20</b>	<b>67</b>	
<b>33 ThinkVision X24-20 Platform Specifications</b>	<b>68</b>	
<b>34 Above 25 Inch</b>	<b>69</b>	

# Contents

---

<b>ThinkVision P27</b>	<b>69</b>
ThinkVision P27 Platform Specifications	70
<b>ThinkVision P27h</b>	<b>71</b>
ThinkVision P27h Platform Specifications	72
<b>ThinkVision P27q</b>	<b>73</b>
ThinkVision P27q Platform Specifications	74
<b>ThinkVision P27u</b>	<b>75</b>
ThinkVision P27u Platform Specifications	76
<b>ThinkVision P32u</b>	<b>77</b>
ThinkVision P32u Platform Specifications	78
<b>ThinkVision Pro2820</b>	<b>79</b>
ThinkVision Pro2820 Platform Specifications	80
<b>ThinkVision S27i</b>	<b>81</b>
ThinkVision S27i Platform Specifications	82
<b>ThinkVision T27i</b>	<b>83</b>
ThinkVision T27i Platform Specifications	84
<b>ThinkVision X1</b>	<b>85</b>
ThinkVision X1 Platform Specifications	86
<b>ThinkVision X1 (2nd Gen)</b>	<b>87</b>
ThinkVision X1 (2nd Gen) Platform Specifications	88
<b>Legal Information</b>	<b>90</b>

# Summary of Changes

---

This section describes the technical changes made in this edition.

This edition might also include minor corrections and editorial changes which are not identified.

## August, 2018 - Version 528

### Additions in this update

▶ **New product(s)**

ThinkVision X1 (2nd Gen) announced July 2018

ThinkVision P32u announced July 2018

ThinkVision T27i announced July 2018

ThinkVision S27i announced May 2018

▶ **New model(s)**

None

▶ **Others**


None

### Withdrawals in this update


▶ **Withdrawn product(s)**

None




<p>Name <b>E1922s Wide Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>60G2AAR6US / 60G2AAT6EU</b>                  Panel <b>TFT-LCD, twisted nematic (TN), White LED backlight</b>                  Viewable image size <b>18.5" (470mm) diagonal</b>                  Max view area (W x H) <b>16.1" x 9.1" / 409.8mm x 230.4mm</b>                  Native resolution <b>1366x768</b>                  Aspect ratio <b>16:9</b>                  Pixel pitch (mm) <b>0.3mm</b>                  Dot/Pixel per Inch <b>85 dpi</b>                  Brightness <b>200 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>600:1 (typical)</b>                  Pixel response time <b>5ms (typical)</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>180° (+/- 90°) horizontal, 100° (+/- 50°) vertical</b>                  Stand <b>Tilt adjustable stand</b>                  Bezel width <b>Sides: 0.73" (18.5mm)</b>                  Dimensions (HxWxD) <b>13.44" H x 17.65" W x 6.58" D;                  341.5mm H x 448.4mm W x 167.2mm D</b>                  Power supply <b>13.7 watts typical, 17 watts maximum,                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)</b>                  Weight <b>6.03 lb; 2.74 kg</b>                  Limited warranty<sup>4</sup> <b>3 year (includes backlight)</b>                  Available date <b>March 2014</b></p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 18.5-inch monitor</li> <li>• Supports HD 1366x768 resolution</li> <li>• Supports VESA mount (100mm)</li> <li>• Mercury free panel and arsenic free glass</li> <li>• Kensington lock slot ready for enhanced security</li> <li>• Support Lenovo Tiny PC via VESA mount</li> <li>• Supports optional soundbar</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 / Windows 8.1 certified</li> </ul>				
<p>VESA-compliant<sup>2</sup> <b>VESA DPMS-compliant</b>                  Power management <b>ENERGY STAR® 7.0</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO (TCO Displays 7.0), WEEE, RoHS,                  EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision E1922s Wide Monitor</b></p> </div>				
<p>Preset resolutions <b>VGA: 640x350, 640x480, 720x400                  SVGA: 800x600, 832x624                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA: 1366x768</b></p> <p>Presets / user settings <b>Standard presets: 15                  user settings: 16</b></p>					
<p>Viewing adjustments <b>Tilt: 20° backward, -5° forward</b>                  Rotating screen <b>None</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (control buttons on front) for automatic image setup and adjustment for brightness</b>                  Multiple input <b>None</b>                  Monitor connectors <b>VGA 15-pin D-shell, analog, blue</b>                  Signal cables <b>detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>					
<p>Ship group <b>Monitor with stand, 1.8 meter analog signal cable, 1.8 meter black power cord</b></p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				





<p>Name <b>E2054 Wide Flat Panel Monitor</b>                  Case color <b>Raven black</b>                  Type-model <b>60DFAAR1US / 60DFAAT1EU</b>                  Panel <b>TFT-LCD, In-Plane Switching (IPS), LED backlight</b>                  Viewable image size <b>19.5" (494mm) diagonal</b>                  Max view area (W x H) <b>16.48" x 10.33" / 418.6mm x 262.4mm</b>                  Native resolution <b>1440x900</b>                  Aspect ratio <b>16:10</b>                  Pixel pitch (mm) <b>0.097mm x 0.292mm</b>                  Dot/Pixel per Inch <b>87 dpi</b>                  Brightness <b>250 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>7ms (typical)</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>178° (+/- 89°) horizontal, 178° (+/- 89°) vertical</b>                  Stand <b>Tilt adjustable stand</b>                  Bezel width <b>Top: 0.71" (18.0mm)</b>  <b>Bottom: 0.70" (17.9mm)</b>  <b>Sides: 1.02" (26.0mm)</b>                  Dimensions (HxWxD) <b>14.65" H x 17.95" W x 7.41" D;</b>  <b>372.0mm H x 456.0mm W x 188.3mm D</b>                  Power supply <b>16 watts typical, 20 watts maximum,</b>  <b>&lt;0.5 watts standby/suspend, universal,</b>  <b>integrated (no external brick-like power supply)</b>                  Weight <b>6.17 lb; 2.8 kg</b>                  Limited warranty <b>3 year (includes backlight)</b>                  Available date <b>November 2015</b></p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 19.5-inch monitor</li> <li>• Supports HD 1440x900 resolution</li> <li>• Supports VESA mount (100mm)</li> <li>• Mercury free panel and arsenic free glass</li> <li>• Kensington lock slot ready for enhanced security</li> <li>• Support Lenovo Tiny PC via VESA mount</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 / Windows 8.1 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant <b>VESA DPMS-compliant</b>                  Power management <b>ENERGY STAR® 6.0</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO (TCO Displays 6.0), WEEE, RoHS,</b>  <b>EPEAT™ Silver rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision E2054 Wide Monitor</b></p> </div>				
<p>Preset resolutions <b>VGA: 640x480, 720x400</b>  <b>SVGA: 800x600</b>  <b>XGA: 1024x768</b>  <b>SXGA: 1280x768, 1280x1024</b>  <b>WXGA: 1366x768</b>  <b>WXGA+: 1440x900</b></p> <p>Presets / user settings <b>Standard presets: 18</b>  <b>user settings: 10</b></p>					
<p>Viewing adjustments <b>Tilt: 22° backward, -5° forward</b>                  Rotating screen <b>None</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (control buttons on front) for automatic image setup and adjustment for brightness</b>                  Multiple input <b>None</b>                  Monitor connectors <b>VGA 15-pin D-shell, analog, blue</b>                  Signal cables <b>detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>					
<p>Ship group <b>Monitor with stand, 1.8 meter analog signal cable, 1.8 meter black power cord</b></p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				






<p>Name <b>LT1913p Square Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>60FBHAR1US / 60FBHAT1EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>19.0" (480.0mm) diagonal</b>                  Max view area (W x H) <b>14.76" x 11.80" (374.7mm x 299.8mm)</b>                  Optimum resolution <b>1280x1024</b>                  Max pixel rate <b>205MHz (VGA), 165MHz (DVI)</b>                  Aspect ratio <b>5:4</b>                  Pixel pitch (mm) <b>0.0976 (H) x 0.2928 (V) mm</b>                  Dot/Pixel per Inch <b>86.8 dpi</b>                  Brightness <b>250 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>7ms (typical)</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>178° horizontal, 178° vertical</b>                  Stand <b>Tilt, swivel, pivot, and height adjustable stand</b>                  Bezel width <b>Sides: 0.68" (17.4mm); top: 0.68" (17.4mm); bottom: 0.68" (17.4mm)</b>                  Dimensions (HxWxD) <b>14.63" H x 16.18" W x 10.40" D; 371.5mm H x 411.0mm W x 264.2mm D</b>                  Power supply <b>24 watts typical, 27 watts maximum, &lt;0.5 watts standby/suspend, universal, integrated (no external brick-like power supply)</b>                  Weight <b>10.69 lb; 4.85kg</b>                  Limited warranty<sup>4</sup> <b>3 year (includes backlight)</b>                  Available date <b>April 2015</b></p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>• 19-inch Square IPS LED backlit panel</li> <li>• Supports 1280x1024 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Mercury and arsenic free glass</li> <li>• Low Halogen</li> <li>• Recycled content in plastic material</li> <li>• Supports optional soundbar</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 / Windows 8.1 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>								
<p>VESA-compliant<sup>2</sup> <b>VESA DDC2B/C1, EDID 1.3</b>                  Power management <b>ENERGY STAR® 7.0</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, TCO Certified Edge 1.1, WEEE, RoHS, EPEAT™ Gold rating, ULE Gold</b></p> <p>Preset resolutions <b>VGA: 640x350, 640x480, 720x400                  SVGA: 800x600, 823x624                  XGA: 1024x768, 1152x864, 1152x900                  SXGA: 1280x1024</b></p> <p>Presets / user settings <b>Standard presets: 20;                  user settings: 20</b></p>	 <p><b>ThinkVision LT1913p Square Monitor</b></p>								
<p>Viewing adjustments <b>Tilt: 30° back, -5° forward; lift: 4.3" (110mm); swivel: +/- 45°</b>                  Rotating screen <b>Screen pivots 90 degrees from landscape to portrait</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for automatic image setup, input switch, and brightness</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue                  (2) Digital Visual Interface (DVI-D), digital, white, <b>HDCP-compliant</b></b>                  Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DVI-D at each end, digital, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p> <p>Ship group <b>Monitor, attached stand, Setup poster, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DVI-D cable, 1.8 meter black power cord</b></p>									
<p><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td>73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td>45K1620</td> </tr> <tr> <td>Lenovo Security Cable Lock</td> <td>57Y4303</td> </tr> <tr> <td>Lenovo Easy Reach Monitor Stand</td> <td>55Y9258</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Security Cable Lock	57Y4303	Lenovo Easy Reach Monitor Stand	55Y9258
Kensington MicroSaver Cable Lock	73P2582								
Kensington Twin Head Cable Lock	45K1620								
Lenovo Security Cable Lock	57Y4303								
Lenovo Easy Reach Monitor Stand	55Y9258								




<p>Name <b>T1714 Square Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>60FDHAR1US / 60FDHAT1EU</b>                  Panel <b>TFT-LCD, twisted nematic (TN), White LED backlight</b>                  Viewable image size <b>17.0" (432mm) diagonal</b>                  Max view area (W x H) <b>13.3" x 10.6" (337.9mm x 270.3mm)</b>                  Optimum resolution <b>1280x1024</b>                  Aspect ratio <b>5:4</b>                  Pixel pitch (mm) <b>0.264mm</b>                  Dot/Pixel per Inch <b>96 dpi</b>                  Brightness <b>250 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>5ms (typical)</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>170° (+/- 85°) horizontal, 160° (+/- 80°) vertical</b>                  Stand <b>Tilt stand</b>                  Bezel width <b>Sides: 0.69" (17.5mm)</b>                  Dimensions (HxWxD, including stand) <b>14.72" H x 14.74" W x 7.87" D;                  373.9mm H x 374.5mm W x 200mm D</b>                  Power supply <b>14.0 watts typical, 18.0 watts maximum,                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)</b>                  Weight <b>5.75 lb; 2.61kg</b>                  Limited warranty <b>3 year (includes backlight)</b>                  Available date <b>September 2015</b></p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>• 17-inch Square LCD monitor</li> <li>• Supports SXGA 1280x1024 resolution</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• Mercury Arsenic free glass</li> <li>• Supports optional soundbar</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 certified</li> <li>• Microsoft Windows 8.1 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>						
<p>VESA-compliant <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® 7.0</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, TCO Certified Edge 2.0, WEEE,                  RoHS, EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T1714 Monitor</b></p> </div>						
<p>Preset resolutions <b>VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768, 1152x864,                  SXGA: 1280x800, 1280x1024</b></p> <p>Presets / user settings <b>Standard presets: 17;                  user settings: 17</b></p>							
<p>Viewing adjustments <b>Tilt: 22° back, -5° forward</b>                  Rotating screen <b>None</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for automatic image setup and brightness</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue                  (2) Digital Visual Interface (DVI-D), digital, white, <b>HDCP-compliant</b></b>                  Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DVI-D at each end, digital, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>							
<p>Ship group <b>Monitor and stand, Setup poster, Safety and Warranty Information, 1.8 meter analog signal cable,                  1.8 meter DVI-D cable, 1.8 meter black power cord</b></p>	<p><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p> <p><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td>73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td>45K1620</td> </tr> <tr> <td>Lenovo Easy Reach Monitor Stand</td> <td>55Y9258</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Easy Reach Monitor Stand	55Y9258
Kensington MicroSaver Cable Lock	73P2582						
Kensington Twin Head Cable Lock	45K1620						
Lenovo Easy Reach Monitor Stand	55Y9258						



<p>Name <b>T1714p Square Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>60FELAR1US / 60FELAT1EU</b>                  Panel <b>TFT-LCD, twisted nematic (TN), White LED backlight</b>                  Viewable image size <b>17.0" (432mm) diagonal</b>                  Max view area (W x H) <b>13.3" x 10.6" (337.9mm x 270.3mm)</b>                  Optimum resolution <b>1280x1024</b>                  Aspect ratio <b>5:4</b>                  Pixel pitch (mm) <b>0.264mm</b>                  Dot/Pixel per Inch <b>96 dpi</b>                  Brightness <b>250 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>5ms (typical)</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>170° (+/- 85°) horizontal, 160° (+/- 80°) vertical</b>                  Stand <b>Tilt height adjustable stand</b>                  Bezel width <b>Sides: 0.69" (17.5mm)</b>                  Dimensions (HxWxD, including stand) <b>17.63" H x 14.74" W x 9.61" D; 447.9mm H x 374.5mm W x 244.2mm D</b>                  Power supply <b>14.0 watts typical, 18.0 watts maximum, &lt;0.5 watts standby/suspend, universal, integrated (no external brick-like power supply)</b>                  Weight <b>8.71 lb; 3.95kg</b>                  Limited warranty <b>3 year (includes backlight)</b>                  Available date <b>September 2015</b></p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>• 17-inch Square LCD monitor</li> <li>• Supports SXGA 1280x1024 resolution</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• Mercury Arsenic free glass</li> <li>• Supports Lenovo Tiny PC and 3rd party thin client via optional Lenovo bracket</li> <li>• Supports optional soundbar</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 certified</li> <li>• Microsoft Windows 8.1 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>						
<p>VESA-compliant <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® 7.0</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T1714p Monitor</b></p> </div>						
<p>Preset resolutions <b>VGA: 640x350, 640x480, 720x400</b>  <b>SVGA: 800x600</b>  <b>XGA: 1024x768, 1152x864,</b>  <b>SXGA: 1280x800, 1280x1024</b>                  Presets / user settings <b>Standard presets: 22; user settings: 22</b></p>							
<p>Viewing adjustments <b>Tilt: 22° back, -5° forward; lift: 4.3" (110mm)</b>                  Rotating screen <b>None</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for automatic image setup and brightness</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue</b>  <b>(2) Digital Visual Interface (DVI-D), digital, white, HDCP-compliant</b>  <b>(3) DisplayPort, digital, black, HDCP-compliant</b>                  Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter</b>  <b>(2) detachable, DVI-D at each end, digital, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>							
<p>Ship group <b>Monitor and stand, Setup poster, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DVI-D cable, 1.8 meter black power cord</b></p>	<p><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p> <p><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td>73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td>45K1620</td> </tr> <tr> <td>Lenovo Easy Reach Monitor Stand</td> <td>55Y9258</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Easy Reach Monitor Stand	55Y9258
Kensington MicroSaver Cable Lock	73P2582						
Kensington Twin Head Cable Lock	45K1620						
Lenovo Easy Reach Monitor Stand	55Y9258						




<p>Name <b>T2054p Wide Flat Panel Monitor</b>                  Bezel color <b>Raven black</b>                  Type-model <b>60G1MAR2US / 60G1MAT2EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight</p> <p>Viewable image size <b>19.5" (495mm) diagonal</b>                  Max view area (W x H) <b>16.48" x 10.33" (418.6mm x 262.4mm)</b>                  Native resolution <b>1440x900</b>                  Aspect ratio <b>16:10</b>                  Pixel pitch (mm) <b>0.2915 x 0.2915 mm</b>                  Dot/Pixel per Inch <b>87 dpi</b>                  Brightness <b>250 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>7ms (typical)</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>178° (+/- 89°) horizontal, 178° (+/- 89°) vertical</b>                  Stand <b>Tilt, swivel, and height adjustable</b>                  Bezel width <b>Sides: 0.67" (17.0mm)</b>                  Dimensions (HxWxD) <b>13.62" H x 17.88" W x 9.55" D; 345.9mm H x 454.2mm W x 242.6mm D</b></p> <p>Power supply <b>14.5 watts typical, 21 watts maximum, &lt;0.3 watts standby/suspend, universal, integrated (no external brick-like power supply)</b></p> <p>Weight <b>8.16 lb; 3.70 kg</b>                  Limited warranty<sup>4</sup> <b>3 year (includes backlight)</b>                  Available date <b>September 2015</b></p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 19.5-inch monitor</li> <li>• Supports 1440x900 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• EPEAT Gold certified</li> <li>• Supports optional soundbar</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 / Windows 8.1 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant<sup>2</sup> <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® qualified</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T2054p Wide Monitor</b></p> </div>				
<p>Preset resolutions <b>VGA: 640x480, 720x400, 720x576</b>  <b>SVGA: 800x600</b>  <b>XGA: 1024x768, 1152x864</b>  <b>SXGA: 1280x800, 1280x1024</b>  <b>WXGA: 1366x768</b>  <b>WXGA+: 1440x900</b></p> <p>Presets / user settings <b>Standard presets: 22</b>  <b>user settings: 16</b></p>					
<p>Viewing adjustments <b>Tilt: 22° backward, -5° forward; lift: 4.3" (110mm); swivel: +/-45°; detachable stand</b>                  Rotating screen <b>None</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for automatic image setup, dual input and brightness</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue</b>  <b>(2) HDMI (1.4), digital, <b>HDCP-compliant</b></b>  <b>(3) DisplayPort, digital, black, <b>HDCP-compliant</b></b></p> <p>Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter</b>  <b>(2) detachable, DisplayPort at each end, digital, 1.8 meter</b></p> <p>Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p> <p>Ship group <b>Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter black power cord</b></p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				






<p>Name <b>E21 Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61B9JAR1US / 61B9JAT1EU</b>                  Panel TFT-LCD, twisted nematic (TN), White LED backlight                  Viewable image size <b>20.7" (525.78mm)</b> diagonal                  Max view area (W x H) <b>18.03" x 10.14" (457.92mm x 257.58mm)</b>                  Native resolution <b>1920x1080</b>                  Aspect ratio <b>16:9</b>                  Pixel pitch (mm) <b>0.2385 x 0.2385 mm</b>                  Dot/Pixel per Inch <b>106 dpi</b>                  Brightness <b>250 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>5ms (typical)</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>170° (+/- 85°) horizontal, 160° (+/- 80°) vertical</b>                  Stand <b>Tilt adjustable stand</b>                  Bezel width <b>Sides: 0.6" (15.3mm)</b>                  Dimensions (HxWxD) <b>14.6" H x 19.31" W x 8.07" D;                  370.9mm H x 490.5mm W x 204.9mm D</b>                  Power supply <b>18 watts typical,                  23 watts maximum,                  &lt;0.3 watts standby/suspend, universal,                  integrated (no external brick-like power supply)</b>                  Weight <b>5.82 lb; 2.64 kg</b>                  Limited warranty <b>3 year (includes backlight)</b>                  Available date <b>August 2017</b></p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 20.7-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Supports optional soundbar</li> <li>• EPEAT Gold certified</li> <li>• Low Blue Light certification</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® qualified</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, TCO Certified Edge 2.0, WEEE,                  RoHS, <b>EPEAT™ Gold rating</b></b></p>	<div style="text-align: center;">  <p><b>ThinkVision E21 Wide Monitor</b></p> </div>				
<p>Preset resolutions <b>VGA: 640x350, 640x480, 720x400                  SVGA: 800x600, 832x624                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA+: 1440x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080</b></p> <p>Presets display modes <b>Standard presets: 22</b></p>					
<p>Viewing adjustments <b>Tilt: 22° back, -5° forward</b>                  Rotating screen <b>None</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for power, menu, input source select and brightness</b>                  USB hub <b>None</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue                  (2) DisplayPort (1.2), digital, black, <b>HDCP-compliant</b></b>                  Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>					
<p>Ship group <b>Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter black power cord</b></p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				



<p>Name <b>E24 Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61B7JAR6US / 61B7JAT6EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>23.8" (604.7mm)</b> diagonal                  Max view area (W x H) <b>20.75" x 11.67"</b> (527.04mm x 296.46mm)                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2745 x 0.2745 mm                  Dot/Pixel per Inch 92.5 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 6ms (typical)                  Color gamut 72%                  Viewing angle at 10:1 CR 178° (+/- 89°) horizontal, 178° (+/- 89°) vertical                  Stand Tilt adjustable stand                  Bezel width <i>Sides:</i> 0.51" (13mm)                  Dimensions (HxWxD) 15.9" H x 21.81" W x 8.07" D;                  403.8mm H x 554mm W x 204.9mm D                  Power supply 18 watts typical,                  23 watts maximum,                  &lt;0.3 watts standby/suspend, universal,                  integrated (no external brick-like power supply)                  Weight 8.2 lb; 3.7 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date August 2017</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23.8-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports ThinkCentre Tiny VESA mount</li> <li>• Supports optional soundbar</li> <li>• Includes dual input connection for attachment to two systems concurrently</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision E24 Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x350, 640x480, 720x400                  SVGA: 800x600, 832x624                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080</p> <p>Presets display modes Standard presets: 24; user settings: 20</p>					
<p>Viewing adjustments <i>Tilt:</i> 22° back, -5° forward                  Rotating screen None                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for power, menu, input source select and brightness                  USB hub None                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) DisplayPort, digital, black, <b>HDCP-compliant</b>                  Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter black power cord</p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>					




<p>Name <b>LT2423 Wide Flat Panel Monitor</b>                  Case color <b>Business black</b>                  Type-model <b>60A8KAR2US / 60A8KAT2EU</b>                  Panel <b>TFT-LCD, twisted nematic (TN), White LED backlight</b>                  Viewable image size <b>24" (610mm) diagonal</b>                  Max view area (W x H) <b>20.9" x 11.8" (531.4mm x 298.9mm)</b>                  Optimum resolution <b>1920x1080</b>                  Max pixel rate <b>205MHz</b>                  Aspect ratio <b>16:9</b>                  Pixel pitch (mm) <b>0.278mm</b>                  Dot/Pixel per Inch <b>92 dpi</b>                  Brightness <b>250 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Contrast ratio <b>2000000:1</b>                  Pixel response time <b>5ms</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>170° horizontal, 160° vertical</b>                  Stand <b>Tilt stand</b>                  Bezel width <b>Sides: 0.67" (17.0mm); top: 0.67" (17.0mm); bottom: 1.02" (26.0mm)</b></p> <p>Dimensions (HxWxD, excluding stand) <b>13.53" H x 22.33" W x 1.97" D;</b>                  Dimensions (HxWxD, including stand) <b>343.7mm H x 567.1mm W x 50.0mm D</b>                  Dimensions (HxWxD, including stand) <b>16.30" H x 22.33" W x 8.50" D;</b>                  Dimensions (HxWxD, including stand) <b>414.3mm H x 567.1mm W x 216.7mm D</b>                  Power supply <b>21 watts typical, 31 watts maximum, &lt;0.5 watts standby/suspend, universal, integrated (no external brick-like power supply)</b></p> <p>Weight <b>8.30 lb; 3.76kg</b>                  Limited warranty<sup>4</sup> <b>3 year (includes backlight)</b>                  Available date <b>July 2013</b></p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 24-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Two 3W stereo speakers</li> <li>• Audio in (3.5mm)</li> <li>• Supports VGA and HDMI 1.4 interfaces</li> <li>• Supports optional soundbar</li> <li>• Support Lenovo Tiny PC and 3rd party thin client via optional Lenovo bracket</li> <li>• Microsoft® Windows® 8 certified</li> <li>• Arsenic/Lead/Mercury free</li> </ul>										
<p>VESA-compliant<sup>2</sup> <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® 6.0</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>MPR-2, FCC Class B</b>                  Environmental <b>TCO Displays 6.0, TCO Certified Edge 1.2, WEEE, RoHS, EPEAT™ Gold rating, ULE Gold</b></p> <p>Preset resolutions <b>VGA: 640x350, 640x480, 720x400</b>  <b>SVGA: 800x600, 832x624</b>  <b>XGA: 1024x768, 1152x864</b>  <b>SXGA: 1280x1024</b>  <b>WXGA: 1366x768</b>  <b>WXGA+: 1440x900, 1600x900</b>  <b>WSXGA+: 1680x1050</b>  <b>Full HD: 1920x1080</b></p> <p>Presets / user settings <b>Standard presets: 24; User settings: 20</b></p>	 <p><b>ThinkVision LT2423 Wide Monitor</b></p>										
<p>Viewing adjustments <b>Tilt: 22° back, -5° forward</b>                  Rotating screen <b>None</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for automatic image setup, input switch, and brightness</b>                  Multimedia <b>Integrated stereo speakers (3 watts x 2)</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue</b>  <b>(2) HDMI (1.4), digital, HDCP-compliant</b>                  Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>	<p>Ship group <b>Monitor, attached stand, Setup poster, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter Audio cable, 1.8 meter black power cord</b></p>										
<p><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td>73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td>45K1620</td> </tr> <tr> <td>Lenovo Security Cable Lock</td> <td>57Y4303</td> </tr> <tr> <td>ThinkCentre Extend Arm</td> <td>57Y4352</td> </tr> <tr> <td>Lenovo Easy Reach Monitor Stand</td> <td>55Y9258</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Security Cable Lock	57Y4303	ThinkCentre Extend Arm	57Y4352	Lenovo Easy Reach Monitor Stand	55Y9258
Kensington MicroSaver Cable Lock	73P2582										
Kensington Twin Head Cable Lock	45K1620										
Lenovo Security Cable Lock	57Y4303										
ThinkCentre Extend Arm	57Y4352										
Lenovo Easy Reach Monitor Stand	55Y9258										



<p>Name <b>P24h Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61AEGAR3US / 61AEGAT3EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>23.8" (604.7mm)</b> diagonal                  Max view area (W x H) <b>20.74" x 11.67"</b> (526.9mm x 296.4mm)                  Native resolution <b>2560x1440</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2058x 0.2058 mm                  Dot/Pixel per Inch 124 dpi                  Brightness 300 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 4ms (extreme) / 6ms (typical)                  Color gamut 99% sRGB                  Viewing angle at 10:1 CR 178° (+/- 89°) horizontal, 178° (+/- 89°) vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides:</i> 0.08" (2.0mm)                  Dimensions (HxWxD) 14.7" H x 21.26" W x 10.3" D;                  373.4mm H x 540.2mm W x 261.75mm D                  Power supply 24 watts typical,                  120 watts maximum (with USB 3.0 hub),                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)                  Weight 12.54 lb; 5.69 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date April 2017</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23.8-inch monitor</li> <li>• Supports 2560x1440 resolution</li> <li>• Supports optional soundbar</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Includes dual input connection for attachment to two systems concurrently</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision P24h Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900, 1680x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080, 1920x1200                  QHD: 2560x1440                  Presets display modes HDMI: 22; DP: 14</p>					
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.3" (110mm); <i>swivel:</i> +/-45°; detachable stand                  Rotating screen Screen pivots 90 degrees from landscape to portrait                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for power, menu, input source select and brightness                  USB hub USB Hub: one USB 3.1 Type-C upstream port, four USB 3.0 Type-A downstream ports                  Multimedia Audio-out, optional sound bar supported                  Camera None                  Multiple input Support HDMI, DisplayPort, USB 3.1 Type-C, DisplayPort-out                  Monitor connectors (1) 2*HDMI (1.4), digital, <b>HDCP-compliant</b>                  (2) DisplayPort (1.2), digital, <b>HDCP-compliant</b>                  (3) DisplayPort-out, digital                  (4) USB 3.1 Type-C                  Signal cables (1) USB 3.1 Type-C cable, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter USB 3.1 Type-C cable, 1.8 meter black power cord</p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>					





<p>Name <b>P24q Wide Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>61A5GAR3US / 61A5GAT3EU</b>                  Panel TFT-LCD, IPS (In-Plane Switching), White LED backlight                  Viewable image size <b>23.8" (604.5mm)</b> diagonal                  Max view area (W x H) <b>20.74" x 11.67"</b> (526.85mm x 296.35mm)                  Optimum resolution <b>2560x1440</b>                  Max pixel rate 300MHz                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2058 x 0.2058mm                  Dot/Pixel per Inch 123 dpi                  Brightness 300 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 4ms                  Color gamut 99% sRGB                  Viewing angle at 10:1 CR 178° horizontal, 178° vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides:</i> 0.08" (2mm)                  Dimensions 14.7" H x 21.26" W x 10.3" D;                  (HxWxD, including stand) 373.4mm H x 540.2mm W x 261.75mm D                  Power supply 24 watts typical,                  67 watts maximum (with USB),                  &lt;0.5 watts sleep/off;                  &lt;0.5 watts switch off                  integrated (no external brick-like power supply)                  Weight 12.35 lb; 5.6kg (including stand)                  Limited warranty <b>3 year</b>                  Available date January 2017</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>• 23.8-inch IPS LED backlight monitor</li> <li>• Supports 2560x1440 resolution</li> <li>• 5-Ports USB hub, support USB 3.0</li> <li>• Support ThinkCentre Tiny</li> <li>• Supports optional soundbar</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>						
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® 7.0                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, RoHS, <b>EPEAT™ Gold rating</b>, ULE Gold</p>	<div style="text-align: center;">  <p><b>ThinkVision P24q Monitor</b></p> </div>						
<p>Preset resolutions                  VGA: 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080, 1920x1200                  QHD: 2560x1440</p> <p>Presets / user settings Standard presets: 20; user settings: 24</p>							
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.33" (110mm); <i>swivel:</i> +/-45°                  Rotating screen <b>Screen pivots 90 degrees from landscape to portrait</b>                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access for menu, source switch, and brightness                  USB hub USB Hub: one USB 3.0 upstream port, four USB 3.0 downstream ports                  Multimedia Audio-out, optional sound bar supported                  Camera None                  Multiple input Support HDMI, DisplayPort, mini DisplayPort, DisplayPort-out                  Monitor connectors (1) 2*HDMI (1.4), digital, <b>HDCP-compliant</b>                  (2) DisplayPort (1.2), digital, <b>HDCP-compliant</b>                  (3) Mini DisplayPort, digital, <b>HDCP-compliant</b>                  Signal cables (1) detachable, mini DisplayPort to DisplayPort, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>							
<p>Ship group Monitor, detachable stand, Quick start and safety poster, 1.8 meter USB 3.0 cable, 1.8 meter mini DP to DP cable, 1.8 meter black power cord</p>	<p><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p> <p><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td>73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td>45K1620</td> </tr> <tr> <td>Lenovo Security Cable Lock</td> <td>57Y4303</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Security Cable Lock	57Y4303
Kensington MicroSaver Cable Lock	73P2582						
Kensington Twin Head Cable Lock	45K1620						
Lenovo Security Cable Lock	57Y4303						



# ThinkVision® S22e-19

## DISPLAY

### Panel Size

21.5 inch

### Screen Dimensions (H x V) (mm)

476.06 (H) × 267.79 (V)

### Panel Type

VA

### Backlight

WLED

### Aspect Ratio

16:9

### Resolution

1920 x 1080

### Pixel Pitch (H x V) (mm)

0.2480 × 0.2480

### Viewing Angle (H x V)

178°/178°

### Response Time (gray to gray)

4 ms (extreme mode)  
6 ms (normal mode)

### Contrast Ratio (typical)

3000:1

### Dynamic Contrast Ratio (typical)

3M:1

### Color Gamut NTSC (CIE 1931)

72%

### Color Support (typical)

16.7M

## CONNECTIVITY

### Video Input Signals

VGA + HDMI1.4

### Video Cable Length

1.8 m

### Audio Out

Yes (3.5 mm)

## MULTI-MEDIA

### Optional Soundbar Support

Yes

## DIMENSIONS

### Size Packed (D x H x W) (mm/inch)

120 x 350 x 582 mm / 4.7 x 13.7 x 22.9 inch

### Size Unpacked w/stand (D x H x W) (mm/inch) (Lowest Position)

200.0 x 373.8 x 489.3 mm / 7.87 x 14.71 x 19.26 inch

### Size Unpacked w/stand (D x H x W) (mm/inch) (Highest Position)

200.0 x 373.8 x 489.3 mm / 7.87 x 14.71 x 19.26 inch

### Size Unpacked w/o stand (D x H x W) (mm/inch) (Head Only)

41.5 x 296.8 x 489.3 mm / 1.63 x 11.68 x 19.26 inch

### Weight Packed (kg/lbs.)

4.07kg / 8.97 lbs.

### Weight Unpacked (kg/lbs.)

2.75kg / 6.06 lbs.

### Weight (Monitor Head Only) (kg/lbs.)

2.46kg / 5.42 lbs.

## SPECIAL FEATURES

### Anti-Glare

Yes

### Thin Client Support (Tiny)

Yes (by VESA mount PN:4XF0N03161)

## MECHANICAL

### Tilt Angle (front / back)

-5°/22°

### VESA Mount

Yes (100 mm)

### Kensington™ Lock Slot

Yes

### Cable Management

Yes

### Bezel Color

Raven Black

### Bezel Width (side)

2.0 mm

### Bezel Width (top / bottom)

2.0 mm / 21.2 mm

## WHAT'S IN THE BOX

Monitor with stand

1 x HDMI Cable

1 x Power Cable

Quick setup guide

## CERTIFICATIONS

### ENERGY STAR Rating

7.0

### CCC

Yes

### TCO

TCO 7.0/TCO Edge 2.0

### EPEAT™

Gold

### RoHS

Yes

### Windows Certification

Windows 7, Windows 10

### China Energy Efficiency Standard

Tier 2

### Ambient Operating Temperature

0°C to 40°C

### Low Blue Light

Yes



© 2018 Lenovo. All rights reserved. These products are available while supplies last. Prices shown are subject to change without notice. For any questions concerning price, please contact your Lenovo Account Executive. Lenovo is not responsible for photographic or typographic errors. Warranty: For a copy of applicable warranties, write to: Warranty Information, 500 Park Offices Drive, RTP, NC 27709, Attn: Dept. ZPYA/B600. Lenovo makes no representation or warranty regarding third-party products or services. Trademarks: Lenovo, the Lenovo logo, Rescue and Recovery, ThinkPad, ThinkCentre, ThinkStation, ThinkVantage, and ThinkVision are trademarks or registered trademarks of Lenovo. Microsoft, Windows, and Vista are registered trademarks of Microsoft Corporation. Intel, the Intel logo, Intel Inside, Intel Core, and Core Inside are trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product, and service names may be trademarks or service marks of others.

Specifications may vary depending upon region.

Lenovo™



# ThinkVision® S24e-10

## DISPLAY

### Panel Size

23.8"

### Screen Dimensions (H x V) (mm)

527.04 (H) × 296.46 (V)

### Panel Type

VA

### Backlight

WLED

### Aspect Ratio

16:9

### Resolution

1920 × 1080

### Pixel Pitch (H x V) (mm)

0.2745 × 0.2745

### Viewing Angle (H x V)

178°/178°

### Response Time (gray to gray)

4 ms (extreme mode)  
6 ms (normal mode)

### Contrast Ratio (typical)

3000:1

### Dynamic Contrast Ratio (typical)

3M:1

### Color Gamut NTSC (CIE 1931)

72%

### Color Support

16.7M

## CONNECTIVITY

### Video Input Signals

VGA + HDMI 1.4

### Video Cable Length

1.8 m

### Audio Out

Yes (3.5 mm)

## MULTI-MEDIA

### Optional Soundbar Support

Yes

## DIMENSIONS

### Size Packed (D x H x W) (mm/inch)

122 × 405 × 639 mm / 4.80 × 15.94 × 25.16 inch

### Size Unpacked w/stand (D x H x W) (mm/inch) (Lowest Position)

200.0 × 402.7 × 539.5 mm / 7.87 × 15.85 × 21.24 inch

### Size Unpacked w/stand (D x H x W) (mm/inch) (Highest Position)

200.0 × 402.7 × 539.5 mm / 7.87 × 15.85 × 21.24 inch

### Size Unpacked w/o stand (D x H x W) (mm/inch) (Head Only)

41.5 × 325.7 × 539.5 mm / 1.63 × 12.82 × 21.24 inch

### Weight Packed (kg/lbs.)

4.84kg / 10.67 lbs.

### Weight Unpacked (kg/lbs.)

3.36kg / 7.41 lbs.

### Weight (Monitor Head Only) (kg/lbs.)

3.07kg / 6.77 lbs.

## SPECIAL FEATURES

### Anti-Glare

Yes

### Thin Client Support (Tiny)

Yes (by VESA mount PN:4XFON03161)

## MECHANICAL

### Tilt Angle (front/back)

-5° / 22°

### VESA Mount

Yes (100 mm)

### Kensington™ Lock Slot

Yes

### Cable Management

Yes

### Bezel Color

Raven Black

### Bezel Width (Side)

2.0 mm

### Bezel Width (top / bottom)

2.0 mm / 22 mm

## WHAT'S IN THE BOX

Monitor with stand  
1 x HDMI Cable  
1 x Power Cable  
Quick setup guide

## CERTIFICATIONS

### ENERGY STAR Rating

7.0

### CCC

Yes

### EPEAT™

Gold

### ULE

Gold

### RoHS

Yes

### Windows Certification

Windows 7, Windows 10

### China Energy Efficiency Standard

Tier 2

### Ambient Operating Temperature

0 to 40°C

### Low Blue Light

Yes




© 2018 Lenovo. All rights reserved. These products are available while supplies last. Prices shown are subject to change without notice. For any questions concerning price, please contact your Lenovo Account Executive. Lenovo is not responsible for photographic or typographic errors. Warranty: For a copy of applicable warranties, write to: Warranty Information, 500 Park Offices Drive, RTP, NC 27709, Attn: Dept. ZPYA/B600. Lenovo makes no representation or warranty regarding third-party products or services. Trademarks: Lenovo, the Lenovo logo, Rescue and Recovery, ThinkPad, ThinkCentre, ThinkStation, ThinkVantage, and ThinkVision are trademarks or registered trademarks of Lenovo. Microsoft, Windows, and Vista are registered trademarks of Microsoft Corporation. Intel, the Intel logo, Intel Inside, Intel Core, and Core Inside are trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product, and service names may be trademarks or service marks of others.

Specifications may vary depending upon region.


Lenovo™



<p>Name <b>T2220 VA Wide Flat Panel Monitor</b>                  Bezel color <b>Raven black</b>                  Type-model <b>61A3HAR1EU</b>                  Panel TFT-LCD, with wide viewing angle (WVA) technology, White LED backlight                  Viewable image size <b>21.5" (546mm) diagonal</b>                  Max view area (W x H) <b>18.74" x 10.54" (476.1mm x 267.8mm)</b>                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.248 x 0.248 mm                  Dot/Pixel per Inch 102 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 3000:1 (typical)                  Pixel response time 8ms (typical)                  Color gamut 72%                  Viewing angle at 10:1 CR <b>178° (+/- 89°) horizontal, 168° (+/- 84°) vertical</b>                  Stand Tilt, and height adjustable stand                  Bezel width <b>Sides: 0.68" (17.3mm)</b>                  Dimensions (HxWxD) <b>14.03" H x 20.18" W x 6.98" D; 356.3mm H x 512.6mm W x 177.2mm D</b>                  Power supply 21.5 watts typical, 27 watts maximum, &lt;0.5 watts standby/suspend, universal, integrated (no external brick-like power supply)                  Weight 9.92 lb; 4.50 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date March 2014</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 21.5-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• EPEAT Gold certified</li> <li>• Supports optional soundbar</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 6.0, TCO Certified Edge 1.2, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T2220 VA Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x350, 640x480, 720x400                  SVGA: 800x600, 832x624                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA+: 1440x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080                  Presets / user settings Standard presets: 26; user settings: 26</p>					
<p>Viewing adjustments <i>Tilt: 22° back, -5° forward; lift: 4.3" (110mm)</i>                  Rotating screen No                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for automatic image setup, dual input and brightness                  USB hub None                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) Digital Visual Interface (DVI-D), digital, white, <b>HDCP-compliant</b>                  Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DVI-D at each end, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DVI-D cable, 1.8 meter black power cord</p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>					






<p>Name <b>T2224d Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61B1JAR1US / 61B1JAT1EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>21.5" (546mm) diagonal</b>                  Max view area (W x H) <b>18.74" x 10.54" (476.1mm x 267.8mm)</b>                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.248 x 0.248 mm                  Dot/Pixel per Inch 102 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 7ms (typical); 4ms (extreme mode)                  Color gamut 72%                  Viewing angle at 10:1 CR 178° (+/- 89°) horizontal, 178° (+/- 89°) vertical                  Stand Tilt stand                  Bezel width <i>Sides:</i> 0.69" (17.6mm)                  Dimensions (HxWxD) 15.02" H x 20.19" W x 8.06" D;                  381.4mm H x 512.9mm W x 204.9mm D                  Power supply 20 watts typical,                  25 watts maximum                  &lt;0.5 watts standby/suspend, universal, integrated (no external brick-like power supply)                  Weight 6.48 lb; 2.94 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date March 2017</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 21.5-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports optional soundbar</li> <li>• Supports ThinkCentre Tiny via VESA back mount</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T2224d Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA: 1280x768, 1280x800, 1366x768                  WXGA+: 1440x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080                  Presets / user settings Standard presets: 22; user settings: 22</p>					
<p>Viewing adjustments <i>Tilt:</i> 22° back, -5° forward                  Rotating screen None                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for automatic image setup, dual input and brightness                  USB hub None                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) DisplayPort, digital, black, <b>HDCP-compliant</b>                  Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter black power cord</p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>					




<p>Name <b>T2224z Wide Flat Panel Monitor</b>                  Bezel color <b>Raven black</b>                  Type-model <b>60F5MARG6US / 60F5MAT6EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight</p> <p>Viewable image size <b>21.5" (546mm) diagonal</b>                  Max view area (W x H) <b>18.74" x 10.54" (476.1mm x 267.8mm)</b>                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.248 x 0.248 mm                  Dot/Pixel per Inch 102 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 7ms (typical)                  Color gamut 72%                  Viewing angle at 10:1 CR 178° (+/- 89°) horizontal, 178° (+/- 89°) vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides:</i> 0.69" (17.6mm)                  Dimensions (HxWxD) 14.08" H x 20.19" W x 9.55" D;                  357.8mm H x 512.9mm W x 242.7mm D</p> <p>Power supply 21 watts typical,                  25 watts maximum (without USB 3.0 hub),                  45 watts maximum (with USB 3.0 hub),                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)</p> <p>Weight 10.63 lb; 4.83 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date March 2015</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 21.5-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Supports optional soundbar</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 / Windows 8.1 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T2224z Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA: 1280x768, 1280x800, 1366x768                  WXGA+: 1440x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080</p> <p>Presets / user settings Standard presets: 27; user settings: 20</p>					
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.3" (110mm); <i>swivel:</i> +/-45°; detachable stand                  Rotating screen Screen pivots 90 degrees from landscape to portrait                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for automatic image setup, dual input and brightness                  USB hub USB 3.0 Hub: 1 port into PC (USB 3.0); 2 ports for accessories (2 USB 3.0)                  Multimedia Integrated digital speakers (3 watts x 2)                  Camera Integrated camera (Full HD) and digital dual array microphone                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) HDMI (1.4), digital, <b>HDCP-compliant</b>                  (3) DisplayPort, digital, black, <b>HDCP-compliant</b></p> <p>Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter</p> <p>Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter USB signal cable, 1.8 meter black power cord</p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				



<p>Name <b>T2254 Wide Flat Panel Monitor</b>                  Bezel color <b>Raven black</b>                  Type-model <b>60F6HAR1EU</b>                  Panel <b>TFT-LCD, twisted nematic (TN), White LED backlight</b>                  Viewable image size <b>22.0" (559mm) diagonal</b>                  Max view area (W x H) <b>18.70" x 11.70" (473.8mm x 296.1mm)</b>                  Native resolution <b>1680x1050</b>                  Aspect ratio <b>16:10</b>                  Pixel pitch (mm) <b>0.282 x 0.282 mm</b>                  Dot/Pixel per Inch <b>90 dpi</b>                  Brightness <b>250 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>5ms (typical)</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>170° (+/- 85°) horizontal, 160° (+/- 80°) vertical</b>                  Stand <b>Tilt and height adjustable stand</b>                  Bezel width <b>Sides: 0.67" (17mm)</b>                  Dimensions (HxWxD) <b>14.97" H x 20.05" W x 9.61" D;                  380.2mm H x 509.3mm W x 244.2mm D</b>                  Power supply <b>16 watts typical,                  22 watts maximum,                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)</b>                  Weight <b>10.38 lb; 4.71 kg</b>                  Limited warranty <b>3 year (includes backlight)</b>                  Available date <b>March 2015</b></p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 22.0-inch monitor</li> <li>• Supports 1680x1050 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• EPEAT Gold certified</li> <li>• Supports optional soundbar</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 / Windows 8.1 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® qualified</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>None</b>                  Environmental <b>TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></b></p>	<div style="text-align: center;">  <p><b>ThinkVision T2254 Wide Monitor</b></p> </div>				
<p>Preset resolutions <b>VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA: 1280x768, 1280x800, 1366x768                  WXGA+: 1440x900                  WSXGA+: 1600x900, 1680x1050</b></p> <p>Presets / user settings <b>Standard presets: 26;                  user settings: 20</b></p>					
<p>Viewing adjustments <b>Tilt: 30° back, -5° forward; lift: 4.3" (110mm)</b>                  Rotating screen <b>None</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for automatic image setup, dual input and brightness</b>                  USB hub <b>None</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue                  (2) Digital Visual Interface (DVI-D), digital, white, <b>HDCP-compliant</b></b>                  Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DVI-D at each end, digital, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>					
<p>Ship group <b>Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DVI-D cable, 1.8 meter black power cord</b></p>	<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p> <p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				



<p>Name <b>T2254p Wide Flat Panel Monitor</b>                  Bezel color <b>Raven black</b>                  Type-model <b>61BAMAR2US / 60E1MAR2US / 60CCMAR2US / 60CCMAT2EU / 61BAMAT2EU</b>                  Panel TFT-LCD, twisted nematic (TN), White LED backlight                  Viewable image size <b>22.0" (559mm) diagonal</b>                  Max view area (W x H) <b>18.70" x 11.70" (473.8mm x 296.1mm)</b>                  Native resolution <b>1680x1050</b>                  Aspect ratio 16:10                  Pixel pitch (mm) 0.282 x 0.282 mm                  Dot/Pixel per Inch 90 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 5ms (typical)                  Color gamut 72%                  Viewing angle at 10:1 CR 170° (+/- 85°) horizontal, 160° (+/- 80°) vertical                  Stand Tilt, swivel, pivot, and height adjustable                  Bezel width <b>Sides: 0.67" (17.1mm)</b>                  Dimensions (HxWxD) <b>14.63" H x 20.01" W x 9.55" D;</b>  <b>371.7mm H x 509.3mm W x 242.7mm D</b>                  Power supply 20 watts typical,                  25 watts maximum,                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)                  Weight 10.14 lb; 4.60 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date March 2015</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 22.0-inch monitor</li> <li>• Supports 1680x1050 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Supports optional soundbar</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 / Windows 8.1 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T2254p Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA: 1280x768, 1280x800, 1366x768                  WXGA+: 1440x900                  WSXGA+: 1600x900, 1680x1050                  Presets / user settings Standard presets: 28;                  user settings: 20</p>					
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.3" (110mm); <i>swivel:</i> +/-45°; detachable stand                  Rotating screen Screen pivots 90 degrees from landscape to portrait                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for automatic image setup, dual input and brightness                  USB hub None                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) HDMI (1.4), digital, <b>HDCP-compliant</b>                  (3) DisplayPort, digital, black, <b>HDCP-compliant</b>                  Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter black power cord</p>	<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p> <p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				







<p>Name <b>T22i Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61A9MAR1US / 61A9MAT1EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>21.5" (546mm) diagonal</b>                  Max view area (W x H) <b>18.74" x 10.54" (476.1mm x 267.8mm)</b>                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.248 x 0.248 mm                  Dot/Pixel per Inch 102 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 6ms (typical); 4ms (extreme mode)                  Color gamut 72%                  Viewing angle at 10:1 CR 178° (+/- 89°) horizontal, 178° (+/- 89°) vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides:</i> 0.08" (2.0mm)                  Dimensions (HxWxD) 14.08" H x 19.28" W x 9.92" D;                  357.6mm H x 489.7mm W x 251.9mm D                  Power supply 16.5 watts typical,                  55 watts maximum (with USB 3.0 hub),                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)                  Weight 10.85 lb; 4.92 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date April 2017</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 21.5-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports optional soundbar</li> <li>• Supports ThinkCentre Tiny via VESA back mount</li> <li>• Includes dual input connection for attachment to two systems concurrently</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T22i Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA: 1280x768, 1366x768                  WXGA+: 1440x900, 1680x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080                  Presets display modes HDMI: 17; DP: 17</p>					
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.3" (110mm); <i>swivel:</i> +/-45°; detachable stand                  Rotating screen Screen pivots 90 degrees from landscape to portrait                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for power, menu, input source select and brightness                  USB hub USB 3.0 Hub: 1 port into PC (USB 3.0); 4 ports for accessories (4 USB 3.0)                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) HDMI (1.4), digital, <b>HDCP-compliant</b>                  (3) DisplayPort, digital, black, <b>HDCP-compliant</b>                  Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter USB signal cable, 1.8 meter black power cord</p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				



<p>Name <b>T22v Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61BBMAR6US / 61BBMAT6EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>21.5" (546mm) diagonal</b>                  Max view area (W x H) <b>18.74" x 10.54" (476.1mm x 267.8mm)</b>                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.248 x 0.248 mm                  Dot/Pixel per Inch 102 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 6ms (typical); 4ms (extreme mode)                  Color gamut 72%                  Viewing angle at 10:1 CR 178° (+/- 89°) horizontal, 178° (+/- 89°) vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides:</i> 0.08" (2.0mm)                  Dimensions (HxWxD) 19.14" H x 19.28" W x 9.92" D;                  485.8mm H x 489.7mm W x 251.9mm D                  Power supply 18 watts typical,                  43 watts maximum (with USB 3.0 hub),                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)                  Weight 10.16 lb; 4.61 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date October 2017</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 21.5-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports optional soundbar</li> <li>• Supports ThinkCentre Tiny via VESA back mount</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T22v Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x480, 720x400                  SVGA: 800x600, 832x624                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080                  Presets display modes Presets: 24; user modes: 20</p>					
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.3" (110mm); <i>swivel:</i> +/-45°; detachable stand                  Rotating screen Screen pivots 90 degrees from landscape to portrait                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access for power, menu, input source select, volume up / down, speaker mute and microphone mute                  USB hub USB 3.0 Hub: 1 port into PC (USB 3.0); 2 ports for accessories (2 USB 3.0)                  Multimedia Integrated speakers, dual-array microphone, audio-in and Audio-out, optional sound bar supported                  Camera Integrated FHD camera with IR                  Multiple input Support HDMI, DisplayPort, VGA                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) HDMI (1.4), digital, <b>HDCP-compliant</b>                  (3) DisplayPort, digital, black, <b>HDCP-compliant</b>                  Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter USB signal cable, 1.8 meter black power cord, 1.8 meter HDMI signal cable (Row)</p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				

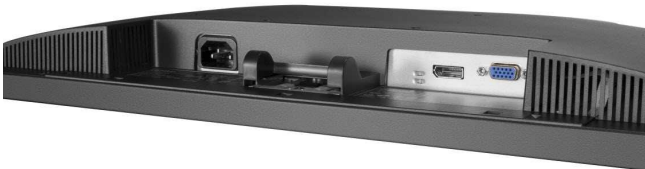

<p>Name <b>T2324d Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>60F3JAR2US / 60F3JAT2EU</b>                  Panel <b>TFT-LCD, twisted nematic (TN), White LED backlight</b>                  Viewable image size <b>23.0" (584mm) diagonal</b>                  Max view area (W x H) <b>20.07" x 11.29" (509.8mm x 286.7mm)</b>                  Native resolution <b>1920x1080</b>                  Aspect ratio <b>16:9</b>                  Pixel pitch (mm) <b>0.2655 x 0.2655 mm</b>                  Dot/Pixel per Inch <b>96 dpi</b>                  Brightness <b>250 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>5ms (typical)</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>170° (+/- 85°) horizontal, 160° (+/- 80°) vertical</b>                  Stand <b>Tilt stand</b>                  Bezel width <b>Sides: 0.68" (17.3mm)</b>                  Dimensions (HxWxD) <b>15.75" H x 21.48" W x 8.06" D;                  400.3mm H x 545.8mm W x 204.9mm D</b>                  Power supply <b>20 watts typical,                  27 watts maximum                  &lt;0.3 watts standby/suspend, universal,                  integrated (no external brick-like power supply)</b>                  Weight <b>7.06 lb; 3.20 kg</b>                  Limited warranty <b>3 year (includes backlight)</b>                  Available date <b>June 2016</b></p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23.0-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports optional soundbar</li> <li>• Supports ThinkCentre Tiny via VESA back mount</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® qualified</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, TCO Certified Edge 2.0, WEEE,                  RoHS, EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T2324d Wide Monitor</b></p> </div>				
<p>Preset resolutions <b>VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA: 1280x768, 1280x800, 1366x768                  WXGA+: 1440x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080</b></p> <p>Presets / user settings <b>Standard presets: 26; user settings: 16</b></p>					
<p>Viewing adjustments <b>Tilt: 22° back, -5°</b>                  Rotating screen <b>None</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for automatic image setup, dual input and brightness</b>                  USB hub <b>None</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue                  (2) DisplayPort, digital, black, <b>HDCP-compliant</b></b>                  Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>					
<p>Ship group <b>Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter black power cord</b></p>	<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p> <p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				



<p>Name <b>T2364t Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>60E9MAR1US / 60E9MAT1EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>23.0" (584mm) diagonal</b>                  Max view area (W x H) <b>20.05" x 11.28" (509.2mm x 286.4mm)</b>                  Native resolution <b>1920x1080</b>                  Touch Supports 10-point touch                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2652 x 0.2652 mm                  Dot/Pixel per Inch 95 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 7ms (typical)                  Color gamut 72%                  Viewing angle at 10:1 CR 178° (+/- 89°) horizontal, 178° (+/- 89°) vertical                  Stand Tilt adjustable stand                  Bezel width <i>Sides:</i> 0.079" (2.0mm)                  Dimensions (HxWxD) 12.53" H x 20.56" W x 2.86" D;                  318.2mm H x 522.2mm W x 72.7mm D                  Power supply 22 watts typical, 45 watts maximum, &lt;0.5 watts standby/suspend, universal, integrated (no external brick-like power supply)                  Weight 9.24 lb; 4.32 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date June 2015</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23.0-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Includes dual input connection for attachment to two systems concurrently</li> <li>• EPEAT Gold certified</li> <li>• 10-point touch screen</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">     <p><b>ThinkVision T2364t</b></p> </div>
<p>Preset resolutions                  VGA: 640x350, 640x480, 720x400, 700x570                  SVGA: 800x600, 832x624                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080                  Presets / user settings User settings: 20</p>	<p>Viewing adjustments <i>Tilt:</i> 10° - 70° degrees; detachable stand                  Rotating screen None                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for automatic image setup, dual input and brightness                  USB hub USB 3.0 Hub: 1 port into PC (USB 3.0); 3 ports for accessories (3 USB 3.0)                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) HDMI (1.4), digital, HDCP-compliant                  (3) DisplayPort, digital, black, HDCP-compliant                  Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, HDMI at each end, digital, 1.8 meter                  (3) detachable, DisplayPort at each end, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)                  Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter HDMI cable, 1.8 meter DisplayPort cable, 1.8 meter USB signal cable, 1.8 meter black power cord</p>

<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				






<p>Name <b>T23d-10 Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61C3MAR6US / 61C3MAT6EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight</p> <p>Viewable image size <b>22.5" (571.5mm)</b> diagonal                  Max view area (W x H) <b>19.5" x 12.4"</b> (496.2mm x 313.9mm)                  Native resolution <b>1920x1200</b>                  Aspect ratio 16:10                  Pixel pitch (mm) 0.25 x 0.25 mm                  Dot/Pixel per Inch 100.6 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 6ms (typical)                  Color gamut 72%                  Viewing angle at 10:1 CR <b>178° (+/- 89°)</b> horizontal, <b>178° (+/- 89°)</b> vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides:</i> 0.09" (2.3mm)                  Dimensions (HxWxD) <b>19.37" H x 19.73" W x 9.9" D;</b>  <b>491.9mm H x 501.2mm W x 251.9mm D</b></p> <p>Power supply 15 watts typical, 18 watts maximum, &lt;0.3 watts standby/suspend, universal, integrated (no external brick-like power supply)</p> <p>Weight 10.67 lb; 4.85 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date June 2018</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 22.5-inch monitor</li> <li>• Supports 1920x1200 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Supports optional soundbar</li> <li>• Includes dual input connection for attachment to two systems concurrently</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T23d-10 Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080                  WUXGA: 1920x1200</p> <p>Presets display modes Standard presets: 27; user settings: 20</p>					
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.3" (110mm); <i>swivel:</i> +/-45°; detachable stand                  Rotating screen Screen pivots 90 degrees from landscape to portrait                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for power, menu, input source select and brightness                  USB hub None                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) HDMI (1.4), digital, <b>HDCP-compliant</b>                  (3) DisplayPort, digital, black, <b>HDCP-compliant</b></p> <p>Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter</p> <p>Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter black power cord, 1.8 meter HDMI signal cable (NA only)</p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				

Note: The specifications above may not be available in all regions.




<p>Name <b>T23i Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61ABMAR1US / 61ABMAT1EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>23" (584.2mm) diagonal</b>                  Max view area (W x H) <b>20.36" x 11.92" (517.2mm x 302.8mm)</b>                  Native resolution <b>1920x1080</b>                  Aspect ratio <b>16:9</b>                  Pixel pitch (mm) <b>0.2652 x 0.2652 mm</b>                  Dot/Pixel per Inch <b>95.8 dpi</b>                  Brightness <b>250 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>6ms (typical)</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>178° (+/- 89°) horizontal, 178° (+/- 89°) vertical</b>                  Stand <b>Tilt, swivel, pivot, and height adjustable stand</b>                  Bezel width <b>Sides: 0.08" (2.0mm)</b>                  Dimensions (HxWxD) <b>13.3" H x 20.56" W x 10.4" D; 337.7mm H x 522.2mm W x 264.2mm D</b>                  Power supply <b>16 watts typical, 45 watts maximum (with USB 3.0 hub), &lt;0.5 watts standby/suspend, universal, integrated (no external brick-like power supply)</b>                  Weight <b>10.85 lb; 4.92 kg</b>                  Limited warranty <b>3 year (includes backlight)</b>                  Available date <b>April 2017</b></p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Includes dual input connection for attachment to two systems concurrently</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® qualified</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T23i Wide Monitor</b></p> </div>				
<p>Preset resolutions <b>VGA: 640x480, 720x400; SVGA: 800x600; XGA: 1024x768, 1152x864; SXGA: 1280x1024; WXGA+: 1440x900; WSXGA+: 1680x1050; Full HD: 1920x1080</b></p> <p>Presets display modes <b>HDMI: 18; DP: 18</b></p>					
<p>Viewing adjustments <b>Tilt: 30° back, -5° forward; lift: 4.3" (110mm); swivel: +/-45°; detachable stand</b>                  Rotating screen <b>Screen pivots 90 degrees from landscape to portrait</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for power, menu, input source select and brightness and automatic image setup</b>                  USB hub <b>USB 3.0 Hub: 1 port into PC (USB 3.0); 4 ports for accessories (4 USB 3.0)</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue; (2) HDMI (1.4), digital, <b>HDCP-compliant</b>; (3) DisplayPort, digital, black, <b>HDCP-compliant</b></b>                  Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter; (2) detachable, DisplayPort at each end, digital, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>					
<p>Ship group <b>Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter USB signal cable, 1.8 meter black power cord</b></p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				



<p>Name <b>T2424z Wide Flat Panel Monitor</b>                  Bezel color <b>Raven black</b>                  Type-model <b>60F8MAR1US / 60F8MAT1EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight</p> <p>Viewable image size <b>23.8" (604.7mm)</b> diagonal                  Max view area (W x H) <b>20.75" x 11.67"</b> (527.0mm x 296.5mm)                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2745 x 0.2745 mm                  Dot/Pixel per Inch 92 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 7ms (typical)                  Color gamut 72%                  Viewing angle at 10:1 CR <b>178° (+/- 89°) horizontal, 178° (+/- 89°) vertical</b>                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <b>Sides: 0.69" (17.5mm)</b>                  Dimensions (HxWxD) <b>19.53" H x 22.19" W x 10.39" D;</b>  <b>496.0mm H x 563.6mm W x 264.2mm D</b></p> <p>Power supply 22 watts typical,                  40 watts maximum (without USB 3.0 hub),                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)</p> <p>Weight <b>12.90 lb; 5.85 kg</b>                  Limited warranty <b>3 year</b> (includes backlight)                  Available date June 2016</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23.8-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 / Windows 8.1 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T2424z Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080</p> <p>Presets / user settings Standard presets: 31; user settings: 20</p>					
<p>Viewing adjustments <i>Tilt: 30° back, -5° forward; lift: 4.3" (110mm); swivel: +/-45°; detachable stand</i>                  Rotating screen Screen pivots 90 degrees from landscape to portrait                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for automatic image setup, dual input and brightness                  USB hub USB 3.0 Hub: 1 port into PC (USB 3.0); 2 ports for accessories (2 USB 3.0)                  Multimedia Integrated digital speakers (3 watts x 2)                  Camera Integrated camera (Full HD) and digital dual array microphone                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) HDMI (1.4), digital, <b>HDCP-compliant</b>                  (3) DisplayPort, digital, black, <b>HDCP-compliant</b></p> <p>Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter</p> <p>Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter USB signal cable, 1.8 meter black power cord</p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>					




<p>Name <b>T2454p Wide Flat Panel Monitor</b>                  Bezel color <b>Raven black</b>                  Type-model <b>60F9MAR1US / 60F9MAT1EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight</p> <p>Viewable image size <b>24.0" (609.6mm) diagonal</b>                  Max view area (W x H) <b>20.41" x 12.76" (518.4mm x 324.0mm)</b>                  Native resolution <b>1920x1200</b>                  Aspect ratio <b>16:10</b>                  Pixel pitch (mm) <b>0.270 x 0.270 mm</b>                  Dot/Pixel per Inch <b>94 dpi</b>                  Brightness <b>300 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>7ms (typical)</b>                  Color gamut <b>77.4%</b>                  Viewing angle at 10:1 CR <b>178° (+/- 89°) horizontal, 178° (+/- 89°) vertical</b>                  Stand <b>Tilt, swivel, pivot, and height adjustable stand</b>                  Bezel width <b>Sides: 0.74" (18.8mm)</b>                  Dimensions (HxWxD) <b>15.85" H x 21.94" W x 10.39" D; 402.5mm H x 557.4mm W x 264.2mm D</b></p> <p>Power supply <b>24 watts typical, 27 watts maximum (without USB 3.0 hub), 54 watts maximum (with USB 3.0 hub), &lt;0.5 watts standby/suspend, universal, integrated (no external brick-like power supply)</b></p> <p>Weight <b>13.60 lb; 6.15 kg</b>                  Limited warranty <b>3 year (includes backlight)</b>                  Available date <b>March 2015</b></p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 24.0-inch monitor</li> <li>• Supports 1920x1200 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Supports optional soundbar</li> <li>• Includes dual input connection for attachment to two systems concurrently (analog and digital)</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 8 / Windows 8.1 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® qualified</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, EPEAT™ Gold rating</b></p> <p>Preset resolutions <b>VGA: 640x350, 640x480, 720x400</b>  <b>SVGA: 800x600</b>  <b>XGA: 1024x768</b>  <b>SXGA: 1280x1024</b>  <b>WXGA: 1280x720, 1280x768, 1280x800</b>  <b>WXGA+: 1440x900</b>  <b>WSXGA+: 1680x1050, 1600x1200</b>  <b>Full HD: 1920x1080, 1920x1200</b></p> <p>Presets / user settings <b>Standard presets: 21; user settings: 20</b></p>	 <p style="text-align: center;"><b>ThinkVision T2454p Wide Monitor</b></p>				
<p>Viewing adjustments <b>Tilt: 30° back, -5° forward; lift: 4.3" (110mm); swivel: +/-45°; detachable stand</b>                  Rotating screen <b>Screen pivots 90 degrees from landscape to portrait</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for automatic image setup, dual input and brightness</b>                  USB hub <b>USB 3.0 Hub: 1 port into PC (USB 3.0); 4 ports for accessories (4 USB 3.0)</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue</b>  <b>(2) HDMI (1.4), digital, <b>HDCP-compliant</b></b>  <b>(3) DisplayPort, digital, black, <b>HDCP-compliant</b></b></p> <p>Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter</b>  <b>(2) detachable, DisplayPort at each end, digital, 1.8 meter</b></p> <p>Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>	<p>Ship group <b>Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DisplayPort cable, 1.8 meter USB signal cable, 1.8 meter black power cord</b></p>				
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				







<p>Name <b>T24d Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61B4MAR1US / 61B4MAT1EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>24" (609.6mm) diagonal</b>                  Max view area (W x H) <b>20.41" x 12.75" (518.4mm x 324mm)</b>                  Native resolution <b>1920x1200</b>                  Aspect ratio <b>16:10</b>                  Pixel pitch (mm) <b>0.27 x 0.27 mm</b>                  Dot/Pixel per Inch <b>94 dpi</b>                  Brightness <b>300 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1000:1 (typical)</b>                  Pixel response time <b>7ms (typical)</b>                  Color gamut <b>99%</b>                  Viewing angle at 10:1 CR <b>178° (+/- 89°) horizontal, 178° (+/- 89°) vertical</b>                  Stand <b>Tilt, swivel, pivot, and height adjustable stand</b>                  Bezel width <b>Sides: 0.08" (2.0mm)</b>                  Dimensions (HxWxD) <b>19.58" H x 20.99" W x 10.25" D; 497.4mm H x 533.2mm W x 260.4mm D</b>                  Power supply <b>22 watts typical, 64 watts maximum (with USB 3.0 hub), &lt;0.3 watts standby/suspend, universal, integrated (no external brick-like power supply)</b>                  Weight <b>12.41 lb; 5.63 kg</b>                  Limited warranty <b>3 year (includes backlight)</b>                  Available date <b>June 2017</b></p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 24-inch monitor</li> <li>• Supports 1920x1200 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Supports optional soundbar</li> <li>• Includes dual input connection for attachment to two systems concurrently</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>																		
<p>VESA-compliant <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® qualified</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, EPEAT™ Gold rating</b></p> <p>Preset resolutions</p> <table border="0"> <tr><td>VGA:</td><td>640x480, 720x400</td></tr> <tr><td>SVGA:</td><td>800x600</td></tr> <tr><td>XGA:</td><td>1024x768</td></tr> <tr><td>SXGA:</td><td>1280x1024</td></tr> <tr><td>WXGA:</td><td>1366x768</td></tr> <tr><td>WXGA+:</td><td>1440x900</td></tr> <tr><td>WSXGA+:</td><td>1680x1050</td></tr> <tr><td>Full HD:</td><td>1920x1080</td></tr> <tr><td>WUXGA:</td><td>1920x1200</td></tr> </table> <p>Presets display modes Standard presets: 22; user settings: 20</p>	VGA:	640x480, 720x400	SVGA:	800x600	XGA:	1024x768	SXGA:	1280x1024	WXGA:	1366x768	WXGA+:	1440x900	WSXGA+:	1680x1050	Full HD:	1920x1080	WUXGA:	1920x1200	 <p style="text-align: center;"><b>ThinkVision T24d Wide Monitor</b></p>
VGA:	640x480, 720x400																		
SVGA:	800x600																		
XGA:	1024x768																		
SXGA:	1280x1024																		
WXGA:	1366x768																		
WXGA+:	1440x900																		
WSXGA+:	1680x1050																		
Full HD:	1920x1080																		
WUXGA:	1920x1200																		
<p>Viewing adjustments <b>Tilt: 30° back, -5° forward; lift: 4.3" (110mm); swivel: +/-45°; detachable stand</b>                  Rotating screen <b>Screen pivots 90 degrees from landscape to portrait</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (buttons on front) for power, menu, input source select and brightness</b>                  USB hub <b>USB 3.0 Hub: 1 port into PC (USB 3.0); 4 ports for accessories (4 USB 3.0)</b>                  Multiple input <b>Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog, blue                  (2) HDMI (1.4), digital, <b>HDCP-compliant</b>                  (3) DisplayPort, digital, black, <b>HDCP-compliant</b></b>                  Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>	<p>Ship group <b>Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter USB signal cable, 1.8 meter black power cord, 1.8 meter HDMI signal cable (NA only)</b></p>																		
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620														
Kensington MicroSaver Cable Lock	73P2582																		
Kensington Twin Head Cable Lock	45K1620																		



<p>Name <b>T24i Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61A6MAR3US / 61A6MAT3EU / 61CEMAT2EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>23.8" (604.7mm)</b> diagonal                  Max view area (W x H) <b>20.75" x 11.67"</b> (527.04mm x 296.5mm)                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2745 x 0.2745 mm                  Dot/Pixel per Inch 93 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 6ms (typical)                  Color gamut 72%                  Viewing angle at 10:1 CR <b>178° (+/- 89°)</b> horizontal, <b>178° (+/- 89°)</b> vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides:</i> 0.08" (2.0mm)                  Dimensions (HxWxD) 14.7" H x 21.26" W x 10.3" D;                  373.4mm H x 540.2mm W x 261.75mm D                  Power supply 16.5 watts typical,                  55 watts maximum (with USB 3.0 hub),                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)                  Weight 11.57 lb; 5.25 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date April 2017</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23.8-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Supports optional soundbar</li> <li>• Includes dual input connection for attachment to two systems concurrently</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p> <p>Preset resolutions                  VGA: 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900, 1680x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080                  Presets display modes HDMI: 17; DP: 17</p>	<div style="text-align: center;">  <p><b>ThinkVision T24i Wide Monitor</b></p> </div>				
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.3" (110mm); <i>swivel:</i> +/-45°; detachable stand                  Rotating screen Screen pivots 90 degrees from landscape to portrait                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for power, menu, input source select and brightness and automatic image setup                  USB hub USB 3.0 Hub: 1 port into PC (USB 3.0); 4 ports for accessories (4 USB 3.0)                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) HDMI (1.4), digital, <b>HDCP-compliant</b>                  (3) DisplayPort, digital, black, <b>HDCP-compliant</b></p> <p>Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, DisplayPort at each end, digital, 1.8 meter</p> <p>Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>	<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter USB signal cable, 1.8 meter black power cord</p>				
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				

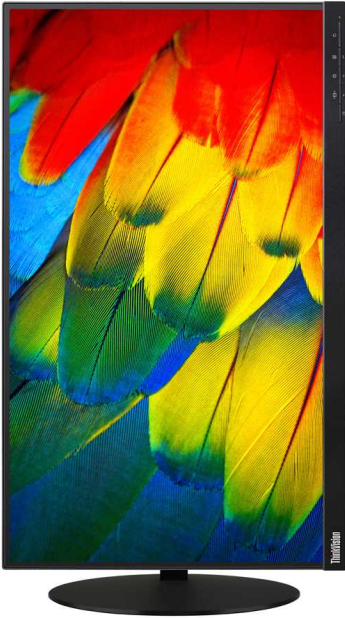


<p>Name <b>T24m Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61B8RAR3US / 61B8RAT3EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>23.8" (604.7mm)</b> diagonal                  Max view area (W x H) <b>20.75" x 11.67"</b> (527.04mm x 296.46mm)                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2745 x 0.2745 mm                  Dot/Pixel per Inch 92 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 6ms (typical)                  Color gamut 99% sRGB                  Viewing angle at 10:1 CR 178° (+/- 89°) horizontal, 178° (+/- 89°) vertical                  Stand Tilt, swivel, pivot, and height adjustable                  Bezel width <i>Sides:</i> 0.08" (2.0mm)                  Dimensions (HxWxD) 19.03" H x 21.26" W x 10.3" D;                  483.4mm H x 540.2mm W x 261.75mm D                  Power supply 17 watts typical,                  110 watts maximum (with USB 3.0 hub),                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)                  Weight 12.34 lb; 5.6 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date August 2017</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23.8-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Supports optional soundbar</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision T24m Wide Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x480                  SVGA: 800x600                  XGA: 1024x768                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080, 1920x1200                  HDMI: 19; DP: 11</p>					
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.3" (110mm); <i>swivel:</i> +/-45°; detachable stand                  Rotating screen Screen pivots 90 degrees from landscape to portrait                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for power, menu, input source select and brightness                  USB hub USB 3.0 Hub: 1 port into PC (USB 3.0); 4 ports for accessories (4 USB 3.0)                  Multimedia Audio-out, optional sound bar supported                  Multiple input Support HDMI, DisplayPort, USB 3.1 Type-C                  Monitor connectors (1) HDMI (1.4), digital, <b>HDCP-compliant</b>                  (2) DisplayPort (1.2), digital, <b>HDCP-compliant</b>                  (3) USB 3.1 Type-C                  Signal cables (1) 1.8 meter USB Type-C to USB Type-C cable                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter USB Type-C to USB Type-C cable, 1.8 meter black power cord</p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				





<p>Name <b>T24v Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>61BCMAR6US / 61BCMAT6EU</b>                  Panel TFT-LCD, In-Plane Switching (IPS), White LED backlight                  Viewable image size <b>23.8" (604.5mm)</b> diagonal                  Max view area (W x H) <b>20.75" x 11.67"</b> (527.04mm x 296.46mm)                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2745 x 0.2745 mm                  Dot/Pixel per Inch 92 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 6ms (typical); 4ms (extreme mode)                  Color gamut 72%                  Viewing angle at 10:1 CR 178° (+/- 89°) horizontal, 178° (+/- 89°) vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides:</i> 0.08" (2.0mm)                  Dimensions (HxWxD) 19.72" H x 21.28" W x 10.32" D;                  500.5mm H x 540.2mm W x 261.9mm D                  Power supply 20 watts typical,                  45 watts maximum (with USB 3.0 hub),                  &lt;0.5 watts standby/suspend, universal,                  integrated (no external brick-like power supply)                  Weight 11.18 lb; 5.07 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date October 2017</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23.8-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Supports ThinkCentre Tiny Clamp Bracket</li> <li>• Supports optional soundbar</li> <li>• EPEAT Gold certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>VESA-compliant VESA DDC2B/C1                  Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b></p> <p>Preset resolutions                  VGA: 640x480, 720x400                  SVGA: 800x600, 832x624                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080</p> <p>Presets display modes Presets: 24; user modes: 20</p>	 <p style="text-align: center;"><b>ThinkVision T24v Wide Monitor</b></p>				
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.3" (110mm); <i>swivel:</i> +/-45°; detachable stand                  Rotating screen Screen pivots 90 degrees from landscape to portrait                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access for power, menu, input source select, volume up / down, speaker mute and microphone mute                  USB hub USB 3.0 Hub: 1 port into PC (USB 3.0); 2 ports for accessories (2 USB 3.0)                  Multimedia Integrated speakers, dual-array microphone, audio-in and Audio-out, optional sound bar supported                  Camera Integrated FHD camera with IR                  Multiple input Support HDMI, DisplayPort, VGA                  Monitor connectors (1) VGA 15-pin D-shell, analog, blue                  (2) HDMI (1.4), digital, <b>HDCP-compliant</b>                  (3) DisplayPort, digital, black, <b>HDCP-compliant</b>                  Signal cables (1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter                  (2) detachable, HDMI at each end, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories, 100mm x 100mm mount                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p> <p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter analog signal cable, 1.8 meter DP signal cable, 1.8 meter USB signal cable, 1.8 meter black power cord, 1.8 meter HDMI signal cable (Row)</p>	<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p> <p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				






<p>Name <b>X24 Pro Wide Flat Panel Monitor</b>                  Bezel color <b>Black</b>                  Type-model <b>60E4ECR1US / 60E4ECT1US / 60E4ECT1EU</b>                  Panel TFT-LCD, AH-IPS (In-Plane Switching), White LED backlight                  Viewable image size <b>23.8" (604.5mm)</b> diagonal                  Max view area (W x H) <b>20.75" x 11.67"</b> (527.0mm x 296.5mm)                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2745 x 0.2745 mm                  Dot/Pixel per Inch 92 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 7ms (typical)                  Color gamut 72%                  Viewing angle at 10:1 CR <b>178° (+/- 89°) horizontal, 178° (+/- 89°) vertical</b>                  Stand Tilt stand                  Bezel width <i>Sides:</i> 0.09" (2.3mm)                  Dimensions (HxWxD) 17.61" H x 21.30" W x 9.39" D;                  447.4mm H x 540.9mm W x 238.4mm D                  Power supply 20 watts typical,                  90 watts maximum,                  &lt;0.5 watts standby/suspend, universal, external power supply                  Weight 9.26 lb; 4.20 kg                  Limited warranty <b>1 year</b> (includes backlight)                  Available date July 2016</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23.8-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Includes dual input connection for attachment to two systems concurrently</li> <li>• EPEAT Silver certified</li> <li>• Intel RealSense 3D camera</li> <li>• Stereo speakers 3 watts x 2</li> <li>• One cable docking through USB 3.1 Type C with power delivery</li> <li>• Windows Hello certified</li> <li>• Microsoft® Windows® 10 certified</li> </ul>				
<p>Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 6.0, WEEE, RoHS, <b>EPEAT™ Silver rating</b></p> <p>Preset resolutions                  VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080</p> <p>Presets / user settings                  Standard presets: 16;                  user settings: 20</p>	<div style="text-align: center;">  <p><b>ThinkVision X24 Pro Wide Monitor</b></p> </div>				
<p>Viewing adjustments <i>Tilt:</i> 22° back, -5° forward                  Rotating screen None                  On screen display On screen display with digital user controls                  Control features Direct access (buttons on side bezel) for dual input and brightness                  USB hub USB Hub: two USB 3.1 Type-C and one micro USB 3.0 ports                  Multimedia Integrated stereo speakers (3 watts x 2), built-in microphone                  Camera RealSense 3D camera SR300                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) mDP, Mini DisplayPort, digital, <b>HDCP-compliant</b>                  (2) USB Type-C, digital                  Signal cables (1) detachable, mDP to DP, digital, 2.0 meter                  (2) DP to mDP adapter                  (3) Micro USB 3.0 cable                  Mounting features None                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, ThinkPad 90W Square tip power adaptor, 2.0 meter Mini DisplayPort to DisplayPort signal cable (with DP to mDP adapter), Micro USB 3.0 cable (for using camera)</p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				




<p>Name <b>X24-20 Flat Panel Monitor</b>                  Bezel color <b>Raven black</b>                  Type-model <b>61BDGAR3US / 61BDGAT3EU</b>                  Panel TFT-LCD, IPS (In-Plane Switching), White LED backlight                  Viewable image size <b>23.8" (604.5mm)</b> diagonal                  Max view area (W x H) <b>20.75" x 11.67"</b> (527.0mm x 296.5mm)                  Native resolution <b>1920x1080</b>                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2745 x 0.2745 mm                  Dot/Pixel per Inch 92 dpi                  Brightness 250 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 6ms (typical)                  Color gamut 72% (NTSC)                  Viewing angle at 10:1 CR <b>178° (+/- 89°) horizontal, 178° (+/- 89°) vertical</b>                  Stand Tilt stand                  Bezel width <i>Sides:</i> 0.04" (1.1mm)                  Dimensions (HxWxD) 12.85" H x 21.16" W x 8.66" D;                  326.4mm H x 537.4mm W x 220mm D                  Power supply 20 watts typical,                  25 watts maximum,                  &lt;0.5 watts standby/suspend, universal, external power supply                  Weight 7.3 lb; 3.3 kg                  Limited warranty <b>3 year</b> (includes backlight)                  Available date December 2017</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• Widescreen 23.8-inch monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• Includes dual input connection for attachment to two systems concurrently</li> <li>• EPEAT Silver certified</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>				
<p>Power management ENERGY STAR® qualified                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Silver rating</b></p>	<div style="text-align: center;">  <p><b>ThinkVision X24-20 Monitor</b></p> </div>				
<p>Preset resolutions                  VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080                  Presets / user settings Standard presets: 18;                  user settings: 0</p>					
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward                  Rotating screen None                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on side bezel) for power, dual input and brightness                  USB hub None                  Multiple input Dual input (two different PCs attach to two different connectors; one PC shows image; select via button)                  Monitor connectors (1) HDMI (1.4a), digital, <b>HDCP-compliant</b>                  (2) DisplayPort, digital, black, <b>HDCP-compliant</b>                  Signal cables (1) detachable, HDMI at each end, digital, 1.8 meter                  Mounting features None                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>					
<p>Ship group Monitor with stand, Safety and Warranty Information, 1.8 meter HDMI signal cable, 1.8 meter black power cord</p>					
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0" style="width: 100%;"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620
Kensington MicroSaver Cable Lock	73P2582				
Kensington Twin Head Cable Lock	45K1620				




<p>Name <b>P27 Wide Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>60E3GAR1US / 60E3GAT1EU</b>                  Panel TFT-LCD, IPS (In-Plane Switching), White LED backlight                  Viewable image size <b>27" (684.7mm) diagonal</b>                  Max view area (W x H) <b>23.49" x 13.21" (596.7mm x 335.7mm)</b>                  Optimum resolution <b>3840x2160</b>                  Max pixel rate <b>600MHz</b>                  Aspect ratio <b>16:9</b>                  Pixel pitch (mm) <b>0.16 x 0.16mm</b>                  Dot/Pixel per Inch <b>163 dpi</b>                  Brightness <b>300 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1300:1 (typical)</b>                  Pixel response time <b>6ms</b>                  Color gamut <b>99%</b>                  Viewing angle at 10:1 CR <b>178° horizontal, 178° vertical</b>                  Stand <b>Tilt, swivel, pivot, and height adjustable stand</b>                  Bezel width <b>Sides: 0.088" (2.23mm)</b>                  Dimensions (HxWxD, including stand) <b>18.59" H x 24.19" W x 11.81" D; 472.3mm H x 614.5mm W x 299.9mm D</b>                  Power supply <b>40 watts typical, 70 watts maximum (with USB), &lt;0.5 watts sleep/off; &lt;0.5 watts switch off</b>                  Weight <b>15.12 lb; 6.86kg (including stand)</b>                  Limited warranty<sup>4</sup> <b>3 year</b>                  Available date <b>March 2016</b></p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>• 27-inch IPS LED backlight monitor with speaker</li> <li>• Supports 3840x2160 resolution</li> <li>• 5-Ports USB hub, support USB 3.0</li> <li>• 3watts x 2 stereo speakers</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>						
<p>VESA-compliant<sup>2</sup> <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® 7.0</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, RoHS, EPEAT™ Gold rating, ULE Gold</b></p>	 <p><b>ThinkVision P27 Monitor</b></p>						
<p>Preset resolutions                  VGA: 640x350, 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768, 1152x864                  SXGA: 1280x1024                  WXGA: 1280x720, 1280x768, 1280x800, 1360x768                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080, 1920x1200                  UHD: 3840x2160</p> <p>Presets / user settings Standard presets: 20; user settings: 20</p>							
<p>Viewing adjustments <b>Tilt: 30° back, -5° forward; lift: 3.15" (80mm); swivel: +/-45°</b>                  Rotating screen <b>Screen pivots 90 degrees from landscape to portrait</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (touch buttons on front) for menu, mute, volume up/down, and brightness</b>                  USB hub <b>USB Hub: one USB 3.0 upstream port, four USB 3.0 downstream ports</b>                  Multimedia <b>Integrated stereo speakers (3 watts x 2)</b>                  Camera <b>None</b>                  Multiple input <b>Support HDMI, DisplayPort</b>                  Monitor connectors <b>(1) HDMI (2.0), digital, HDCP-compliant</b>  <b>(2) DisplayPort (1.2), digital, HDCP-compliant</b>                  Signal cables <b>(1) detachable, DisplayPort at each end, digital, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>							
<p>Ship group <b>Monitor, detachable stand, Quick start and safety poster, 1.8 meter DisplayPort cable, 1.8 meter USB 3.0 cable, 1.8 meter black power cord, mini DP to DP adapter, power adapter (90W)</b></p>	<p><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p> <p><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td>73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td>45K1620</td> </tr> <tr> <td>Lenovo Security Cable Lock</td> <td>57Y4303</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Security Cable Lock	57Y4303
Kensington MicroSaver Cable Lock	73P2582						
Kensington Twin Head Cable Lock	45K1620						
Lenovo Security Cable Lock	57Y4303						




<p>Name <b>P27h Wide Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>61AFGAR1US / 61AFGAT1EU</b>                  Panel TFT-LCD, IPS (In-Plane Switching), White LED backlight                  Viewable image size <b>27" (685.8mm)</b> diagonal                  Max view area (W x H) <b>23.49" x 13.21"</b> (596.7mm x 335.7mm)                  Optimum resolution <b>2560x1440</b>                  Max pixel rate 300MHz                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2331 x 0.2331mm                  Dot/Pixel per Inch 109 dpi                  Brightness 350 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 4ms (extreme) / 6ms (typical)                  Color gamut 99% sRGB                  Viewing angle at 10:1 CR 178° horizontal, 178° vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides:</i> 0.08" (2mm)                  Dimensions 20.21" H x 24.08" W x 10.62" D;                  (HxWxD, including stand) 513mm H x 611.6mm W x 269.8mm D                  Power supply 38 watts typical,                  140 watts maximum (with USB),                  &lt;0.5 watts sleep/off;                  &lt;0.5 watts switch off                  integrated (no external brick-like power supply)                  Weight 15.43 lb; 7.0kg (including stand)                  Limited warranty <b>3 year</b>                  Available date April 2017</p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• 27-inch IPS LED backlit monitor</li> <li>• Supports 2560x1440 resolution</li> <li>• 5-Ports USB hub, support USB 3.0</li> <li>• Supports optional soundbar</li> <li>• Support ThinkCentre Tiny</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>						
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® 7.0                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, RoHS, <b>EPEAT™ Gold rating</b>, ULE Gold</p>	<div style="text-align: center;">  <p><b>ThinkVision P27h Monitor</b></p> </div>						
<p>Preset resolutions                  VGA: 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900, 1680x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080, 1920x1200                  QHD: 2560x1440</p> <p>Presets display modes HDMI: 22; DP: 14</p>							
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.33" (110mm); <i>swivel:</i> +/-45°                  Rotating screen <b>Screen pivots 90 degrees from landscape to portrait</b>                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for power, menu, input source select and brightness                  USB hub USB Hub: one USB 3.1 Type-C upstream port, four USB 3.0 Type-A downstream ports                  Multimedia Audio-out, optional sound bar supported                  Camera None                  Multiple input Support HDMI, DisplayPort, USB 3.1 Type-C, DisplayPort-out                  Monitor connectors (1) 2*HDMI (1.4), digital, <b>HDCP-compliant</b>                  (2) DisplayPort (1.2), digital, <b>HDCP-compliant</b>                  (3) DisplayPort-out, digital                  (4) USB 3.1 Type-C                  Signal cables (1) USB 3.1 Type-C cable, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>							
<p>Ship group Monitor, detachable stand, Quick start and safety poster, 1.8 meter USB 3.1 Type-C cable, 1.8 meter black power cord</p>	<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p> <p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> <tr> <td>Lenovo Security Cable Lock</td> <td style="text-align: right;">57Y4303</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a>                  See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Security Cable Lock	57Y4303
Kensington MicroSaver Cable Lock	73P2582						
Kensington Twin Head Cable Lock	45K1620						
Lenovo Security Cable Lock	57Y4303						





<p>Name <b>P27q Wide Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>61A8GAT1EU</b>                  Panel TFT-LCD, IPS (In-Plane Switching), White LED backlight                  Viewable image size <b>27" (685.8mm)</b> diagonal                  Max view area (W x H) <b>23.49" x 13.21"</b> (596.7mm x 335.7mm)                  Optimum resolution <b>2560x1440</b>                  Max pixel rate 300MHz                  Aspect ratio 16:9                  Pixel pitch (mm) 0.2331 x 0.2331mm                  Dot/Pixel per Inch 109 dpi                  Brightness 350 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 4ms                  Color gamut 99% sRGB                  Viewing angle at 10:1 CR 178° horizontal, 178° vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides:</i> 0.08" (2mm)                  Dimensions 20.21" H x 24.17" W x 10.62" D;                  (HxWxD, including stand) 513mm H x 614mm W x 269.8mm D                  Power supply 38 watts typical,                  75 watts maximum (with USB),                  &lt;0.5 watts sleep/off;                  &lt;0.3 watts switch off                  integrated (no external brick-like power supply)                  Weight 15.43 lb; 7.0kg (including stand)                  Limited warranty <b>3 year</b>                  Available date January 2017</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>• 27-inch IPS LED backlight monitor</li> <li>• Supports 2560x1440 resolution</li> <li>• 5-Ports USB hub, support USB 3.0</li> <li>• Support ThinkCentre Tiny</li> <li>• Supports optional soundbar</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>						
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® 7.0                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, RoHS, <b>EPEAT™ Gold rating</b>, ULE Gold</p>	 <p><b>ThinkVision P27q Monitor</b></p>						
<p>Preset resolutions                  VGA: 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768                  SXGA: 1280x1024                  WXGA: 1366x768                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080, 1920x1200                  QHD: 2560x1440</p> <p>Presets / user settings Standard presets: 20; user settings: 24</p>							
<p>Viewing adjustments <i>Tilt:</i> 30° back, -5° forward; <i>lift:</i> 4.33" (110mm); <i>swivel:</i> +/-45°                  Rotating screen <b>Screen pivots 90 degrees from landscape to portrait</b>                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access for menu, source switch, and brightness                  USB hub USB Hub: one USB 3.0 upstream port, four USB 3.0 downstream ports                  Multimedia Audio-out, optional sound bar supported                  Camera None                  Multiple input Support HDMI, DisplayPort, mini DisplayPort, DisplayPort-out                  Monitor connectors (1) 2*HDMI (1.4), digital, <b>HDCP-compliant</b>                  (2) DisplayPort (1.2), digital, <b>HDCP-compliant</b>                  (3) Mini DisplayPort, digital, <b>HDCP-compliant</b>                  Signal cables (1) detachable, mini DisplayPort to DisplayPort, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>							
<p>Ship group Monitor, detachable stand, Quick start and safety poster, 1.8 meter USB 3.0 cable, 1.8 meter mini DP to DP cable, 1.8 meter black power cord</p>	<p><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p> <p><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td>73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td>45K1620</td> </tr> <tr> <td>Lenovo Security Cable Lock</td> <td>57Y4303</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Security Cable Lock	57Y4303
Kensington MicroSaver Cable Lock	73P2582						
Kensington Twin Head Cable Lock	45K1620						
Lenovo Security Cable Lock	57Y4303						



<p>Name <b>P27u Wide Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>61CBGAR1US / 61CBGAT1EU / 61CBGAR1EU / 61B0GAR1US / 61B0GAT1EU</b>                  Panel TFT-LCD, IPS (In-Plane Switching), White LED backlight                  Viewable image size <b>27" (684.7mm)</b> diagonal                  Max view area (W x H) <b>23.49" x 13.21"</b> (596.74mm x 335.66mm)                  Optimum resolution <b>3840x2160</b>                  Max pixel rate 600MHz                  Aspect ratio 16:9                  Pixel pitch (mm) 0.1554 x 0.1554mm                  Dot/Pixel per Inch 163 dpi                  Brightness 350 nits or cd/m<sup>2</sup> (typical)                  Contrast ratio 1000:1 (typical)                  Pixel response time 6ms (typical)                  Color gamut 1.457 sRGB                  Viewing angle at 10:1 CR 178° horizontal, 178° vertical                  Stand Tilt, swivel, pivot, and height adjustable stand                  Bezel width <i>Sides: 0.08" (2mm)</i>                  Dimensions (HxWxD, including stand) 20.21" H x 24.08" W x 10.62" D;                  513.3mm H x 611.6mm W x 269.8mm D                  Power supply 50 watts typical,                  160 watts maximum (with USB),                  &lt;0.5 watts sleep/off;                  &lt;0.3 watts switch off                  integrated (no external brick-like power supply)                  Weight 15.32 lb; 6.95kg (including stand)                  Limited warranty <b>3 year</b>                  Available date August 2017</p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>• 27-inch IPS LED backlight monitor</li> <li>• Supports 3840x2160 resolution</li> <li>• 5-Ports USB hub, support USB 3.0</li> <li>• Support ThinkCentre Tiny</li> <li>• Supports optional soundbar</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>						
<p>VESA-compliant VESA DDC2B/CI                  Power management ENERGY STAR® 7.0                  Ergonomics ISO 9241-307                  Emission standards FCC Class B                  Environmental TCO Displays 7.0, TCO Certified Edge 2.0, WEEE, RoHS, <b>EPEAT™ Gold rating</b>, ULE Gold</p>	 <p><b>ThinkVision P27u Monitor</b></p>						
<p>Preset resolutions                  VGA: 640x480, 720x400, 720x480, 720x576                  SVGA: 800x600                  XGA: 1024x768                  SXGA: 1280x720, 1280x800, 1280x1024                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080, 1920x1200                  QHD: 2560x1440                  UHD: 3840x2160</p> <p>Presets / user settings                  Standard presets: 27;                  user settings: 20</p>							
<p>Viewing adjustments <i>Tilt: 30° back, -5° forward; lift: 4.33" (110mm); swivel: +/-45°</i>                  Rotating screen <b>Screen pivots 90 degrees from landscape to portrait</b>                  On screen display On screen display with digital user controls (8 languages)                  Control features Direct access (buttons on front) for power, menu, input source select and brightness                  USB hub USB Hub: one USB 3.1 Type-C port, four USB 3.0 Type-A downstream ports                  Multimedia Audio-out, optional sound bar supported                  Camera None                  Multiple input Support HDMI, DisplayPort, USB 3.1 Type-C                  Monitor connectors (1) 2*HDMI (2.0), digital, <b>HDCP-compliant</b>                  (2) DisplayPort (1.2), digital, <b>HDCP-compliant</b>                  (3) USB 3.1 Type-C                  Signal cables (1) detachable, DisplayPort to DisplayPort, digital, 1.8 meter                  Mounting features Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)                  Security Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</p>							
<p>Ship group                  Monitor, detachable stand, Quick start and safety poster, 1.8 meter USB Type-C to USB Type-C cable, 1.8 meter DP to DP cable, 1.8 meter HDMI to HDMI cable (NA only), 1.8 meter black power cord, 1.8 meter USB Type-C to USB Type-A cable</p>							
<p><b>Limited Warranty</b>                  See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td>73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td>45K1620</td> </tr> <tr> <td>Lenovo Security Cable Lock</td> <td>57Y4303</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a>                  See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Security Cable Lock	57Y4303
Kensington MicroSaver Cable Lock	73P2582						
Kensington Twin Head Cable Lock	45K1620						
Lenovo Security Cable Lock	57Y4303						



# ThinkVision P32u-10 MONITOR




## SPECIFICATIONS

DISPLAY		ENVIRONMENTAL	
Panel Size	32"	Temperature	
Panel Type	In-Plane Switching	Operating	0°C – 40°C
Backlight	WLED	Non-Operating	-20°C – 60°C
Resolution	3840 x 2160	Humidity	
Aspect Ratio	16:9	Operating	8% – 80%
Anti-Glare	Yes	Non-Operating	5% – 95%
Screen Dimensions (W x H) (mm)	708.48 (H) x 398.52 (V)	Altitude	
Maximum Brightness (Typical)	300 cd/m <sup>2</sup>	Operating	0 ft – 5000 ft
Viewing Angle (H/V at CR 10:1)	178°/178°	Non-Operating	0 ft – 40,000 ft
Contrast Ratio (Typical)	1000:1	Arsenic-Free Glass	Yes
Dynamic Contrast Ratio	3M:1	PVC-Free	Yes
Pixel Pitch (W x H) (mm)	0.1845 (H) x 0.1845 (V)	Mercury-Free	Yes
Dot/Pixel Per Inch (DP/PPI)	137	PCC % of Plastic Resins	85% with >25 g Plastic Parts
Color Gamut (1931)	99.5% AdobeRGB		
Response Time (Typical)	6 ms		
POWER CONSUMPTION		DIMENSIONS (W x D x H)	
Typical	70 W	Size Packed	
Maximum	200 W	(mm)	844 x 228 x 528
Sleep-Mode	≤0.5 W	(inches)	33.23" x 8.98" x 20.79"
Switch Off-Mode	≤0.5 W	Size Unpacked with Stand	
Power Supply	External	Lowest Position	
Power Voltage	90 VAC – 264 VAC	(mm)	726.7 x 350 x 497.8
Voltage Dynamic Frequency	47 Hz – 63 Hz	(inches)	28.61" x 13.78" x 19.6"
		Highest Position	
		(mm)	726.7 x 350 x 606.8
		(inches)	28.61" x 13.78" x 23.89"
		Size Unpacked without Stand	
		(Monitor Head Only)	
		(mm)	726.7 x 63.3 x 431.5
		(inches)	28.61" x 2.49" x 16.99"
		Distance from Table to Panel	
		Lowest Pixel at Bottom of Screen	
		(mm / inches)	90.9 / 3.58"
		Highest Pixel at Top of Screen	
		(mm / inches)	489.4 / 19.27"
		Stand Base Footprint Area	
		(mm / inches)	350 x 350 / 13.78" x 13.78"
		Weight	
		Packed	Starting at 29.32 lbs (13.3 kg)
		Unpacked	Starting at 22.05 lbs (10 kg)
		Monitor Head Only	Starting at 15.21 lbs (6.9 kg)
SIGNAL INPUT		COMPLIANCE	
Video Input Signals	2 x HDMI™ 2.0 + DisplayPort™ 1.2 + Thunderbolt™ 3.0-In + Thunderbolt™ 3.0-Out	EPEAT™	Gold
Video Cables Supplied	HDMI™, DisplayPort™, Thunderbolt™ 3.0	ENERGY STAR® Rating	7.0
Video Cable Length	2 m for Thunderbolt™, 1.8 m for HDMI™ and DisplayPort™	TCO	TCO 7.0 / TCO Edge 2.0
USB Hub	Yes (4 x Downstream, 1 x BC)	Windows Certification	Windows 7 / Windows 10
USB Cable Supplied	Yes (USB Type-A to Type-B)	China Energy Efficiency Standard	Tier 2
Audio-Out	Yes (3.5 mm)		
SIGNAL INTERFACE / PERFORMANCE		WARRANTY AND AVAILABILITY	
Horizontal Frequency	30 kHz – 160 kHz	Warranty	3 Years
Vertical Frequency	23 Hz – 80 Hz	Geography Availability	WW
Native Resolution	3840 x 2160		
Maximum Pixel Clock Speed / Bandwidth	HDMI™ : 600 MHz Display Port™: 5.4 Gbps Thunderbolt™: 10 Gbps		
Preset / User	28 / 20		
OSD Buttons	5 Buttons		
OSD Languages	English, French, German, Spanish, Italian, Japanese, Simplified Chinese, Russian		
MECHANICAL			
Tilt Angle (Front / Back)	-5° / 22°		
Swivel Angle (Left / Right)	45° / 45°		
Lift (mm)	110		
(CW / CCW)	90° / 90°		
VESA® Mount (mm)	100 x 100		
Kensington® Lock Slot	Yes		
Cable Management	Yes		
Bezel Color	Raven Black		
Bezel Width			
Top (mm / inches)	2 / 0.08"		
Bottom (mm / inches)	23.8 / 0.94"		
Sides (mm / inches)	2 / 0.08"		





<p>Name <b>Pro2820 Wide Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>60FCRAR6US / 60FCRAT6EU</b>                  Panel TFT-LCD, with wide viewing angle (WVA) technology, White LED backlight                  Viewable image size <b>28" (711mm) diagonal</b>                  Max view area (W x H) <b>24.44" x 13.44" (620.9mm x 341.3mm)</b>                  Optimum resolution <b>1920x1080</b>                  Max pixel rate <b>205MHz (VGA); 165MHz(DP/ HDMI); 149MHz (MHL)</b>                  Frequency <b>Supports 1920 x 10800 @ 60Hz</b>                  Aspect ratio <b>16:9</b>                  Pixel pitch (mm) <b>0.32 x 0.32mm</b>                  Dot/Pixel per Inch <b>79 dpi</b>                  Brightness <b>300 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>3000:1 (typical)</b>                  Pixel response time <b>6.5ms</b>                  Color gamut <b>72%</b>                  Viewing angle at 10:1 CR <b>178° horizontal, 178° vertical</b>                  Stand <b>Tilt, swivel, and height adjustable stand</b>                  Bezel width <b>Sides: 0.86" (21.85mm)</b>                  Dimensions (HxWxD, excluding stand) <b>17.45" H x 26.21" W x 2.30" D;</b>                  Dimensions (HxWxD, including stand) <b>443.3mm H x 665.9mm W x 58.2mm D</b>                  Power supply <b>60 watts typical, 90 watts typical (with USB), 65 watts maximum, 95 watts maximum (with USB), &lt;1.2 watts sleep/off; &lt;0.5 watts switch off integrated (no external brick-like power supply)</b>                  Weight <b>17.84 lb; 8.11kg (including stand)</b>                  Limited warranty<sup>4</sup> <b>3 year (includes backlight)</b>                  Available date <b>September 2014</b></p>	<p style="text-align: center;"><b>Features</b></p> <ul style="list-style-type: none"> <li>• 28-inch MVA (Multi-domain Vertical Alignment) panel LED backlit monitor</li> <li>• Supports 1920x1080 resolution</li> <li>• 5-Ports USB hub, support USB 3.0</li> <li>• Arsenic/Mercury free</li> <li>• Microsoft® Windows® 7</li> <li>• Windows 8/ Windows 8.1 certified</li> </ul>						
<p>VESA-compliant<sup>2</sup> <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® 6.0</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 6.0, TCO Certified Edge 1.2, RoHS, EPEAT™ Gold rating, ULE Gold</b></p> <p>Preset resolutions                  VGA: 640x480, 720x400                  SVGA: 800x600                  XGA: 1024x768, 1024x760                  SXGA: 1280x1024                  WXGA: 1280x720, 1280x800, 1366x768                  WXGA+: 1440x900, 1600x900                  WSXGA+: 1680x1050                  Full HD: 1920x1080                  Others: 1152x864</p> <p>Presets / user settings Standard presets: 17; user settings: 17</p>	 <p style="text-align: center;"><b>ThinkVision Pro2820 Monitor</b></p>						
<p>Viewing adjustments <i>Tilt: 25° back, -5° forward; lift: 4.3" (110mm); swivel: +/-45°</i>                  Rotating screen <b>Screen pivots 90 degrees from landscape to portrait</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (touch buttons on front) for automatic image setup, input switch, and brightness</b>                  USB hub <b>USB Hub: one USB 3.0 upstream port, four USB 3.0 downstream ports</b>                  Multimedia <b>None</b>                  Camera <b>None</b>                  Multiple input <b>Support VGA, HDMI, DisplayPort, MHL connections (Mobile High-definition Link)</b>                  Monitor connectors <b>(1) VGA 15-pin D-shell, analog (2) HDMI (1.4), digital, <b>HDCP-compliant</b> (3) DisplayPort (1.2), digital, <b>HDCP-compliant</b></b></p> <p>Signal cables <b>(1) detachable, VGA 15-pin D-shell at each end, analog, 1.8 meter (2) detachable, DisplayPort at each end, digital, 1.8 meter</b></p> <p>Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>							
<p>Ship group <b>Monitor, detachable stand, Quick start and safety poster, 1.8 meter DisplayPort cable, 1.8 meter VGA cable, 1.8 meter USB 3.0 cable, 1.8 meter black power cord</b></p>							
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> <tr> <td>Lenovo Security Cable Lock</td> <td style="text-align: right;">57Y4303</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Security Cable Lock	57Y4303
Kensington MicroSaver Cable Lock	73P2582						
Kensington Twin Head Cable Lock	45K1620						
Lenovo Security Cable Lock	57Y4303						





# ThinkVision® S27i-10

## DISPLAY

### Panel Size

27 inch

### Screen Dimensions (H x V) (mm)

597.89 (H) × 336.31 (V)

### Panel Type

In-Plane Switching

### Backlight

WLED

### Aspect Ratio

16:9

### Resolution

1920 x 1080

### Pixel Pitch (H x V) (mm)

0.3110 × 0.3110

### Viewing angle (H x V)

178° / 178°

### Response Time (gray to gray)

4 ms (extreme mode)

6 ms (normal mode)

### Contrast Ratio (typical)

1000:1

### Dynamic Contrast Ratio (typical)

3M:1

### Color Gamut NTSC (CIE 1931)

72%

### Color Support

16.7M

## CONNECTIVITY

### Video Input Signals

VGA + HDMI 1.4

### Video Cable Length

1.8 m

### Audio Out

Yes (3.5 mm)

## MULTI-MEDIA

### Optional Soundbar Support

Yes

## DIMENSIONS

### Size Packed (D x H x W) (mm/inch)

132 x 455 x 715 mm / 5.20 x 17.91 x 28.15 inch

### Size Unpacked w/stand (D x H x W) (mm/inch) (Lowest Position)

220.0 x 443.5 x 611.9 mm / 8.66 x 17.46 x 24.10 inch

### Size Unpacked w/stand (D x H x W) (mm/inch) (Highest Position)

220.0 x 443.5 x 611.9 mm / 8.66 x 17.46 x 24.10 inch

### Size Unpacked w/o stand (D x H x W) (mm/inch) (Head Only)

46.2 x 366.5 x 611.9 mm / 1.82 x 14.43 x 24.10 inch

### Weight Packed (kg/lbs.)

6.80kg / 14.99 lbs.

### Weight Unpacked (kg/lbs.)

4.76kg / 10.49 lbs.

### Weight (Monitor Head Only) (kg/lbs.)

4.22kg / 9.30 lbs.

## SPECIAL FEATURES

### Anti-Glare

Yes

### Thin Client Support (Tiny)

Yes

(by VESA mount PN:4XFON03161)

## MECHANICAL

### Tilt Angle (front/back)

-5° / 22°

### VESA Mount

Yes (100 mm)

### Kensington™ Lock Slot

Yes

### Cable Management

Yes

### Bezel Color

Raven Black

### Bezel Width (Side)

2.0 mm

### Bezel Width (top / bottom)

2.0 mm / 21.68 mm

## WHAT'S IN THE BOX

Monitor with stand

1 x HDMI Cable

1 x VGA Cable (AP, EMEA only)

1 x Power Cable

Quick setup guide

## CERTIFICATIONS

### ENERGY STAR Rating

7.0

### TCO

7.0

### EPEAT™

Gold

### ULE

Gold

### RoHS

Yes

### Windows Certification

Windows 7, Windows 10

### China Energy Efficiency Standard

Tier 2

### Ambient Operating Temperature

0°C to 40°C

### TÜV Eye Confort Certification

Yes



© 2018 Lenovo. All rights reserved. These products are available while supplies last. Prices shown are subject to change without notice. For any questions concerning price, please contact your Lenovo Account Executive. Lenovo is not responsible for photographic or typographic errors. Warranty: For a copy of applicable warranties, write to: Warranty Information, 500 Park Offices Drive, RTP, NC 27709, Attn: Dept. ZPYA/B600. Lenovo makes no representation or warranty regarding third-party products or services. Trademarks: Lenovo, the Lenovo logo, Rescue and Recovery, ThinkPad, ThinkCentre, ThinkStation, ThinkVantage, and ThinkVision are trademarks or registered trademarks of Lenovo. Microsoft, Windows, and Vista are registered trademarks of Microsoft Corporation. Intel, the Intel logo, Intel Inside, Intel Core, and Core Inside are trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product, and service names may be trademarks or service marks of others.

Specifications may vary depending upon region.

Lenovo™



# ThinkVision® T27i-10

## DISPLAY

### Panel Size

27 inch

### Screen Dimensions (H x V) (mm)

597.89 (H) × 336.31 (V)

### Panel Type

In-Plane Switching

### Backlight

WLED

### Aspect Ratio

16:9

### Resolution

1920 x 1080

### Pixel Pitch (H x V) (mm)

0.3110 × 0.3110

### Viewing angle (H x V)

178° / 178°

### Response Time (gray to gray)

4 ms (extreme mode)

6 ms (normal mode)

### Contrast Ratio (typical)

1000:1

### Dynamic Contrast Ratio (typical)

3M:1

### Color Gamut NTSC (CIE 1931)

72%

### Color Support

16.7M

## CONNECTIVITY

### Video Input Signals

VGA + HDMI 1.4 + DP 1.2

## USB Hub

Yes

1 x USB 3.0 (Upstream)

4 x USB 3.0 (Downstream, incl. 1BC)

### Cable Length

1.8 m

### Audio Out

Yes (3.5 mm)

### Power Consumption

22W (Typical) / 58W (max) at On mode;

<0.5W at Sleep mode; <0.3W at Switch off mode

## MULTI-MEDIA

### Optional Soundbar Support

Yes

## DIMENSIONS

### Size Packed (D x H x W) (mm/inch)

187 x 455 x 715 mm / 7.362 x 17.913 x 28.15 inch

### Size Unpacked w/stand (D x H x W) (mm/inch) (Lowest Position)

269.8 x 403.3 x 611.9 mm / 10.62 x 15.88 x 24.09 inch

### Size Unpacked w/stand (D x H x W) (mm/inch) (Highest Position)

269.8 x 513.3 x 611.9 mm / 10.62 x 20.21 x 24.09 inch

### Size Unpacked w/o stand (D x H x W) (mm/inch) (Head Only)

49.9 x 366.5 x 611.9 mm / 1.96 x 14.43 x 24.09 inch

### Weight Packed (kg/lbs.)

9.32kg / 20.55 lbs.

### Weight Unpacked (kg/lbs.)

6.55kg / 14.44 lbs.

### Weight (Monitor Head Only) (kg/lbs.)

4.60kg / 10.14 lbs.

## SPECIAL FEATURES

### Anti-Glare

Yes

### Thin Client Support (Tiny)

Yes

(by Tiny Clamp Bracket Kit+VESA

mount PN:4XFON82412+

PN:4XFON03161)

## MECHANICAL

### Tilt Angle (front/back)

-5°/30°

### Swivel Angle (left/right)

-45°/+45°

### Lift (Max range)

110 mm

### Pivot

-90°/90°

### VESA Mount

Yes (100 mm)

### Kensington™ Lock Slot

Yes

### Cable Management

Yes

### Bezel Color

Raven Black

### Bezel Width (Side)

2.0 mm

## WHAT'S IN THE BOX

Monitor with stand

1 x Power cable

1 x DP-DP cable

1 x HDMI cable (NA only)

1 x USB 3.0 cable

Quick setup guide

## CERTIFICATIONS

### ENERGY STAR Rating

7.0

### CCC

Yes

### TCO

7.0

### EPEAT™

Gold

### ULE

Gold

### Windows Certification

Windows 7, Windows 10

### China Energy Efficiency Standard

Tier 2

### Ambient Operating Temperature

0°C to 40°C

### Eye Comfort Certification

Yes




Lenovo™

© 2018 Lenovo. All rights reserved. These products are available while supplies last. Prices shown are subject to change without notice. For any questions concerning price, please contact your Lenovo Account Executive. Lenovo is not responsible for photographic or typographic errors. Warranty: For a copy of applicable warranties, write to: Warranty Information, 500 Park Offices Drive, RTP, NC 27709, Attn: Dept. ZPYA/B600. Lenovo makes no representation or warranty regarding third-party products or services. Trademarks: Lenovo, the Lenovo logo, Rescue and Recovery, ThinkPad, ThinkCentre, ThinkStation, ThinkVantage, and ThinkVision are trademarks or registered trademarks of Lenovo. Microsoft, Windows, and Vista are registered trademarks of Microsoft Corporation. Intel, the Intel logo, Intel Inside, Intel Core, and Core Inside are trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product, and service names may be trademarks or service marks of others.

Specifications may vary depending upon region.



<p>Name <b>X1 Wide Flat Panel Monitor</b>                  Case color <b>Black</b>                  Type-model <b>60E2GAR1US / 60E2GAT1US / 60E2GAT1EU</b>                  Panel TFT-LCD, IPS (In-Plane Switching), White LED backlight                  Viewable image size <b>27" (684.7mm) diagonal</b>                  Max view area (W x H) <b>23.49" x 13.21" (596.7mm x 335.7mm)</b>                  Optimum resolution <b>3840x2160</b>                  Max pixel rate <b>600MHz</b>                  Aspect ratio <b>16:9</b>                  Pixel pitch (mm) <b>0.16 x 0.16mm</b>                  Dot/Pixel per Inch <b>163 dpi</b>                  Brightness <b>300 nits or cd/m<sup>2</sup> (typical)</b>                  Contrast ratio <b>1300:1 (typical)</b>                  Pixel response time <b>6ms</b>                  Color gamut <b>99%</b>                  Viewing angle at 10:1 CR <b>178° horizontal, 178° vertical</b>                  Stand <b>Tilt stand</b>                  Bezel width <b>Sides: 0.088" (2.23mm)</b>                  Dimensions (HxWxD, including stand) <b>19.35" H x 24.19" W x 10.63" D; 491.4mm H x 614.5mm W x 270.0mm D</b>                  Power supply <b>40 watts typical, 130 watts maximum (with USB), &lt;0.5 watts sleep/off; &lt;0.5 watts switch off</b>                  Weight <b>14.11 lb; 6.40kg (including stand)</b>                  Limited warranty<sup>4</sup> <b>3 year</b>                  Available date <b>March 2016</b></p>	<p><b>Features</b></p> <ul style="list-style-type: none"> <li>• 27-inch IPS LED backlight monitor with speaker</li> <li>• Supports 3840x2160 resolution</li> <li>• 5-Ports USB hub, support USB Type-C</li> <li>• 3watts x 2 stereo speakers</li> <li>• Microsoft® Windows® 7 certified</li> <li>• Microsoft Windows 10 certified</li> </ul>						
<p>VESA-compliant<sup>2</sup> <b>VESA DDC2B/CI</b>                  Power management <b>ENERGY STAR® 7.0</b>                  Ergonomics <b>ISO 9241-307</b>                  Emission standards <b>FCC Class B</b>                  Environmental <b>TCO Displays 7.0, RoHS, EPEAT™ Silver rating, ULE Gold</b></p>	 <p style="text-align: center;"><b>ThinkVision X1 Monitor</b></p>						
<p>Preset resolutions <b>VGA: 640x350, 640x480, 720x400</b>  <b>SVGA: 800x600</b>  <b>XGA: 1024x768, 1152x864</b>  <b>SXGA: 1280x1024</b>  <b>WXGA: 1280x720, 1280x768, 1280x800, 1360x768</b>  <b>WXGA+: 1440x900, 1600x900</b>  <b>WSXGA+: 1680x1050</b>  <b>Full HD: 1920x1080, 1920x1200</b>  <b>UHD: 3840x2160</b></p> <p>Presets / user settings <b>Standard presets: 20; user settings: 20</b></p>							
<p>Viewing adjustments <b>Tilt: 22° back, -5° forward;</b>                  Rotating screen <b>None</b>                  On screen display <b>On screen display with digital user controls (8 languages)</b>                  Control features <b>Direct access (touch buttons on front) for menu, mute, volume up/down, and brightness</b>                  USB hub <b>USB Hub: one USB 3.1 Type-C upstream port, four USB 3.0 Type-A downstream ports</b>                  Multimedia <b>Integrated stereo speakers (3 watts x 2), built-in microphone</b>                  Camera <b>Full HD camera with LED light</b>                  Multiple input <b>Support HDMI, DisplayPort</b>                  Monitor connectors <b>Support HDMI, DisplayPort</b>                  Signal cables <b>(1) detachable, HDMI at each end, digital, 1.8 meter</b>  <b>(2) detachable, DisplayPort at each end, digital, 1.8 meter</b>                  Mounting features <b>Wall or desk mounting using the Extend Arm or third-party accessories meeting the VESA FPMPI® (100mm mount)</b>                  Security <b>Security keyhole for attachment of optional cable lock (Kensington® lock-compatible)</b></p>							
<p>Ship group <b>Monitor, detachable stand, Quick start and safety poster, 1.8 meter DisplayPort cable, 1.8 meter HDMI cable, 1.8 meter USB Type-C cable, 1.8 meter USB Type-C to Type-A cable, 1.8 meter black power cord, mini DP to DP adapter, power adapter (135W)</b></p>							
<p style="text-align: center;"><b>Limited Warranty</b></p> <p>See details at <a href="http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281">http://support.lenovo.com/en_US/guides-and-manuals/detail.page?DocID=UM008281</a></p>	<p style="text-align: center;"><b>Accessories</b></p> <table border="0"> <tr> <td>Kensington MicroSaver Cable Lock</td> <td style="text-align: right;">73P2582</td> </tr> <tr> <td>Kensington Twin Head Cable Lock</td> <td style="text-align: right;">45K1620</td> </tr> <tr> <td>Lenovo Security Cable Lock</td> <td style="text-align: right;">57Y4303</td> </tr> </table> <p>See details at <a href="http://www.lenovo.com/support/monitoraccessories">www.lenovo.com/support/monitoraccessories</a></p> <p>See all monitors at <a href="http://www.lenovo.com/thinkvision">www.lenovo.com/thinkvision</a></p>	Kensington MicroSaver Cable Lock	73P2582	Kensington Twin Head Cable Lock	45K1620	Lenovo Security Cable Lock	57Y4303
Kensington MicroSaver Cable Lock	73P2582						
Kensington Twin Head Cable Lock	45K1620						
Lenovo Security Cable Lock	57Y4303						

See footnotes for important warranty information



# ThinkVision X1 (2nd GEN) MONITOR

EXTREME STYLISH, EXTREME FOREFRONT.



THE MILESTONE OF X-SERIES, 27" FULL-SCREEN, 4K, THUNDERBOLT™ 3 MONITOR.

Pushing the limit of screen share ratio with innovative technology, the 27" Lenovo™ ThinkVision® X1 (2nd GEN) display brings full-screen and ultra-slim appearance in elegant design. With 4K resolution and >99% sRGB color gamut, you will be assured of excellent watching experience and Thunderbolt™ 3 interface will bring the best user experience. "Motor" camera is first used on monitor, which will move up and down automatically and with it you will own standard VoIP system.

## WHY YOU SHOULD BUY THE LENOVO THINKVISION X1 (2nd GEN) MONITOR



### Full-screen appearance

With world's slimmest (4.7 mm) 27" 4K TBT monitor you will experience full-screen 4-side Near-Edgeless display with the screen ratio of approximately 93%. The monitor also comes with a metal stand and a base.



### Brilliant performance

The 4K UHD IPS screen displays 3840 x 2160 resolution at 60 Hz, 99% sRGB color gamut, 10-bit depth, with 1.07 billion color support assures you stunning visuals and superb color experience.



### Convenient user experience

Total versatility with Thunderbolt™ 3 interface supporting 4K + USB 3.0 & 45W PD + motor-camera with dual-array microphone. A Think RedDot tracking button is integrated in the back cover.

## THE LENOVO THINKVISION X1 (2nd GEN) MONITOR IS BEST SUITED FOR

1

The Executives and CXO of company.

2

SOHO and Gold Collars with high income.

3

Trendsetters who pursue an extreme and forefront monitor.





# ThinkVision X1 (2nd GEN) MONITOR



## SPECIFICATIONS

DISPLAY		ENVIRONMENTAL	
Panel Size	27"	Temperature Operating	0°C - 45°C
Panel Type	IPS	Temperature Non-Operating	-20°C - 60°C
Backlight	WLED	Humidity Operating	8% - 80%
Resolution	3840 (H) x 2160 (V)	Humidity Non-Operating	5% - 95%
Aspect Ratio	16:9	Altitude Operating	16,000 ft
Anti-Glare	Yes	Altitude Non-Operating	40,000 ft
Screen Dimensions (W x H) (mm)	596.7 (H) x 335.7 (V)	Arsenic-Free Glass	Yes
Maximum Brightness (Typical)	350 cd/m <sup>2</sup>	PVC-Free	Yes (W/O cable)
Viewing Angle (H/V at CR 10:1)	178°/178°	Mercury-Free	Yes
Contrast Ratio (Typical)	1000:1	PCC % of Plastic Resins	25%
Dynamic Contrast Ratio	3M:1		
Pixel Pitch (W x H) (mm)	0.1554 x 0.1554	DIMENSIONS (W x D x H)	
Dot/Pixel Per Inch (DP/PPI)	163	Size Packed (mm)	718 x 140 x 470
Color Gamut (CIE 1931)	99% sRGB	Size Packed (inches)	28.27" x 5.51" x 18.5"
Response Time (Extreme/Typical/Off)	4/6/14 ms (G-to-G)	Size Unpacked with Stand (mm)	609.74 x 234.81 x 474.76
		Size Unpacked with Stand (inches)	24" x 9.24" x 18.69"
POWER CONSUMPTION		Size Unpacked without Stand (Monitor Head Only) (mm)	609.74 x 32.7 x 351.71
Typical	65 W	Size Unpacked without Stand (Monitor Head Only) (inches)	24" x 1.29" x 13.85"
Maximum	135 W	Distance from Table to Panel Lowest Pixel at Bottom of Screen (mm / inches)	134 / 5.276"
Sleep-Mode	0.5 W	Distance from Table to Panel Highest Pixel at Top of Screen (mm / inches)	450 / 17.717"
Switch Off-Mode	0.5 W	Stand Base Footprint Area (mm)	234.81 x 234.81
Power Supply	External	Stand Base Footprint Area (inches)	9.24" x 9.24"
Power Voltage	100 VAC - 240 VAC	Weight Packed	Starting at 18.45 lbs (8.37 kg)
Voltage Dynamic Frequency	50 Hz - 60 Hz	Weight Unpacked	Starting at 12.21 lbs (5.54 kg)
		Weight Monitor Head Only	Starting at 9.46 lbs (4.29 kg)
SIGNAL INPUT			
Video Input Signals	DisplayPort™ 1.2 + HDMI™ 2.0 + Thunderbolt™ 3	COMPLIANCE	
Video Cables Supplied	HDMI™ + Thunderbolt™ 3	EPEAT™	Silver
Video Cable Length	1.8 m	ENERGY STAR® Rating	7.0
USB Hub	Yes (4 x USB 3.0)	ULE	Silver
USB Cable Supplied	N/A	TCO®	7.0
Audio-Jack	Yes	RoHS	Yes
		Windows Certification	Windows 10
SIGNAL INTERFACE / PERFORMANCE		China Energy Label	Grade 2
Horizontal Frequency	30 kHz - 136 kHz	WARRANTY AND AVAILABILITY	
Vertical Frequency	30 Hz - 60 Hz	Warranty	3 Years
Native Resolution	3840 x 2160	Geography Availability	WW
Maximum Pixel Clock Speed/Bandwidth	20 Gbps		
Default Color Temperature	6500K		
Preset Modes	24		
OSD Buttons	2 Buttons + Tracking Point		
OSD Languages	English, French, Italian, German, Spanish, Japanese, Chinese, Russian		
MECHANICAL			
Tilt Angle (Front / Back)	-5° / 30°		
Swivel Angle (Left / Right)	N/A		
Lift (mm)	N/A		
Pivot	N/A		
VESA® Mount (mm)	N/A		
Kensington® Lock Slot	Yes		
Cable Management	Yes		
Bezel Color	N/A		
Bezel Width			
Top (mm / inches)	1.2 / 0.05"		
Bottom (mm / inches)	1.2 / 0.05"		
Sides (mm / inches)	1.2 / 0.05"		



WWW.LENOVO.COM

Lenovo reserves the right to alter product offerings and specifications at any time, without notice. Lenovo makes every effort to ensure accuracy of all information but is not liable or responsible for any editorial, photographic or typographic errors. All images are for illustration purposes only. For full Lenovo product, service and warranty specifications visit [www.lenovo.com](http://www.lenovo.com). Lenovo makes no representations or warranties regarding third party products or services. **Trademarks:** The following are trademarks or registered trademarks of Lenovo: Lenovo, the Lenovo logo, Rescue and Recovery, ThinkPad, ThinkCentre, ThinkStation, ThinkServer, ThinkVantage and ThinkVision. Microsoft, Windows and Vista are registered trademarks of Microsoft Corporation. Ultrabook, Celeron, Celeron Inside, Core Inside, Intel, Intel Logo, Intel Atom, Intel Atom Inside, Intel Core, Intel Inside, Intel Inside Logo, Intel vPro, Itanium, Itanium Inside, Pentium, Pentium Inside, vPro Inside, Xeon, Xeon Phi, and Xeon Inside are trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product and service names may be trademarks or service marks of others. Battery life (and recharge times) will vary based on many factors including system settings and usage. Visit [www.lenovo.com/lenovo/us/en/safecom/](http://www.lenovo.com/lenovo/us/en/safecom/) periodically for the latest information on safe and effective computing. ©2018 Lenovo. All rights reserved.

This publication was developed for products and services offered in the United States and E.M.E.A countries. Lenovo may not offer the products, services or features discussed in this document in other countries. Lenovo may withdraw an offering at any time. Information is subject to change without notice. Consult your local representative for information on offerings available in your area.

Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors.

LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

**Availability:** All offers subject to availability. Lenovo reserves the right to alter product offerings and specifications at any time, without notice. Lenovo is not responsible for photographic or typographic errors.

**General:** Review key information provided by Microsoft that may apply to your system purchase, including details on Windows 10, Windows 8, Windows 7, and potential upgrades/downgrades. Lenovo makes no representation or warranty regarding third-party products or services.

**Trademarks:** Lenovo, ThinkPad, ThinkCentre, ThinkStation and the Lenovo logo are trademarks of Lenovo. Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation. Ultrabook, Celeron, Celeron Inside, Core Inside, Intel, Intel Logo, Intel Atom, Intel Atom Inside, Intel Core, Intel Inside, Intel Inside Logo, Intel vPro, Itanium, Itanium Inside, Pentium, Pentium Inside, vPro Inside, Xeon, Xeon Phi, and Xeon Inside are trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product or service names may be trademarks or service marks of others.

**Warranty:** For a copy of applicable warranties, write to: Lenovo Warranty Information, 1009 Think Place, Morrisville, NC, 27560. Lenovo makes no representation or warranty regarding third party products or services. The Lenovo Limited Warranty applies only to Lenovo hardware products purchased for your own use, and does not transfer upon resale.

**Limited warranty:** Support unrelated to a warranty issue may be subject to additional charges.

#### **Lenovo Services:**

**Carry-in or Mail-in Service:** Parts and labor repair coverage where the customer is responsible for shipping (including packaging) or delivery to authorized warranty provider or repair center.

**Depot or Courier Service:** Parts and labor repair coverage where shipping (including packaging) or delivery to the repair center is paid for by Lenovo.

**Expedited Depot:** Parts and labor coverage with expedited turnaround. Shipping (including packaging) or delivery to the repair center is paid for by Lenovo.

**Onsite / In-home Service:** Parts and labor repair coverage where labor is provided onsite at your place of business.

If Lenovo determines your product problem is covered by the product warranty and cannot be resolved over the telephone, a technician will be dispatched to arrive onsite, typically the next day.

**International Warranty Service (IWS):** PC repair coverage for customers who require a critical warranty repair while travelling internationally. Visit [www.lenovo.com/internationalwarranty](http://www.lenovo.com/internationalwarranty) for details. Visit [www.lenovo.com/warranty](http://www.lenovo.com/warranty) for Lenovo Warranty Services terms and conditions for complete details and restrictions.

**Included software:** may differ from its retail version (if available), and may not include user manuals or all program functionality. Software license agreements may apply.

**Battery life:** Battery life (and recharge times) will vary based on many factors including screen brightness, applications, features, power management, battery conditioning, and other customer preferences.

Visit <http://psref.lenovo.com/> for the latest version of Product Specifications Reference.

© Lenovo, 2018. All rights reserved.  
Lenovo 1009 Think Place Morrisville, NC 27560 U.S.A.