



# P14


# UHF RFID ANTENNA

The Vulcan RFID™ p14 UHF RFID Antenna is a compact RFID UHF antenna with circular polarization. This antenna has a radiation pattern characterized by a 30° beamwidth in the endfire direction and a 90° beamwidth in the broadside direction.

This antenna is IP 68 rated, meaning it is dust resistant even in high concentrations, making it perfect for indoor use. Additionally, this antenna can withstand water immersion up to 1 m (3 ft) up to 30 minutes.

The Vulcan RFID™ p14 UHF RFID Antenna's radiation pattern makes it ideal for many RFID applications such as:

- Loss Prevention Systems
- Portals
- Tunnels
- Tight Corridors
- Doors

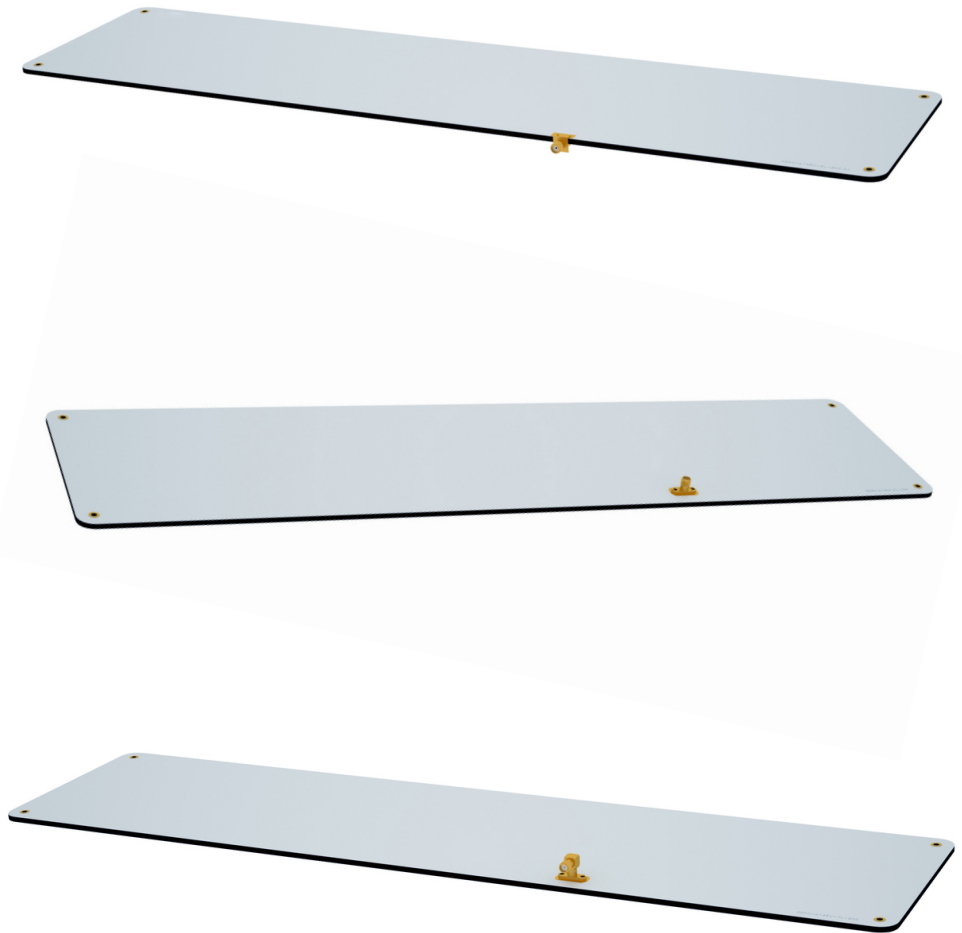




## Specifications

ELECTRICAL	Operating Frequency:	FCC (902-928 MHz), ETSI (865-868 MHz)
	Polarization:	Right Hand Circular Polarization
	Gain:	8.1 dBi (US), 8.0 dBi (EU)
	Max Read Distance:	Up to 4.5 m (14.8 ft)
	Elevation Beamwidth:	30°
	Azimuth Beamwidth:	90°
	Input Impedance:	50 Ω
	VSWR:	< 1.4:1
	Front-to-Back Ratio:	< -18 dB
	Axial Ratio:	US: At boresight 0.6 dB, at 3 dB beamwidth 0.5 dB (typical), 3.6 dB (max)
		EU: At boresight 0.2 dB, at 3 dB beamwidth 0.6 dB (typical), 3.4 dB (max)
	Radiation Pattern:	Fan beam
Antenna Technology:	Patch	
Sidelobe:	< -15 dB	
MECHANICAL	Connector Type:	SMA Female (connects to SMA Male)
	Mounting:	Integrated Mounting Holes
	Cable:	Not Included
	Dimensions - Excludes Connector:	557 x 137 x 3.3 mm (21.9 x 5.4 x 0.13 in)
	Dimensions - Edge Mount Connector:	557 x 137 x 8 mm (21.9 x 5.4 x 0.3 in)
	Dimensions - Flange Connector:	557 x 137 x 15 mm (21.9 x 5.4 x 0.6 in)
	Weight:	0.46 kg (1.01 lbs)
ENVIRONMENT	Operating Temperature:	-20 °C to +80 °C (-4 °F to +176 °F)
	IP Rating:	IP 68




# Diagrams




With flange straight or flange right angle connector

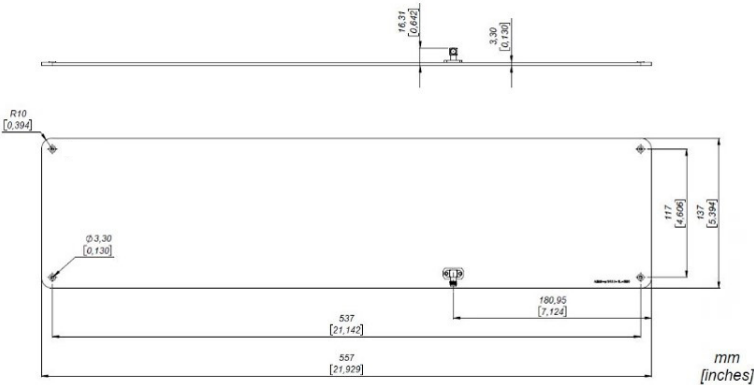

With edge mount connector

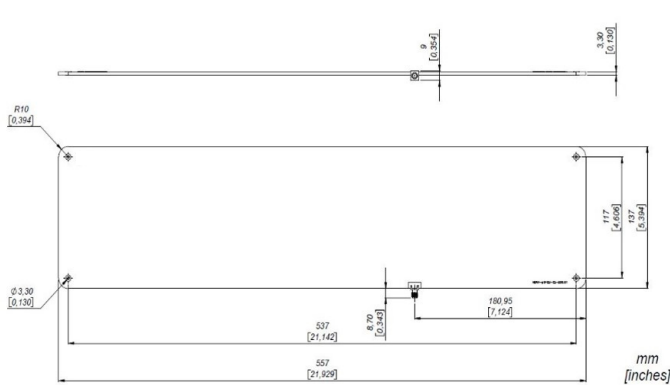

## Radiation Pattern

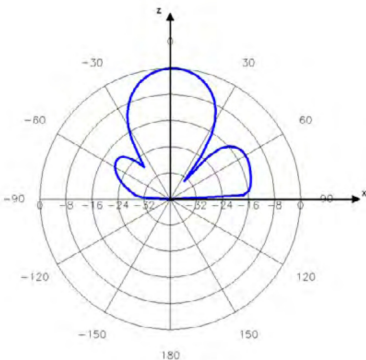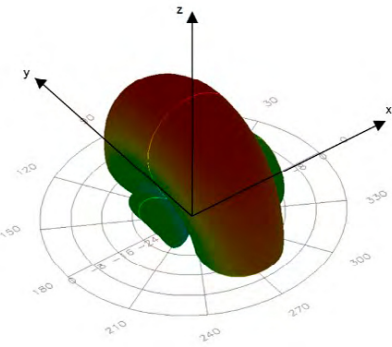



## Product Variations

Product Code	Connector Type	FCC (902-928 MHz)	ETSI (865-868 MHz)
	Flange Straight	VUL-ADAN-P14US-FLSMA-200	VUL-ADAN-P14EU-FLSMA-200
	Flange Right Angle	VUL-ADAN-P14US-FRSMA-200	VUL-ADAN-P14EU-FRSMA-200
	Edge Mount	VUL-ADAN-P14US-ELSMA-200	VUL-ADAN-P14EU-ELSMA-200

## Accessories & Compatible Products

Vulcan RFID™



VUL-MAPPER

Vulcan RFID™



VUL-ADHD-ADANP14-100

Vulcan RFID™



195-RP-TNC-M-SMA-M-12  
240-RP-TNC-M-SMA-M-25  
400-RP-TNC-M-SMA-M-35

\*For custom cable connectors or lengths please [contact us](#).

## About Vulcan RFID™ Products

Vulcan RFID™ offers a broad range of innovative RFID antennas, RFID inlays, custom RFID tags, and accessories suited for a wide variety of industries and applications. With an extensive portfolio, Vulcan RFID™ products are manufactured to withstand environments ranging from mild to extreme. All Vulcan RFID™ products are thoroughly tested and built on a name you can trust. Vulcan RFID™ products enable you to reach and sustain high levels of performance with your UHF or NFC frequency application.



Inside USA  
**1 (888) 238-1155**

Outside USA  
**1 (205) 383-2244**

info@atlasRFIDstore.com  
www.atlasRFIDstore.com