

g

PowerMark Gold ^o Commercial Accessories

- PowerMark Gold Riser Panel
- Auxiliary Gutter
- Three Pole Subfeed Lugs

PowerMark Gold Riser Panel

- Single phase, 125A only, 12 and 20 circuits
- Offset interior allowing 4 5/8 inches of gutter space to allow use of tap kits
- Interior mounting allows either gutter location... left or right side
- Accepts 22kAIC rated main breaker, series rated 22/10
- Sturdy copper bus and galvanized box increase durability and reliability

Auxiliary Gutter


- 65kAIC rated
- Galvanized enclosure
- Meets UL 50, UL 67 and UL 870

One-piece interior removes and reinstalls easily

Sturdy copper bus is tinplated for corrosion resistance

Galvanized box and breaker mounting rails increase durability and reliability

Accepts GE Q-Line branch circuit breakers, including GE's exclusive 1/2" THQP's

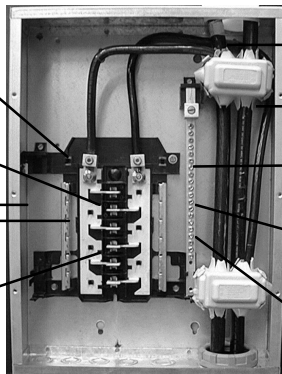

4 5/8" gutter provides additional wire space to allow use of tap kits


Panel rated 22kAIC standard

Combination slotted/Robertson screws speed wiring

Extruded neutrals are easier to wire, reducing installation time and cost

All neutral holes rated for 14 - 4 wire

Front packed in inner carton for added protection during shipment and on the job site

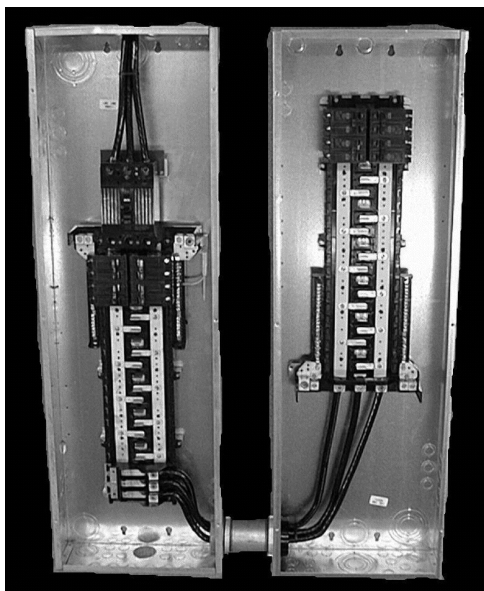


Three Pole Subfeed Lugs

- 225A, 22 kAIC rated
- Fits in PowerMark Plus™ Load Centers
- Used when more than 42 circuits are required


PowerMark Gold [®] Commercial Accessories Selection Guide

Product	Description	Catalog Number	Equipment Ground Kit
125A Riser Panel	20 Circuit	TLM2012CCURP	TGK32
125A Riser Panel	12 Circuit	TLM1212CCURP	TGK12
225A Feed Through Lug Kit	3-Pole, 22kAIC	THLK3225	-----
24" Auxiliary Gutter	14" x 24.68" x 3.75"	TMAGB24	-----
28" Auxiliary Gutter	14" x 26.44" x 3.75"	TMAGB28	-----
33" Auxiliary Gutter	14" x 33.19" x 3.75"	TMAGB33	-----
39" Auxiliary Gutter	14" x 39.19" x 3.75"	TMAGB39	-----
43" Auxiliary Gutter	14" x 43.44" x 3.75"	TMAGB43	-----
43" Auxiliary Gutter (deep)	14" x 43.44" x 4.63"	TMAGB43D	-----
250 MCM Tap Kit	#6 - 250 MCM (line/load lug) #6 - 250 MCM (tap lug)	TMGT250	-----
500 MCM Tap Kit	350 - 500 MCM (line/load lug) #2 - 500 MCM (tap lug)	TMGT500	-----
750 MCM Tap Kit	500 - 750 MCM (line/load lug) #2 - 500 MCM (tap lug)	TMGT750	-----

Wiring Diagrams

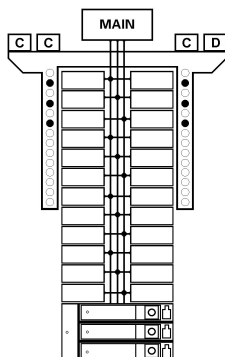


PowerMark Plus™ Load Center with
Three-Pole Subfeed Lugs



TLM2012

Breaker Symbol	Breaker Fill	
	1" THQL	1/2" THQL
	1	-
	1	2

Terminal Symbol	Wire Range	
	Cu	Al
	14-4	12-4
A	6-2/0	6-2/0



TLM1212

PowerMark Gold Riser Panel

Accessories & Options

- Door and handle
- Equipment ground kits (see Cat. #'s TGK32, TGK12)
- Front filler plates
- Handle locks
- Handle ties
- Hardware kits (see Cat. # THDWRKIT)
- Universal raintight hubs

References

DEM-070 Riser Panel and Auxiliary Gutter Submittal Drawings

For more information, contact your local GE ED&C sales office or visit us on the web at www.ge.com/edc/components

Install Confidence. Install GE

g

GE Electrical Distribution & Control