

Server Memory Compatibility Test Certificate


Test System: **Supernmicro X10DRi** Test Result: **Pass**

Leveraged System(s): X10DRi-T, X10DAi, X10DAC, X10DRH-CT, X10DRW-i / X10DRW-iT, X10DDW-i / X10DDW-iN, X10DRG-H / X10DRG-HT, X10DRT-P / X10DRT-PT, X10DRT-PIBQ / X10DRT-PIBF, X10DRFR / X10DRFR-T / X10DRH-C, X10DRH-CLN4, X10DRH-ILN4, X10DRT-PS, X10DRX, X10DRU-X, X10DRU-XLL, X10DRFF-CG, X10DRFF-CTG, X10DRFF-iG, X10DRFF-iTG, X10DGQ, X10DRG-Q

Module Specifications										Rev. 1/13/2015
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank	
Kingston	KSM26RD8/16MEI	RDIMM	1.20V	16GB	2Gx72	2666	19	E2	DR	
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition			
Micron	MT40A1G8SA-075:E	8Gb			1024Mx8bit 1752		IDT	B1		(2048x8)*72

System Configuration	
SETUP	System Information
AVL S/N	SV2271
System S/N	0M148004057
Board Rev. (PBA)	1.01
CPU Type	Intel E5-2650 v4 (BDW) x2
Chipset	Intel C612
BIOS / Date	3.2 /11/22/2019
BMC / ME	1.94/3.0.6.267
FRU/SDR	1.02
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7 /Memtest86+

Testing Summary				
Test Items	Test Description		Test Results	
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS		Done	
2. SPD Check	DIMM SPD content check for JEDEC compliance		Pass	
3. Reset Cycle	Max Load	200 Loops	Pass	
4. Memoy Stress - Memtest86+		Room	2 Loops	Pass
5. Memory Stress- Stressapptest		40°C	24Hrs	Pass
Note:				

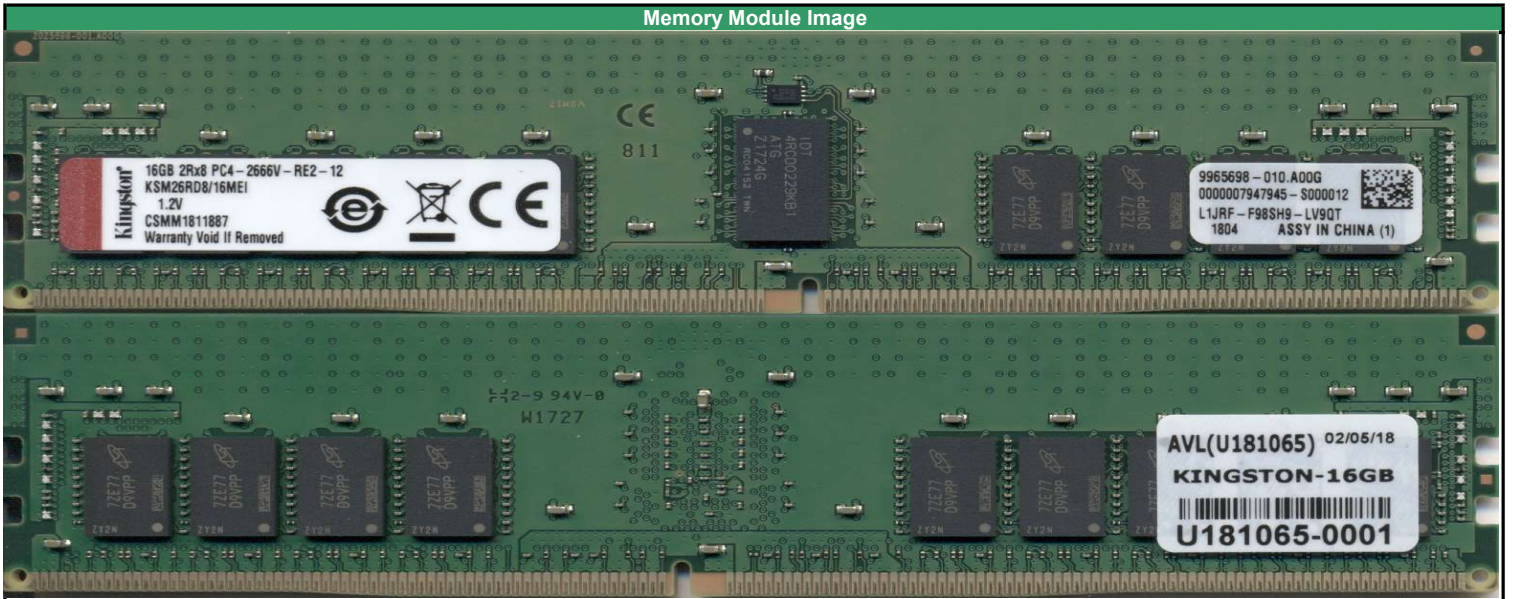

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	2/6/2020	AVL A#	U181065	AVL W/O	WF5118
Comments:							