

**Server Memory Compatibility Test Certificate**

Test System: **Supermicro X11DPi-N (System SYS-6029P-TR)** Test Result: **Pass**

Leveraged Board(s) / System(s): X11DPi-N, X11DPi-NT, X11DAi-N, X11DPH-T, X11DPH-I, X11DPH-TQ, X11DPG-QT, X11DPT-PS, X11DPX-T, B11DRT-P, SYS-7039A-I, SYS-7049A-T, SSG-2029P-E1CR24H, SSG-2029P-E1CR24L, SSG-6029P-E1CR12T, SSG-6029P-E1CR16T, SSG-6039P-E1CR16H, SSG-6039P-E1CR16L, SYS-2029P-C1RT, SYS-2029P-C1R, SYS-6029P-TRT, SYS-6029P-TR, SYS-7049P-TRT, SYS-7049P-TR, SSG-2029P-ACR24H, SSG-2029P-ACR24L, SSG-6049P-E1CR36H, SYS-7049GP-TRT, SYS-2029TP-HTR, SYS-2029TP-HC0R, SYS-2029TP-HC1R, SYS-6029TP-HTR, SYS-6029TP-HC1R, SYS-6029TP-HC0R, SYS-2029P-TXRT, SYS-6039P-TXRT, SBI-4129P-C2N, SBI-4129P-T3N

**Module Specifications**

Rev. 05/16/19

DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM29RD8/32MER	RDIMM	1.2V	32GB	4096Mx72	2933	21-21-21	E4	2
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code		Register Vendor / Rev.		DIMM Composition			
Micron Technology Inc.	MT40A2G8JC-062E:E	16Gb	2048Mx8	2018	Rambus	B0	(2048Mx8)*72		

**System Configuration**


SETUP	System Information
AVL S/N	H180200-001
System S/N	n/a
Board Rev. (PBA)	n/a
CPU Type	Intel Xeon Gold 6252(PLCX) x2
Chipset	C621
BIOS / Date	3.3 /2/21/20
BMC / ME	1.45
FRU/SDR	n/a
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7/Memtest86+

**Testing Summary**

Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Reset Cycle	Room	200 Loops
4. Memory Stress - Memtest86+		2 Loops
5. Memory Stress-Stressapptest	40°C	24Hrs

Note:

**Memory Module Image**

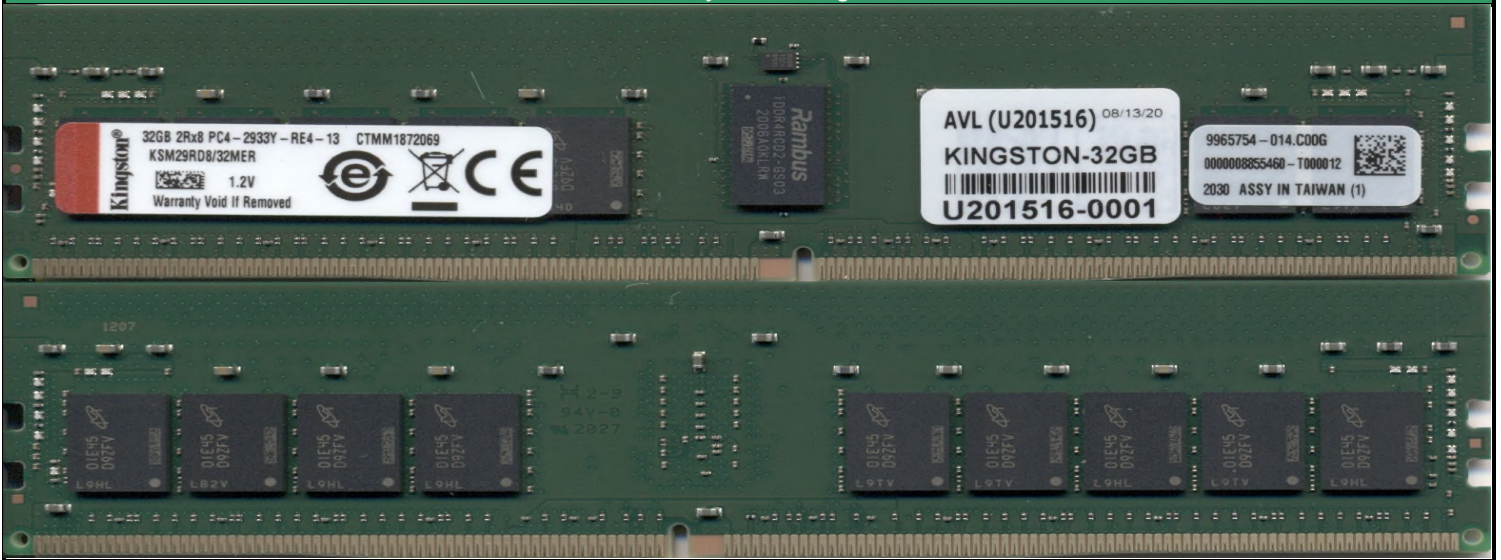

**AVL USE ONLY:**

Completed by:	Van Nguyen	Completion Date:	8/25/2020	AVL A#	U201516	AVL W/O	WF7214
---------------	------------	------------------	-----------	--------	---------	---------	--------

Comments: