


### Overview

#### HPE ProLiant BL460c Gen9 Server Blade

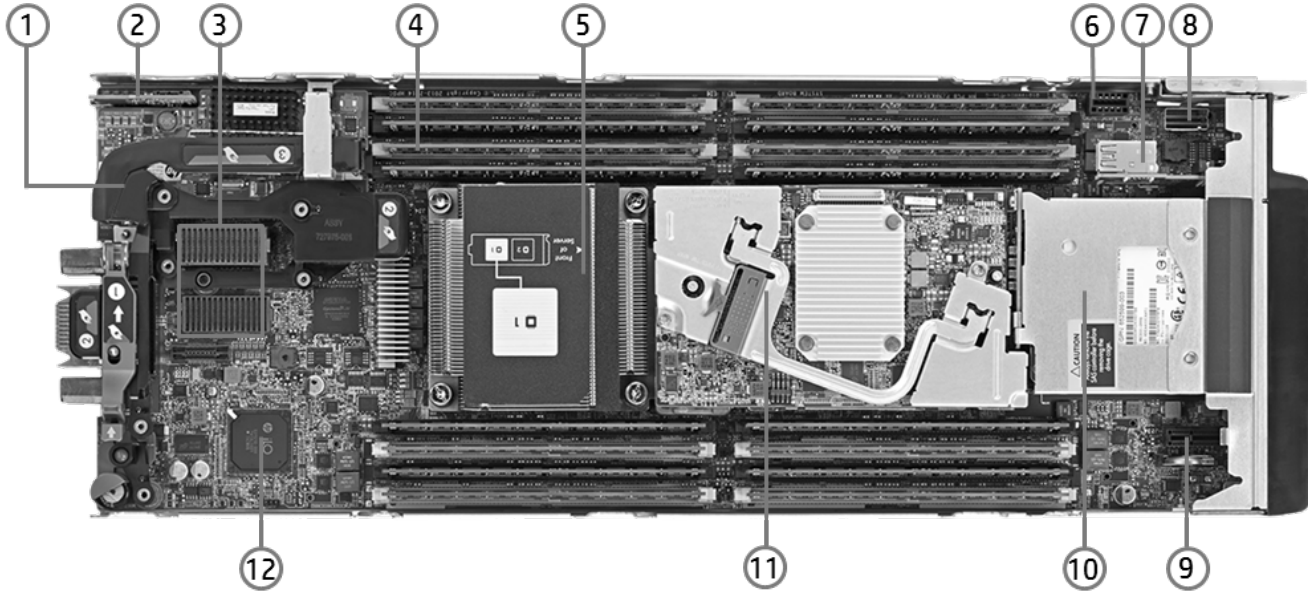

#### HPE ProLiant BL460c Gen9 Server Blade – Internal View

- |  |   |
|--|---|
| 1. FlexibleLOM adapter                                     | 7. USB 3.0 and TPM                                  |
| 2. Nand Flash & Micro SD                                   | 8. Embedded SATA Connector                          |
| 3. Mezzanine Slots (x16 PCI 3.0)                           | 9. Solid State Device Connector                     |
| 4. Sixteen (16) DDR4 DIMM slots (8 per processor)          | 10. Two hot-plug drive bays                         |
| 5. Up to two (2) Intel® Xeon® E5-2600 v3 family processors | 11. HPE Smart Array P244br Controller with 1GB FBWC |
| 6. HPE BLc 12W Smart Storage Battery connector             | 12. iLO Management Engine                           |

#### What's New

- Flexible Controller Options
- Support for 2133MHz DDR4 memory
- Support for 12Gb SAS internal hard drives and 12Gb SAS storage controller offerings
- Support for the Intel E5-2600 v3 Product Family

## Standard Features

**NOTE:** This document covers the HPE ProLiant BL460c Gen9 server blade only. For information on HPE BladeSystems c-Class Enclosures and HPE BladeSystem c-Class Interconnect and Mezzanine Components, please see the following:

HPE BladeSystem c-Class Enclosures QuickSpecs:

- HPE BladeSystem c3000 Enclosure QuickSpecs at <http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04123379>  
**NOTE:** The c3000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c7000 Enclosure QuickSpecs at <http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04229580>  
**NOTE:** The c7000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c-Class Interconnect and Mezzanine Components at <http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html>  
<http://h18004.www1.hp.com/products/blades/components/c-class-adapters.html>

**NOTE:** For optimal cooling and system performance the BL460c Gen9 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.

**NOTE:** For proper BladeSystem operation, the minimum required versions of HPE Onboard Administrator and HPE Virtual Connect are required and available via the HPE Service Pack for ProLiant, please see <http://www.hp.com/go/spp/download>.

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

### Processor **E5-2600 v3 series Processors**

One of the following depending on Model	HPE BL460c Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W)
	HPE BL460c Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W)
	HPE BL460c Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W)
	HPE BL460c Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W)
	HPE BL460c Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W)
	HPE BL460c Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W)
	HPE BL460c Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W)
	HPE BL460c Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W)
	HPE BL460c Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W)
	HPE BL460c Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W)
	HPE BL460c Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W)
	HPE BL460c Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W)
	HPE BL460c Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W)
	HPE BL460c Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W)
HPE BL460c Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W)	

## Standard Features

HPE BL460c Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W)

HPE BL460c Gen9 Intel® Xeon® E5-2637v3 (3.5GHz/4-core/15MB/135W)

HPE BL460c Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W)

HPE BL460c Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W)

HPE BL460c Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W)

HPE BL460c Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W)

**NOTE:** All processors within the server must be identical.

**NOTE:** DIMM slots 4 and 5 are not accessible when either the E5-2699 v3, the E5-2697 v3, the E5-2643 v3, the E5-2637 v3, or the E5-2667 v3 is used. In a 2 processor configuration, there are twelve (12) total available DIMM slots.

**NOTE:** For the maximum supported memory speeds for each processor listed above, please reference the 'Memory Speed by Processor Model' table in the Memory section of the QuickSpecs.

**NOTE:** HT indicates that the processor model supports Intel® Hyper-Threading Technology.

**NOTE:** All processors support Intel® Hyper-Threading and Intel® Turbo Boost Technologies except the E5-2603 v3 and E5-2609 v3.

**NOTE:** Turbo indicates the maximum potential frequency when using Intel® Turbo Boost Technology.

The frequency boost increment is dependent on the processor SKU and the number of active cores. In general, a higher boost increment is obtained when fewer cores are active.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** Supports 1 or 2 processors. Mixing different processor models is not supported.

**NOTE:** For the Intel® C610 Chipset E5-2600 v3 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, and x = L for low power SKUs.

**NOTE:** The BL460c Gen9 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

**NOTE:** The letter "L" following the model number indicates denotes lower wattage.

---

<b>Cache Memory</b>	45MB (1x45MB) L3 cache
One of the following	<b>NOTE:</b> For Eighteen-core processors.
depending on	40MB (1x40MB) L3 cache
Model	<b>NOTE:</b> For Sixteen-core processors.
	35MB (1x35MB) L3 cache
	<b>NOTE:</b> For Fourteen-core processors.
	30MB (1x30MB) L3 cache
	<b>NOTE:</b> For Twelve-core processors.
	25MB (1x25MB) L3 cache
	<b>NOTE:</b> For Ten-core processors.
	20MB (1x20MB) L3 cache
	<b>NOTE:</b> For Six or Eight-core processors.
	15MB (1x15MB) L3 cache
	<b>NOTE:</b> For Quad or Six-core processors.
	10MB (1x10MB) L3 cache
	<b>NOTE:</b> For Quad-core processors.

## Standard Features

---

**Chipset** Intel® C610 Series Chipset  
 Intel® E5-2600v3 Processor Family  
**NOTE:** For more information regarding Intel chipsets, please see the following:  
<http://www.intel.com/products/server/chipsets/>.

---

**Upgradeability** Upgradeable to two (2) processors

---

**On System Management Chipset** HPE iLO (Firmware HPE iLO4 2.0), 4GB NAND with 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the [iLO QuickSpecs](#).  
**NOTE:** For more information, visit: <http://www.hp.com/go/ilo>

---

**Memory Protection** Advanced ECC  
 Memory Mirroring  
 Memory Online Spare Mode (Rank Spare Mode)

---

<b>Memory</b> One of the following depending on Model	Type	HPE SmartMemory DDR4 Load Reduced (LRDIMM), or Registered (RDIMM)
	Standard (Pre-configured Models)	128GB (4 x 32GB) DDR4 2133MHz RDIMMs at 1.2V 64GB (4 x 16GB) DDR4 2133MHz RDIMMs at 1.2V 32GB (2 x 16GB) DDR4 2133MHz RDIMMs at 1.2V 32GB (2 x 16GB) DDR4 2133MHz RDIMMs at 1.2V 16GB (2 x 8GB) DDR4 2133MHz RDIMMs at 1.2V 16GB (2 x 8GB) DDR4 2133MHz RDIMMs at 1.2V

Maximum (LRDIMM) 1TB (16 x 64GB) up to 2133MHz at 1.2V

Maximum (RDIMM) 512GB (16 x 32GB) up to 2133MHz at 1.2V

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at:

<http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111535>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, or 1600MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://h22195.www2.hp.com/DDR4memoryconfig/Home/Legal>

---

**Network Controller** One (1) 20Gb 2-port FlexFabric FLB, 10Gb 2-port HPE FlexFabric FLB, or 10Gb 2-port Ethernet FLB  
 One of the following **NOTE:** Supports FCoE, , TCP/IP offload engine, hardware-based accelerated iSCSI, iSCSI boot, and depending on autosensing 10Gb/1Gb Ethernet.

## Standard Features

Model	<p><b>NOTE:</b> Each port is autosensing the speed, and can interoperate with 1Gb HPE BladeSystem c-Class interconnect components. Both ports will operate at the same speed.</p> <p><b>NOTE:</b> FlexFabric capabilities require the use of an HPE Virtual Connect FlexFabric or Flex10/10D module module.</p> <p>Fibre Channel over Ethernet (FCoE) is supported with HPE interconnects. Learn more at: <a href="http://www.hp.com/go/bladeSystem/interconnects">http://www.hp.com/go/bladeSystem/interconnects</a></p> <p>One (1) HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM One (1) HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM</p> <p><b>NOTE:</b> FlexibleLOMs are not compatible with prior generation c-Class server blades</p> <p>Standard iLO Network Controller: One (1) 10/100 Mbps port for the HPE iLO 4 to Onboard Administrator link. The Onboard Administrator (with 10/100/1000 Mbps) to BladeSystem link is 1Gbps</p>
-------	---

---

<b>Expansion Slots</b>	<p>Two (2) I/O expansion mezzanine slots:</p> <ul style="list-style-type: none"><li>• x16 PCIe 3.0 Type A (supports Type A mezzanine cards) (expansion slot 1). <b>NOTE:</b> This expansion slot supports dual-port mezzanine cards: one port is routed to interconnect module bay 3 and the other to bay 4.</li><li>• x16 PCIe 3.0 Type B (supports Type A and Type B mezzanine cards) (expansion slot 2). <b>NOTE:</b> This expansion slot supports dual-port and quad-port mezzanine cards. For dual-port cards, one port is routed to interconnect module bay 5 and the other to bay 6. For quad-port cards, one port is routed to interconnect module bay 5, one to bay 6, one to bay 7, and one to bay 8. <b>NOTE:</b> A second processor must be installed (in processor slot 2) to have access to the second expansion slot (expansion slot 2).</li></ul> <p>Mezzanine card options include:</p> <ul style="list-style-type: none"><li>• Dual-port 20Gb FlexFabric, Dual-port 10Gb FlexFabric, 10GbE options, and quad-port 1Gb Ethernet server adapter mezzanine options for additional network ports.</li><li>• Dual-port 16Gb Fibre Channel HBA for SAN connectivity.</li><li>• QDR and FDR InfiniBand for low latency and high bandwidth server interconnectivity.</li><li>• I/O accelerator mezzanine options for high transaction rate local storage</li></ul>
------------------------	--

---

<b>HPE Server ROM</b>	<p>HPE ROM (read only memory) is now digitally signed using HPE's Corporate Signing Service. This signature is verified before the flash process starts, reducing accidental programming and preventing malicious efforts to corrupt system ROM.</p> <p>HPE ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.</p> <p>HPE ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these</p>
-----------------------	--

## Standard Features

configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis.

HPE's ProLiant ROM is used to configure the following:

- Processor and chipset status registers
- System memory, memory map, and memory initialization
- System hardware configuration (integrated PCI devices and optional PCIe cards).
- Customer-specific BIOS configuration using the HPE ROM-Based Setup Utility (RBSU).

**NOTE:** For further information, please refer to HPE's RBSU (ROM based setup utility) user guide: <http://www.hp.com/support/rbsu>

### HPE Server UEFI /Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

**NOTE:** The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hp.com/go/proliantuefi/docs>

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using HPE RESTful API
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM

**NOTE:** For more information please visit <http://www.hp.com/go/proliant/uefi>

**NOTE:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

**NOTE:** HPE UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory.

<b>Storage Controller</b>	<b>All BTO Models</b>	One (1) HPE Smart Array P244br Controller with 1GB Flash-Backed Write Cache (FBWC) supporting RAID 0 and RAID 1, or HPE H244br Smart HBA. <b>NOTE:</b> The HPE Smart Array P244br, the HPE H244br Smart HBA, and the HPE B140i (chipset SATA). Support two (2) small form factor (SFF) hot plug drive bays.
---------------------------	-----------------------	--

<b>Maximum Internal Storage</b> One of the following depending on Model	Hot Plug SFF SAS	4.0TB	2 x 2.0TB
	Hot Plug SFF SATA	4.0TB	2 x 2.0TB
	Hot Plug SFF SAS SSD	3.2TB	2 x 1.6TB
	Hot Plug SFF SATA SSD	3.2TB	2 x 1.6TB

**NOTE:** The ProLiant BL460c Gen9 server includes the HPE hot plug small form factor (SFF) SmartDrive

## Standard Features

carrier for enhanced management and reduced maintenance errors. HPE drives from previous generation servers (prior to Gen8) are not compatible with the ProLiant BL460c Gen9 drive bays.

---

<b>Interfaces</b>	Micro SDHC Slot	One (1) internal Micro Secure Digital High Capacity (Micro SDHC) card slot
	USB 3.0 Port	One (1) internal USB 3.0 connector for USB flash media drive keys

**NOTE:** The above options are intended for integrated hypervisor virtualization environments.

---

<b>Industry Standard Compliance</b>	ACPI 2.0
	Microsoft® Logo certifications
	USB 3.0 Support
	IPMI 2.0
	Secure Digital 2.0
	TPM 1.2 Support
	IEEE (specific IEEE standards depending on Ethernet adapter card(s) installed)
	Advanced Encryption Standard (AES)
	Triple Data Encryption Standard (3DES)
	SNMP
	SSL 2.0
	DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
	Active Directory v1.0
	PCIe 3.0
	ASHRAE A3
FIPS 140-2 Level-2 certification pending	
Energy Star	

**NOTE:** Energy Star Family level certification covering all BL460c Gen9 configurations that do not include the Intel Xeon E5-2699v3 processor. For more information, visit

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdata/energystarservers.html>

---

<b>Operating Systems and Virtualization Software Support for ProLiant Servers</b>	<b><u>Microsoft Windows Server</u></b>
	<b><u>Red Hat Enterprise Linux (RHEL)</u></b>
	<b><u>SUSE Linux Enterprise Server (SLES)</u></b>
	<b><u>Canonical Ubuntu</u></b>
	<b><u>Oracle Solaris</u></b>
	<b><u>VMware</u></b>

**NOTE:** For more information on HPE's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/ossupport> and our driver download page:

<http://www.hp.com/servers/BL460cGen9>

---

<b>Enclosures</b>	Hewlett Packard Enterprise offers two different c-Class server blade enclosures to meet your individual needs:
-------------------	--

- The HPE BladeSystem c7000 rack enclosure is 10U high and holds up to sixteen (16) ProLiant BL460c Gen9 servers plugged vertically.
- The HPE BladeSystem c3000 rack enclosure is 6U high and holds up to eight (8) HPE ProLiant

## Standard Features

BL460c Gen9 servers plugged horizontally.

Server blades, interconnect modules, power supplies, fans, and redundant Onboard Administrator modules are all designed to fit into the c3000 and c7000 enclosures.

**NOTE:** For additional enclosure information, please see:

<http://h18004.www1.hp.com/products/blades/components/enclosures/c-class/index.html>

---

### Graphics

Integrated Matrox G200eh video controller

- 1600 x 1200 (32 bpp)
- 1920 x 1200 (16 bpp)

HPE iLO Management On System Management Memory

- 16 MB Flash Video Memory
- 256 MB DDR 3 with ECC (112 MB after ECC and video)

---

### Form Factor

HPE ProLiant BL460c Gen9 is a half-height server blade that plugs into the HPE BladeSystem c3000 and c7000 enclosures.

---

### Embedded Management

#### HPE Integrated Lights Out

Monitor your servers for ongoing management, service alerting, reporting and remote management with iLO. Learn more at <http://www.hp.com/go/ilo>

#### UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hp.com/go/ProLiant/uefi>.

#### HPE RESTful API

RESTful API is an application programming interface. RESTful Web Service API served by iLO's web server. <http://www.hp.com/go/restfulapi>.

#### Intelligent Provisioning

Provision servers by discovering and deploying 1 to few servers with Intelligent Provisioning. Learn more at <http://www.hp.com/go/intelligentprovisioning>.

---

### Server Utilities

#### HPE Smart Update

Optimize firmware and driver updates with HPE Smart Update solutions. Learn more at <http://www.hp.com/go/smartupdate>.

#### HPE Systems Insight Manager (HPE SIM)

HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-Hewlett Packard Enterprise servers. HPE SIM also integrates with HPE SUM to provide quick and seamless firmware updates. Learn more at <http://www.hp.com/go/sim>.

#### Scripting Tool Kit and Windows PowerShell

Provision 1 to many servers using your own scripts to discover and deploy them with HPE Scripting Tool Kit for Windows and Linux or HPE Scripting Tools for Windows PowerShell. Learn more at <http://www.hp.com/go/ProLiantSTK> or <http://www.hp.com/go/powershell>.



## Standard Features

- HPE RESTful Interface Tool** HPE RESTful API tool is a scripting tool to provision servers using RESTful API Interface to discover and deploy servers at scale. Learn more at <http://www.hp.com/go/restfulapi>.
- HPE iLO Mobile Application** Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hp.com/go/ilo/mobileapp>.
- HPE Insight Online** HPE Insight Online, available at no additional cost as part of your HPE warranty, Care Pack or contractual support agreement with HPE, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at <http://www.hp.com/go/insightonline/info>.

---

### Security

- Power-on password
- Administrator's password
- Keyboard password (QuickLock)
- HPE iLO Management On System Management Chipset with:
  - SSL encryption
  - Secure Shell version 2
  - Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface
  - AES and RC4 encryption of video
- External USB port enable/disable
- Network server mode
- Serial interface control
- TPM (Trusted Platform Module) 1.2 option
- Advanced Encryption Standard (AES)
- Intel® Advanced Encryption Standard-New Instructions (AES-NI)
- FIPS 140-2 Level-2 certification pending

---

### Availability

#### Memory

- Advanced ECC uses single device data correction (SDDC) to detect and correct single and all multi-bit error that occurs within a single DRAM chip. Both x4 and x8 SDDC are supported (x8 requires lockstep mode).
- Memory online spare mode (also known as rank spare mode) detects a rank that is degrading and switches operation to the spare rank.
- Memory demand and patrol scrubbing to prevent accumulation of correctable errors and reducing the likelihood of unplanned downtime.
- Failed DIMM isolation improves the service time thus improving the overall system availability.
- Address parity protection available on RDIMMs and LRDIMMs detects address bit errors to improve service time and overall system availability.

#### Mezzanine options and I/O

- Support for one (1) FlexibleLOM, providing two (2) (i.e. redundant) Ethernet ports
- Multiple mezzanine I/O expansion slots that support a wide variety of mezzanine cards each supporting multiple data paths routed to redundant interconnect modules.
- Network Adapter Teaming (bonding) provides network fault tolerance, transmit load balancing, and

## Standard Features

switch-assisted load balancing.

### Storage

- Two (2) Small Form Factor hot-plug SAS/SATA HDD or SSD drive bays.
- Choice of the HPE Smart Array P244br Controller with 1GB FBWC/HPE, Smart HBA H244br, or the HP B140i (chipset SATA). RAID 0 and 1 support for all three storage controller offerings.
- Optional dual-port Fibre Channel mezzanine card(s) for redundant SAN connections.

### Processor/Chipset

- Processor internal sensors & thermal control protection against over-temperature conditions.
- Cache parity/ECC protects cache data from accidental data corruption.
- Machine Check Architecture (MCA) detects and captures hardware errors such as system bus, memory ECC, parity, and cache, and improves service time.
- Intel® QPI Protocol Protection allows detection of data errors using a checksum of 8-bits.
- Core Disable for FRB (fault resilient boot) allows a system to power-on despite a failing core-pair. It uses BIST (built-in self-test) results to detect a failure and disables the target core-pair upon subsequent boot.

### Server Blade Enclosure Infrastructure

- Pooled power for true N+N power redundancy through up to six (6) hot-plug, high-efficiency, common slot enclosure-based power supplies (configuration dependent).
- Up to ten (10) enclosure-based hot-plug HPE Active Cool fans that scale to meet future demands, optimize airflow, reduce power draw, and improve acoustic performance.
- Dual grid power providing redundant rack enclosure power feeds to the server blade enclosure.
- HPE Dynamic Power Saver Mode monitors the total enclosure power consumption in real time and automatically adjusts with change in demand for improved efficiency and reliability. HPE Dynamic Power Capping safely limits power usage without impacting performance by capping peak usage instead of average power usage, removes risk to electrical infrastructure with a fast-acting, hardware-based capping algorithm, and reclaims more power by dynamically controlling power limits based on workload demand.
- Up to eight interconnect modules per server blade enclosure providing four simultaneous redundant fabrics for FlexFabric, Virtual Connect Ethernet, Fibre Channel, InfiniBand, Pass Thru Ethernet, etc.
- Enclosure crosslinks between adjacent enclosures to provide interconnect module-to-module connections or as Virtual Connect module stacking links.
- Optional enclosure redundant Onboard Administrator system management module.

---

## Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Certain restrictions and exclusions apply. Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

**NOTE: Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HPE**

## Standard Features

replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at

<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

## Optional Features

<b>Fibre Channel Support</b>	Up to two (2) optional Fibre Channel mezzanine HBAs are supported on the HPE ProLiant BL460c Gen9.
<b>Compatible SAN</b>	<p>HPE ProLiant BL460c Gen9 server blades are optimized for HPE MSA, EVA, 3PAR and XP. HPE ProLiant BL460c Gen9 server blades are compatible with select 3rd party SANs. Please see blade storage page for more details at <a href="http://h18004.www1.hp.com/products/blades/components/c-class-sans.html">http://h18004.www1.hp.com/products/blades/components/c-class-sans.html</a>.</p>
<b>HPE Virtual Connect</b>	<p>HPE Virtual Connect is an interconnect option for <a href="#">c-Class</a> BladeSystem that simplifies server connectivity to data and storage networks, and reduces costs. Unique HPE Flex-10 technology makes maximum use of network bandwidths, provide dynamic tuning and enable extreme flexibility to meet individual server and infrastructure requirements by allocating up to 4 network connections per server port. Virtual Connect FlexFabric modules extend those capabilities to allocate one function per port to storage connections (FCoE).</p> <p>HPE OneView's software-defined approach to infrastructure management enables central console to administer network connections and workloads for thousands of servers, see <a href="http://www.hp.com/go/oneview">http://www.hp.com/go/oneview</a></p> <p>For more information on Virtual Connect Ethernet, Fibre Channel, Converged Network and management options, see <a href="http://www.hp.com/go/virtualconnect">http://www.hp.com/go/virtualconnect</a>.</p>
<b>Embedded Management</b>	<p><b>iLO Advanced for BladeSystem</b> HPE iLO Advanced for BladeSystem licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <a href="http://www.hp.com/go/iloadvanced">http://www.hp.com/go/iloadvanced</a></p>
<b>Server Management</b>	<p><b>HPE Insight Control</b> HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <a href="http://www.hp.com/go/insightcontrol">http://www.hp.com/go/insightcontrol</a></p>
	<p><b>HPE OneView</b> Powerful converged management of servers, storage, and network for IT service automation and infrastructure simplicity, see <a href="http://www.hp.com/go/oneview">http://www.hp.com/go/oneview</a> .</p>
	<p><b>HPE Matrix Operating Environment</b> The HPE Matrix Operating Environment (Matrix OE) for ProLiant and Integrity servers is an integrated command center that helps you instantly adjust to dynamic business demands. This advanced infrastructure management software lets you reduce the cost of common data center tasks by up to 40 percent while keeping pace with your changing business. The HPE Matrix OE includes the automated provisioning, optimization, and recovery management capabilities for HPE CloudSystem Matrix, the ideal platform for private cloud and Infrastructure as a Service (IaaS). <b>NOTE:</b> For more information, visit: <a href="http://www.hp.com/go/matrixoe">http://www.hp.com/go/matrixoe</a></p>

## Optional Features

**HPE Insight Cluster Management Utility (CMU)** HPE Insight Cluster Management Utility is a Hyperscale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hp.com/go/cmu>.

---

**High Performance Clusters** **HPE Cluster Platforms** HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. <http://www.hp.com/go/clusters>

**HPE HPC Interconnects** High Performance Computing (HPC) interconnect technologies are available for this server as part of the HPE Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HPE when integrated within an HPE cluster. Flexible, validated solutions can be defined with the help of configuration tools. <http://www8.hp.com/us/en/products/servers/scalable-systems/clusterplatform.html>

---

**Storage Software** Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HPE storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- **Data Protection and Recovery Software**  
Whether you're a large enterprise or a smaller business, HPE data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- **Data Archive and Migration Software**  
HPE's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- **Storage Resource Management Software (SRM)**  
HPE's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- **Data Replication Software**  
Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**  
Maximize your investment in HPE storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.

## Optional Features

- **HPE StoreVirtual VSA**

HPE StoreVirtual VSA allows you to create fully featured shared storage on a VMware vSphere or Microsoft Hyper-V virtualized server. This server model starting November 2013, includes a limited license for HPE StoreVirtual VSA software with 1TB of capacity. To download the license key and StoreVirtual VSA software, visit: <http://www.hp.com/go/unlockVSA>.

**NOTE: You will need your server serial number in order to complete the registration form. Fully functional, capacity-based licenses are available in 4TB, 10T and 50TB sizes. For more information and access to the 60-day free trial, visit: <http://www.hp.com/go/tryVSA>**

**NOTE: For more information available Storage Software including QuickSpecs, please see: <http://www.hp.com/go/storage/software>.**

---

**HPE Insight Online** HPE Insight Online is part of the HPE Support Center for one stop, secure access to product and HPE support information personalized to your IT environment. Insight Online can automatically display devices remotely monitored by HPE Remote Support tools. With Insight Online's easy navigation you can efficiently track your IT support contracts and device status from anywhere and at anytime.

<http://www.hp.com/go/insightonline>

---

**Get connected to HPE** **To** get the most from your investment in Hewlett Packard Enterprise servers, get connected to HPE using our innovative remote support technology which provides system health monitoring, pre-failure alert notification and more. For details, visit <http://www.hp.com/services/getconnected>

---

**Expansion Blade Support** Supports one (1) optional D2220sb storage or PCI expansion blade

**NOTE: Expansion blade support requires the use of either the HPE Dynamic Smart Array B140i or the HPE Smart Array P246br controller.**

**NOTE: Expansion blade support requires server firmware versions from SPP 2015.04 or later.**

---

**Factory Express Portfolio for Servers and Storage** HPE Factory Express offers configuration, customization, integration and deployment services for Hewlett Packard Enterprise servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. Hewlett Packard Enterprise products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services on your specific server model please contact your sales representative or go to: <http://www8.hp.com/us/en/campaigns/factory-express/server-storage-networking.html>

---

**HPE Simple Configurator** SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not

## Optional Features

available in SCE, please contact HPE's Customer Business Center or an Authorized Partner for assistance.

**<https://h22174.www2.hp.com/SimplifiedConfig/Index>**

## Recommended Support Services for BL460

### Service and Support

#### **HPE Technology Services for BladeSystem**

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HPE to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

#### **Protect your business beyond warranty with HPE Care Pack Services**

HPE Care Pack Services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.

### Optimized Support recommendation

#### **HPE Proactive Care Advanced** - 24x7 coverage, three year Care Pack Service

Achieve a higher return on your product investment with the personal attention from a locally assigned Account Support Manager who delivers recommendations designed to improve availability and performance. Leverage your system's ability to connect to HPE for automated problem detection and rapid critical event management to increase stability and reduce unplanned downtime. This recommendation provides 24x7 coverage with four-hour response for hardware and two-hour callback for supported software. Collaborative call management comes with Proactive Care Advanced or you may choose full support from HPE where we own all cases through to resolution. Hewlett Packard Enterprise is a leading provider of support services for most operating systems used on HPE BladeSystem with long, successful partnerships with vendors such as Microsoft, Red Hat, VMware, SUSE and others. Purchasing software support from HPE simplifies troubleshooting and shortens time to resolution with one call for hardware or software questions.

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA5-3259ENW&cc=us&lc=en>

#### **HPE ProLiant Blade Server Hardware Installation**

This easy-to-buy, easy-to-use HPE Care Pack service helps ensure your new HPE BladeSystem hardware is installed smoothly, efficiently and with minimal disruption to your IT and business operations.

<http://www.hp.com/services/bladessystemservices>

### Standard Support recommendation

#### **HPE Proactive Care** - 24x7 coverage, three year Care Pack Service

This service helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HPE. It combines three years' proactive reporting and advice with 24x7 four hour response coverage and enhanced escalation management. It also includes collaborative call management with two hour call back on software questions to reduce troubleshooting on hardware and industry leading software.

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

#### **HPE ProLiant Blade Server Hardware Installation**

Same as in Optimized support recommendation

<http://www.hp.com/services/bladessystemservices>

### Related Services

#### **Data Center Platform Consulting Services**

Choose HPE Technology Services Consulting to modernize and migrate your key systems. These services help fine tune your data center to improve security, management and efficiency across IT infrastructure,



## Recommended Support Services for BL460

operations, and facilities and prepare you for the new style of IT. HPE understands the needs of the data center of the future and will serve as your guide for the journey.

**<http://www.hp.com/services/consulting>**

### Data Privacy Services

Protect your data through better media management. HPE Data privacy services help manage and protect sensitive data to reduce the risk of unauthorized access to private information and help meet compliance requirements. Our retention services allow you to keep drives and other devices upon failure with Defective Media Retention and Comprehensive Defective Material Retention, our removal services provide convenient data sanitization and our recovery services allow you to safely retire IT assets and capture any remaining value from the hardware.

**<http://www.hp.com/services/dataprivacy>**

### Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for Hewlett Packard Enterprise servers and storage products. Choose how your factory solutions are built, tested, integrated, shipped and deployed.

**<http://www.hp.com/go/factory-express>**

### Additional hardware installation services for HPE BladeSystem

In addition to hardware installation of your Blade server, Hewlett Packard Enterprise offers installation and startup services for your BladeSystem and Network infrastructure.

**<http://www.hp.com/services/bladessystemservices>**

### HPE Foundation Care

HPE Foundation Care provides hardware and software support, enabling faster resolution of problems on HPE and third party products. Standard service levels have been simplified, making it even easier for you to determine the right level of coverage for your SLA and budgetary requirements.

**<http://www.hp.com/services/foundationcare>**

## Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

## Models

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

**NOTE:** Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

**NOTE:** Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

**NOTE:** If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

**NOTE:** All Pre-configured Models come populated with some hard drive blanks installed.

**NOTE:** Not all models are available in all regions. Check with your local country Hewlett Packard Enterprise offices for availability.

### E5-2600 v3 series Processors

<b>HP ProLiant BL460c Gen9 E5- 2609v3 1P 16GB-R H244br Entry Server</b> 727026-B21	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2609 v3 (1.9GHz/6-core/15MB/6.4GT-s QPI/85W, DDR4-1600)
	<b>Cache Memory</b>	15MB (1x15MB) Level 3 cache
	<b>Memory</b>	16GB (2x 8GB) PC4-2133P-R (DDR4-2133) Registered DIMMS at 1.2V <b>NOTE: Total of 16 DIMM slots.</b>
	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart HBA H244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
	<b>Internal Storage</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure	
<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.	

<b>HP ProLiant BL460c Gen9 E5- 2620v3 1P 16GB-R H244br Entry Server</b> 727027-B21	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2620 v3 (2.40GHz/6-core/15MB/8.0GT-s QPI/85W, DDR4-1866, HT, Turbo2)
	<b>Cache Memory</b>	15MB (1x15MB) Level 3 cache
	<b>Memory</b>	16GB (2x 8GB) PC4-2133P-R (DDR4-2133) Registered DIMMS at 1.2V <b>NOTE: Total of 16 DIMM slots.</b>
	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart HBA H244br Controller with RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives

## Models

	<b>Internal Storage</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB ; SATA SSD: 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HP ProLiant BL460c Gen9 E5-2640v3 1P 32GB-R P244br Base Server</b> 727028-B21	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2640 v3 (2.6GHz/8-core/20MB/8.0GT-s QPI/95W, DDR4-1866, HT, Turbo2)
	<b>Cache Memory</b>	20MB (1x20MB) Level 3 cache
	<b>Memory</b>	32GB (2x 16GB) PC4-2133P-R (DDR4-1866 Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>
	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with 1GB FBWC RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
	<b>Internal Storage</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year Labor, 3-year on-site support.
<b>HP ProLiant BL460c Gen9 E5-2650v3 1P 32GB-R P244br Base Server</b> 727029-B21	<b>Processor(s)</b>	(1) Intel® Xeon® E5-2650 v3 (2.3GHz/10-core/25MB/9.6GT-s QPI/105W, DDR4-2133, HT, Turbo2)
	<b>Cache Memory</b>	25MB (1x25MB) Level 3 cache
	<b>Memory</b>	32GB (2x 16GB) PC4-2133P-R (DDR4-2133 Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>
	<b>Network Controller</b>	HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with 1GB FBWC RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type

## Models

		B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year 3-year Labor, 3-year on-site support.
<hr/>		
<b>HP ProLiant BL460c Gen9 E5-2660v3 2P 64GB-R P244br Performance Server</b> 727030-B21	<b>Processor(s)</b>	(2) Intel® Xeon® E5-2660 v3 (2.6GHz/10-core/25MB/9.6GT-s QPI/105W, DDR4-2133, HT, Turbo2)
	<b>Cache Memory</b>	25MB (1x25MB) Level 3 cache
	<b>Memory</b>	64GB (4x 16GB) PC4-2133P-R (DDR4-2133 Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>
	<b>Network Controller</b>	HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM
	<b>Storage Controller</b>	HPE Smart Array P244br Controller with 1GB FBWC RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
	<b>Internal Storage</b>	SAS: 2.0TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control
	<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
	<b>Warranty</b>	Server warranty includes 3-year Parts, 3-year 3-year Labor, 3-year on-site support.
<hr/>		
<b>HP ProLiant BL460c Gen9 E5-2670v3 2P 128GB-L P244br Performance Server</b> 727031-B21	<b>Processor(s)</b>	(2) Intel® Xeon® E5-2670 v3 (2.3GHz/12-core/30MB/9.6GT-s QPI/120W, DDR4-2133, HT, Turbo2)
	<b>Cache Memory</b>	30MB (1x130MB) Level 3 cache
	<b>Memory</b>	128GB (4x 32GB) PC4-2133P-L (DDR4-2133) Registered DIMMs at 1.2V) <b>NOTE: Total of 16 DIMM slots. Only eight (8) usable with single processor.</b>
	<b>Network Controller</b>	HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM
	<b>Storage Controller</b>	Smart Array P244br Controller with 1GB FBWC RAID 0,1
	<b>Hard Drive</b>	None ship standard Supports up to two (2) HPE hot-plug SFF SAS/SATA/SDD drives
	<b>Internal Storage</b>	SAS: 2.4TB; SATA: 2.0TB; SAS SSD: 3.2TB; SATA SSD: 1.6TB
	<b>Optical Drive Bay</b>	None
	<b>Expansion Slots</b>	2 standard - Slot 1 supports Type A mezzanine Cards. Slot 2 supports Type A and Type B mezzanine cards.
	<b>Management</b>	HPE iLO Management (standard) Optional: HPE OneView or HPE Insight Control

## Models

<b>Form Factor</b>	Up to eight (8) half-height blades supported in the HPE BladeSystem c3000 Enclosure Up to sixteen (16) half-height blades supported in HPE BladeSystem c7000 Enclosure
<b>Warranty</b>	Server warranty includes 3-year3-year Parts, 3-year Labor, 3-year on-site support.

## Configuration Information - Factory Integrated Models

**NOTE:** This section lists some of the steps required to configure a Factory Integrated Model (configure-to-order or CTO server). To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

**NOTE:** Configure-to-order server blades must start with a CTO Blade Server.

**NOTE:** FIO indicates that this option is only available as a factory installable option.

**NOTE:** All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

### Step 1: Base Server Blade Configuration (Select a configurable Blade)

<b>Models</b>	HP ProLiant BL460c Gen9 E5-v3 10Gb/20Gb FlexibleLOM Configure-to-order Blade Server	727021-B21
---------------	---	------------

**Configurable Models ship with:**

One (1) FlexibleLOM connector providing a choice for one (1) of the supported 10Gb/20Gb FlexibleLOMs (see Step 2)

Two (2) HPE small form factor hot-plug SAS/SATA/ HDD or SSD hard drive bays

Two (2) x16 PCIe I/O expansion slots (one Type A, one Type A/B)

One (1) integrated USB connector and one (1) MicroSDHC connector

One (1) TPM connector

HPE iLO Management (standard)

### Step 2: Choose Required Options (one of the following from each list unless otherwise noted)

**HPE Processors** **NOTE:** All configure-to-order processor kits (i.e. xxxxxx-L21) contain one (1) processor.

**NOTE:** If two processors are desired, select one xxxxxx-L21 here in Step 2 and one xxxxxx-B21 in Step 4.

**E5-2600 v3 series Processors**

HP BL460c Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) FIO Processor Kit	726987-L21
HP BL460c Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) FIO Processor Kit	726988-L21
HP BL460c Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) FIO Processor Kit	726989-L21
HP BL460c Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) FIO Processor Kit	726990-L21
HP BL460c Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) FIO Processor Kit	726991-L21
HP BL460c Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO Processor Kit	726992-L21
HP BL460c Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) FIO Processor Kit	726993-L21
HP BL460c Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) FIO Processor Kit	726994-L21
HP BL460c Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) FIO Processor Kit	726995-L21
HP BL460c Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) FIO Processor Kit	726996-L21
HP BL460c Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) FIO Processor Kit	726997-L21
HP BL460c Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) FIO Processor Kit	726999-L21
HP BL460c Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) FIO Processor Kit	727000-L21

## Configuration Information - Factory Integrated Models

HP BL460c Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) FIO Processor Kit	727001-L21
HP BL460c Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) FIO Processor Kit	727002-L21
HP BL460c Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) FIO Processor Kit	727003-L21
HP BL460c Gen9 Intel® Xeon® E5-2637v3 (3.5GHz/4-core/15MB/135W) FIO Processor Kit	765268-L21
HP BL460c Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) FIO Processor Kit	767049-L21
HP BL460c Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) FIO Processor Kit	773123-L21
HP BL460c Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) FIO Processor Kit	773124-L21
HP BL460c Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) FIO Processor Kit	779795-L21

**NOTE:** All processors within the server must be identical.

**NOTE:** DIMM slots 4 and 5 are not accessible when either the E5-2699 v3, the E5-2697 v3, the E5-2643 v3, the E5-2637 v3, or the E5-2667 v3 is used. In a 2 processor configuration, there are twelve (12) total available DIMM slots.

**NOTE:** For the maximum supported memory speeds for each processor listed above, please reference the 'Memory Speed by Processor Model' table in the Memory section of the QuickSpecs.

**NOTE:** HT indicates that the processor model supports Intel® Hyper-Threading Technology.

**NOTE:** All processors support Intel® Hyper-Threading and Intel® Turbo Boost Technologies except the E5-2603 v3 and E5-2609 v3.

**NOTE:** Turbo indicates the maximum potential frequency when using Intel® Turbo Boost Technology. The frequency boost increment is dependent on the processor SKU and the number of active cores. In general, a higher boost increment is obtained when fewer cores are active.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** Supports 1 or 2 processors. Mixing different processor models is not supported.

**NOTE:** For the Intel® C610 Chipset E5-2600 v3 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, and x = L for low power SKUs.

**NOTE:** The BL460c Gen9 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

**NOTE:** The letter "L" following the model number indicates denotes lower wattage.

### HPE Memory

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at:

<http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111535>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, or 1600MHz. Please see Memory Population Table or the Online Memory Configuration Tool at:

<http://h22195.www2.hp.com/DDR4memoryconfig/Home/Legal>

## Configuration Information - Factory Integrated Models

### HPE SmartMemory

#### Registered DIMMs (RDIMMs) - E5-2600 v3 series Processors

HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	759934-B21
HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	728629-B21

#### Load Reduced DIMMs (LRDIMMs) - E5-2600 v3 series Processors

HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726720-B21
HP 48GB (1x16GB +1x32GB) DDR4-2133 CAS-15-15-15 Load Reduced Memory FIO Kit	792278-B21
HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726724-B21

**NOTE:** For more information on ProLiant Energy Efficient Features, see:

<http://www.hp.com/go/proliant-energy-efficient>

### HPE Networking

#### FlexibleLOM Adapters

**NOTE:** The server requires one (1) FlexibleLOM that is installed in the FlexibleLOM connectors. All FlexibleLOMs are dual port: One port is routed to interconnect module bay 1 and the other to bay 2.

#### 20Gb FlexibleLOM Adapters

HP FlexFabric 20Gb 2-port 630FLB FIO Adapter	700066-B21
HP FlexFabric 20Gb 2-port 650FLB FIO Adapter	700764-B21

#### 10Gb FlexibleLOM Adapters

HP FlexFabric 10Gb 2-port 536FLB FIO Adapter	766491-B21
HP Ethernet 10Gb 2-port 560FLB FIO Adapter	684214-B21

**NOTE:** Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hp.com/go/ProLiantNICs>

## Step 3: Choose Additional Factory Integration Options

<b>HPE Insight Software</b>	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A
<b>Converged Infrastructure Management Software</b>	<p><b>HPE OneView with iLO Advanced - Server hardware required on same purchase order</b></p> <p>HP OneView incl 3yr 24x7 Supp Flex Qty E-LTU</p> <p>HP OneView for Blade Server incl 3yr 24x7 Supp FIO Bundle Physical 1 Svr Lic</p>	<p>E5Y35AAE</p> <p>F6Q89A</p>
<b>HPE Storage Controllers</b>	<p>HP Smart Array P244br/1GB FBWC 12Gb 2-ports Int FIO SAS Controller</p> <p>HP Smart Array P246br/1GB FBWC 12Gb 4-ports Int FIO SAS Controller</p>	<p>761871-B21</p> <p>749975-B21</p>



## Configuration Information - Factory Integrated Models

HP Smart Array P741m/4GB FBWC 12Gb 4-ports Ext Mezzanine SAS Controller	726782-B21
HP H244br 12Gb 2-ports Int FIO Smart Host Bus Adapter	761878-B21
HP FIO Enable Smart Array B140i Setting	784308-B21

**NOTE:** The HPE Smart Array B140i Controller (chipset SATA) comes standard with the HPE BL460c Gen9 10Gb/20Gb FLB CTO Blade (727021-B21). If neither the HPE Smart Array P244br nor the HPE H244br controllers are chosen, a SATA cable will be provided to support SATA devices for the two internal drives. If RAID is required when using the B140i, please choose 'HPE FIO B140i RAID Enable Kit - BIOS Setting' (784308-B21).

**NOTE:** The HPE Smart Array P246br controller is only required when using an expansion blade with the BL460c Gen9.

---

## Step 4: Choose Additional Options for Factory Integration

**NOTE:** For additional options, please refer to the "Core Options" and "Additional Options" section below. For additional options, including server blade enclosures interconnect, mezzanine options and power subsystem options; please see the Core Options and Additional sections below; or the following:

- HPE BladeSystem c3000 Enclosure QuickSpecs:  
<http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04123379>  
**NOTE:** The c3000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c7000 Enclosure QuickSpecs:  
<http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04229580>  
**NOTE:** The c7000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c-Class Interconnect and Mezzanine Components:  
<http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html> and  
<http://h18004.www1.hp.com/products/blades/components/c-class-adapters.html>

**NOTE:** For optimal cooling and system performance the BL460c Gen9 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.

## Core Options

### HPE Networking

**NOTE:** A 10 Gigabit Ethernet adapter supports linking at 1Gbps or 10Gbps when connected to an interconnect module with 10Gb Ethernet downlinks.

**NOTE:** A 10 Gigabit Ethernet adapter supports linking at only 1Gbps when connected to an interconnect module with 1Gb Ethernet downlinks.

**NOTE:** The 10 Gigabit Ethernet adapters on each server blade connect to a 10Gb interconnect in bays 3-6 (HPE BladeSystem c7000 Enclosure) or bays 2-4 (HPE BladeSystem c3000 Enclosure).

#### 20 Gigabit Ethernet Mezzanine Cards

HP FlexFabric 20Gb 2-port 630M Adapter

700076-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04312720>

HP FlexFabric 20Gb 2-port 650M Adapter

700767-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04347342>

#### 10 Gigabit Ethernet Mezzanine Cards

HP FlexFabric 10Gb 2-port 534M Adapter

700748-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at: [http://h18000.www1.hp.com/products/QuickSpecs/14619\\_div/14619\\_div.html](http://h18000.www1.hp.com/products/QuickSpecs/14619_div/14619_div.html)

HP Ethernet 10Gb 2-port 560M Adapter

665246-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at: [http://h18000.www1.hp.com/products/QuickSpecs/14478\\_div/14478\\_div.html](http://h18000.www1.hp.com/products/QuickSpecs/14478_div/14478_div.html).

#### 1 Gigabit Ethernet Mezzanine Cards

HP Ethernet 1Gb 4-port 366M Adapter

615729-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at: [http://h18000.www1.hp.com/products/QuickSpecs/14335\\_div/14335\\_div.html](http://h18000.www1.hp.com/products/QuickSpecs/14335_div/14335_div.html)

#### FlexibleLOM Adapters

**NOTE:** The server supports one (1) FlexibleLOM that is installed in the FlexibleLOM connectors and is already included in the pre-configured models. However, it must be added in Step 2 for Configure-to-Order Models. The FlexibleLOM options below are used to change these original FlexibleLOMs.

#### 20Gb FlexibleLOM Adapters

HP FlexFabric 20Gb 2-port 630FLB Adapter

700065-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04312719>

HP FlexFabric 20Gb 2-port 650FLB Adapter

700763-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04347341>

#### 10Gb FlexibleLOM Adapters

## Core Options

HP FlexFabric 10Gb 2-port 536FLB Adapter 766490-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04347246>

HP Ethernet 10Gb 2-port 560FLB Adapter 655639-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at [http://h18000.www1.hp.com/products/QuickSpecs/14331\\_div/14331\\_div.html](http://h18000.www1.hp.com/products/QuickSpecs/14331_div/14331_div.html)

### HPE Infiniband Mezzanine Adapters

**NOTE:** When an InfiniBand adapter is installed in mezzanine slot 1, only one port is active (regardless of operating mode). When installed in mezzanine slot 2, both ports are active.

**NOTE:** InfiniBand QDR and FDR speeds are only supported on the HPE BladeSystem c7000 Enclosure. For additional information, please see the HPE BladeSystem c7000 Enclosure and InfiniBand QuickSpecs at:

[http://h18004.www1.hp.com/products/QuickSpecs/12586\\_div/12586\\_div.html](http://h18004.www1.hp.com/products/QuickSpecs/12586_div/12586_div.html)

[http://h18000.www1.hp.com/products/QuickSpecs/13078\\_div/13078\\_div.html](http://h18000.www1.hp.com/products/QuickSpecs/13078_div/13078_div.html)

HP InfiniBand QDR/Ethernet 10Gb 2-port 544+M Adapter 764282-B21

**NOTE:** The QDR InfiniBand adapter may be installed in either mezzanine slot of the server.

HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+M Adapter 764283-B21

**NOTE:** The FDR InfiniBand adapter must be installed in mezzanine slot 1 for FDR mode and may be installed in either mezzanine slot if operated in any other mode.

HP InfiniBand FDR 2-port 545M Adapter 702213-B21

---

**HPE Fibre Channel** HP LPe1605 16Gb Fibre Channel HBA for BladeSystem c-Class 718203-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at [http://h18000.www1.hp.com/products/QuickSpecs/14742\\_div/14742\\_div.html](http://h18000.www1.hp.com/products/QuickSpecs/14742_div/14742_div.html)

HP QMH2672 16Gb Fibre Channel Host Bus Adapter 710608-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at <http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04126962>

---

## HPE Processors **E5-2600 v3 series Processors**

HP BL460c Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) Processor Kit 726987-B21

HP BL460c Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) Processor Kit 726988-B21

HP BL460c Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) Processor Kit 726989-B21

HP BL460c Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) Processor Kit 726990-B21

HP BL460c Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) Processor Kit 726991-B21

HP BL460c Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor Kit 726992-B21

HP BL460c Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) Processor Kit 726993-B21

HP BL460c Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) Processor Kit 726994-B21

HP BL460c Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) Processor Kit 726995-B21

HP BL460c Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) Processor Kit 726996-B21

## Core Options

HP BL460c Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor Kit	726997-B21
HP BL460c Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) Processor Kit	726999-B21
HP BL460c Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) Processor Kit	727000-B21
HP BL460c Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) Processor Kit	727001-B21
HP BL460c Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) Processor Kit	727002-B21
HP BL460c Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) Processor Kit	727003-B21
HP BL460c Gen9 Intel® Xeon® E5-2637v3 (3.5GHz/4-core/15MB/135W) Processor Kit	765268-B21
HP BL460c Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) Processor Kit	767049-B21
HP BL460c Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) Processor Kit	773123-B21
HP BL460c Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) Processor Kit	773124-B21
HP BL460c Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) Processor Kit	779795-B21

**NOTE:** All processors within the server must be identical.

**NOTE:** DIMM slots 4 and 5 are not accessible when either the E5-2699 v3, the E5-2697 v3, the E5-2643 v3, the E5-2637 v3, or the E5-2667 v3 is used. In a 2 processor configuration, there are twelve (12) total available DIMM slots.

**NOTE:** For the maximum supported memory speeds for each processor listed above, please reference the 'Memory Speed by Processor Model' table in the Memory section of the QuickSpecs.

**NOTE:** HT indicates that the processor model supports Intel® Hyper-Threading Technology.

**NOTE:** All processors support Intel® Hyper-Threading and Intel® Turbo Boost Technologies except the E5-2603 v3 and E5-2609 v3.

**NOTE:** Turbo indicates the maximum potential frequency when using Intel® Turbo Boost Technology. The frequency boost increment is dependent on the processor SKU and the number of active cores. In general, a higher boost increment is obtained when fewer cores are active.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** Supports 1 or 2 processors. Mixing different processor models is not supported.

**NOTE:** For the Intel® C610 Chipset E5-2600 v3 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, and x = L for low power SKUs.

**NOTE:** The BL460c Gen9 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

**NOTE:** The letter "L" following the model number indicates denotes lower wattage.

## HPE Memory

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at:

**<http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111535>**

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

## Core Options

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, or 1600MHz. Please see Memory Population Table or the Online Memory Configuration Tool at:

<http://h22195.www2.hp.com/DDR4memoryconfig/Home/Legal>

### HPE SmartMemory

#### Registered DIMMs (RDIMMs) - E5-2600 v3 series Processors

HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	759934-B21
HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	728629-B21

#### Load Reduced DIMMs (LRDIMMs) - E5-2600 v3 series Processors

HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726720-B21
HP 48GB (1x16GB +1x32GB) DDR4-2133 CAS-15-15-15 Load Reduced Memory FIO Kit	792278-B21
HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726724-B21

**HPE Solid State M.2 SATA Drives** **NOTE:** The solid state M.2 SATA drives plug directly into a connector on the system board and do not use a SFF drive cage slot.

**NOTE:** RAID 1, 0 are provided through the B140i in UEFI BIOS mode only.

HP 64GB Value Endurance Solid State M.2 Enablement Kit for ProLiant Blades	785233-B21
HP Dual 64GB Value Endurance Solid State M.2 Enablement Kit for ProLiant Blades	775588-B21
HPE 120GB Read Intensive-1 Solid State Drive M.2 Kit for ProLiant Blades	846495-B21
HPE Dual 120GB Read Intensive-1 Solid State Drive M.2 Kit for ProLiant Blades	846497-B21

**HPE Hard Drives** **NOTE:** The ProLiant BL460c Gen9 server includes the HPE hot-plug small form factor (SFF) SmartDrive carrier for enhanced management and reduced maintenance errors. HPE drives from generation G7 servers and before are not compatible with the BL460c Gen9 drive bays.

**NOTE:** The mixing of standard SAS drives with SAS SSD is supported within the server, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported.

**NOTE:** HPE hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**NOTE:** The hard drive options are not required when configuring a drive-less model.

#### 6G SATA LE Hot Plug SFF (2.5-inch) SC EL G1 Solid State Drives

HP 960GB 6G SATA Light Endurance SFF 2.5-in SC Enterprise Light 3yr Wty G1 Solid State Drive	756601-B21
--	------------

#### 6G SATA Hot Plug with SmartDrive SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655710-B21
HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655708-B21

**NOTE:** Please see the QuickSpecs for technical specifications and additional

## Core Options

information at

<http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04111725>.

### 12G SAS (2.5-inch) 512e SC HDD

HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC 512e Enterprise 3yr Warranty Hard Drive	748387-B21
HP 1TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765464-B21
HP 1.8TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 512e 3yr Warranty Hard Drive	791034-B21
HP 2TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765466-B21

### 12G SAS (2.5-inch) SFF MDL SC HDD

HPE 1TB 12G SAS 7.2K rpm SFF (2.5in) SC Midline 1yr Warranty Hard Drive	832514-B21
---	------------

### SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives

HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive	718162-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652589-B21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652583-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652572-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652564-B21
HP 300GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652611-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652605-B21

### SAS Hot Plug SmartDrive SFF (2.5-inch) Midline Drives

HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652749-B21
HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652745-B21

**NOTE:** Please see QuickSpecs for technical specifications and additional information at [http://h18000.www1.hp.com/products/QuickSpecs/12244\\_div/12244\\_div.html](http://h18000.www1.hp.com/products/QuickSpecs/12244_div/12244_div.html).

### 6G SATA (2.5-inch) 512e SC HDD

HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765453-B21
HP 2TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765455-B21

### 12G SAS Write Intensive SFF (2.5-inch) SC 3yr Wty H2 Solid State Drive

HP 200GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802578-B21
HP 400GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802582-B21
HP 800GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802586-B21
HP 1.92TB 12G SAS Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802891-B21

### 12G SAS SFF (2.5-inch) SC 3yr Wty H2 Solid State Drive

HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781518-B21
HP 900GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785069-B21
HP 600GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781516-B21
HP 300GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785067-B21

## Core Options

### **6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Boot Solid State Drives**

HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive	717965-B21
HP 80GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive	734360-B21

### **6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives**

HP 1.6TB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	757339-B21
HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	717973-B21
HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	739898-B21
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	717971-B21
HP 300GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	739888-B21
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	717969-B21

### **6G SATA Value Endurance SFF (2.5-inch) SC Enterprise Value M1 Solid State Drives**

HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764923-B21
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764925-B21
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764927-B21
HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764929-B21

### **6G SATA ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives**

HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691868-B21
HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691866-B21
HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691864-B21
HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691862-B21

### **6G SAS VE (2.5-inch) SC EV Solid State Drives**

HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty G1 Solid	756636-B21
--	------------

## Core Options

### State Drive

#### **6G SATA 2.5in WI-PLP SC SSD**

HP 1.2TB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804677-B21
HP 800GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804671-B21
HP 400GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804665-B21
HP 200GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804639-B21

#### **6G SATA 2.5in MU-PLP SC SSD**

HP 1.6TB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804631-B21
HP 800GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804625-B21
HP 480GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	832414-B21
HP 200GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804613-B21

#### **6G SATA 2.5in RI-PLP SC SSD**

HP 1.6TB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804605-B21
HP 800GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804599-B21
HP 480GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804593-B21
HP 240GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804587-B21
HP 120GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804581-B21
HP 80GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804575-B21

#### **12G SAS ME SFF (2.5-inch) SC Enterprise Mainstream H2 Solid State Drives**

HP 1.6TB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive	779176-B21
HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive	779164-B21
HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive	779168-B21
HP 800GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive	779172-B21

#### **12G SAS VE SFF (2.5-inch) SC EV Solid State Drives**

HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762263-B21
HP 800GB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762261-B21

#### **6G SATA Hot Plug MU-3 SFF (2.5-inch) SC Solid State Drives**

HP 1.92TB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	817011-B21
HP 960GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816995-B21
HP 480GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816985-B21
HP 240GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816975-B21



## Core Options

HP 120GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive 816965-B21

### **6G SATA Hot Plug RI-3 SFF (2.5-inch) SC Solid State Drives**

HP 3.84TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive 816929-B21

HP 1.92TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive 816919-B21

HP 960GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive 816909-B21

HP 480GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive 816899-B21

HP 240GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive 816889-B21

HP 120GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive 816879-B21

### **6G SATA Read Intensive (2.5-inch) SC G2 Solid State Drive**

HP 480GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive 789145-B21

### **SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives**

HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 759208-B21

HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 759210-B21

HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive 759212-B21

**NOTE:** The mixing of standard SAS drives with SAS SSD is supported within the server, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported

**NOTE:** Please see the QuickSpecs for technical specifications and information at [http://h18000.www1.hp.com/products/QuickSpecs/14038\\_div/14038\\_div.html](http://h18000.www1.hp.com/products/QuickSpecs/14038_div/14038_div.html).

## Additional Options

### HPE Insight software

#### HPE Insight Control

HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License C6N27A

HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License C6N28ABE

HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO Electronic License C6N36ABE

HP Insight Control Server Provisioning Media Kit BD883A

HP Insight Management Media Kit C6N31A

**NOTE:** HPE Insight Management Media Kit contains DVDs without licenses. Contains HPE Systems Insight Manager, HPE Insight Control, HPE Matrix Operating Environment, and Virtual Connect Enterprise Manager software. Uses an integrated installer to perform quick and accurate software installation and updates.

**NOTE:** Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

**NOTE:** Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HPE Software Technical Support Service.

**NOTE:** Licenses ship without media. The HPE Insight Management Media Kit can be ordered separately, or can be downloaded at <http://www.hp.com/go/insightupdates>

**NOTE:** For additional license kits, please see the QuickSpecs at:

<http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04123391>

### HPE iLO Advanced License

#### HPE Integrated Lights-Out (iLO) Advanced for ProLiant BladeSystem Remote Management

HP iLO Advanced for BladeSystem including 3yr 24x7 Technical Support and Updates E-LTU E6U63ABE

HP iLO Advanced Blade 1 Server License with 3yr 24x7 Tech Support and Updates BD502A

HP iLO Advanced for BladeSystem including 1yr 24x7 Technical Support and Updates E-LTU E6U60ABE

HP iLO Advanced for BladeSystem including 1yr 24x7 Support Single Server License 512488-B21

**NOTE:** Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one or three years of 24 x 7 HPE Software Technical Support Service.

**NOTE:** For additional license kits, including electronic delivery options, please see the iLO QuickSpecs at <http://www.hp.com/go/iLO>

**NOTE:** Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one or three year of 24 x 7 HPE Software Technical Support Service.

**NOTE:** For additional license kits, please see the QuickSpecs at:

[http://h18004.www1.hp.com/products/QuickSpecs/14276\\_div/14276\\_div.html](http://h18004.www1.hp.com/products/QuickSpecs/14276_div/14276_div.html)

## Additional Options

### Converged Infrastructure Management Software

#### HPE OneView

#### HPE OneView with iLO Advanced

HP OneView incl 3yr 24x7 Supp Phys 1 Svr Lic	E5Y34A
HP OneView incl 3yr 24x7 Supp Flex Qty E-LTU	E5Y35AAE
HP OneView Media Kit Phys No Lic	E5Y37A
HP OneView w/o iLO including 3yr 24x7 Support 1 Server LTU	P8B24A
HP OneView w/o iLO including 3yr 24x7 Support Flex Quantity E-LTU	P8B26AAE
HP OneView w/o iLO including 3yr 24x7 Support FIO 1 Server LTU	P8B31A

**NOTE:** For additional license kits please see the QuickSpecs at [http://h18004.www1.hp.com/products/QuickSpecs/14621\\_div/14621\\_div.html](http://h18004.www1.hp.com/products/QuickSpecs/14621_div/14621_div.html).

### High Performance Clusters

#### HPE Cluster Management Utility

HP Insight Cluster Management Utility 1yr 24x7 Flexible License	QL803B
HP Insight Cluster Management Utility 3yr 24x7 Flexible License	BD476A

**NOTE:** These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.

HP Insight Cluster Management Utility Media	BD477A
---	--------

**NOTE:** For additional license kits please see the QuickSpecs at [http://h18004.www1.hp.com/products/QuickSpecs/12612\\_div/12612\\_div.html](http://h18004.www1.hp.com/products/QuickSpecs/12612_div/12612_div.html).

### HPE I/O Accelerator Options

HP 1.2TB Read Intensive Mezzanine PCIe Workload Accelerator for BladeSystem c-Class	794603-B21
HP 1.6TB Read Intensive Mezzanine PCIe Workload Accelerator for BladeSystem c-Class	794605-B21

### HPE Security

HP Trusted Platform Module Option	488069-B21
HP Trusted Platform Module 2.0 Kit	745823-B21

**NOTE:** The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008 R2 and 2012. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 R2 and 2012 has not been tampered with while the system was offline.

**NOTE:** For more information about TPM, including a white paper, go to <http://h20195.www2.hp.com/v2/getpdf.aspx/4AA5-4782ENW.pdf>

**NOTE:** ProLiant OS pre-installed units will come with the partition required for TPM deployment.

**NOTE:** The TPM key is unique to every TPM deployed server and must be retained.

## Additional Options

Misplacing or losing the key could result in data loss.

<b>HPE Storage Controllers</b>	HPE Smart Array P244br/1GB FBWC 12Gb 2-ports Int SAS Controller	749680-B21
	HP H244br 12Gb 2-ports Int Smart Host Bus Adapter	726809-B21
	HP Smart Array P246br/1GB FBWC 12Gb 4-ports Int SAS Controller	726793-B21
<b>NOTE:</b> The HPE Smart Array P246br controller is only required when using an expansion blade with the BL460c Gen9.		
<b>HPE Secure Encryption</b>	HP Secure Encryption per Svr Entitlement	C9A82AAE
	<p><b>NOTE:</b> HPE Secure Encryption is supported on the HPE Smart Array P244br and H244br (running in RAID mode) as an option. HPE Secure Encryption licensing is based on the number of physical drives requiring encryption.</p> <p><b>NOTE:</b> For more information about HPE Secure Encryption, go to <a href="http://www.hp.com/go/hpsecureencryption">http://www.hp.com/go/hpsecureencryption</a>.</p>	
<b>HPE InfiniBand Mezzanine Adapters</b>	<p><b>NOTE:</b> When an InfiniBand adapter is installed in mezzanine slot 1, only one port is active (regardless of operating mode). When installed in any other mezzanine slot, both ports are active.</p> <p><b>NOTE:</b> InfiniBand QDR and FDR speeds are only supported on the HPE BladeSystem c7000 Enclosure. For additional information, please see the HPE BladeSystem c7000 Enclosure and InfiniBand QuickSpecs at:  <a href="http://h18004.www1.hp.com/products/QuickSpecs/12586_div/12586_div.html">http://h18004.www1.hp.com/products/QuickSpecs/12586_div/12586_div.html</a>  <a href="http://h18000.www1.hp.com/products/QuickSpecs/13078_div/13078_div.html">http://h18000.www1.hp.com/products/QuickSpecs/13078_div/13078_div.html</a></p>	
	HP InfiniBand QDR/Ethernet 10Gb 2-port 544+M Adapter	764282-B21
	<p><b>NOTE:</b> The QDR InfiniBand adapter may be installed in any mezzanine slot of the server.</p>	
	HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+M Adapter	764283-B21
<p><b>NOTE:</b> The FDR InfiniBand adapter must be installed in mezzanine slot 1 for FDR mode and may be installed in any mezzanine slot if operated in any other mode.</p>		
	HP InfiniBand FDR 2-port 545M Adapter	702213-B21
<b>HPE Flash Media Kits for USB Drives</b>	<b>HPE Flash Media Kits for USB Drives</b>	
	<b>HPE Enterprise Mainstream Flash Media Kits for Memory Cards</b>	
	HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21
	HP 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B21
	HP 32GB microSD Enterprise Mainstream Flash Media Kit	700139-B21
HP Dual 8GB microSD Enterprise Midline USB Kit	741279-B21	
<p><b>NOTE:</b> Please see the QuickSpecs for Technical Specifications and additional information:  <a href="http://h18000.www1.hp.com/products/QuickSpecs/13971_div/13971_div.html">http://h18000.www1.hp.com/products/QuickSpecs/13971_div/13971_div.html</a></p>		

## Additional Options

### HPE Care Pack Services

#### Proactive Care Services

HPE 3 year Proactive Care 24x7 BL4xxc Gen9 Service	U7BN8E
HPE 3 year Proactive Care 24x7 with DMR BL4xxc Gen9 Service	U7BN9E
HPE 3 year Proactive Care Advanced 24x7 BL4xxc Gen9 Service	U7BT6E
HPE 3 year Proactive Care Advanced 24x7 with DMR BL4xxc Gen9 Service	U7CF8E

#### Installation Services

HPE Install c-Class Server Blade Service	UE493E
--	--------

**NOTE:** Additional HPE Care Pack services can be found at:  
<http://www.hp.com/go/cpc>

## Memory

For detailed memory configuration rules and guidelines, please use the Online DDR4 Memory Configuration Tool:

<http://h22195.www2.hp.com/DDR4memoryconfig/Home/Legal>

### Memory Subsystem Architecture

Each Intel® Xeon® E5-2600 v3 family or Intel® Xeon® E5-2600 v3 family processor socket contains four memory channels that support two DIMMs each for a total of eight (8) DIMM per installed processor or a grand total of sixteen (16) DIMMs for the server. Up to 64GB capacity DIMMs are supported for 1TB of memory (16 DIMM slots x 64GB per DIMM).

**NOTE: 64GB DIMM support available in earl 2015.**

### Memory Population Rules and Guidelines:

- A minimum of one DIMM is required per processor.
- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- DIMM sizes can be mixed in channel. To maximize performance, it is recommended to balance the total memory capacity between all installed processors and to load the channels similarly whenever possible.
- LRDIMM and RDIMMs are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support RDIMM and LRDIMM.
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- HPE memory from previous generation servers is not compatible with the BL460c Gen9 Server Blade.
- To realize the performance memory capabilities listed in this document, HPE SmartMemory is required. For additional information, please see the HPE SmartMemory QuickSpecs at:

<http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111535>

- For memory population rules and additional memory guidelines, please see the BL460c Gen9 user guide at <http://www.hp.com/support>.

### Supported Memory Bandwidth on Intel® Xeon® E5-2600 v3 series Processors

DIMM Rank	Register DIMM (RDIMM)				Load Reduced (LRDIMM)		
	Single Rank (1R)	Dual Rank (2R)			Dual Rank (2R)	Quad Rank (4R)	
DIMM Capacity	8GB	16GB	8GB	32GB	16GB	32GB	64GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
<b>SLOTS THAT CAN BE POPULATED</b>							
12 slot servers	12	12	12	12	12	12	NA
16 slot servers	16	16	16	16	16	16	16
<b>MAXIMUM CAPACITY (GB)*</b>							
12 slot servers	96	192	96	384	192	384	NA

**Memory**

16 slot servers	128	256	128	512	256	512	1024
<b>POPULATED DIMM SPEED (MT/s)</b>							
1 DIMM Per Channel	2133	2133	2133	2133	2133	2133	2133
2 DIMM Per Channel	2133	2133	2133	2133	2133	2133	2133
*Maximum Capacity will vary based on individual serve platform qualification schedule							

**Memory Speed by E5-2600 v3 Series Processor Model**

Processor Models	Supported Memory Speeds
E5-2690 v3, E5-2695 v3, E5-2697 v3, E5-2698 v3, E5-2699 v3, E5-2687W v3, E5-2683 v3, E5-2680 v3, E5-2670 v3, E5-2667 v3, E5-2660 v3, E5-2650 v3, E5-2650L, E5-2643 v3, E5-2637 v3	2133MHz
E5-2640 v3, E5-2630 v3, E5-2630L v3, E5-2623 v3, E5-2620 v3	1866MHz
E5-2609 v3, E5-2603 v3	1600MHz

**Standard and Maximum Memory Capacity (Pre-configured Models) for E5-2600 v3 Series**

Pre Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
Intel Xeon E5-2670 v3	128GB (4x 32GB)	896GB (4x 32GB + 12x 64GB)	1TB (16x 64GB)
Intel Xeon E5-2660 v3	64GB (4x 16GB)	256GB (4x 16GB + 12x 16GB)	1TB (16x 64GB)
Intel Xeon E5-2650 v3, E5-2640 v3	32GB (2x 16GB)	256GB (2x 16GB + 14x 16GB)	1TB (16x 64GB)
Intel Xeon E5-2620 v3, E5-2609 v3	16GB (2x 8GB)	240GB (2x 8GB + 14x 16GB)	1TB (16x 64GB)


**NOTE:** Support for 64GB LRDIMMs and 32GB RDIMMs to be available by early 2015.

**NOTE:** Capacity references are rounded to the common gigabyte (GB) values.

- 2GB = 2,048MB
- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB

Memory

Memory options part number decoder

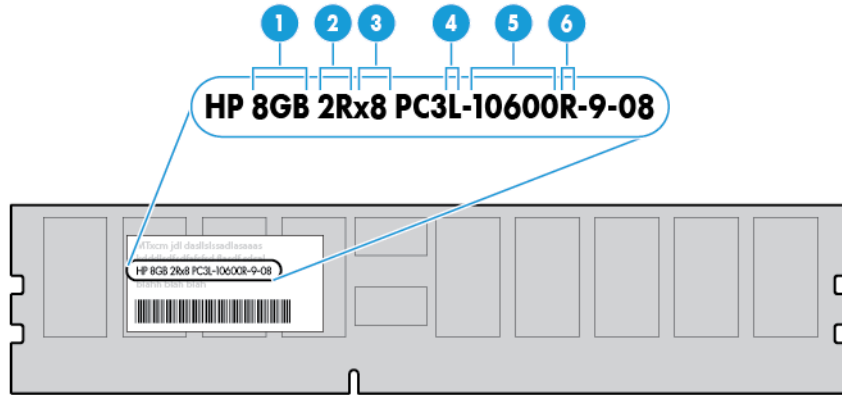

Item	Description	Definition
1	Capacity	8 GByte 16 GByte 32 GByte
2	Rank	1R = Single-rank 2R = Dual-rank 4R = Quad-rank
3	Data width	x4 = 4-bit x8 = 8-bit
4	Memory generation	DDR4
5	Max. Memory speed	2133MT/s
6	CasLatency	P = 15
6	DIMM type	R = RDIMM (registered) L = LRDIMM (load reduced)

Following are memory options available from HPE:

**HPE Memory**

**NOTE:** HPE memory from previous generation servers (DDR3) is not compatible with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9. For additional information, please see the HPE SmartMemory QuickSpecs at:

<http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04111535>

**NOTE:** LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, or 1600MHz.

**HPE SmartMemory**



## Memory

### Registered DIMMs (RDIMMs)


#### Registered DIMMs (RDIMMs) - E5-2600 v3 series Processors

HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	759934-B21
HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	728629-B21

#### Load Reduced DIMMs (LRDIMMs) - E5-2600 v3 series Processors

HP 48GB (1x16GB +1x32GB) DDR4-2133 CAS-15-15-15 Load Reduced Memory FIO Kit	792278-B21
HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726720-B21
HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726724-B21

## Storage

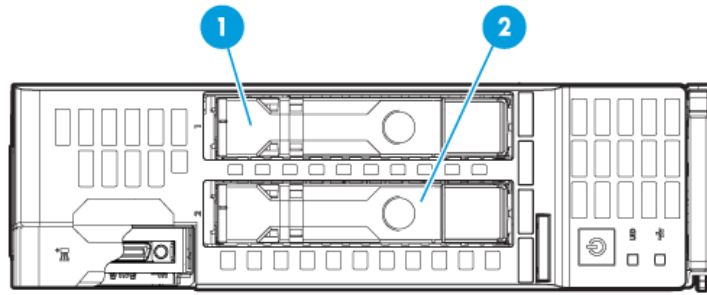

1-2 2 x SFF hot-plug SAS, SATA, SAS SDD, and SATA SSD hard drives

## Technical Specifications

<b>System Unit</b>	<b>Dimensions</b> (H x W x D) (with bezel)	7.11 x 2.18 x 20.37 in (18.07 x 5.54 x 51.76 cm)				
	<b>Weight</b> (approximate)	<table border="0"> <tr> <td style="vertical-align: top;">Maximum: all processors, 16 DIMMs, hard drives, mezzanine cards, and two flash cache batteries installed)</td> <td style="vertical-align: top;">14.00 lb (6.33 kg)</td> </tr> <tr> <td style="vertical-align: top;">Minimum: one processor and 2 DIMMs installed</td> <td style="vertical-align: top;">10.50 lb (4.75 kg)</td> </tr> </table>	Maximum: all processors, 16 DIMMs, hard drives, mezzanine cards, and two flash cache batteries installed)	14.00 lb (6.33 kg)	Minimum: one processor and 2 DIMMs installed	10.50 lb (4.75 kg)
Maximum: all processors, 16 DIMMs, hard drives, mezzanine cards, and two flash cache batteries installed)	14.00 lb (6.33 kg)					
Minimum: one processor and 2 DIMMs installed	10.50 lb (4.75 kg)					
	<b>Power Specifications</b>	<p>For power specifications including input requirements, BTU rating, and power supply output, please see the:</p> <ul style="list-style-type: none"> <li>• HPE BladeSystem c3000 Enclosure QuickSpecs at <a href="http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04123379">http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04123379</a></li> <li>• HPE BladeSystem c7000 Enclosure QuickSpecs at <a href="http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04229580">http://www8.hp.com/h20195/v2/GetHTML.aspx?docname=c04229580</a></li> </ul> <p>To review typical system power ratings use the HPE Power Advisor which is available via the online tool located at <a href="http://www.hp.com/go/hppoweradvisor">http://www.hp.com/go/hppoweradvisor</a>.</p> <p><b>NOTE:</b> For optimal cooling and system performance the BL460c Gen9 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.</p>				
	<b>System Inlet Temperature</b>	<table border="0"> <tr> <td style="vertical-align: top;">Operating</td> <td> <p>10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1,000 ft) above sea level to a maximum of 3,050 m (10,000 ft), no direct sustained sunlight.</p> <p>Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed.</p> <p>System performance may be reduced if operating with a fan fault or above 30°C (86°F).</p> </td> </tr> <tr> <td style="vertical-align: top;">Non-operating</td> <td>-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).</td> </tr> </table>	Operating	<p>10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1,000 ft) above sea level to a maximum of 3,050 m (10,000 ft), no direct sustained sunlight.</p> <p>Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed.</p> <p>System performance may be reduced if operating with a fan fault or above 30°C (86°F).</p>	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
Operating	<p>10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1,000 ft) above sea level to a maximum of 3,050 m (10,000 ft), no direct sustained sunlight.</p> <p>Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed.</p> <p>System performance may be reduced if operating with a fan fault or above 30°C (86°F).</p>					
Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).					
	<b>Extended Ambient Operating Support</b>	<p>For Approved hardware configurations, the supported system inlet range is extended to be:</p> <p>5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft)</p>				

## Technical Specifications

**NOTE:** Qualifications for extended ambient configurations are detailed at:  
<https://www.hp.com/servers/ASHRAE>

<b>Relative Humidity</b> (non-condensing)	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.
	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
<b>Altitude</b>	Operating	3,050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1,500 ft/min).
	Non-operating	9,144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1,500 ft/min).
<b>Acoustic Noise</b>	For acoustic noise specifications, please see the HPE BladeSystem c-Class Enclosures QuickSpecs located at: <ul style="list-style-type: none"> <li>HPE BladeSystem c3000 Enclosure QuickSpecs: <a href="http://h18000.www1.hp.com/products/QuickSpecs/12790_div/12790_div.html">http://h18000.www1.hp.com/products/QuickSpecs/12790_div/12790_div.html</a></li> <li>HPE BladeSystem c7000 Enclosure QuickSpecs: <a href="http://h18000.www1.hp.com/products/QuickSpecs/12810_div/12810_div.html">http://h18000.www1.hp.com/products/QuickSpecs/12810_div/12810_div.html</a></li> </ul>	

---

<b>HPE Smart Array P244br Controller</b>	<b>Disk Drive Interface</b>	12Gb/s SAS (Serial Attached SCSI) 6Gb/s SATA (Serial ATA)
	<b>Server Interface</b>	x8 5G PCIe 3.0 provides 8GB/s maximum bandwidth
	<b>Cache Memory</b>	1GB flash backed write cache (FBWC) cache standard
	<b>Logical Drives Supported</b>	64 (with included 1GB cache)
	<b>Host Memory Addressing</b>	64-bit, supporting servers memory space greater than 4GB
	<b>RAID Support</b>	RAID 1 (mirroring), RAID 0 (striping), RAID 10
	<b>Other</b>	Upgradeable firmware with recovery ROM Online drive flash (with SAS drives)

---

<b>HPE Smart HBA H244br Controller</b>	<b>Disk Drive Interface</b>	12Gb/s SAS (Serial Attached SCSI) 6Gb/s SATA (Serial ATA)
	<b>Server Interface</b>	x8 5G PCIe 3.0 provides 8GB/s maximum bandwidth
	<b>Cache Memory</b>	None
	<b>Logical Drives Supported</b>	64
	<b>Host Memory</b>	64-bit, supporting servers memory space greater than 4GB

## Technical Specifications

<b>Addressing</b>	
<b>RAID Support</b>	RAID 1 (mirroring) and RAID 0 (striping)
<b>Other</b>	Upgradeable firmware with recovery ROM Online drive flash (with SAS drives)

---

<b>HPE Dynamic Smart Array B140i Controller</b>	<b>Disk Drive Interface</b>	6Gb/s SATA (Serial ATA)
	<b>Server Interface</b>	Embedded x4 PCIe 2.0
	<b>SAS Connectors</b>	2 internal SATA ports
	<b>Cache Memory</b>	None
	<b>SAS Speed</b>	6Gb/s SATA links
	<b>Logical Drives Supported</b>	Up to 10 logical volumes (2 physical drives)
	<b>Host Memory Addressing</b>	64-bit, supporting greater than 4GB server memory space
	<b>Hot Plug Support</b>	Yes
	<b>RAID Support</b>	RAID 1 (Mirroring) RAID 0 (Striping)
	<b>Other</b>	Upgradeable firmware with recovery ROM

---

<b>HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM</b>	<b>Type</b>	Integrated dual-port KR 10Gb FlexibleLOM with FlexFabric (Flex-10, FCoE, hardware-based iSCSI, iSCSI boot, TCP/IP offload engine, and autosensing 1Gb/10Gb Ethernet capability)
	<b>Network Processor</b>	QLogic 57840S with integrated MAC/PHY
	<b>Data Transfer Method</b>	x8 PCI Express 3.0
	<b>Network Transfer Rate</b>	Two ports, each at 20Gbps full duplex; 40Gbps aggregate full duplex theoretical bandwidth <b>NOTE: Each port is autosensing 1Gb/10Gb, and can interoperate with 1Gb or 10Gb HPE BladeSystem c-Class interconnect components. Both ports will operate at the same speed.</b> <b>NOTE: Each port on the 536FLB adapter transmits from the server at 20Gbps (theoretical) full duplex.</b>
	<b>IEEE Compliance</b>	802.1p, 802.1q, 802.1qau, 802.3ad, 802.3ae, 802.3ap (10GBase-KX4) and 802.3x
	<b>Standard Features</b>	Full hardware offload of iSCSI and FCoE storage protocol processing for highest performance converged Ethernet data and storage networks. Dual-port 10GbE Flex-10 FlexibleLOM network adapter that provides the flexibility to choose the type of LOM to meet growing infrastructure needs Industry-leading throughput and latency performance Supports HPE's Flex-10 blade interconnect technology User configurable bandwidth settings when combined with the 10Gb Flex-10 Virtual Connect module. From 100Mb/s to 10Gb/s on up to four "Physical Function" NICs per port, in

## Technical Specifications

increments of  
 100Mb/s for NIC. The combined bandwidth of NICs cannot exceed port bandwidth i.e. 10 Gb.  
 Up to 40Gb/s bi-directional near line rate throughput  
 Hardware acceleration and offloads for stateless TCP/IP, TCP Offload Engine (TOE)  
 Improved small packet performance  
 Support for Preboot eXecution Environment (PXE)  
 Integrated PHY and MAC  
 Supports for SR-IOV  
 Support for Network Partitioning (NPAR)

### HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM

<b>Type</b>	Integrated dual-port KR2 20Gb FlexibleLOM with FlexFabric (Flex-20, FCoE, RoCE, Tunnel Offload with VXLAN/NVGRE, hardware-based iSCSI, iSCSI boot, TCP/IP offload engine, and autosensing Ethernet speed capability)
<b>Network Processor</b>	Emulex XE-104
<b>Data Transfer Method</b>	x8 PCI Express 3.0
<b>Network Transfer Rate</b>	Two ports, each at 40 Gbps bi-directional; 80 Gbps aggregate bi-directional theoretical bandwidth
<b>IEEE Compliance</b>	802.3ae, 802.1Q, 802.3x, 802.1p, 802.3ad/LACP, 802.1AB(LLDP), 802.1Qbg, 802.1Qbb, 802.1Qaz, 802.3ap
<b>Standard Features</b>	<p>Dual 20Gb ports provide up to 80Gb bi-directional per adapter</p> <p>Multi-speed adapter operates at either 20GbE or 10GbE</p> <p>Converges FCoE or RoCE with LAN traffic on a single Ethernet wire</p> <p>Tunnel Offload support for VXLAN and NVGRE</p> <p>RDMA over Converged Ethernet (RoCE) for greater server efficiency and lower latency (6125XLG only)</p> <p>Advanced storage offload processing freeing up valuable CPU cycles</p> <p>Supports UEFI and legacy boot options</p> <p>Mixed Storage – supports NIC + FCoE on one port, and NIC + iSCSI on the other</p> <p>Concurrent Storage – concurrently supports NIC, FCoE, and iSCSI storage functions on the same port (NIC + FCoE + iSCSI)</p> <p>Industry-leading throughput and latency performance</p> <p>Supports HPE's Flex-20 blade interconnect technology</p> <p>Over eight million small packets/s, ideal for web/mobile applications, mobile messaging, and social media</p> <p>User configurable bandwidth settings when combined with the 20Gb Flex-20 Virtual Connect module. From 100Mb/s to 10Gb/s on up to four "Physical Function" NICs per port, in increments of 100Mb/s for NIC. The combined bandwidth of NICs cannot exceed port bandwidth i.e. 20 Gb/s.</p> <p>Greater bandwidth with PCIe 3.0</p> <p>Jumbo Frames support</p> <p>Supports Wake On LAN (WOL)</p> <p>Support for Preboot eXecution Environment (PXE)</p> <p>Support for Microsoft Windows SMB Direct</p> <p>Optimized host virtualization density with SR-IOV support</p>

## Technical Specifications

### Environment-friendly Products and Approach

### End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to:

<https://promotions.ext.hpe.com/WMCF.Web/us/en/page/GlobalLandingPage/>.

To recycle your product, please go to:

<https://promotions.ext.hpe.com/WMCF.Web/us/en/page/GlobalLandingPage/>

or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at:

<https://promotions.ext.hpe.com/WMCF.Web/us/en/page/GlobalLandingPage/>.

These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.



[hp.com/qref/bl460cgen9](http://hp.com/qref/bl460cgen9)

## Summary of Changes

Date	Version History	Action	Description of Change
16-Feb-2016	From Version 16 to 17	Changed	Information updated in different sections.
		Added	SKUs Added in Core Options sections: 846495-B21, 846497-B21, 832514-B21.
		Removed	Obsolete SKUs were deleted: 789135-B21, E5Y38A, E5Y39AAE, QK763A, QK762A, QK761A, D8585AAE, D8584A.
09-Oct-2015	From Version 15 to 16	Changed	Core Options section was updated.
		Added	SKUs added: P8B24A, P8B26AAE, P8B31A
		Removed	Obsolete SKUs were deleted: 756621-B21, 756657-B21, 789155-B21
28-Sep-2015	From Version 14 to 15	Added	SKU added in Additional Options: 745823-B21
28-Aug-2015	From Version 13 to 14	Changed	Information in Core Options section was updated.
		Added	SKUs added in Core Options section: 659818-B21, 651281-B21
17-Aug-2015	From Version 12 to 13	Changed	Standard Features, Optional Features, Configuration Information - Factory Integrated Models, Core Options and Memory sections were updated.
		Added	SKUs added in Additional Options and Core Options sections: C9A82AAE, 804677-B21, 804671-B21, 804665-B21, 804639-B21, 804631-B21, 804625-B21, 832414-B21, 804613-B21, 804605-B21, 804599-B21, 804593-B21, 804587-B21, 804581-B21, 804575-B21.
		Removed	Obsolete SKU deleted: F6Q89AAE
19-Jun-2015	From Version 11 to 12	Changed	Information updated.
1-Jun-2015	From Version 10 to 11	Changed	Information in Optional Features, Configuration Information- Factory Integrated, and Models sections was updated.
		Added	SKUs added: 726724-B21, 748387-B21, 791034-B21, 726793-B21
		Removed	SKUs removed: 726793-B21, 741159-B21, 741151-B21
6-Apr-2015	From Version 9 to 10	Changed	Industry Standard Compliance and Additional Options sections were updated
30-Mar-2015	From Version 8 to 9	Added	SKUs Added: 741279-B21, 728629-B21, 726793-B21, 749975-B21, 726782-B21, 727261-B21, 802578-B21, 802582-B21, 802586-B21, 802891-B21, 781516-B21, 785067-B21, 765453-B21, 765455-B21, 765464-B21, 765466-B21, 789135-B21, 789145-B21, 789155-B21, 794603-B21, 794605-B21, 781518-B21, 785069-B21
		Removed	Obsolete SKUs Deleted:



## Summary of Changes

			741146-B21, 741138-B21
27-Feb-2015	From Version 7 to 8	Changed	Smart Buy 779805-S01 processor was updated in Product Bulletin US version.
9-Feb-2015	From Version 6 to 7	Changed	Core Options and Additional Options sections were updated
		Added	SKUs Added on Hard Drives section: 779164-B21, 779168-B21, 779172-B21, 779176-B21, 764923-B21, 764925-B21, 764927-B21, 764929-B21
		Removed	SKUs removed: 728935-B21, 718939-B21
12-Dec-2014	From Version 5 to 6	Changed	Descriptions were updated throughout the QuickSpecs.
		Added	SKU Added on HPE Smart Memory: 792278-B21
1-Dec-2014	From Version 4 to 5	Changed	Overview, Standard Features, Configuration Information - Factory Integrated Models and Core Options sections were updated
		Added	SKUs added: 759934-B21, 726720-B21, 775588-B21, 785233-B21, 757339-B21, 756657-B21, 756621-B21
		Removed	SKU E5Y35AAE deleted due to compatibility issues
10-Oct-2014	From Version 3 to 4	Changed	Smart Buy section added to the NA version only
8-Oct-2014	From Version 2 to 3	Changed	Network Controller, Enclosures and Compatible SAN sections were updated
		Added	HPE I/O Accelerator Options section has been added including following SKUs: QK763A, QK762A, QK761A
		Removed	Expansion Blade Support section was deleted
17-Sep-2014	From Version 1 to 2	Changed	Changes made throughout the Standard Features, Models, SmartMemory, Core Options and Carepacks sections.



**Sign up for updates**

★ Rate this document

© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

c04347343 - 15052 - Worldwide - V17 - 16-February-2016