

## PORTABLE SKYLIGHT NETTING SYSTEM

7' x 7' Part ID: 65400 (13866 Net Only)

10' x 10' Part ID: 65401 (13789 Net Only)

The Portable Skylight Netting Systems are made of high-impact 4" knot-less polypropylene materials. Skylight Netting from Tie Down is used during design builds, new construction, renovations, and maintenance roof work. The Skylight Netting System is designed to protect employee and personnel from falling through openings or hazards that are not properly secure with a hardcover or otherwise unprotected. The Tie Down Portable Skylight Netting fits over a standard skylight or hatch opening.

This Portable Skylight Netting System complies with OSHA 1910.23(a)(5), 1926.501(b)(1), ANSI Z359.1-07 & ANSI A10.32-12

- QUICK AND EASY INSTALLATION
- NO TOOLS REQUIRED
- MUST BE TIED OFF TO A FALL PROTECTION DEVICE PRIOR TO INSTALLATION


### STEPS

1. Prior to installation, find a suitable anchorage connection for your fall protection. Once netting is installed, the ratchet strap can be used as an anchorage point if the skylight is permanently secured into the roof structure.
2. Remove the Skylight Netting from carrying bag.
3. The green ratchet strap is already woven through the netting perimeter.
4. Place the netting over the skylight .
5. Wrap the straps around the outside of the frame of the skylight. Make sure ratchet strap is free of snagging on the corners and fully sits underneath the lip of the skylight.
6. Once in position, pull any excess webbing through the ratchet drum ensuring the corners are under the skylight flange.
7. Use ratchet straps to secure the netting over the skylight.

Two snap hooks are included and can be used to help collect the excess net for skylights smaller than the net. Any excess strapping can be tucked neatly under the flange of the skylight.

### NOTE:

If skylight has water damage or there is wood or roofing rot around the skylight, do not use the netting system. If you have any questions, please call 404-344-0000. Always consult a competent person prior to use and carefully read instructions.

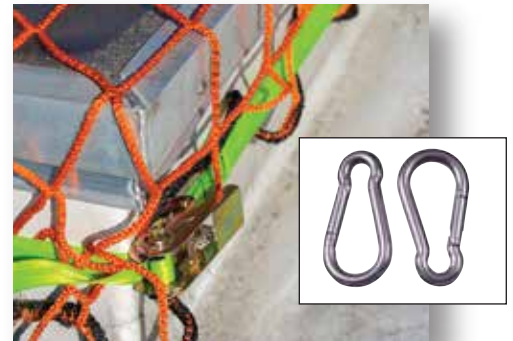

Each Kit includes:  
Netting with ratchet/strap,  
2 snap hooks and carry bag.



Instructions #08354 (E1783 - Rev. 2/26/21)

## PORTABLE SKYLIGHT NETTING SYSTEM

7' x 7' Part ID: 65400 (13866 Net Only)

10' x 10' Part ID: 65401 (13789 Net Only)

The Tie Down Portable Skylight Netting System is a simple and ideal way to temporarily work around skylights. Often times your work on a rooftop can be minimal, however there are no shortcuts to safety. You need an easy way to protect your workers from fall hazards that can be portable, use able, and one that is cost effective.

- Easy to set-up for fall protection use
- Functions as a fall prevention system, protecting workers in the event of a fall into a skylight.
- When installed on a skylight that is permanently integrated into the roof, the system can be used as an anchorage connector. Simply attach a compatible lanyard or SRL to ratchet strap, and begin work in fall arrest.
- Two snap hooks included with each net to help gather loose netting
- OSHA and ANSI Compliant


The Tie Down Portable Skylight Netting System comes in a carrying bag so that your workers can maintain three points of contact with the ladder as they climb to their work area. Great for storage, the bag allows for easy access and protection from the elements.

### Applications

- Personnel Fall Protection
- Skylight/Hatch Opening Cover
- Solar Panel Installation Protection
- New Roof Construction
- Roof Renovation
- Roof Maintenance

### Specs

- High tenacity polypropylene knotless net (HTTP)
- Includes green web strapping & ratchet strap
- Net Size: 7' x 7', 10' x 10'
- Mesh Size: 4" inch square
- Cord Diameter: 3/16" inch
- Color: Bright Safety Orange
- Border: Reinforced with rope border edges
- Melting Point: 320° F
- Weight Limit: 310 lbs.

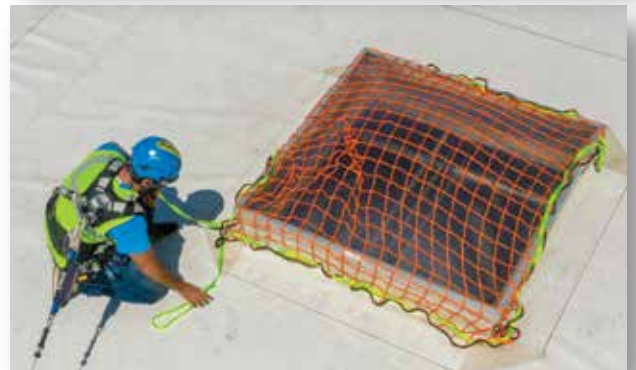

### Benefits

- Provides safety fall protection for workers during roof skylight installation and maintenance work

Instructions #08354 (E1783 - Rev. 8/5/21)