
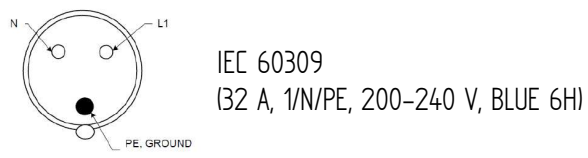


Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwendung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

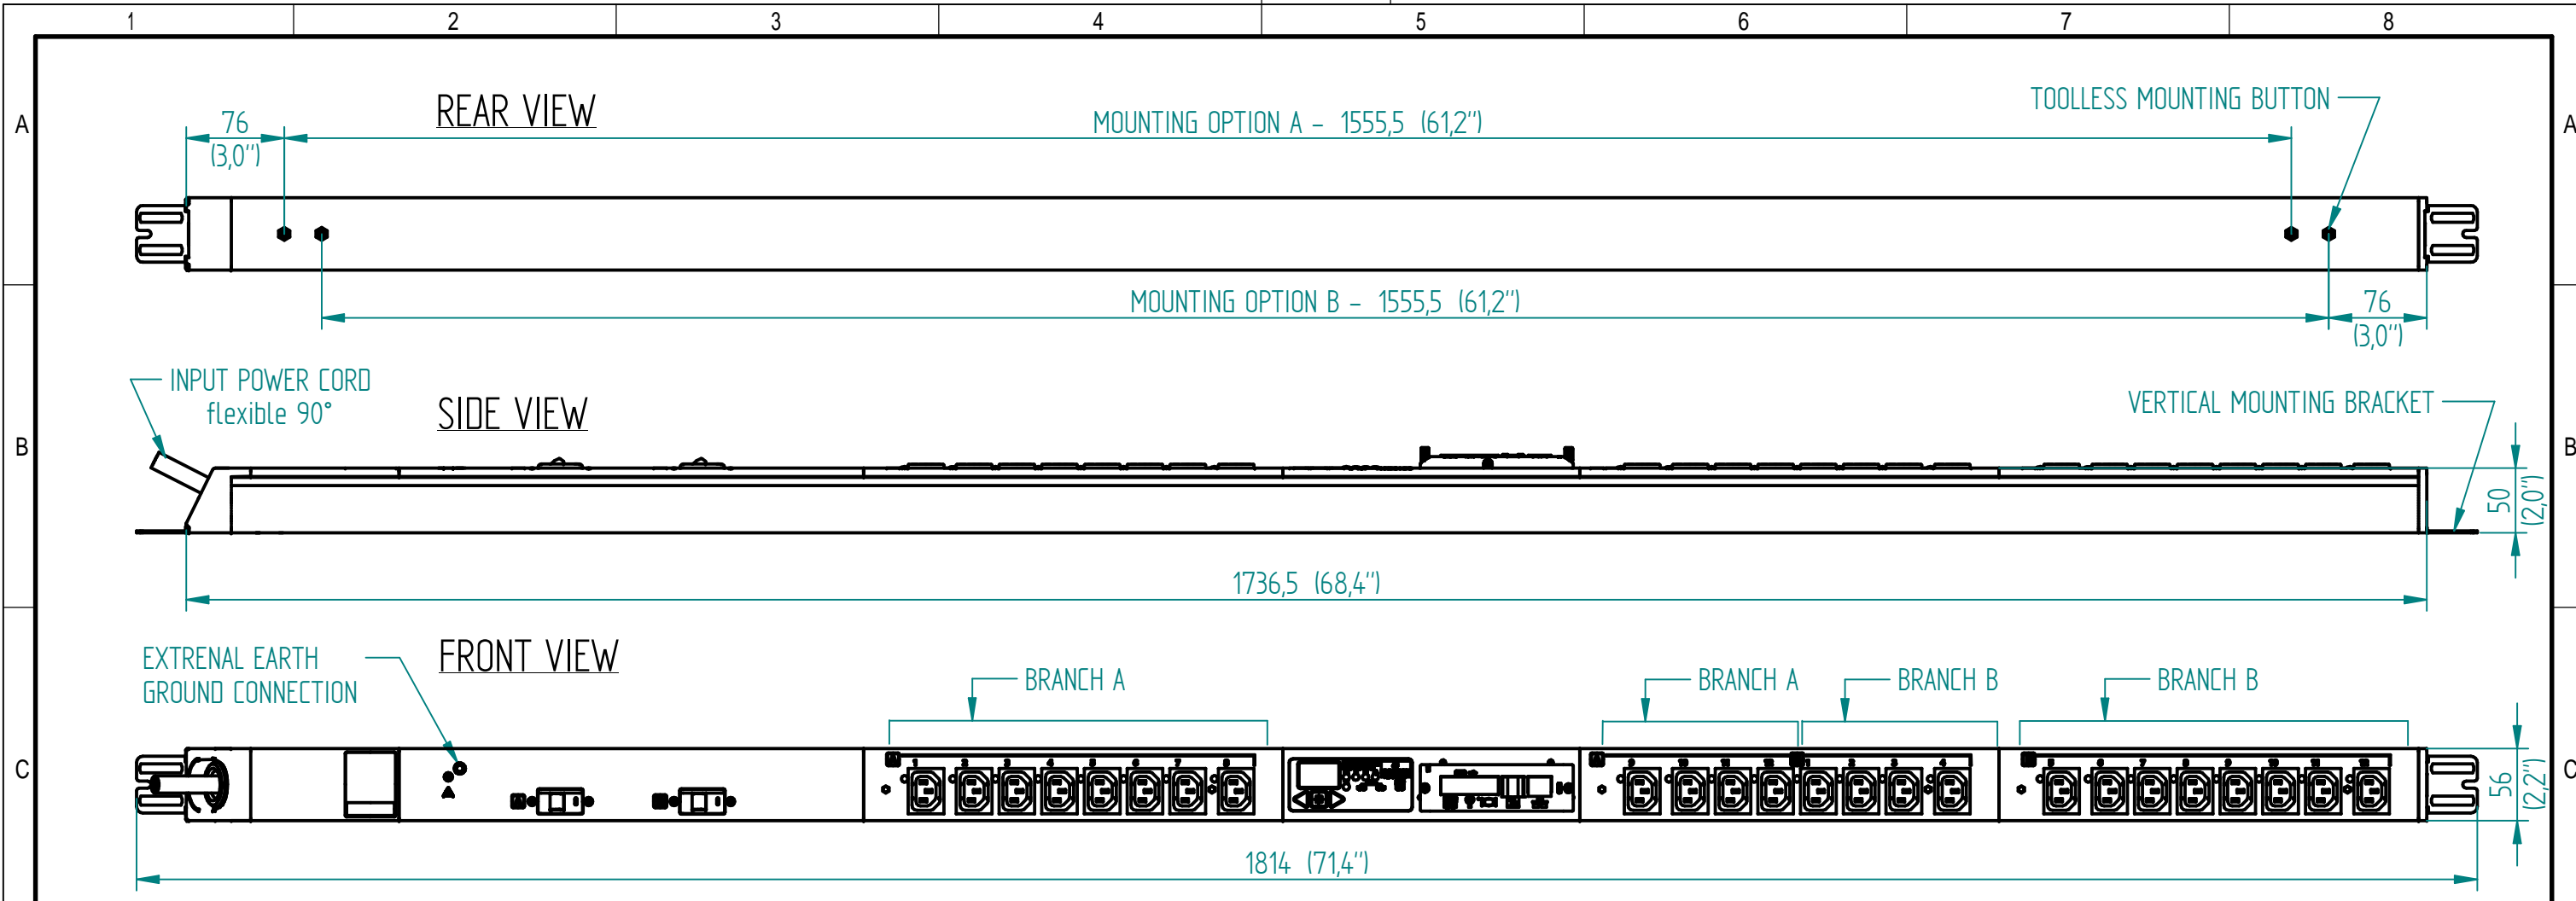

OUTPUT POWER

BRANCH	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER BRANCH
A	L1	12x C13	200-240	10	20
B	L1	12x C13	200-240	10	20

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10 ft / 3 m	IEC 60309	1/N/PE	50/60	200-240	32	32

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1 % + 0.1 VAC
CURRENT	±1.5 % + 0.01 A FROM 1 % TO 10 % OF UNIT RATING; ±1 % FROM >10 % TO 125 % OF UNIT RATING

RoHS COMPLIANT

AGENCY COMPLIANCE:

- CE-mark: LVD, EMC, RoHS (incl. harmonized standards hereunder)
- CB certification: IEC 60950-1 (2nd)
- BG certification: BV-BG (factory inspected)

ENVIRONMENTAL RATING:

OPERATING TEMPERATURE: 5 °C - 60 °C (41 °F - 140 °F) NON-CONDENSING, NON-CORROSIVE, 10 % - 90 % RH
 STORAGE TEMPERATURE: -20 °C - 85 °C (-4 °F - 185 °F)
 MAX. OPERATING ALTITUDE: 2000 m

NOTES:

- UNIT DIMENSIONS: 1736.5 mm (68.4") H x 50 mm (2.0") D x 56 mm (2.2") W
- UNIT WEIGHT: 4 kg / 8.8 lbs
- SHIPPING DIMENSIONS: 2017.0 mm (79.4") H x 297 mm (11.7") D x 176 mm (7.0") W
- SHIPPING WEIGHT: 6,81 kg / 15 lbs
- (2) MOUNTING BUTTONS AND (2) MOUNTING BRACKETS SUPPLIED WITH EACH UNIT. EITHER OPTION CAN BE USED TO MOUNT THE PDU.

	Allgemeintoleranzen General tolerances		Oberfläche Finish		Werkstoff / Material		Gewicht: Weight: -	
	-		-		-		-	
Date		Name		Bezeichnung / Description				
30/03/16		Racek		MPH2-ERV_2P3W-32A_24N				
30/03/16		Votýpka		Input and Branch Metered + Outlet Metered/Switched				
-		-		Zeichnungs-Nr. / Drawing no.				Maßstab Scale
-		-		MPHR1243				1:5
-		-		Verwendet in / Used in				Blatt/Sheet
-		-		-				1/1
Rev.	Change	Date	Name					